


100

Quiz Dynamic Programming

Name Brandon Buchanan

1) Use Dijkstra's Algorithm to find the shortest path from s to e

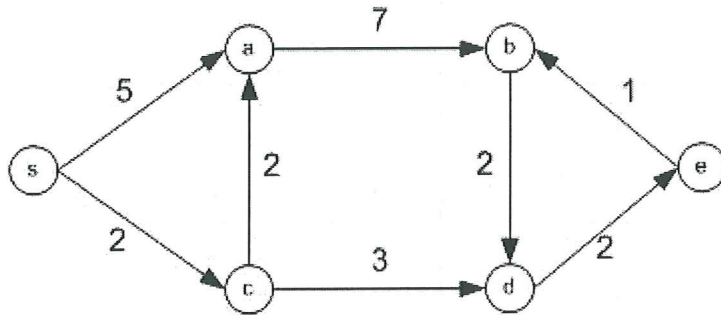

s, c, d, e

	s	a	c	d	b	e
	0	∞	∞	∞	∞	∞
s		5		2		
c		4			5	
a			11			
d					7	
e			8			
b						



2) Finish the table for $c[i,j]$.
Using the table give the LCS

$x_i \backslash y_j$	0	1 B	2 D	3 C	4 A	5 B	6 A
0	0	0	0	0	0	0	0
1 A	0	↑ 0	↑ 0	↑ 0	↖ 1	← 1	↖ 1
2 B	0	↖ 1	← 1	← 1	← 1	↖ 2	← 2
3 C	0	↑ 1	↑ 1	↖ 2	← 2	↑ 2	↑ 2
4 B	0	↖ 1	↑ 1	↑ 2	↑ 2	← 3	← 3
5 D	0	↑ 1	↖ 2	↑ 2	↑ 2	↑ 3	↑ 3
6 A	0	↑ 1	↑ 2	↑ 2	↖ 3	↑ 3	↖ 4
7 B	0	↖ 1	↑ 2	↑ 2	↑ 3	↖ 4	↑ 4

b c b a