



ChatAI for Project API

🔧 ChatAI for Project API 🔧

We provide the QA functionality of "Chat AI for Project," an in-house AI service designed for using ChatAI (generative AI) within specific groups such as organizations, teams, and projects, as an API.

* This service is different from the "ChatAI API for system use" and is provided under the terms and conditions of "ChatAI for Project".

★ If you get an error with the ChatAI for Project API, check [here](#) first

★ Please see below for a comparison of the features of ChatAI for Project in terms of UI and API.



クイックリンク



Application for Use



How to Use



API Specification

1 . Application for Use

You need a ChatAI for Project project in advance to use the API.

※ Click [here](#) to apply for use of ChatAI for Project

After checking the rules below, apply for use from "API key management" in the project management screen of ChatAI for Project.

Project Management Screen : <https://management.ai-service.global.fujitsu.com/qabot/<Project Key>/pm>

After completing the application, you can check the API authentication information at any time from the "API key management screen".
You can also apply for reissuance of authentication information from the "API key management screen".
If there are any defects in the application, we may suspend the use at a later date.

 Usage Rules

Usage Rules	• Information classification restrictions • In addition to the information classification restrictions specified by the project manager, the following restrictions apply. ▪ When using this API in a project where FUJITSU-CONFIDENTIAL and FUJITSU-CONFIDENTIAL-IN-TRUST information is entered and knowledge is registered, please include the personal identification API key issued by the end user himself/herself in the request header. Using a personal identification API key other than that of the user is prohibited. ▪ For information on how to issue a personal identification API key, please refer to the Internal AI Practice SPO site. • Authorization restrictions • As a public scope setting (access control) of the project management function (for administrators), enabling user authorization settings is mandatory. • Please include the user's own email address in the request body when using this API. Using an email address other than the user's own is prohibited. • About credentials

- API keys and API secrets will be issued as credentials.
- If your credentials are compromised, there is a risk that the information registered as knowledge may be leaked. The project manager should manage the credentials securely and not disclose or share them with third parties.
- Credentials expire after 200 days. If you wish to continue using them, please reissue them through the prescribed procedure starting 30 days before the expiration date.
- If you wish to stop using the credentials after issuance, please contact us from the following:
 - [ChatAI for Project API Termination Request Forms](#)
- **About traffic restrictions**
 - There is a limit on the number of requests per minute for each system. Please note that we may impose additional restrictions based on usage conditions. For details, please refer to the [Internal AI Practice SPO site](#)
- **About end users**
 - **End users can use it if they meet one of the following conditions:**
 1. Regular employees of Fujitsu Limited
 2. [DTSA](#) -covered regular employees of Fujitsu group companies.
 3. For individuals working under a temporary staffing (dispatch) or outsourcing (contract) agreement, who have a "Grocomi" account and whose host company is the company of the employee mentioned above
- **About the use of the agent function**
 - AI generation results with the agent function enabled may include answers based on information from external sites. When using this API's response results, please be sure to clearly state the source information included in the AI's answer (output parameter) and the reference documents (ragDocs parameter).
 - For details on the agent function, please refer to [the internal AI Practice SharePoint site](#) .
- **Application of ChatAI for Project Terms**
 - In addition to the rules set forth in the preceding items, you must comply with the terms of use of ChatAI for Project (not API) when using ChatAI for Project API.

2 . IP add/change request

ChatAI for Project API allows access to the API gateway (Google Cloud Platform) only for internal networks (SIG/FJ-WAN/some authorized overseas proxies) and some internal clouds ([DXP Cloud](#), [DP Azure Development Environment](#)).

If you use the API from an IP address other than the above range, please apply for IP add/change.

The **project manager** should submit the application after "Application for use of ChatAI for Project API".

* To access ChatAI for Project API from the internal cloud, you may need to apply for permission for outbound communication.


For details, contact the service provider.

(As of March 14, 2025, the DP Azure development environment allows outbound communication to ChatAI for Project by default.)

* We will contact you by email after the firewall update is completed.

Also, if our team determines that the IP cannot be added, we will notify you by email.

Please note that it takes about 1~2 weeks to receive your email.

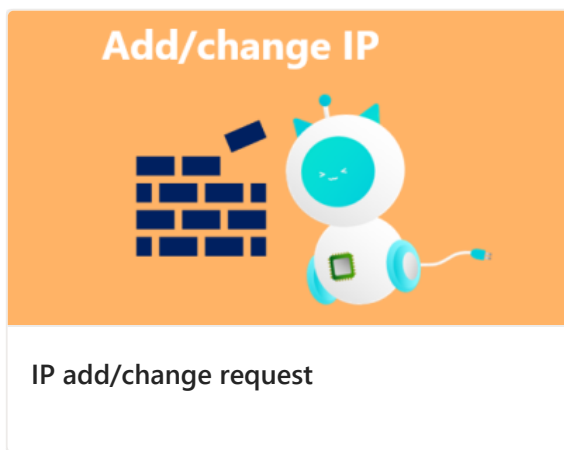

3 . How to Use ChatAI for Project API

API Endpoint

Functions	Endpoint
OAuth2.0 Access Token Issuance	https://api.ai-service.global.fujitsu.com/ai-foundation/chat-ai/project/accesstoken
AI answer generation	https://api.ai-service.global.fujitsu.com/ai-foundation/chat-ai/project/{PROJECT_KEY}/service/{SERVICE_KEY}/qa

* For {PROJECT_KEY} and {SERVICE_KEY}, specify the project key or service key to be used.

Authentication Method

This API utilizes OAuth2.0 authentication

- OAuth2.0 Access Token Issuance Request: Authenticate by embedding authentication information in body
- AI response generation request : Authenticate by embedding an access token in the header

Usage Procedure

0 . Prerequisites for using the API

- **The following must be met in "Project Management" of ChatAI for Project.**
 - Apply "User Authorization" is enabled
 - The "Authorized User List" contains the addresses of the API end users
 - API key and secret has been issued
- **If you have selected "Information Classification Handling" under "Project Management" in ChatAI for Project, each end-user will require a personal proof API key for the ChatAI for Project API (details [here](#)).**
 - When requesting a project that has selected the following regarding "Information Classification and Handling" in "Project Management" for ChatAI for Project

- FUJITSU-CONFIDENTIAL
- FUJITSU-CONFIDENTIAL-IN-TRUST
- When making a request to a service where the "Agent Settings" for "Knowledge Management" in ChatAI for Project are set to something other than None (default).

1 . Issuing an OAuth2.0 Access Token

Issue the OAuth2.0 access token required for AI answer generation requests. The issued access token is valid only for requests to the project to which the credentials are associated.

Access tokens expire in 60 minutes and should not be disclosed or shared with third parties.

■List of API parameters

Please specify "Content-Type": "application/x-www-form-urlencoded" in the header. Please specify the following parameters in the request body.

Parameters	Types	Descriptions
grant_type	string	Please enter "client_credentials" (fixed value).
client_id	string	API Key
client_secret	string	API Secret

■Example request in Python

```
1 import requests
2
3 API_KEY = "api-key"
4 API_SECRET = "api-secret"
5
6 ENDPOINT = "https://api.ai-service.global.fujitsu.com/ai-foundation/chat-ai/project/accesstoken"
7
8
9 headers = {
10     "Content-Type": "application/x-www-form-urlencoded"
11 }
12
13 data = {
14     "grant_type": "client_credentials",
15     "client_id": API_KEY,
16     "client_secret": API_SECRET
17 }
18
19
20 response = requests.post(ENDPOINT, headers=headers, data=data)
```

```

21 print(response.text)
22
23 ## Response
24 # {
25 #   'access_token': '(string)OAuth2.0 Access Token',
26 #   'issued_at': '(int)Token issue time (Unix timestamp in milliseconds)',
27 #   'expires_in': '(int)Token expiration in seconds. For 3599, expires after 3599
    seconds (1 hour).'
28 # }

```

■ Example request in command line

```

1 curl -X POST "https://api.ai-service.global.fujitsu.com/ai-foundation/chat-
  ai/project/accesstoken" ^
2 -H "Content-Type:application/x-www-form-urlencoded" ^
3 -d "grant_type=client_credentials&client_id={API_KEY}&client_secret={API_SECRET}"
4
5 ## Response
6 # {
7 #   'access_token': '(string)OAuth2.0 Access Token',
8 #   'issued_at': '(int)Token issue time (Unix timestamp in milliseconds)',
9 #   'expires_in': '(int)Token expiration in seconds. For 3599, expires after 3599
    seconds (1 hour).'
10 # }

```

■ Example of use in Power Automate

[EN Guide to Using ChatAI for Project API with Power Automate](#) (There is an English version of the attached document at the link)

2 . AI Response Generation Request

Requests the generation of an answer from the specified service.

For the settings related to answer generation (AI model, temperature, etc.), the settings of "Model retrieval settings" in "Knowledge management screen" are applied.

* Service settings other than Model and Retrieve Settings do not apply

■ Regarding the use of AI agent

the AI agent executed during a QA request will apply the settings configured in "Agent Settings" within the "Knowledge Management Screen".

The AI-generated results with the agent function enabled may include answers based on information from external websites.

When using the response results of this API, please clearly state the source information included in the AI's answer (output parameter) and reference documents (ragDocs parameter).

Currently, the following agents are available in the API. Using agents other than those listed below will result in an error.

Additionally, using agents other than "None" requires a personal proof API key.

- None (qabot: no agent settings)
- Business Support (biz)
 - The PowerPoint file generation result of the slide generation function is returned as base64 encoded data.
- Developer Support (developer: Legacy Developer Support, developer_preview: New Developer Support)
 - By default, New Developer Support is selected. Legacy Developer Support can also be selected in the request parameters.
 - Currently, New Developer Support is only available in Japanese language.
- Custom
 - The following are the functional differences from the UI version.
 - The sub-agent of Type "Microsoft 365 Search" is not available.
 - Regardless of the model selected in the sub-agent, the file size limit is 10MB for the total request size, and images in PDFs cannot be read.

Please refer to [here](#) for details on each agent.

■ List of API parameters

- Request Header

Required	Header Name	Value	Descriptions
○	Content-Type	application/json	Fixed value
○	Authorization	Bearer {issued access token}	Enter the OAuth 2.0 access token issued after Bearer.

Required	Header Name	Value	Descriptions
	User-API-Key	{End User's Personal Proof API Key }	This is required if the project's information classification includes "FUJITSU-CONFIDENTIAL" or "FUJITSU-CONFIDENTIAL-IN-TRUST". Enter the personal proof API key issued by the end-user. *Always enter the personal proof API key of the end-user themselves

- Request Body (For the body structure, please refer to the Python request example at the bottom of the table.)

Required	Parameters	Tyeps	Descriptions
☐	endUserEmail	string	End User Email Address *Be sure to enter the end user's own address
☐	messages	list	An array of conversation histories. Each conversation is entered in object format.
☐	role	string	Speaker in a conversation. Specify either "user" or "assistant". Conversations should alternate between "user" and "assistant," beginning and ending with "user."
☐	content	string	What is said in a conversation. Prompt.
	developerPreview	bool	* Only valid for Developer Support agents. Specify either true or false. If true (default), the New Developer Support (Preview) agent will be executed. If false, the Legacy Developer Support agent will be executed. Currently, New Developer Support is only available in Japanese language.
	agentId	string	*Only valid for the New Developer Support agent. Agent ID.Specify the usecase to run with the new Developer Support agent. Please refer to this(Japanese site) for available usecases and agent IDs.
	language	string	*Only valid for the Business Support、 Legacy Developer Support agent The response language of the AI agent. Specify

Required	Parameters	Tyeps	Descriptions
			either "ja" (default value, Japanese) or "en" (English).
	jsonMode	bool	※ This setting is only effective when "Agent setting" is "None" and a Gemini model is selected. Specify true or false (default). If true, the answer will be generated in JSON format (It is not guaranteed that the answer will always be in JSON format.).
	files	list	An array of files to attach. Information for each file is entered in object format. Please refer to the bottom of the page for detailed specifications on file attachments.
	name	string	File name including extension. Required when inputting a file. If the extension is incorrect, the file may not be read correctly.
	mimeType	string	The MIME type of the file. Required when inputting a file. If the MIME type is incorrect, the file may not be loaded correctly.
	data	string	Base64 encoded data of the file. Required if a file is input.

■Example request in Python

```

1 import requests
2
3 # Define request information
4 PROJECT_KEY = "project-key" # ChatAI for Project project key
5 SERVICE_KEY = "service-key" # ChatAI for Project service key
6 ACCESS_TOKEN = "access-token" # OAuth2.0 access token obtained in the previous step
7 END_USER_API_KEY = "end-user-api-key" # Specify the end-user's personal
  identification API key (this is required if the project's information classification
  includes "FUJITSU-CONFIDENTIAL" or "FUJITSU-CONFIDENTIAL-IN-TRUST").
8 END_USER_EMAIL = "end-user-email@fujitsu.com" # Specify the end-user's email
  address
9
10 ENDPOINT = f"https://api.ai-service.global.fujitsu.com/ai-foundation/chat-
  ai/project/{PROJECT_KEY}/service/{SERVICE_KEY}/qa"
11
12 headers = {

```

```

13     "Authorization": f"Bearer {ACCESS_TOKEN}",
14     "Content-Type": "application/json",
15     "User-API-Key": f"{END_USER_API_KEY}" # This is required if the project's
information classification includes "FUJITSU-CONFIDENTIAL" or "FUJITSU-CONFIDENTIAL-
IN-TRUST".If you are not using a personal authentication API key, please delete this
line.
16 }
17
18 data = {
19     "endUserEmail": END_USER_EMAIL, # Specify the end-user's email address
20     "messages": [
21         {
22             "role": "user", # Speaker. Specify either "user"
or "assistant".
23             "content": "First User message", # Prompt.
24             "developerPreview": True, # Only valid for Developer Support
agents.Specify either True or False to indicate which agent to execute.
25             "agentId": "xxx-yyy", # Valid only for new Developer
Support agents. Specifies the execution agent.
26             "language": "en", # Valid only for Business Support
and former Developer Support agents.Specifies the response language.
27             "jsonMode": False # This is only effective when no
agent is set (None) and a Gemini model is selected.If true, the answer will be
generated in JSON format.
28             "files": [ # Enter if you want to attach a
file.
29                 {
30                     "name": "sample.txt", # File name
31                     "mimeType": "text/plain", # MIME type of the file
32                     "data": "6KiT57e0440H440844K/" # Base64 encoded data of the file
33                 }
34             ]
35         },
36         {
37             "role": "assistant",
38             "content": "First assistant response"
39         },
40         {
41             "role": "user",
42             "content": "Second user message"
43         }
44     ]
45 }
46
47 response = requests.post(ENDPOINT, headers=headers, json=data)
48 print(response.text)
49
50 # Response
51 # {
52 #     "output": "(string) AI's response",
53 #     "token": "(float) Remaining token ratio",
54 #     "model": "(string) AI model name",
55 #     "ragText": "(string) Response basis text",
56 #     "ragDocs": "(string) Response basis documents",
57 #     "agent": "(string)AI agent executed. qabot, biz, developer, developer_preview,
etc.",
58 #     "files": [
59 #         {

```

```

60 #         "name": "(string)File name",
61 #         "mimeType": "(string)MIME type of the file",
62 #         "data": "(string)Base64 encoded data of the file"
63 #     }
64 # ]
65 # }

```

■Example request in command line

```

1 curl -X POST "https://api.ai-service.global.fujitsu.com/ai-foundation/chat-
  ai/project/{PROJECT_KEY}/service/{SERVICE_KEY}/qa" ^
2 -H "Authorization: Bearer {ACCESS_TOKEN}" ^
3 -H "Content-type: application/json" ^
4 -d "{\"endUserEmail\": \"END_USER_EMAIL\", \"messages\": [{\"role\": \"user\",
  \"content\": \"First user message\", \"files\": [{\"name\": \"sample.txt\",
  \"mimeType\": \"text/plain\", \"data\": \"6KiT57e0440H440844K/\"}]}, {\"role\":
  \"assistant\", \"content\": \"First assistant response\"}, {\"role\": \"user\",
  \"content\": \"Second user message\"}]}"
5
6 # Response
7 # {
8 #     "output": "(string) AI's response",
9 #     "token": "(float) Remaining token ratio",
10 #     "model": "(string) AI model name",
11 #     "ragText": "(string) Response basis text",
12 #     "ragDocs": "(string) Response basis documents",
13 #     "agent": "(string)AI agent executed. qabot, biz, developer, developer_preview,
  etc.",
14 #     "files": [
15 #         {
16 #             "name": "(string)File name",
17 #             "mimeType": "(string)MIME type of the file",
18 #             "data": "(string)Base64 encoded data of the file"
19 #         }
20 #     ]
21 # }

```

■Example of use in Power Automate

[EN Guide to Using ChatAI for Project API with Power Automate](#) (There is an English version of the attached document at the link)

Regarding the Personal Identification API Key (for FUJITSU-CONFIDENTIAL, FUJITSU-CONFIDENTIAL-IN-TRUST projects,

or use of services configured with AI agents).

- If you have selected "Information Classification Handling" under "Project Management" in ChatAI for Project, each end-user will require a personal proof API key for the ChatAI for Project API (details here).(A personal authentication API key is not required for projects that do not fall under any of the following categories.)
 - When requesting a project that has selected the following regarding "Information Classification and Handling" in "Project Management" for ChatAI for Project
 - FUJITSU-CONFIDENTIAL
 - FUJITSU-CONFIDENTIAL-IN-TRUST
 - When making a request to a service where the "Agent Settings" for "Knowledge Management" in ChatAI for Project are set to something other than None (default).
- How to Issue Keys
 - End-users can issue their own Personal Proof API Key from the "Personal Proof API Key Management Screen" for each project at the following URL:
 - <https://chat.ai-service.global.fujitsu.com/qabot/<Project Key from the ChatAI for Project application design sheet>/qa/key-manager>
 - ↑ This URL is created by adding /key-manager to the end of your project's chat screen URL.

 Rules for Using Personal Proof Keys

Usage Rules	• About Chat AI for Project API Personal Proof API Key ◦ The Personal Proof API Key is required for personal identification when using the ChatAI for Project API in projects with information classification settings including "FUJITSU-CONFIDENTIAL" and "FUJITSU-CONFIDENTIAL-IN-TRUST". ▪ The Personal Proof API Key is not required for projects that do not handle the above information classification categories.

- To execute the ChatAI for Project API, a separate API key and secret for the 'ChatAI for Project API', which can be issued by a 'Project Administrator' on the 'Project Management Screen,' is required. For information on whether the API can be used in each project, as well as the API key and secret, please contact the 'Project Administrator' of each project.

- **About credentials**

- An API key will be issued as credentials.
- If the credentials are leaked, there is a possibility that the information registered as knowledge may be leaked. Please do not disclose or share the credentials with third parties; their use is limited to the applicant only.
- The API key value can only be viewed on the completion screen immediately after issuance. Please note that once you close the issuance completion screen, you will not be able to refer to it again.
- Credentials expire in 30 days, and only two can be issued per person for replacement purposes. If you wish to continue using them, please delete any API keys that are no longer in use and reissue them.
- Credentials can be deleted from the ChatAI for Project API Personal Proof Key Management Screen.

- **Information classification restrictions**

- Each project has a set of available information classification categories. For information on the available information classification categories for your project, please contact your "Project Administrator".

- **Application of ChatAI for Project Terms**

- In addition to the rules set forth in the preceding items, you must comply with the terms of use of ChatAI for Project (not API) when using ChatAI for Project API.

4 . Handling of authentication information (API key)

Manage the authentication information strictly to prevent unauthorized use.

* If you store credentials, do not store them in a location where third parties can access them.

* If the use or suspected use by a third party is confirmed, the project manager is obliged to notify this service, and this service has the right to suspend or delete the relevant authentication information without prior notice.

5 . Others

If you have any other questions, please check the [FAQ](#) and the [internal AI Practice Viva Engage](#).

★ If you get an error with the ChatAI for Project API, check [here](#) first

ChatAI for Project API Specification

	Details	Remarks
Basic Functions	Ability for AI to generate answers based on knowledge registered for prompts entered	
Usage Environment	Environments connected to the internal network (SIG/FJ-WAN/some authorized overseas proxies) * Exceptions	Access is only accepted from the internal network (SIG/FJ-WAN/some authorized overseas proxies). Please connect to the company network when using.

		To apply for an exception IP, apply for "2. IP add/change request"
Delivery Model	Models Available in ChatAI for Project	The model set in "Model & Retrieve Setting" on the "Knowledge Management Screen" is used.
Quota limits	Maximum number of requests per minute: 50 / project Maximum number of requests per day: 24,000 / project	Environment-wide quotas are dynamically assigned and the limits are undefined. The Day quota will reset on 00:00(UTC) every day.
Supported Languages	Japanese, English	It is possible to generate answers in other languages, but please use mainly the ones on the left.
FAQ	Please check here for frequently asked questions.	If you get an error with the ChatAI for Project API, check here
Inquiry	Please check the FAQ above and contact us via Viva Engage.	If there is any change from the information at the time of application, please contact the following email address. FJ-AI Foundation (Web App) Support: fj-ai-found-support@dl.jp.fujitsu.com

File Input Specifications

ChatAI for Project UI app has different specifications for compatible files and sizes. Also, please note that the generation results for the same file may differ from the UI app due to differences in the internal processing method.

Common specifications

Please refer to [the usage procedure](#) at the top of the page for information on how to make a request and the parameters.

	Details	Note
Supported Files	PDF (pdf), Word (docx), PowerPoint (pptx), Excel (xlsx), Text-based files (txt, csv, etc.), image (png, jpeg, webp)	-
Number of attachable files	10 files/each conversation turn	It is counted per conversation turn, not as a total for the entire conversation.
Total File Size Allowable per Upload	Request size up to 10MB	It is limited by the total size of the request (sum of headers and body), not the file size.

PDF files

	Details	Note
MIME type	application/pdf	
plain text	supported	
image	NOT supported	
figure	Only text within the figure is supported.	
tables	supported	It is read as text and not read as a table. (There is a possibility that the AI will recognize it as a table.)
multi-page	supported	
page recognition	supported	It is possible to respond to requests such as "Summarize page 1"

Word files

	Details	Note
MIME type	application/vnd.openxmlformats-officedocument.wordprocessingml.document	Only .docx files are supported. Files with other extensions such as .doc are not supported.
plain text	supported	
image	NOT supported	
figure	NOT supported	
text in figures	NOT supported	
text in tables	supported	It is read as text and not read as a table. (There is a possibility that the AI will recognize it as a table.)
multi-page	supported	
page recognition	supported	It is possible to respond to requests such as "summarize page 1."

PowerPoint files

	Details	Note
MIME type	application/vnd.openxmlformats-officedocument.presentationml.presentation	Only .pptx files are supported. Files with other extensions such as .ppt are not supported.
plain text	supported	
image	NOT supported	
figure	NOT supported	

	Details	Note
text in figures	NOT supported	
text in tables	supported	It is read as text and not read as a table. (There is a possibility that the AI will recognize it as a table.)
text in graphs	NOT supported	
slide number recognition	supported	It is possible to respond to requests such as "summarize slide number 2."
wordart	supported	

Excel files

	Details	Note
MIME type	application/vnd.openxmlformats-officedocument.spreadsheetml.sheet	Only .xlsx files are supported. Files with other extensions such as .xls are not supported.
plain text	supported	
image	NOT supported	
figure	NOT supported	
text in figures	NOT supported	
text in tables	NOT supported	

	Details	Note
text in graphs	NOT supported	
sheets recognition	supported	It is possible to respond to requests such as "summarize sheet 1."
wordart	NOT supported	
function	results are read in after the calculation.	

Text format files

Supported formats (MIME type):

txt(text/plain), csv(text/csv), etc.

Files that can be opened with Notepad (plain text) can be input.

Supported character encodings:

UTF-8, Unicode (with BOM only), Shift-JIS, EUC-JP

* If the character encoding cannot be determined, it will be processed as UTF-8.

Image format files

Supported formats (MIME type):

png(image/png), jpeg(image/jpeg), webp(image/webp)

Zip files

	Details	Note
MIME Type	application/x-zip-compressed	
Readable files in zip	PDF (.pdf) Word (.docx) PowerPoint (.pptx) Excel (.xlsx) CSV (.csv)	See above for specifications of each file. Files that cannot be opened in Notepad are skipped with import errors

	Other files that can be opened in Notepad	
Image	NOT supported	
File size	Request size up to 10MB and 1GB or less before compression	
With Password	NOT supported	

Conversations

View all Start a discussion

Posted in Global - 社内AI実践 / I...



Suehara, Yoshihi...
5h ago

サポートセンター業務で chat ai for projectを使用しています。

過去の問い合わせデータをRAGに取り込んで、事例検索で利用しています。

いつもは同じプロンプトでほしい事例をひっぱり出してくるんですけども、

4/4（土） 9:00～17:00

See 2 comments

 1

Posted in Global - 社内AI実践 / I...



Higuchi, Dai/樋...
Mar 30

☀️ **ChatAIの処理改善 第2弾! / ChatAI Processing Improvements Part 2!**

☀️

English follows Japanese

Yamaguchi, Saki/山口 ...

☀️ **ChatAIの処理を改善しました / ChatAI**

📎 1 attachment

See 2 comments

   30

Posted in Global - 社内AI実践 / I...



Fujimori, Makot...
9h ago

QUESTION

業務委託先からの同意書の取得について

「顧客・外部組織向け業務用ChatAI 利用ルール v1.1に記載されている同意書について確認させてください。

📎 1 attachment

 **See best answer**