

D. Paths in a Complete Binary Tree

time limit per test: 3 seconds


memory limit per test: 256 megabytes

input: standard input

output: standard output

T is a complete binary tree consisting of n vertices. It means that exactly one vertex is a root, and each vertex is either a leaf (and doesn't have children) or an inner node (and has exactly two children). All leaves of a complete binary tree have the same depth (distance from the root). So n is a number such that $n + 1$ is a power of 2.

In the picture you can see a complete binary tree with $n = 15$.

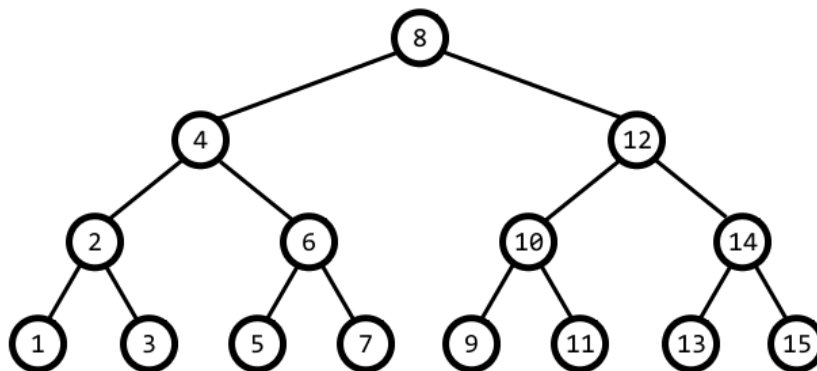

Vertices are numbered from 1 to n in a special recursive way: we recursively assign numbers to all vertices from the left subtree (if current vertex is not a leaf), then assign a number to the current vertex, and then recursively assign numbers to all vertices from the right subtree (if it exists). In the picture vertices are numbered exactly using this algorithm. It is clear that for each size of a complete binary tree exists exactly one way to give numbers to all vertices. This way of numbering is called *symmetric*.

You have to write a program that for given n answers q queries to the tree.

Each query consists of an integer number u_i ($1 \leq u_i \leq n$) and a string s_i , where u_i is the number of vertex, and s_i represents the path starting from this vertex. String s_i doesn't contain any characters other than 'L', 'R' and 'U', which mean traverse to the left child, to the right child and to the parent, respectively. Characters from s_i have to be processed from left to right, considering that u_i is the vertex where the path starts. If it's impossible to process a character (for example, to go to the left child of a leaf), then you have to skip it. The answer is the number of vertex where the path represented by s_i ends.

For example, if $u_i = 4$ and $s_i = \text{«UURL»}$, then the answer is 10.

Input

The first line contains two integer numbers n and q ($1 \leq n \leq 10^{18}$, $q \geq 1$). n is such that $n + 1$ is a power of 2.

The next $2q$ lines represent queries; each query consists of two consecutive lines. The first of these two lines contains u_i ($1 \leq u_i \leq n$), the second contains non-empty string s_i . s_i

Educational Codeforces Round 18

Finished

→ Virtual participation

Virtual contest is a way to take part in past contest, as close as possible to participation on time. It is supported only ACM-ICPC mode for virtual contests. If you've seen these problems, a virtual contest is not for you - solve these problems in the archive. If you just want to solve some problem from a contest, a virtual contest is not for you - solve this problem in the archive. Never use someone else's code, read the tutorials or communicate with other person during a virtual contest.

[Start virtual contest](#)

→ Problem tags

[bitmasks](#) [trees](#)

No tag edit access

→ Contest materials

- Announcement
- Tutorial

doesn't contain any characters other than 'L', 'R' and 'U'.

It is guaranteed that the sum of lengths of s_i (for each i such that $1 \leq i \leq q$) doesn't exceed 10^5 .

Output

Print q numbers, i -th number must be the answer to the i -th query.

Example

input
15 2 4 UURL 8 LRLLLLLLLL
output
10 5

[Codeforces](#) (c) Copyright 2010-2017 Mike Mirzayanov

The only programming contests Web 2.0 platform

Server time: Mar/28/2017 19:18:36^{UTC-5} (c2).

Desktop version, switch to [mobile version](#).