

Today's Class

Class Objectives

In today's class, we will introduce:



JavaScript Definitions



JavaScript Basics:



Variables



Logging, alerting, prompting



Arrays



If/else statements

JavaScript

Prepare to become true coders!



How to Learn JavaScript





Time to Take Notes!



Learning JavaScript

Follow these general tips:



Review classwork immediately.



Redo class activities at home.



Come to office hours and keep asking questions.



Do not fear—you will get this!




Partner Activity:

Code Dissection

A big part of being a developer is learning on the fly!

Instructions sent via Slack



Partner Activity: Code Dissection



Download the file sent to you via Slack.



Open it in Chrome and observe what happens.



With a partner, try to explain how the code connects to the events that happen on the page.



When downloading code from Slack, make sure you choose **Download**. If you copy and paste directly from Slack, your code will not work!





JavaScript Definition

JavaScript is one of the three fundamental programming languages of the modern web (the others are HTML and CSS).

HTML	css	JavaScript
Used to write content.	Used to format content.	Used to create dynamic web applications that take in user inputs, change what's displayed to users,
HTML		animate elements, and much more.



Variables



The *nouns* of programming



Numbers, strings, Booleans, etc.




Made up of a **name** and a **value**

```
var name = "Snow White";
var dwarfCount = 7;
var isSleeping = true;
```




Instructor Demonstration Variables

Variable Basics: Syntax

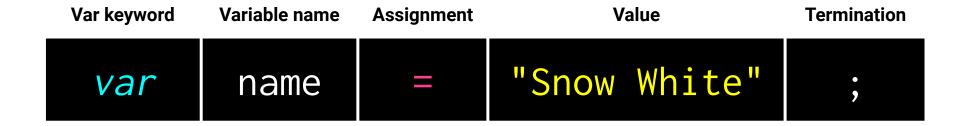


Variable Basics: Syntax

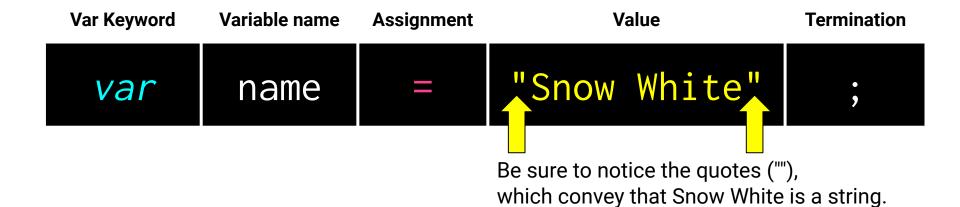



Activity: Variables

In this activity, you will fill in the missing JavaScript code to create variables.



Activity: Variables

01

Using the instructions in the file sent to you, fill in the missing JavaScript code to create variables.

02

When you are done, open the file in Chrome and check the output.



If you successfully complete the activity, you will see a series of pop-up windows with text inside.



Finally, look at the rest of the code and try to figure out why the text displayed the way it did.





Time's Up! Let's Review.





Instructor Demonstration Console Log

Console.log

console. log is a quick expression that prints content to the debugger—very useful during development and debugging!

```
var quick = "Fox";
var slow = "Turtle";
var numbers = 121;
// The console.log() method is used to display data in the the browser's console.
// We can log strings, variables, and even equations.
console.log("Teacher");
console.log(quick);
console.log(slow);
console.log(numbers + 15);
```

How do you comfort a JavaScript bug?



How do you comfort a JavaScript bug?





Activity: Console Log




Activity: Console Log

- 01
- Using the file sent to you as a guide, modify the code so that is uses *console*. log instead of alerts to display messages.
- 02
- Then open the file in the browser and open up Chrome Developer Tools -> Console to confirm that the changes worked.
- 03

With a partner, discuss the difference between console.log and alert.

```
alert("Welcome: " + name);
alert("Pizzas cost $5 each");
alert("Your total is: $" + totalCost);
alert("Still Hungry: " + isHungry);
```



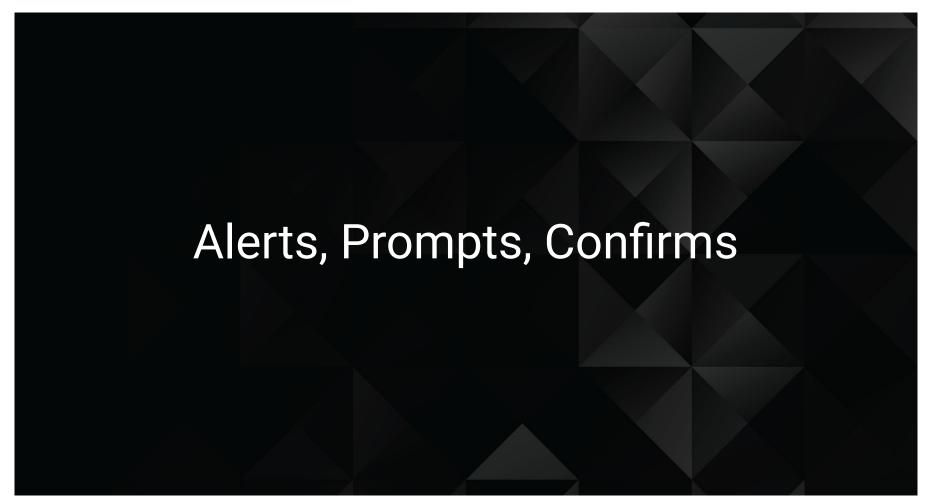





Instructor Demonstration
Alerts, Prompts, Confirms

Alerts, Prompts, Confirms

Alerts, prompts, and confirms create a popup in the browser when run. These are also useful for development and debugging.

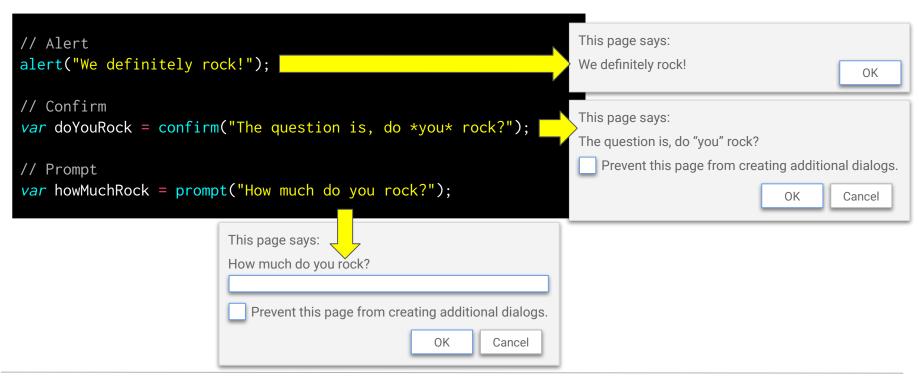



Activity: Alerts



Activity: Alerts

Write JavaScript code that does the following:

01

Using a confirm, ask the user "Do you like _____?" and store their response in a variable.

02

Using a prompt, ask the user: "What kind of _____ do you like?" and store their response in a variable.



alert both variables to the screen.





Time's Up! Let's Review.





Instructor Demonstration Conditionals

If/Else Statements Are Critical

Each statement is composed of an if, else-if, or else (keyword), a condition, and the resulting code in curly brackets { }.

```
// If the user likes sushi (confirmSushi === true), we run the following block of code.
if (confirmSushi) {
  alert("You like " + sushiType + "!");
// If the user likes ginger tea (confirmGingerTea === true), we run the following block of code.
else if (confirmGingerTea) {
  alert("You like ginger tea!!");
// If neither of the previous condition were true, we run the following block of code.
else {
 alert("You don't like sushi or ginger tea.");
```



Partner Activity: If/Else Part 1

With a partner you will create a website (from scratch) that asks users if they eat steak.



Partner Activity: If/Else Part 1



With a partner, create a website (from scratch) that asks users if they eat steak.



If they respond with yes, alert the following to the page: "Here's a Steak Sandwich!".



If they respond with no alert the following to the page: "Here's a Tofu Stir-Fry!".



Bonus: Ask what the user's birth year is. If they are under 21, alert the following: "No sake for you!"






Time's Up! Let's Review.



Activity: If/Else Part 2

As a class, we will go through and predict what the result of a conditional statement will be.



Activity: If/Else Part 2

Do this activity as a class.



Open the file sent to you in Sublime.



As a class, go through and predict what the result of each conditional statement will be (i.e., will the "if" or the "else" be triggered).




Then run the program to check if you are right. Note any that you got wrong and ask about it in class.



Take a Break!



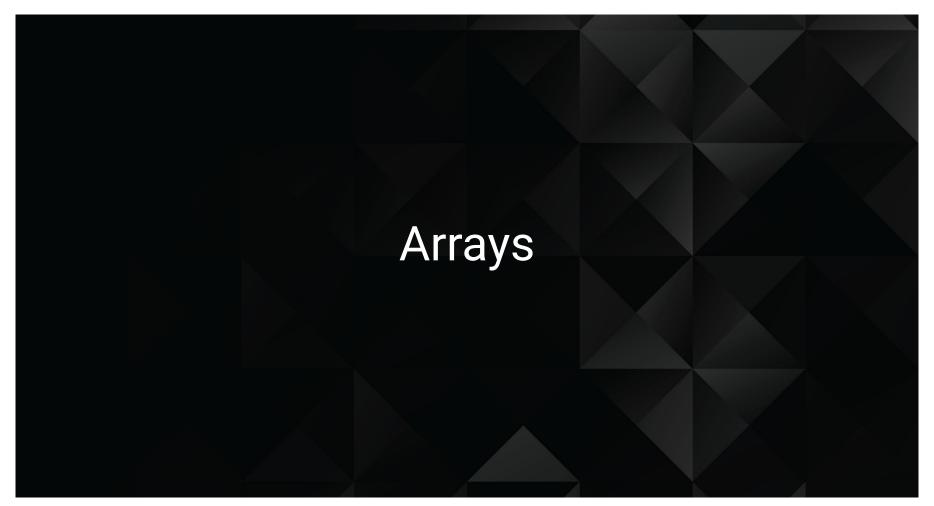

The Zoo Pen

Array Name: zooAnimals



The Zoo Pen: Coded

Array Name: zooAnimals



Coded in JavaScript using an array:

```
// Our array of zoo animals.
var zooAnimals = ["Zebra", "Rhino", "Giraffe", "Owl"];
```

Arrays



Arrays are a type of variable that are collections.

These collections can be made up of strings, numbers, Booleans, other arrays, objects ... anything.

Each element of the array is marked by an index. Indexes always start with 0.

```
var nickCharacters = ["Tommy", "Doug", "Oblina"];
var diceNumbers = [1, 2, 3, 4, 5, 6,];
var mixedArray = ["Zoo", 12, "Carrot", 3];
```

Arrays: Indices



To recover the value at any specific index, include the name of the array with a square bracket and inside the bracket is the element's index.



You can easily grab the number of elements in the array using the method array.length.

```
// Our array of zoo animals.
var zooAnimals = ["Zebra", "Rhino", "Giraffe", "Owl"];

// Prints 4 to the console because there are 4 items in our zooAnimals array.
console.log(zooAnimals.length);

// Prints Rhino to the console. Remember, the first item in an array has an index position of 0!
console.log(zooAnimals[1]);

// Prints undefined...because the last index ("Owl") is 3.
console.log(zooAnimals[4]);
```



Instructor Demonstration Arrays

Partner Activity: Code Dissection

With a partner, take a few moments to look over the following code.

Above each *console*.log(), write a comment predicting what you think the output will be.





Challenge: Favorite Band Array

In this challenge, you will create an array of your favorite bands.



Challenge: Favorite Band Array


Create a website that accomplishes the following:

Create an array of your favorite bands.

With a prompt, ask the user's favorite band.

If it's one of your favorites, alert: "YEAH, I LOVE THEM!"

If it's not, alert: "Nah. They're pretty lame."





Hint: You will need to research how to use .indexOf()

Hint: You will also need to research how to use .toLowerCase()




Challenge: Code Dissection (Re-examined)

Re-examine the file sent to you at the start of class. See if you can better understand how it works after having completed today's class.

Suggested Time: 5 minutes



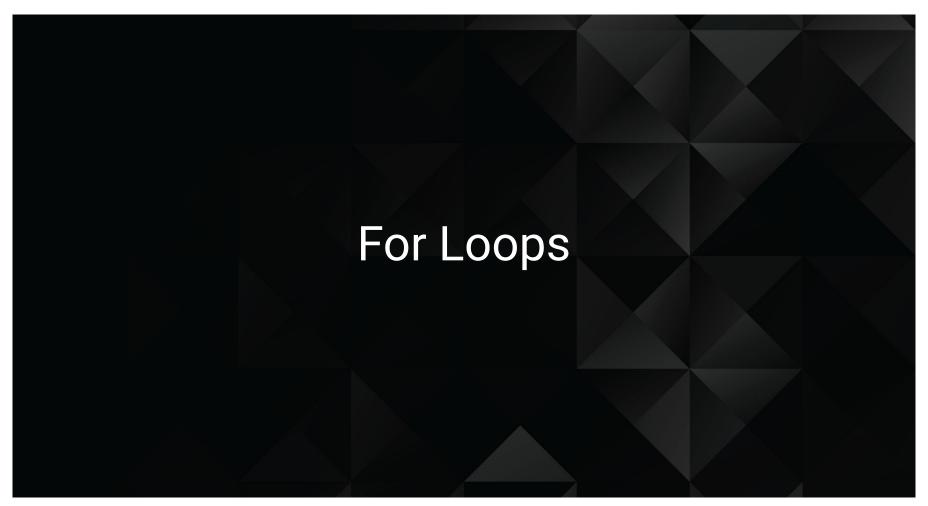

Back to The Zoo Pen

Array Name: zooAnimals



Coded in JavaScript using an Array

```
// Our array of zoo animals.
var zooAnimals = ["Zebra", "Rhino", "Giraffe", "Owl"];
```

Back to The Zoo Pen

Array Name: zooAnimals





What's wrong here?

```
// Array of zoo animals.
var zooAnimals = ["Zebra", "Rhino", "Giraffe", "Owl"];

console.log(zooAnimals[0];
console.log(zooAnimals[1];
console.log(zooAnimals[2];
console.log(zooAnimals[3];
)
Elements C

② ▼ top ▼ □ Pre

Rhino

Giraffe

Owl

console.log(zooAnimals[3];
>>
```

Don't Repeat Yourself (DRY)

Repeated Code! Let's be more efficient.

```
// Array of zoo animals.
var zooAnimals = ["Zebra", "Rhino", "Giraffe", "Owl"];

console.log(zooAnimals[0];
console.log(zooAnimals[1];
console.log(zooAnimals[2];
console.log(zooAnimals[3];

Elements C

Zebra

Rhino

Giraffe

Owl

console.log(zooAnimals[3];

>>
```



Activity:

For Loop Dissection



Activity: For Loop Dissection



With a partner, spend a few moments trying to dissect the code sent to you.



Try to explain to one another what is happening in each line of code.



Feel free to do research if you are stumped. As a hint, look into the phrase "for loop".



Be prepared to share when time is up.




Enter the For Loop

For loops are **critical** in programming.

We use for loops to run **repeated blocks of code** over a set period.

Each for loop is composed of a:

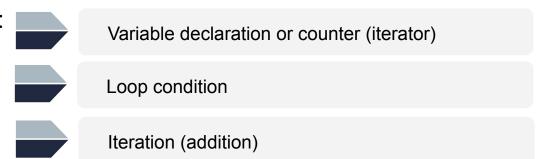

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];

// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {
   console.log("I love " + vegetables[i]);
}</pre>
```

Enter the For Loop

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];
// Loops through each index of the Array.
for (var | i = 0; | i < vegetables.length; | i++) {</pre>
  console.log("I love " + regetables[i])
// Logs:
   I love (
             rots
   I love F
   I love
             tuce
// I love
             atoes
                      Condition
                                     Increment
        Iterator
```

Enter the For Loop

Code between the $\{\}$ gets repeated each time the iterator is smaller than the condition (in this case, as long as i < 4).

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];
// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {</pre>
 console.log("I love " + vegetables[i]);
// Logs:
// I love Carrots
   I love Peas
// I love Lettuce
  I love Tomatoes
```

Enter the For-Loop

Running the code "loops" through and prints each element in the array.

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];
// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {</pre>
  console.log("I love " + vegetables[i]);
   I love Carrots
     love Peas
     love Lettuce
     love Tomatoes
```


```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];
// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {</pre>
  console.log("I love " + vegetables[i]);
     When i = 0 ... console.log("I love Carrots")
    Carrots
                      Peas
                                      Lettuce
                                                      Tomatoes
    Index 0
                     Index 1
                                      Index 2
                                                       Index 3
```

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];
// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {</pre>
  console.log("I love " + vegetables[i]);
                       When i = 1 ... console.log("I love Peas")
    Carrots
                      Peas
                                      Lettuce
                                                      Tomatoes
    Index 0
                     Index 1
                                      Index 2
                                                       Index 3
```

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];

// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {
   console.log("I love " + vegetables[i]);
}</pre>
```


When i = 2 ... console.log("I love Lettuce")

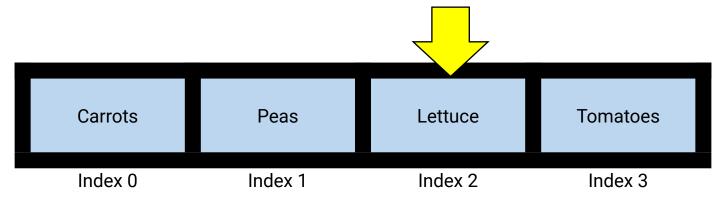

```
// Start with an Array.
var vegetables = ["Carrots", "Peas", "Lettuce", "Tomatoes"];

// Loops through each index of the Array.
for (var i = 0; i < vegetables.length; i++) {
   console.log("I love " + vegetables[i]);
}</pre>
```

When i = 3 ... console.log("I love Tomatoes")

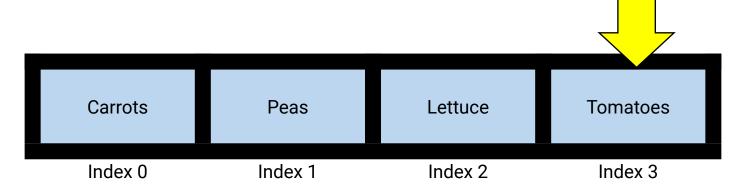



Activity: For Loop Zoo



Activity: For Loop Zoo

- 01
- Spend a few moments rewriting the code below using a for loop.
- 02
- If you need help, use the code from the previous example as a guide.
- 03

Then try to explain to the person next to you how your code works.

```
// Array of zoo animals.
var zooAnimals = ["Zebra", "Rhino", "Giraffe", "Owl"];

console.log(zooAnimals[0];
console.log(zooAnimals[1];
console.log(zooAnimals[2];
console.log(zooAnimals[3];
```



