Under the Clock: Shorter Steps and Fewer Bytes for Tool-Using Agents

Wilmer E. Henao
Advanced Engineering, Invesco

Abstract

In the Gemma 4 Developer Agent competition, Gemma 4 31B, served in 4 bits on four L4 GPUs, gets 8 minutes and 24 tool calls to fix a repository issue, so shorter or faster steps buy more of them. We shortened steps by fine-tuning and sped them up by pruning, and traced each to tasks solved. Fine-tuning on the model's own successes mostly changed how long it reasons before each call: supervising only calls after short reasoning solved more of the competition's tasks (25 vs 18, exploratory) but not more from unseen repositories, and a stronger teacher's preferences halved the slowest steps but kept the agent working after it had submitted. Keeping 70% of the MLP channels decodes 1.15 times faster for little loss, yet the pruned model solved 20 of 112 tasks against 32 and 34 for the full model ($p = 1.5 \times 10^{-5}$): in 24% of its calls, one string argument swallowed the next. Average loss missed this; a 15-minute next-action test caught it. Healed by the full model and merged into its 4-bit weights, the pruned model kept its speed and solved 32; on 56 tasks, a parser that accepts its wrong quotes did as well without training. Under a clock, how an agent writes its calls and when it stops mattered more than how fast it decodes. Code and notebooks: https://github.com/wilmerhenao/under-the-clock.

1 Introduction

A coding agent works in steps: it reasons, calls a tool and reads the result. Under a fixed clock, shorter steps (fewer tokens) or faster ones (cheaper tokens) buy more of them. We pulled both levers, fine-tuning (Section 3) and pruning (Section 4), and asked what each buys in tasks solved. The answer turned less on how fast the model runs than on how the agent reasons, writes its calls and stops: fine-tuning moved reasoning length before behavior, and pruning broke the tool calls (Figure 1) in a way average loss missed. Section 5 repairs the pruned model, by training and by parsing, and Section 6 shows how much of any comparison between agents is noise.

2 Setting

Episodes. The competition's harness [19] runs a declarative agent (YAML, prompts, optional LoRA [24] adapters) in a sandbox at the repository's pre-fix commit, with shell, file, edit, patch and three code-graph tools. An *episode*, one attempt at a task, gets 8 minutes, 24 tool calls, a 4,096-token thinking budget and temperature 0.2, and the agent can ask a status tool for the time left. It ends when the agent answers without a tool call after submitting a patch (it *stops*), at the 24-call cap, or at the clock (a *timeout*). Hidden tests then grade the diff, as in SWE-bench [29], but a timeout loses the task: none of our 2,027 timed-out episodes passed, even after a submitted patch. An episode *loops* when it repeats one call, arguments included, three times in a row (repeated empty submits aside). At 14,336 tokens of context the model summarizes older events (*compaction*).

Tasks. We compare models on the 71 tasks of the competition's public repositories (*development* tasks) and on verified tasks from *unseen* repositories, outside every training pool (two turned up later under new owners; no model solved their tasks, so they change no count; Appendix B). The scorer serves only its own 4-bit (W4A16) checkpoint plus LoRA adapters under 3 GiB, so a pruned model cannot be submitted; we study pruning for self-hosted agents on the same model, harness, hardware and clock.

Hardware and comparisons. We trained on a TPU v5e-8 and served the competition's Gemma 4 31B checkpoint [17] on four L4 GPUs with vLLM [32] (tensor parallel 4). A *paired session* runs two *arms* (say, the base model and an adapter) on one server, 8 tasks each at a time on a 16-minute clock for the doubled load, and compares them by the tasks one solved and the other did not (exact McNemar test; Section 6 measures the noise). There a model call that writes n tokens takes about $a + n \cdot b$ seconds, with $a = 16.7$ s and $b = 0.139$ s per token at these 16 concurrent requests (one stream alone decodes at 0.026 s per token; Figure 2), and model calls fill 98% of an episode: fine-tuning acts on n, pruning on b and on the prompt reading inside a. Models with different weights cannot share a server; in a *same-session comparison* each serves the same tasks alone, 8 at a time on the 8-minute clock, in ABCD–DCBA order over two blocks of 56 tasks, so neither order nor time of day favors one.

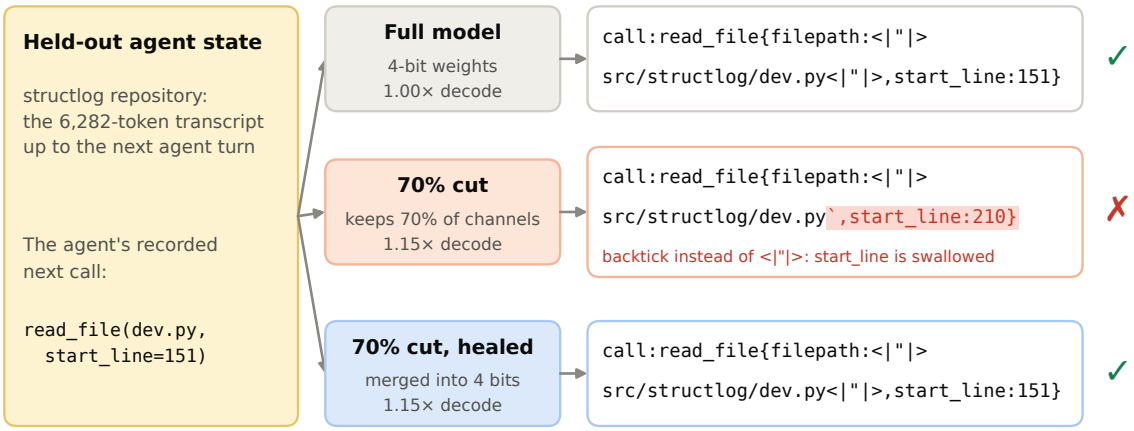


Figure 1: Three models' next call after one held-out transcript. The 70% cut (70% of MLP channels kept) ends the path with a backtick instead of Gemma's string delimiter <|"|>, swallowing `start_line`; healed and merged, it writes the full model's call.

3 Lever 1: fine-tuning moves length first

Pipeline. We ran Gemma through the harness in private Kaggle Benchmarks [30] tasks on SWE-rebench-style [4] task banks and FreshSWE-Py [41] (issues filed after the model's cutoff), never on development or unseen repositories, and kept the runs whose diffs passed the hidden tests (422 for *Every-call*, 458 for *Short-thought*, 611 for *Short-thought+*; Appendix B), rendered as the scorer sees them: a compaction simulator matched the token counts of all 82 captured scorer requests, and Gemma writes the summaries. On these we trained rank-16 LoRA adapters on TPU (JAX/Tunix [18], fp32 factors) with the loss on the tool calls only, each named after what it supervises (Table 1).

Length moved both ways. *Imitation* wrote short, narrated thoughts and looped (26 consecutive re-reads of one file) while its validation loss fell from 1.05 to 0.37. *Thought-first*, trained only on turns that opened with a thought, which selected long ones, thought at length on every turn, made 1,171 model calls to the base's 1,709 in the same time, and lost eight tasks without winning one.

One filter reversed the long steps. *Every-call* lengthened steps and lost to the base. With the same recipe and hyperparameters on 36 more runs, *Short-thought* supervised a call only if at most 1,500 characters of reasoning preceded it (59% of calls): steps got shorter, timeouts fell from the base's 38 to 24, and it solved 25 tasks to the base's 18. No reasoning token was trained, so length moved

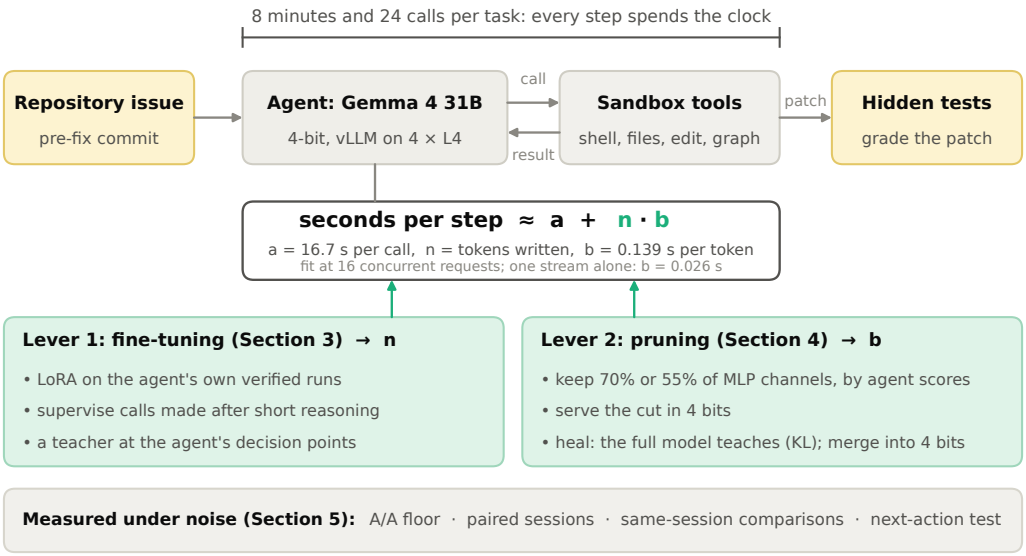


Figure 2: The agent under the clock and the two levers. The step-time fit (a, b) is from paired sessions at 16 concurrent requests.

Table 1: Fine-tuned adapters against the base model. Each comparison is one paired session on the tasks both arms finished (Appendix B); step text is the 90th percentile of characters the agent writes per step.

Adapter	Trained on	Step text vs base (p90, full sessions)	Solved vs base (discordant: only-this / only-base)
Imitation	Public runs of stronger models (SWE-smith, SWE-Gym, R2E-Gym, SWE-Zero), whole turns	0.24×	16 vs 26 of 103 (4/14), $p = 0.031$
Thought-first	Own runs, only turns that open with a thought	1.72×	19 vs 27 (0/8), $p = 0.008$
Every-call	Own runs (422), every call	1.11×	16 vs 22 (2/8)
Short-thought	458 runs, only calls after at most 1,500 characters of reasoning	**0.90**×	**25 vs 18 (8/1), $p = 0.039$**; unseen: 17 vs 19 of 64 (2/4)
Short-thought+	The same, +153 runs	1.03× of *Short-thought*	vs *Short-thought*: 18 vs 18 dev; 27 vs 35 of 125 unseen (1/9), $p = 0.021$

only through which calls were supervised, much as training on short chains shortens reasoning models [23]. The gain is exploratory: one session, against a low draw of a base that solved 17–27 of these tasks across sessions. On unseen repositories *Short-thought* tied the base, and more data (*Short-thought*+) lost there (77 timeouts vs 53), as on the public leaderboard (*Short-thought* 0.18, *Short-thought*+ 0.10, base 0.15).

A teacher at decision points. An *agent state* is the transcript up to the agent's next turn. At 717 states, mostly from slow or failed episodes, the stronger Gemini 3.8 Flash (`gemini-3.8-flash`, medium thinking) judged Gemma's next step and rewrote the ones it found wasteful, slow or wrong: 589 preference pairs for $9.21. Trained on them from the base with DPO [48] (*Teacher-DPO*), Gemma took on the teacher's terse style (90th-percentile step 172 tokens; 514 for *Short-thought* in that session) but looped in 36 of 98 episodes and lost to *Short-thought* (20 vs 27). A second stage started from *Short-thought* and added a next-token loss on the teacher's step (*Teacher-DPO-2*, the RPO objective of Liu et al. [35]). It no longer lost to *Short-thought* (20 vs 17, 5/2), looped in only 6 of 70 episodes and halved the slow steps (229 vs 610 tokens and 56 vs 125 s at the 90th percentile, against *Short-thought* in that session), yet the agent was not faster: in 38 of the 65 episodes where it submitted a patch, it kept calling tools until the clock took the task, though the patch changed in only one, and 52% of its episode time came after its first patch. The same stage without the preference term stopped normally but looped (31 of 103 episodes); it solved 24 vs 19 on the 84 tasks both arms finished ($p = 0.18$), partly because loops ended its episodes early at the call cap. The teacher's data shortens steps and brings loops; the preference term prevents the loops but breaks the stop.

4 Lever 2: prune what the agent does not use

Each of the model's 60 layers has a gated MLP with 21,504 hidden channels, about 70% of the layer's weights. We score each channel by the size (RMS) of its activation on 300 agent rows (2.37 M tokens; a row is a trajectory as the scorer renders it, or its part after a compaction) times the norm of its output (down-projection) weights, and keep the top share in every layer, as an exact mask, without retraining or reconstruction. A cut is named by the share it keeps: the *70% cut* removes 30% of the channels, 21% of the layer's weights. Its *damage* is the rise in loss, in nats per token, on *agent tokens* (the thought and call of each turn with at most 1,500 characters of reasoning, 17% of the agent's text) in 40 held-out rows from other tasks, where the full model scores 0.26. The 70% cut costs +0.080 when its channels are scored on agent text, +0.533 when they are drawn at random (one seed) and +0.867 when scored on WikiText-103 [39] in chat format. Each score keeps the channels its own text uses: the WikiText-chosen cut costs WikiText only +0.145 against +1.316 for the agent-chosen one, so each cut hurts the other domain more than a random cut does (Appendix A).

Real 4-bit cuts. We then cut the competition's 4-bit checkpoint itself and served each cut in vLLM, keeping a multiple of 512 channels per layer as the 4-bit kernels require (18,432, 14,848 and 11,776 of 21,504, so 69% for the 70% cut). The checkpoint shares one 4-bit scale per group of 32 inputs, so removing single channels splits the down projection's groups and we re-quantize it (activation-weighted); removing whole groups needs no re-quantization but loses twice as much. The 85%, 70% and 55% cuts decode 1.05, 1.15 and 1.24 times faster (1.03–1.14 with 8 streams) for a served damage of +0.025, +0.084 and +0.188, within 0.005 nats of what masking the 16-bit model predicted, a gap the size of the channel rounding (Appendix A). Removing 6 whole layers by block influence [38] costs +0.925 for 1.07× (Figure 3).

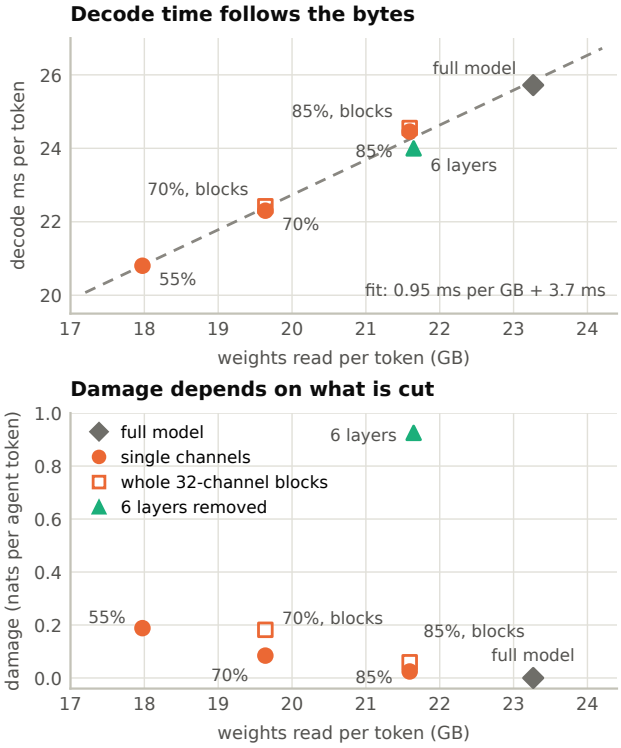


Figure 3: Decode time follows the bytes read (top). At equal bytes, damage depends on what is removed (bottom).

Speed without a cut. N-gram speculative decoding [50], which drafts tokens by copying from the context, kept the full model's calls (89% the same next call, malformed 2/103) but sped up real agent turns only 1.05–1.07×: unlike a cut's, its gain depends on the text (3.4× on a synthetic continuation, Figure 4). We did not test Gemma 4's own drafter, a multi-token-prediction head [17].

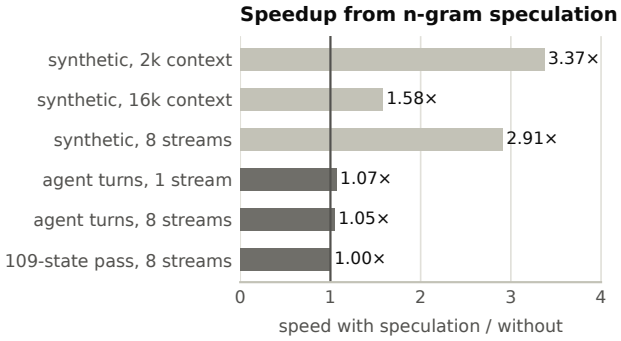


Figure 4: N-gram speculative decoding against plain decoding (full model, same session).

Tasks under the clock. In the same-session comparison on 112 unseen-repository tasks (Figure 5), the 70% cut solved 20 tasks against 32 and 34 for two runs of the full model, which differed from each other on 8 (3/5). It won none of the tasks that separated it from either run, in both task blocks and both orders (17 tasks differ from the runs' average, all against the cut; two-sided exact sign-flip test, as pre-registered, $p = 2^{-16} = 1.5 \times 10^{-5}$), losing them at the clock: 72 timeouts against 43–44. The failure is in the call syntax. Gemma 4 writes a call as `call:name{key:<|"|>text<|"|>,...}`, and the cut often closes a string with a backtick or a JSON quote instead of <|"|> (Figure 1), so the string runs on and swallows the next argument. This broke 24% of its calls, against 2–3% for the full model: the call fails, the agent resends it, and 42 of its episodes looped (full model: 4 and 7).

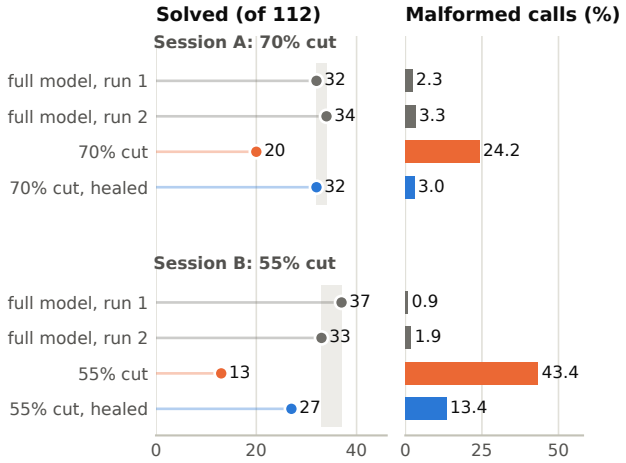


Figure 5: Same-session comparisons on 112 unseen-repository tasks. Grey band: two runs of the full model.

5 Repairing the cut

Healing from the full model. Healing trains a rank-16 LoRA on the cut, here for two epochs on 628 agent rows in two arms on identical batches: one imitates the full model by minimizing $\mathrm{KL}(\mathrm{full} \,\|\, \mathrm{cut})$ at every token, the other minimizes the plain next-token loss. A removed channel gets no gradient, so the adapter slices exactly onto the 4-bit cut. The KL arm met its pre-registered bar (damage below $+0.04$ and KL halved; 2.4 TPU hours): in the trainer's bf16 evaluation damage fell from $+0.085$ to $+0.021$ and KL on agent tokens from 0.098 to 0.042. The next-token arm went below the full model's loss (-0.078) while its KL rose to 0.243: it fit the data rather than the full model. Trained on the tool calls alone (token level only), the KL arm cut the calls' KL from 0.045 to 0.025, short of its pre-registered half, while the next-token arm let the rest drift ($+0.195$). Served through vLLM's LoRA path, the adapter costs the whole speedup (1.02× against 1.15×), so it must be merged into the 4-bit weights. Rounding each merged weight to the nearest 4-bit value would erase the repair, whose changes average 5% of a quantization step (as Scale-QLoRA [34] found), so we round stochastically [22]: up or down at random, right on average, on the checkpoint's own grid. Per

weight, that noise carries about 19 times the change's energy, but it is independent across weights while the change is low-rank; from one draw, the merged cut keeps the repair (+0.022 nats) and the speed (1.15×). Merging in bf16 and re-quantizing with fresh scales, as GPTQ [16] would, is the alternative we did not test.

In the same-session comparison the healed 70% cut solved 32 of 112, within noise of the full model (one task below its mean; 95% interval −7.5 to +5; discordant 5/5 and 6/8) and 12 more than the unhealed cut (15/3, $p = 0.0075$). With no margin fixed in advance, this is not non-inferiority: the plan written before the run expected to detect a loss the size of the unhealed cut's, not half of it. Its malformed calls fell to 3%. Faster per call (16.9 s against 19.0–19.3 s at equal length), it had 36 timeouts against 43–44, but most of the difference turned into endings at the 24-call cap (21 against 12–16), which pass one time in five: under the cap its speed was worth about one task. The 55% cut (1.24×) solved 13 against 37 and 33; healing recovered the same share of its damage (+0.185 to +0.047, missing its +0.04 bar) and 14 of its 22 lost tasks, still short of the full model ($p = 0.007$), with malformed calls down from 43% to 13% (full model 1–2%).

A next-action test. Task sessions take hours, so we built a 15-minute check: at 109 held-out agent states (starts of short-reasoning turns in the 40 held-out rows), each model writes its next call greedily, and we compare it with the full model's (Figure 6). The same weights with other batching agree on 78% of calls, a floor set by numerics [64]; sampling at the agent's temperature agrees on 64%; the cuts, healed or not, on 28–42%. Exact agreement does not track tasks (the unhealed 70% and 55% cuts, which solved 20 and 13, agree on 29% and 28%), but the malformed share does, and so does agreement with the call the agent actually made (full 0.40, healed 0.34, 70% 0.28, 55% 0.24). In an earlier version of the test (38 states), both healing arms matched the full model's next call equally often (16 each, against 13 for the unhealed cut), so the KL arm was chosen by its bar, not by behavior. The test is a gate, not a predictor, and a thin one: the 70% cut wrote 8 malformed calls of 100 against the full model's 2 of 102 (two-sided Fisher $p = 0.057$), a rate its sessions, resending each failed call, compounded to 24%; and the 85% cut (6 of 101) never ran a session, so the gate has no calibrated bar.

A better score? Scoring channels only on agent tokens, as RAC calibrates on a model's own chains [36], changed nothing at 70% (Figure 6). Scoring by token role (after SKIM [9], Section 7) gives an equal vote to text read, prose, argument values, call syntax and the closing quote: only 0.08% of positions, but where the 55% cut's loss rose most (+0.50 nats, against +0.19 overall). At 141 states the role-scored cut halved both that rise and the wrongly closed strings, but its

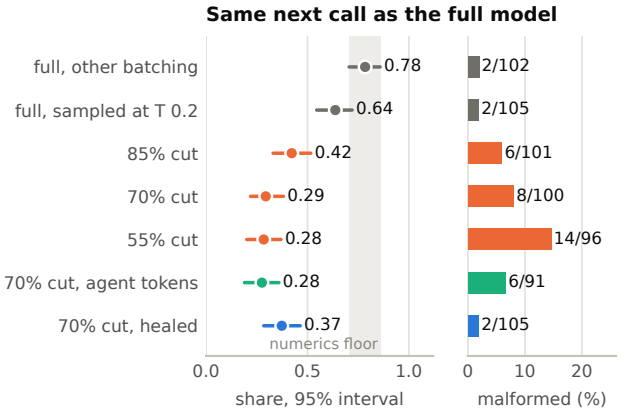


Figure 6: The next-action test at 109 held-out states (agreement over the 102 where the full model calls; malformed shares over each model's calls). Grey band: the same weights with other batching.

calls lost their first token instead (Figure 7): 20% of its call attempts failed, against 19%. Its pre-registered test failed (malformed parsed calls 12/112 against 20/122, one-sided Fisher $p = 0.14$, bar 0.05); paired over the 103 states where both cuts called, 9 broke only for the plain cut and 1 only for the role-scored one (exact McNemar $p = 0.02$, descriptive).

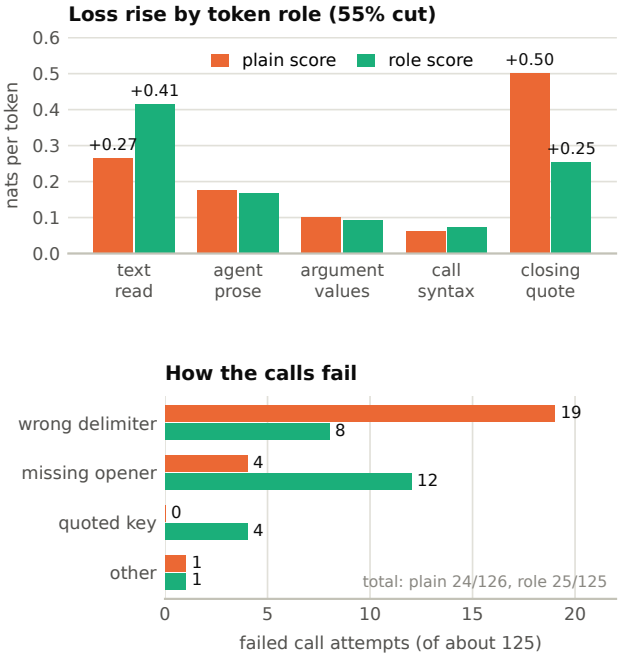


Figure 7: Scoring by token role (55% cut, 141 states). The closing quote recovers and the opener breaks.

A tolerant parser. The cut's slips are regular: a backtick, a JSON quote or an escaped quote where <|"|> should close a string, or a stray quote after a key. A parser that accepts them, only inside an open string and only directly

before a parameter of the requested tool or the end of the arguments, repairs 53 of the cuts' 68 malformed calls in the next-action test. We served it as a vLLM tool-parser plugin, which rewrites the call text and hands it to the stock Gemma 4 parser, and ran the unhealed 70% cut with it on the first block of the same-session comparison: the same 56 tasks, harness, server settings and clock, in a later session. It solved 15, against 8 for the same cut in the same-session comparison (9 tasks gained, 2 lost; exact McNemar $p = 0.065$), 14 and 15 for the two full runs and 14 for the healed cut. That meets the recovery we pre-registered for this cross-session test (at least four more tasks, discordant at least 3:1) and closes the whole gap to the full runs' mean of 14.5. Its timeouts fell from 37 to 20 (full model: 21 and 23) and its loops from 20 episodes to 4 (2 and 5). The parser rewrote 92 of its 1,165 calls (7.9%), the next-action test's rate of 8 in 100, and left none malformed; by first match, 51 rewrites replaced a backtick, 14 an escaped quote, 10 a JSON quote and 17 a quote after a key. On these tasks the same cut without it had 21% malformed calls: resending each failed call had compounded the slip. The parser needs no training and leaves the weights alone, but it repairs only the slips we listed, after the fact.

6 Measuring agents under noise

Between sessions the same model moved by up to ten tasks and flipped 7–14% of the same unseen tasks, so we compared adapters only within paired sessions. Two identical full-model arms on one server, our *A/A floor*, flipped 6 of 82 tasks (2/4), as many as across sessions: pairing controls load and time of day but not these flips, so only lopsided splits such as 8/1 carry signal. Pairing also couples the arms: one that writes less speeds up its rival. Competitions give a clean held-out test [51], but a leaderboard score is one more session: the base model's own submissions scored 0.10–0.18, the same range as every adapter's, so we ranked adapters only by paired sessions. Single-session p-values near 0.04, among about twenty adapter comparisons, are exploratory, and we claim only directions that held across sessions or mechanisms. The same-session, healing, role, parser and speculation tests are confirmatory: their analysis sets, primary tests and bars were fixed in dated logbook entries before each run, released with the code (`docs/preregistrations.md`).

7 Related work

Fine-tuning on a model's own filtered successes dates to expert iteration [3], STaR [65] and ReST-EM [52]; SWE-Gym [47] found it weak for software agents, and SWE-smith [62], R2E-Gym [25] and SWE-rebench [4] supply tasks and trajectories. Training on shorter chains helps reasoning models [23]. Agents overthink [10] and, under wall-clock budgets, fill spare time with repeated actions (On the Clock [56]), as *Teacher-DPO-2* did; that paper's remedy, showing the agent the time, was already in our harness. *Teacher-DPO*'s collapse under DPO [48] resembles likelihood displacement [46, 49], and *Teacher-DPO-2*'s objective is RPO [35].

Perplexity misses what compression breaks [26], for agents too (ACBench [13], worst on JSON outputs); flips and KL track it better [15], and 4-bit quantization hides amplified agent failures behind flat scores [27]. Under pruning, tool calls lose grounded specificity before schema-level intent [66]. Our channel score is FLAP's Wanda-sp [2], a structured Wanda [53], and calibration data steer it [28, 59], as our crossed agent and WikiText scores show. Reasoning models are pruned with calibration on their own chains (RAC [36], SSGR [60], RESP [57], OBC-Prune [44]), without tools or a clock. Concurrent SKIM [9] prunes tool-calling agents by per-role saliency and heals on-policy, under a grammar that enforces the format; engines such as XGrammar [14] make such grammars cheap. Our parser repairs the format after decoding instead.

Minitron [42] is our cut-then-distill template, and healing after pruning goes back to Gromov et al. [20], who heal with QLoRA [11] after removing layers. LLM-Pruner [37] retrains, D-Pruner [67] calibrates on a target domain, and self-data distillation [55] heals with the unpruned model's outputs. We heal with off-policy forward KL [on-policy: 1, 21] and merge by stochastic rounding [22], where adaptive rounding [43] and GPTQ [16] choose roundings that minimize a layer's output error; QA-LoRA [61] and LoTA-QAF [7] train adapters that merge onto the grid, PEQA [31] tunes the scales, and FALQON [8] meets the same sub-step updates when merging LoRA into an FP8 backbone. Speculative decoding [6, 33] keeps the model's outputs, and SuffixDecoding [45] targets agents. On error bars, see Miller [40]; agent reruns vary by 2–6 points [5].

Further related work. Nested models such as MatFormer [12] and Star Elastic [54], which also works in 4 bits, are trained to be cut; ours was cut post hoc. Scale-QLoRA [34] also finds that stochastic re-rounding collapses QAT-LoRA adapters, but those adapters are trained for a nearest-rounding grid, a different case from our single unbiased merge of an adapter trained in floating point. ActionOPD [63] distils a black-box teacher's decisions at the states a student visits, and Google deploys repair agents under latency limits [68].

8 Limitations and conclusion

With one model, harness and competition, the mechanisms (supervision shapes reasoning length, cuts break rare syntax tokens, preference terms move stopping) may generalize, but the numbers need not. The fine-tuning gain held on

development repositories only, and we did not try policy-gradient training [58]. Each cut has one mask, uniform across layers and without reconstruction, one healing run and one rounding draw. The token-level tests cover short-reasoning turns within 8,192 tokens, on held-out tasks that share repositories with training rows. We did not rescale the clock: two in five of the full model's solved episodes end after 7 minutes, so speed should pay more where the call cap does not bind. The healed cut's result is one session of 112 tasks at our own load (8 tasks at a time), sized to detect the unhealed cut's loss, not to bound a small one; the parser's is one block of 56 tasks, compared across sessions, on the 70% cut only, and neither it nor grammar-constrained decoding was tested on the 55% cut.

Before asking what a faster model buys an agent, measure the agent: its tokens per step, which fine-tuning moves first, and its time per token, which follows the bytes read. Before any long run, check cheaply whether it still writes its calls and stops as it did; on a clock, those decided every result we measured.

Code and data

The code, the result files and this paper's sources are at https://github.com/wilmerhenao/under-the-clock: the code that builds the training rows, trains the adapters, scores, cuts, heals and serves the pruned models, the tolerant tool-call parser, and the analyses of the runs; the small result files behind every number here; the pre-registered analysis plans (`docs/preregistrations.md`); and the script that draws the figures from them. Every experiment ran as a Kaggle notebook. Appendix C lists them, and the repository's README maps each number to a notebook version and a result file. Task data, agent trajectories and model weights are not redistributed: the notebooks rebuild or load them from their sources.

Disclosure

This work was done independently, outside the author's role at Invesco, and used no Invesco resources. The views expressed are the author's own and not necessarily those of Invesco.

References

[1] Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. On-Policy Distillation of Language Models: Learning from Self-Generated Mistakes, 2024. URL https://arxiv.org/abs/2306.13649. ICLR 2024.

[2] Yongqi An, Xu Zhao, Tao Yu, Ming Tang, and Jinqiao Wang. Fluctuation-based Adaptive Structured Pruning for Large Language Models, 2023. URL https://arxiv.org/abs/2312.11983.

[3] Thomas Anthony, Zheng Tian, and David Barber. Thinking Fast and Slow with Deep Learning and Tree Search, 2017. URL https://arxiv.org/abs/1705.08439.

[4] Ibragim Badertdinov, Alexander Golubev, Maksim Nekrashevich, Anton Shevtsov, Simon Karasik, Andrei Andriushchenko, Maria Trofimova, Daria Litvintseva, and Boris Yangel. SWE-rebench: An Automated Pipeline for Task Collection and Decontaminated Evaluation of Software Engineering Agents, 2025. URL https://arxiv.org/abs/2505.20411. NeurIPS 2025.

[5] Bjarni Haukur Bjarnason, André Silva, and Martin Monperrus. On Randomness in Agentic Evals, 2026. URL https://arxiv.org/abs/2602.07150.

[6] Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating Large Language Model Decoding with Speculative Sampling, 2023. URL https://arxiv.org/abs/2302.01318.

[7] Junyu Chen, Junzhuo Li, Zhen Peng, Wenjie Wang, Yuxiang Ren, Long Shi, and Xuming Hu. LoTA-QAF: Lossless Ternary Adaptation for Quantization-Aware Fine-Tuning, 2025. URL https://arxiv.org/abs/2505.18724.

[8] Kanghyun Choi, Hyeyoon Lee, SunJong Park, Dain Kwon, and Jinho Lee. FALQON: Accelerating LoRA Fine-tuning with Low-Bit Floating-Point Arithmetic, 2025. URL https://arxiv.org/abs/2510.24061. NeurIPS 2025.

[9] Moonseok Choi, Jongwon Jeong, Minki Kang, Giung Nam, and Juho Lee. SKIM: Pruning Large Language Model Agents via Selective Knowledge Informed Masking, 2026. URL https://arxiv.org/abs/2611.07558.

[10] Alejandro Cuadron, Dacheng Li, Wenjie Ma, Xingyao Wang, Yichuan Wang, Siyuan Zhuang, Shu Liu, Luis Gaspar Schroeder, Tian Xia, Huanzhi Mao, Nicholas Thumiger, Aditya Desai, Ion Stoica, Ana Klimovic, Graham Neubig, and Joseph E. Gonzalez. The Danger of Overthinking: Examining the Reasoning-Action Dilemma in Agentic Tasks, 2025. URL https://arxiv.org/abs/2502.08235.

[11] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient Finetuning of Quantized LLMs, 2023. URL https://arxiv.org/abs/2305.14314. NeurIPS 2023.

[12] Devvrit, Sneha Kudugunta, Aditya Kusupati, Tim Dettmers, Kaifeng Chen, Inderjit Dhillon, Yulia Tsvetkov, Hannaneh Hajishirzi, Sham Kakade, Ali Farhadi, and Prateek Jain. MatFormer: Nested Transformer for Elastic Inference, 2023. URL https://arxiv.org/abs/2310.07707.

[13] Peijie Dong, Zhenheng Tang, Xiang Liu, Lujun Li, Xiaowen Chu, and Bo Li. Can Compressed LLMs Truly Act? An Empirical Evaluation of Agentic Capabilities in LLM

Compression, 2025. URL https://arxiv.org/abs/2505.19433.

[14] Yixin Dong, Charlie F. Ruan, Yaxing Cai, Ruihang Lai, Ziyi Xu, Yilong Zhao, and Tianqi Chen. XGrammar: Flexible and Efficient Structured Generation Engine for Large Language Models, 2025. URL https://arxiv.org/abs/2411.15100. MLSys 2025.

[15] Abhinav Dutta, Sanjeev Krishnan, Nipun Kwatra, and Ramachandran Ramjee. Accuracy is Not All You Need, 2024. URL https://arxiv.org/abs/2407.09141.

[16] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. GPTQ: Accurate Post-Training Quantization for Generative Pre-trained Transformers, 2023. URL https://arxiv.org/abs/2210.17323. ICLR 2023.

[17] Gemma Team. Gemma 4 Technical Report, 2026. URL https://arxiv.org/abs/2607.02770.

[18] Google. Tunix: A Lightweight LLM Post-Training Library. GitHub repository, 2025. URL https://github.com/google/tunix. Accessed 2026-11-09.

[19] Google Research and The Gemma Team. Google - The Gemma 4 Developer Agent Competition. Kaggle competition, 2026. URL https://www.kaggle.com/competitions/gemma-4-developer-agent. Accessed 2026-11-09.

[20] Andrey Gromov, Kushal Tirumala, Hassan Shapourian, Paolo Glorioso, and Daniel A. Roberts. The Unreasonable Ineffectiveness of the Deeper Layers, 2025. URL https://arxiv.org/abs/2403.17887. ICLR 2025.

[21] Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. MiniLLM: Knowledge Distillation of Large Language Models, 2024. URL https://arxiv.org/abs/2306.08543. ICLR 2024.

[22] Suyog Gupta, Ankur Agrawal, Kailash Gopalakrishnan, and Pritish Narayanan. Deep Learning with Limited Numerical Precision, 2015. URL https://arxiv.org/abs/1502.02551.

[23] Michael Hassid, Gabriel Synnaeve, Yossi Adi, and Roy Schwartz. Don't Overthink it. Preferring Shorter Thinking Chains for Improved LLM Reasoning, 2025. URL https://arxiv.org/abs/2505.17813.

[24] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-Rank Adaptation of Large Language Models, 2021. URL https://arxiv.org/abs/2106.09685.

[25] Naman Jain, Jaskirat Singh, Manish Shetty, Liang Zheng, Koushik Sen, and Ion Stoica. R2E-Gym: Procedural Environments and Hybrid Verifiers for Scaling Open-Weights SWE Agents, 2025. URL https://arxiv.org/abs/2504.07164.

[26] Ajay Jaiswal, Zhe Gan, Xianzhi Du, Bowen Zhang, Zhangyang Wang, and Yinfei Yang. Compressing LLMs: The Truth is Rarely Pure and Never Simple, 2024. URL https://arxiv.org/abs/2310.01382. ICLR 2024.

[27] Jiwon Jang, Kisu Yang, Heuiseok Lim, and Hyunwoo Park. Flat Score, Amplified Failures: How the Error Budget Masks Damage in Quantized LLM Agents, 2026. URL https://arxiv.org/abs/2607.27275.

[28] Yixin Ji, Yang Xiang, Juntao Li, Qingrong Xia, Ping Li, Xinyu Duan, Zhefeng Wang, and Min Zhang. Beware of Calibration Data for Pruning Large Language Models, 2025. URL https://arxiv.org/abs/2410.17711. ICLR 2025.

[29] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. SWE-bench: Can Language Models Resolve Real-World GitHub Issues?, 2024. URL https://arxiv.org/abs/2310.06770. ICLR 2024.

[30] Kaggle. Kaggle Benchmarks. Python library https://github.com/Kaggle/kaggle-benchmarks, 2025. URL https://www.kaggle.com/benchmarks. Accessed 2026-11-09.

[31] Jeonghoon Kim, Jung Hyun Lee, Sungdong Kim, Joonsuk Park, Kang Min Yoo, Se Jung Kwon, and Dongsoo Lee. Memory-Efficient Fine-Tuning of Compressed Large Language Models via sub-4-bit Integer Quantization, 2023. URL https://arxiv.org/abs/2305.14152.

[32] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention, 2023. URL https://arxiv.org/abs/2309.06180. SOSP 2023.

[33] Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast Inference from Transformers via Speculative Decoding, 2022. URL https://arxiv.org/abs/2211.17192.

[34] Tung-Ling Li, Jiale Huang, Lee-Chi Wang, and Janaki Ram Gotei. Scale-QLoRA: Code-Invariant Adapter Merging for Native 4-bit Microscaling LLMs, 2026. URL https://arxiv.org/abs/2609.04526.

[35] Zhihan Liu, Miao Lu, Shenao Zhang, Boyi Liu, Hongyi Guo, Yingxiang Yang, Jose Blanchet, and Zhaoran Wang. Provably Mitigating Overoptimization in RLHF: Your SFT Loss is Implicitly an Adversarial Regularizer, 2024. URL https://arxiv.org/abs/2405.16436. NeurIPS 2024.

[36] Ryan Lucas, Kayhan Behdin, Zhipeng Wang, Qingquan Song, Shao Tang, and Rahul Mazumder. Reasoning Models Can be Accurately Pruned Via Chain-of-Thought Reconstruction, 2025. URL https://arxiv.org/abs/2509.12464.

[37] Xinyin Ma, Gongfan Fang, and Xinchao Wang. LLM-Pruner: On the Structural Pruning of Large Language

Models, 2023. URL https://arxiv.org/abs/2305.11627.

[38] Xin Men, Mingyu Xu, Qingyu Zhang, Bingning Wang, Hongyu Lin, Yaojie Lu, Xianpei Han, and Weipeng Chen. ShortGPT: Layers in Large Language Models are More Redundant Than You Expect, 2024. URL https://arxiv.org/abs/2403.03853.

[39] Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer Sentinel Mixture Models, 2017. URL https://arxiv.org/abs/1609.07843. ICLR 2017; the WikiText-103 corpus.

[40] Evan Miller. Adding Error Bars to Evals: A Statistical Approach to Language Model Evaluations, 2024. URL https://arxiv.org/abs/2411.00640.

[41] moshegolderson. FreshSWE-Py: Post-Cutoff SWE Tasks for Gemma 4. Kaggle dataset; 663 tasks from 33 Python repositories, created after 2026-04-02, 2026. URL https://www.kaggle.com/datasets/mosheg olderson/freshswe-py. Accessed 2026-10-23.

[42] Saurav Muralidharan, Sharath Turuvekere Sreenivas, Raviraj Joshi, Marcin Chochowski, Mostofa Patwary, Mohammad Shoeybi, Bryan Catanzaro, Jan Kautz, and Pavlo Molchanov. Compact Language Models via Pruning and Knowledge Distillation, 2024. URL https://arxiv.org/abs/2407.14679.

[43] Markus Nagel, Rana Ali Amjad, Mart van Baalen, Christos Louizos, and Tijmen Blankevoort. Up or Down? Adaptive Rounding for Post-Training Quantization, 2020. URL https://arxiv.org/abs/2004.10568. ICML 2020.

[44] Ha Lan Nguyen, Huy Hoang Tran, Trac-Duy Tran, and Dung D. Le. OBC-Prune: Outcome-Based Calibration for Large Reasoning Model Pruning, 2026. URL https://arxiv.org/abs/2609.17890.

[45] Gabriele Oliaro, Zhihao Jia, Daniel Campos, and Aurick Qiao. SuffixDecoding: Extreme Speculative Decoding for Emerging AI Applications, 2024. URL https://arxiv.org/abs/2411.04975.

[46] Arka Pal, Deep Karkhanis, Samuel Dooley, Manley Roberts, Siddartha Naidu, and Colin White. Smaug: Fixing Failure Modes of Preference Optimisation with DPO-Positive, 2024. URL https://arxiv.org/abs/2402.13228.

[47] Jiayi Pan, Xingyao Wang, Graham Neubig, Navdeep Jaitly, Heng Ji, Alane Suhr, and Yizhe Zhang. Training Software Engineering Agents and Verifiers with SWE-Gym, 2024. URL https://arxiv.org/abs/2412.21139.

[48] Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct Preference Optimization: Your Language Model is Secretly a Reward Model, 2023. URL https://arxiv.org/abs/2305.18290.

[49] Noam Razin, Sadhika Malladi, Adithya Bhaskar, Danqi Chen, Sanjeev Arora, and Boris Hanin. Unintentional Unalignment: Likelihood Displacement in Direct Preference Optimization, 2024. URL https://arxiv.org/abs/2410.08847.

[50] Apoorv Saxena. Prompt Lookup Decoding, November 2023. URL https://github.com/apoorvumang/prompt-lookup-decoding/. Implemented in vLLM as the n-gram speculative method.

[51] D. Sculley, Will Cukierski, Phil Culliton, Sohier Dane, Maggie Demkin, Ryan Holbrook, Addison Howard, Paul Mooney, Walter Reade, Megan Risdal, and Nate Keating. Position: AI Competitions Provide the Gold Standard for Empirical Rigor in GenAI Evaluation, 2025. URL https://arxiv.org/abs/2505.00612.

[52] Avi Singh, John D. Co-Reyes, Rishabh Agarwal, Ankesh Anand, Piyush Patil, Xavier Garcia, Peter J. Liu, James Harrison, Jaehoon Lee, Kelvin Xu, Aaron Parisi, Abhishek Kumar, Alex Alemi, Alex Rizkowsky, Azade Nova, Ben Adlam, Bernd Bohnet, Gamaleldin Elsayed, Hanie Sedghi, Igor Mordatch, Isabelle Simpson, Izzeddin Gur, Jasper Snoek, Jeffrey Pennington, Jiri Hron, Kathleen Kenealy, Kevin Swersky, Kshiteej Mahajan, Laura Culp, Lechao Xiao, Maxwell L. Bileschi, Noah Constant, Roman Novak, Rosanne Liu, Tris Warkentin, Yundi Qian, Yamini Bansal, Ethan Dyer, Behnam Neyshabur, Jascha Sohl-Dickstein, and Noah Fiedel. Beyond Human Data: Scaling Self-Training for Problem-Solving with Language Models, 2023. URL https://arxiv.org/abs/2312.06585.

[53] Mingjie Sun, Zhuang Liu, Anna Bair, and J. Zico Kolter. A Simple and Effective Pruning Approach for Large Language Models, 2024. URL https://arxiv.org/abs/2306.11695. ICLR 2024.

[54] Ali Taghibakhshi, Ruisi Cai, Saurav Muralidharan, Sharath Turuvekere Sreenivas, Aditya Vavre, Ameya Sunil Mahabaleshwarkar, Bilal Kartal, Sheldon Liang, Marcin Chochowski, Zijia Chen, Akhiad Bercovich, Ran Zilberstein, Ran El-Yaniv, Yonatan Geifman, Daniel Korzekwa, Yoshi Suhara, Oluwatobi Olabiyi, Ashwath Aithal, Nima Tajbakhsh, and Pavlo Molchanov. Star Elastic: Many-in-One Reasoning LLMs with Efficient Budget Control, 2026. URL https://arxiv.org/abs/2605.07182.

[55] Vithursan Thangarasa, Ganesh Venkatesh, Mike Lasby, Nish Sinnadurai, and Sean Lie. Self-Data Distillation for Recovering Quality in Pruned Large Language Models, 2024. URL https://arxiv.org/abs/2410.09982.

[56] Aaron Wang, Neelabh Madan, Vlad Sobal, Matthew Trager, Michael Kleinman, Elman Mansimov, Wei Xia, and Stefano Soatto. On the Clock: Towards Punctual and Productive Time-Budgeted AI Agents, 2026. URL https://arxiv.org/abs/2610.10833.

[57] Ziyan Wang, Enmao Diao, Qi Le, Pu Wang, Guanchu Wang, Minwoo Lee, Shu-ping Yeh, and Li Yang. Think Before You Prune: Self-Reflective Structured Pruning for Reasoning Language Models, 2025. URL https://arxiv.org/abs/2512.02185.

[58] Yuxiang Wei, Olivier Duchenne, Jade Copet, Quentin Carbonneaux, Lingming Zhang, Daniel Fried, Gabriel Synnaeve, Rishabh Singh, and Sida I. Wang. SWE-RL: Advancing LLM Reasoning via Reinforcement Learning on

Open Software Evolution, 2025. URL https://arxiv.org/abs/2502.18449. NeurIPS 2025.

[59] Miles Williams and Nikolaos Aletras. On the Impact of Calibration Data in Post-training Quantization and Pruning, 2024. URL https://arxiv.org/abs/2311.09755. ACL 2024.

[60] Yang Xiang, Yixin Ji, Juntao Li, and Min Zhang. Think Before You Prune: Selective Self-Generated Calibration for Pruning Large Reasoning Models, 2025. URL https://arxiv.org/abs/2511.18864.

[61] Yuhui Xu, Lingxi Xie, Xiaotao Gu, Xin Chen, Heng Chang, Hengheng Zhang, Zhengsu Chen, Xiaopeng Zhang, and Qi Tian. QA-LoRA: Quantization-Aware Low-Rank Adaptation of Large Language Models, 2023. URL https://arxiv.org/abs/2309.14717.

[62] John Yang, Kilian Lieret, Carlos E. Jimenez, Alexander Wettig, Kabir Khandpur, Yanzhe Zhang, Binyuan Hui, Ofir Press, Ludwig Schmidt, and Diyi Yang. SWE-smith: Scaling Data for Software Engineering Agents, 2025. URL https://arxiv.org/abs/2504.21798.

[63] Huining Yuan, Xiangmin Yi, Zelai Xu, Zixu Wang, Xinlei Chen, Xiao-Ping Zhang, Yu Wang, and Chao Yu. ActionOPD: Distilling Decisions, Not Tokens, 2026. URL https://arxiv.org/abs/2610.19820.

[64] Jiayi Yuan, Hao Li, Xinheng Ding, Wenya Xie, Yu-Jhe Li, Wentian Zhao, Kun Wan, Jing Shi, Xia Hu, and Zirui Liu. Understanding and Mitigating Numerical Sources of Nondeterminism in LLM Inference, 2025. URL https://arxiv.org/abs/2506.09501.

[65] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah D. Goodman. STaR: Bootstrapping Reasoning With Reasoning, 2022. URL https://arxiv.org/abs/2203.14465.

[66] Congjing Zhang, Vashishtha Patil, Henning Lange, and Usman Aleem. What Breaks Under Pruning in Smart Homes, and When? Evaluating LLM Degradation Across Architectures and Task Complexity, 2026. URL https://arxiv.org/abs/2609.17515.

[67] Nan Zhang, Yanchi Liu, Xujiang Zhao, Wei Cheng, Runxue Bao, Rui Zhang, Prasenjit Mitra, and Haifeng Chen. Pruning as a Domain-specific LLM Extractor, 2024. URL https://arxiv.org/abs/2405.06275.

[68] Celal Ziftci, Spencer Greene, Ray Liu, Livio Dalloro, and Lorenzo Dini. Catching Developers in the Flow: Low-Latency Agentic Program Repair at Google Scale, 2026. URL https://arxiv.org/abs/2610.07289.

A Real 4-bit cuts

Table 2 gives the measurements behind Figure 3. The model is Gemma 4 31B in W4A16 (compressed-tensors, group 32), served by vLLM on 4× L4. Decode speed is for one stream at a 2,000-token prompt, and "8 streams" is the total decode rate of eight 2,000-token prompts at once. GB are the checkpoint's bytes: the full model's `model.safetensors` (23,265,352,448 bytes) and each cut's written tensors. Every removed channel takes 9,072 bytes from each layer (its 4-bit row of the gate and up projections, its column of the down projection, and their scales), so the 3,072, 3,584 and 3,072 channels between successive cuts remove 1.67, 1.95 and 1.67 GB: the uneven steps come from rounding the kept channels to multiples of 512.

Damage is the rise in held-out nats per token on the agent's own text (40 rows, 25,896 tokens). "Predicted" is the damage of the bf16 mask before any 4-bit serving. Those masks keep exactly 85, 70 and 55% of the channels (18,278, 15,053 and 11,827), while the served cuts keep 18,432, 14,848 and 11,776. At 70% the served cut therefore removes 205 more channels per layer, about 0.004 nats on the slope between the 85% and 70% masks: the gap between the mask's +0.080 and the served +0.084. At 70%, the WikiText-scored cut costs the agent +0.867 and WikiText +0.145, the agent-scored one +0.080 and +1.316, and a random cut (one seed) +0.533 and +0.866.

Table 2: Real 4-bit cuts: kept channels, checkpoint size, decode speed and damage. Speeds are relative to the full model's 38.9 tok/s on one stream and 210 tok/s on 8.

			Decode speed		Damage	
MLP kept	channels	GB	1 stream	8 streams	served	predicted
100%	21,504	23.3	1.00×	1.00×	0	0
85%	18,432	21.6	1.05×	1.03×	+0.025	+0.025
85%, groups[b]	18,432	21.6	1.05×	1.04×	+0.059	–
70%	14,848	19.6	1.15×	1.09×	+0.084	+0.080
70%, groups[b]	14,848	19.6	1.15×	1.10×	+0.182	–
55%	11,776	18.0	1.24×	1.14×	+0.188	+0.185
6 layers[a]	21,504	21.6	1.07×	1.09×	+0.925	+0.970

[a]Layers 4, 13, 14, 16, 18 and 21, removed by block influence [38]; the other rows keep that share of MLP channels in every layer. [b]Whole 32-channel groups, exact in 4 bits (no re-quantization).

B Task sets and data

A paired session runs both arms on one server until its time budget, so each arm finishes as many tasks as its speed allows, and a comparison counts the tasks both arms finished (Table 3). The development set is the 71 tasks of the competition's public repositories. The unseen pool is repograph's `priv_eval` minus the 10 repositories that overlap our pools (198 tasks); sessions take its first 150 (one earlier session, 125), and the same-session comparisons two blocks of 56 of those. Two of the 70% comparison's 112 tasks came from training repositories listed under new owners; no run solved them, so dropping them changes no count, and the 55% comparison excludes them. Table 4 gives the training and measurement data.

Table 3: Every task comparison in the paper. Paired sessions run on the 16-minute clock, same-session comparisons on the 8-minute one; discordant tasks are listed as only-first / only-second.

Comparison	Tasks from	Compared	Solved	Discordant; notes
Imitation vs base	development, two passes	103 (50 + 53)	16 vs 26	4/14
Thought-first vs base	development	69	19 vs 27	0/8
Every-call vs base	development	71	16 vs 22	2/8
Short-thought vs base	development	71	25 vs 18	8/1
Short-thought+ vs *Short-thought*	development	71	18 vs 18	5/5
Short-thought vs base	unseen, 150	64	17 vs 19	2/4
Short-thought+ vs *Short-thought*	unseen, 125	125	27 vs 35	1/9
Teacher-DPO vs *Short-thought*	unseen, 150	91	20 vs 27	3/10; loops in 36 of its 98 episodes
Teacher-DPO-2 vs *Short-thought*	unseen, 150	70	20 vs 17	5/2; loops in 6 of 70; 65 of 70 submitted
Next-token arm vs *Short-thought*	unseen, 150	84	24 vs 19	7/2; loops in 31 of its 103 episodes
Full model vs full model (A/A)	unseen, 150	82	23 vs 25	2/4
Full, full, 70% cut, 70% healed	unseen, 2× 56	112	32, 34, 20, 32	malformed calls 2.3, 3.3, 24.2, 3.0%
Full, full, 55% cut, 55% healed	unseen, 2× 56	112	37, 33, 13, 27	malformed calls 0.9, 1.9, 43.4, 13.4%
70% cut, parser vs 70% cut	unseen, first 56	56	15 vs 8	9/2, two sessions; malformed 0 vs 20.7%

Table 4: Training and measurement data. A row is a trajectory as the scorer renders it, or its part after a compaction.

Use	Data
Imitation	320 rows of public trajectories under 8,192 tokens, as many as the 4-hour training cap allowed (SWE-smith 155, SWE-Zero 101, R2E-Gym 53, SWE-Gym 6, Qwen 5)
Every-call	422 verified runs of our agent (793 rows)
Short-thought	458 verified runs (887 rows, 694 with a supervised call)
Short-thought+	611 verified runs (+153)
Teacher	717 agent states, mostly from slow or failed episodes; 589 preference pairs
Pruning	*Short-thought*'s 694 rows split by task (1 task in 10 held out): 628 training rows heal; the first 300 with agent tokens within 8,192 tokens score channels (2.37 M tokens). Of the 66 held-out rows, the first 40 measure damage (25,896 agent tokens) and give the 109 next-action states; the role test draws 141 states from 54 rows
WikiText-103	301k tokens to score, 24 held-out chunks of 2,048

C Notebooks

Each experiment ran as a Kaggle notebook at `https://www.kaggle.com/code/verracodeguacas/` followed by the name below (each links to its notebook); the repository's README gives the version behind each number and its result files.

Fine-tuning (Section 3). The compaction simulator: `g4dev-train-mix4-cpu`. The training rows are private Kaggle datasets (`g4dev-g11-data`, `g4dev-g13-data`), since they hold agent trajectories; the repository's scripts render them from the agent's runs. The teacher's labels: `g4dev-g17-labels-cpu`. Trainers: *Imitation*, `g4dev-train-g2b-gpu` (also its evaluation); *Thought-first*, `g4dev-train-g6-gpu`; *Every-call*, `gemma-4-31b-agent-lora-compaction-aware-trainer`; *Short-thought*, `gemma-4-31b-agent-lora-short-thought-trainer`; *Short-thought+*, `gemma-4-31b-agent-lora-short-thought-trainer-v3`; *Teacher-DPO*, `gemma-4-31b-agent-teacher-guided-step-preferences`; *Teacher-DPO-2*, `gemma-4-31b-agent-in-step-teacher-preferences`. Paired sessions on the development repositories: `g4dev-eval-g6-gpu`, `g4dev-eval-g10a-gpu`, `g4dev-eval-g11a-gpu`, `g4dev-eval-g11g13-gpu`. On unseen repositories: `g4dev-eval-rg-base-g11a-gpu`, `g4dev-eval-rg-g11g13-gpu`, `g4dev-eval-rg-g17-gpu`, `g4dev-eval-rg-g17v2a-gpu`, `g4dev-eval-rg-g17v2b-gpu`. The A/A floor: `g4dev-eval-rg-aa-gpu`.

Pruning (Section 4). Channel scores and damage: `g4dev-prune-score-gpu`, `g4dev-prune-score3-gpu`; the role score: `g4dev-prune-score4-gpu`. Real 4-bit cuts and decode speed: `g4dev-prune-serve-gpu`. Healing: `gemma-4-31b-agent-pruned-model-teacher-healing` (70%), `gemma-4-31b-agent-healing-a-deeper-pruning-cut` (55%). The LoRA serving path: `g4dev-prune-serve2b-gpu`. Merged healing and the next-action test: `g4dev-prune-serve5-gpu`. The role score's test: `g4dev-prune-serve6-gpu`. Speculative decoding: `g4dev-prune-serve7-gpu`. Same-session comparisons: `g4dev-eval-rg-same4-gpu` (70%), `g4dev-eval-rg-same55-gpu` (55%) and, with the tolerant parser, `g4dev-eval-rg-tol70-gpu`.