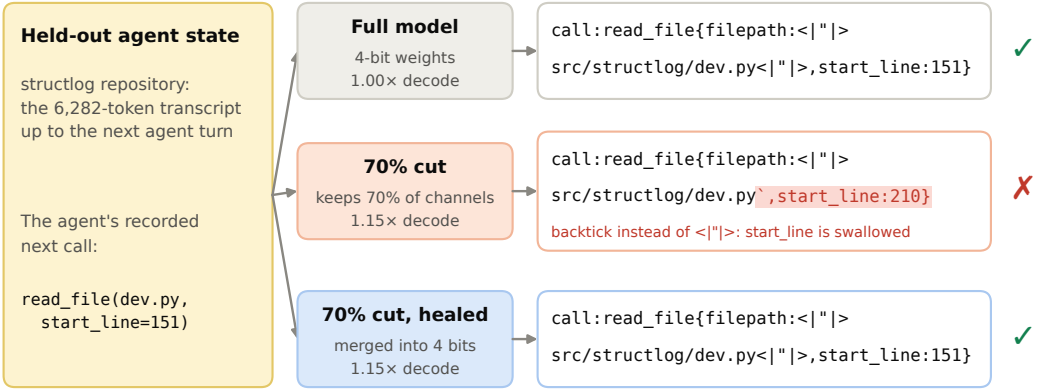
Held-out agent state
structlog repository:
the 6,282-token transcript
up to the next agent turn
The agent's recorded
next call:
read_file(dev.py,
start_line=151)
Full model
4-bit weights
1.00× decode
call:read_file{filepath:<|"|>
src/structlog/dev.py<|"|>,start_line:151}
70% cut
keeps 70% of channels
1.15× decode
call:read_file{filepath:<|"|>
src/structlog/dev.py`,start_line:210}
backtick instead of <|"|>: start_line is swallowed
70% cut, healed
merged into 4 bits
1.15× decode
call:read_file{filepath:<|"|>
src/structlog/dev.py<|"|>,start_line:151}