Under the Clock: Shorter Steps and Fewer Bytes for Tool-Using Agents

Wilmer E. Henao
Advanced Engineering, Invesco

Abstract

In the Gemma 4 Developer Agent competition, a coding agent works under a clock. Gemma 4 31B, in 4 bits on four L4 GPUs, gets 8 minutes per repository issue. We made each step faster in two ways and traced each to tasks solved. Fine-tuning on the model's own verified trajectories changed the agent's reasoning length before each tool call more than its actions. Supervising only calls preceded by short reasoning solved more dev-set tasks (25 vs 18), though not on unseen repositories, and a teacher-guided preference stage halved the slow steps (125 to 56 seconds at the 90th percentile) but broke the agent's stopping. Pruning 30% of the MLP channels, chosen on agent trajectories, costs $+0.08$ nats per agent token and decodes 1.15 times faster on one stream (1.1 at 8). Yet in one session on the 8-minute clock the cut solved 20 of 112 tasks against 32 and 34 for two full-model runs, winning none of the tasks that separated them ($p = 1.5 \times 10^{-5}$). Its string arguments ran into one another in 24% of its calls (full model: 2-3%), and it looped on the failures. Healed with the full model as teacher and merged into the 4-bit weights by stochastic rounding, the cut kept its speed and solved 32 (-1 task, 95% interval -7.5 to $+5$). With 45% pruned, healing won back 14 of the 22 lost tasks. Average per-token loss ranked the cuts but neither sized nor located the failure. A 15-minute next-action test located it, and showed a role-aware channel score moving it instead of removing it. Code and notebooks: https://github.com/wilmerhenao/under-the-clock.

1 Introduction

An agent that writes fewer tokens per step, or writes each faster, gets more steps under a clock. Does it solve more tasks? We pulled two levers on seconds per step, fine-tuning and pruning (Figure 2). How the agent reasons, writes tool calls and stops outweighed every gain in model speed we measured. Our contributions:

1. Fine-tuning moves reasoning length before decisions. A teacher at the agent's decision points shortened steps and broke stopping.
2. An agent-chosen cut has the 4-bit loss and speed that its bf16 mask and bytes predict, yet fails through malformed tool calls (Figure 1) that average per-token loss ranks but does not locate.
3. Healed from the full model and merged into the 4-bit weights by stochastic rounding, the cut keeps its speed and stays within noise of the full model's task rate.
4. We measure agents under noise with an A/A floor, a same-session comparison of checkpoints and a next-action test.

2 Setting

Harness. The competition's harness [37] compiles a declarative agent (YAML, prompts, optional LoRA [17] adapters) and runs it in a sandbox holding the repository at its pre-fix commit, with shell, file, edit, patch and three code-graph tools. Hidden tests grade the agent's diff, submitted or not, as in SWE-bench [21]. We allow each *episode* (one attempt at a task) 8 minutes and 24 tool calls, a 4,096-token thinking budget and temperature 0.2. At 14,336 tokens the model summarizes older events (compaction). Evaluation repositories are outside our training pools (two, found later under other owners, change no result). The scorer serves one 4-bit (W4A16) checkpoint with LoRA adapters under 3 GiB, so a pruned model cannot be submitted. We therefore study pruning for self-hosted agents on the competition's model, harness, hardware and clock.

Hardware and clocks. Training ran on a TPU v5e-8, serving on 4× L4 with vLLM [24] (tensor parallel 4) and the competition's checkpoint of Gemma 4 31B [13], which has one scale per 32 inputs. *Paired sessions* (Section 3) put two arms on one server, 8 concurrent tasks each, on a clock doubled to 16 minutes. At 16 concurrent requests a model call writing n tokens takes $a + n \cdot b$ seconds (Figure 2), and calls take 98% of episode time. Fine-tuning acts on n, pruning on b. For checkpoints that cannot share a server, the *same-session comparison* (Section 4) runs them one at a time on the same tasks, 8 at once on the 8-minute clock, in ABCD-DCBA order over two blocks, so neither order nor time favours a model.

3 Lever 1: fine-tuning moves length first

Pipeline. We ran Gemma through the harness in private Kaggle Benchmarks [22] tasks on SWE-rebench-style [5] task banks and FreshSWE-Py (issues filed after the model's

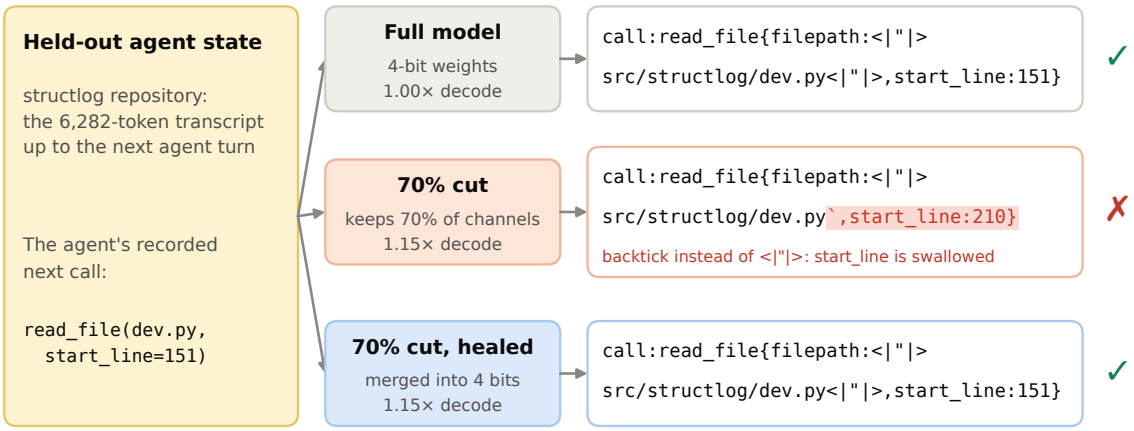


Figure 1: One held-out agent state, three models. The 70% cut (70% of MLP channels kept) ends the path with a backtick instead of Gemma's string delimiter <|"|> and swallows `start_line`. Healed and merged, it writes the full model's call.

cutoff), excluding the public (development) repositories, and kept the 732 trajectories whose diffs passed the hidden tests. Each is re-rendered as the scorer sees it. A compaction simulator matched the token counts of all 82 captured scorer requests, and Gemma writes the summaries. A rank-16 LoRA on all projections is trained on TPU (JAX/Tunix [14], fp32 factors) with the loss on tool-call bodies only. Table 1 lists the adapters.

Length moved in both directions. *Imitation* wrote short narrated thoughts and looped (26 consecutive re-reads of one file) while its validation loss fell from 1.05 to 0.37. *Thought-first* trained only on turns that opened with a thought, which selected long ones. Served, it thought long on every turn, made 1,171 model calls to the base's 1,709 in the same time, and lost eight tasks without winning one.

One filter reversed *Every-call*'s longer steps. With *Every-call*'s rows and hyperparameters, *Short-thought* supervised a call only if at most 1,500 characters of reasoning preceded it (59% of calls): shorter steps, timeouts 38 to 24, and 25 vs 18 solved. No reasoning token was trained, so length moved only through which calls were supervised. Our reading is that the adapter generalizes the deliberation that preceded them. The gain is exploratory. On unseen repositories *Short-thought* tied the base (Table 1), with 90th-percentile steps still 0.89 times the base's, and more data (*Short-thought*+) lost there (77 timeouts vs *Short-thought*'s 53), as on the public leaderboard (*Short-thought* 0.18, *Short-thought*+ 0.10, base 0.15).

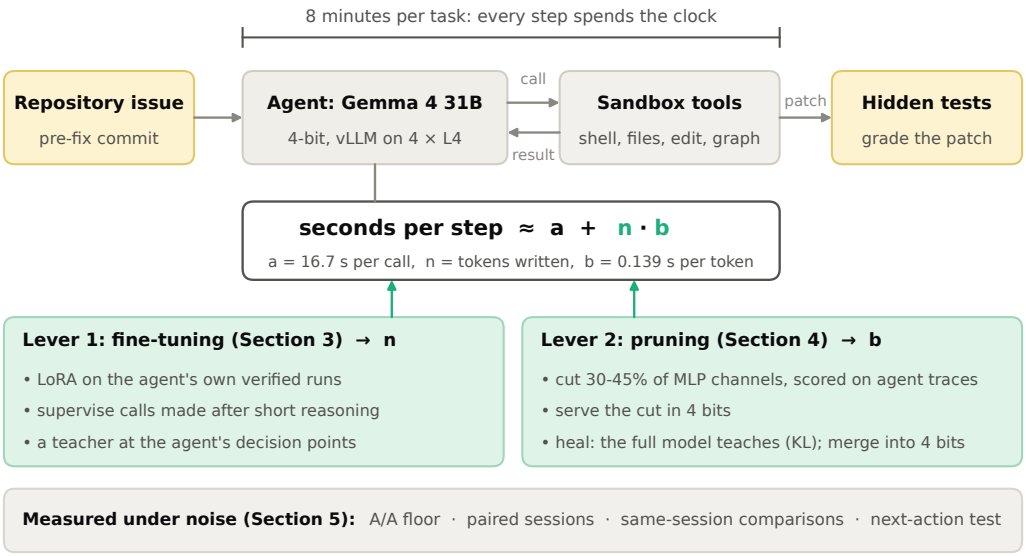


Figure 2: The agent under the clock and the two levers.

Table 1: Fine-tuned adapters against the base model: step length and tasks solved. Each adapter is named after what it supervises.

Adapter	Data and supervision	Step text vs base (p90, full sessions)	Solved vs base (discordant: only-this / only-base)
Imitation	Stronger models' trajectories, whole turns	0.24×	16 vs 26 of 103 (4/14), $p = 0.031$
Thought-first	Own runs, only turns opening with a thought	1.72×	19 vs 27 (0/8), $p = 0.008$
Every-call	Own runs, compaction-aware, every call	1.11×	16 vs 22 (2/8)
Short-thought	*Every-call*'s rows, calls after thoughts $\leq$ 1,500 chars	**0.90**×	**25 vs 18 (8/1), $p = 0.039$**; unseen: 17 vs 19 of 64 (2/4)
Short-thought+	*Short-thought*'s recipe, +153 runs	1.03× of *Short-thought*	dev: 18 vs *Short-thought* 18; unseen: 27 vs *Short-thought* 35 of 125 (1/9), $p = 0.021$

A teacher at decision points. At 717 agent states (Figure 1), mostly from slow or failed episodes, the stronger Gemini 3.8 Flash judged Gemma's next step or wrote its own (589 preference pairs, $9.21). Trained from the base (*Teacher-DPO*), Gemma took the teacher's style (90th-percentile step 172 tokens, *Short-thought*'s 514) but looped (36 of 98 episodes) and lost to *Short-thought* (20 vs 27). A second stage on *Short-thought* computed the preference in each training step (*Teacher-DPO-2*, DPO [35] plus a next-token loss on the teacher's step). It removed the losses to *Short-thought* (20 vs 17, 5/2) and kept steps short (229 vs 610 tokens, 56 vs 125 s at the 90th percentile). Yet the agent was not faster. Once a patch is submitted, an episode ends at the first response without a tool call, and *Teacher-DPO-2*, after submitting early, kept calling tools until the clock. Of its episode time, 52% came after a first patch that then changed in 1 of 65 episodes. The next-token loss alone kept steps short and stops normal, but the agent looped (31 of 103). The teacher's data shortens steps, and the preference term prevents loops but breaks the stop.

4 Lever 2: prune what the agent does not use

Each of the model's 60 layers has a gated MLP with 21,504 hidden channels (about 70% of the layer's weights). We score each channel by the RMS of its activation over 300 agent trajectories (2.37 M tokens) times the norm of its down-projection weights. A cut is an exact mask, without retraining. Its *damage* is the rise in nats per token on *agent tokens*, the thought and call of each short-reasoning turn (at most 1,500 characters of reasoning, 17% of the agent's text), in 40 held-out trajectories from other tasks. The 70% cut (70% of channels kept per layer, 21% of layer weights removed) costs +0.080 with agent scores, +0.867 with WikiText-103 scores and +0.533 at random.

Real 4-bit cuts. We cut the competition's 4-bit checkpoint and served each cut in vLLM. Single channels split the down projection's quantization groups of 32, so the projection is re-quantized (activation-weighted) or cut in whole groups. The 85%, 70% and 55% cuts decode 1.05, 1.15 and 1.24 times faster (1.03-1.14 at 8 streams) for a served damage of +0.025, +0.084 and +0.188 (Appendix A). Removing 6 layers by block influence [29] costs +0.925 at 1.07× (Figure 3). Every single-channel cut loses in vLLM what its bf16 mask predicted, within 0.005 nats. Whole groups lose twice as much.

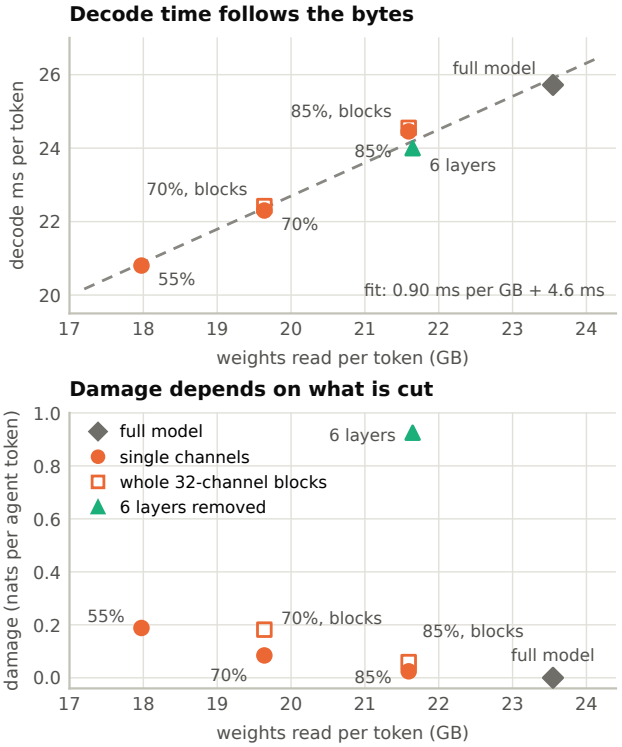


Figure 3: Decode time follows the bytes read (top). At equal bytes, damage depends on what is removed (bottom).

Tasks under the clock. In the same-session comparison (112 unseen-repository tasks, Figure 4), the 70% cut solved 20 tasks against 32 and 34 for two runs of the full model, which differed on only 8 tasks (3/5). The cut won none of the 12 and 14 tasks that separated it from them (exact paired sign-flip test, $p = 1.5 \times 10^{-5}$), in both task blocks and both orders. It lost them at the clock (72 timeouts against 43-44), and none of our 1,944 timed-out episodes passed the hidden tests. The failure is in the call syntax (Figure 1): a string

closed with a backtick or a JSON quote instead of Gemma's delimiter swallows the next argument. Of the cut's calls, 24% were malformed, against 2-3% for the full model. The call fails, the agent resends it, and 42 episodes looped, 31 until the clock (full-model runs: 4 and 7).

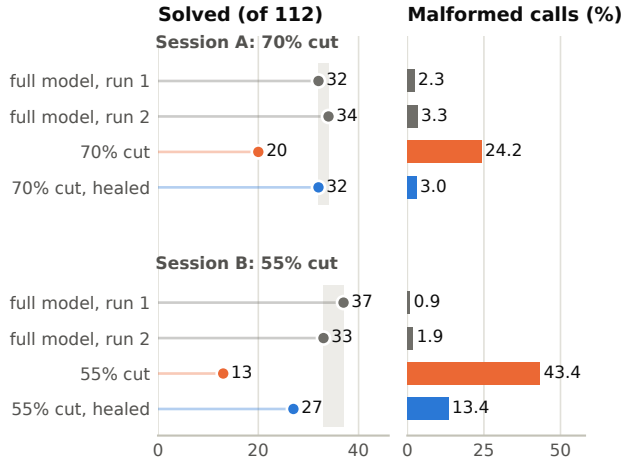


Figure 4: Same-session comparisons on 112 unseen-repository tasks. Grey band: two runs of the full model.

Healing from the full model (mask and adapter off). A rank-16 LoRA is trained for two epochs on 628 agent trajectories in two arms on identical batches. The KL arm minimizes $\mathrm{KL}(\text{full} \,\|\, \text{cut})$ at every token, the next-token arm the next-token loss. A removed channel gets no gradient, so the adapter slices exactly onto the 4-bit cut. The KL arm met its pre-registered bar, damage below $+0.04$ and KL halved (2.4 TPU hours). In the trainer's bf16 evaluation the damage fell from $+0.085$ to $+0.021$ and the KL on agent tokens from 0.098 to 0.042. The next-token arm reached -0.078, below the full model, while its KL rose to 0.243. It fit the data, not the model. Served through vLLM's LoRA path, the adapter costs the whole speedup ($1.02\times$ against $1.15\times$). Rounding $W + dW$ to the nearest 4-bit value would erase the repair, since its deltas average 5% of a grid step (Scale-QLoRA [26] saw the same). So we use stochastic rounding [16] (up or down at random, exact in expectation), and the merged cut keeps the repair ($+0.022$ nats) and the speed ($1.15\times$).

In the same-session comparison the merged cut solved 32 of 112, within noise of the full model (-1 task, 95% interval -7.5 to $+5$, discordant 5/5 and 6/8; against the unhealed cut 15/3, $p = 0.0075$). It made 3% malformed calls and 36 timeouts against 43-44 (seven fewer, worth about 3 tasks, since full-model episodes ending after 7 minutes pass 43% of the time). Its calls took 16.9 s against 19.0-19.3 s at equal length. On the 55% cut ($1.24\times$), healing recovers the same share of the damage ($+0.185$ to $+0.047$, missing its $+0.04$ bar) and 14 of the 22 lost tasks, still short of the full model ($p = 0.007$). Malformed calls fell from 43% to 13% (full model 1-2%, Figure 4).

A next-action test. At 102 held-out agent states (starts of short-reasoning turns in 40 trajectories), each model's greedy next call is compared with the full model's (Figure 5). Two engines with the same weights agree on 78% of calls, sampling at the agent's temperature on 64%, and the cuts, healed or not, on 28-42%. Exact agreement does not track tasks (the cuts solving 20 and 13 agree on 29% and 28%). The malformed share does, and so does agreement with the call the agent recorded (full 0.40, healed 0.34, 70% 0.28, 55% 0.24). The test is a gate, not a predictor.

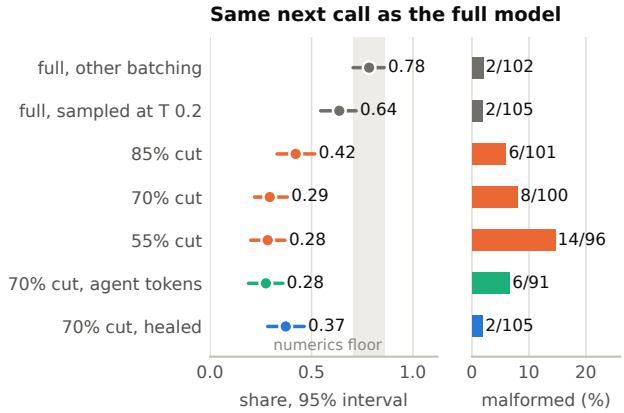


Figure 5: The next-action test at 102 held-out states. Grey band: two engines with the same weights.

Two scores for pruning reasoning. Scoring channels only on agent tokens, in the spirit of RAC's calibration on the model's own chains [27], changed nothing at 70% (Figure 5). Scoring by token role (after SKIM [8], Section 6) gives an equal vote to text read, prose, argument values, call syntax and the closing quote (0.08% of positions). Split by role, the 55% cut's loss rose most on that quote ($+0.50$ nats, against $+0.19$ overall). At 141 states the role-scored cut halved both that rise and the wrongly closed strings, but its calls lost their opener (their first token) instead (Figure 6). In all, 20% of its attempts failed against 19% (pre-registered test, parsed calls only: 11% vs 16%, $p = 0.14$). A format-enforcing grammar would block the failures the role score adds but not those it removes (inference).

Speed without a cut. N-gram speculative decoding [38] kept the full model's calls (89% the same next call, malformed 2/103) but sped up real agent turns only 1.05-$1.07\times$. Unlike a cut's, its gain depends on the text ($3.4\times$ on a synthetic continuation, Figure 7). We did not test Gemma 4's own draft model, a multi-token-prediction (MTP) drafter [13].

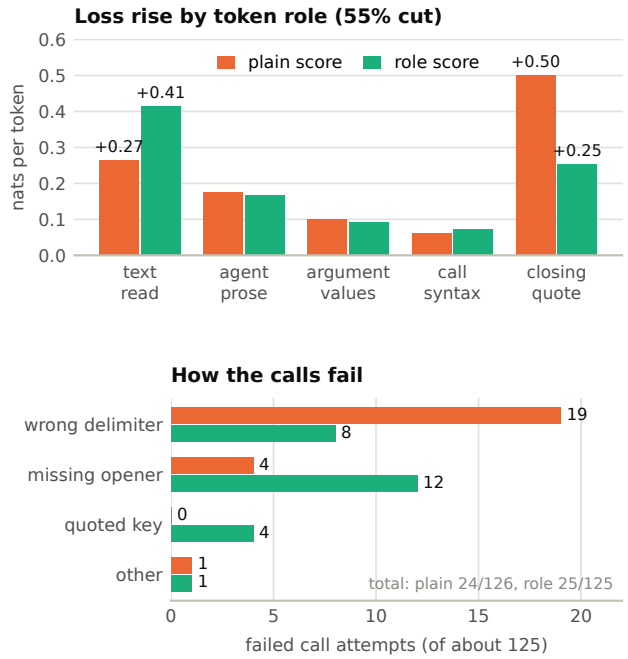


Figure 6: Scoring by token role (55% cut, 141 states). The closing quote recovers and the opener breaks.

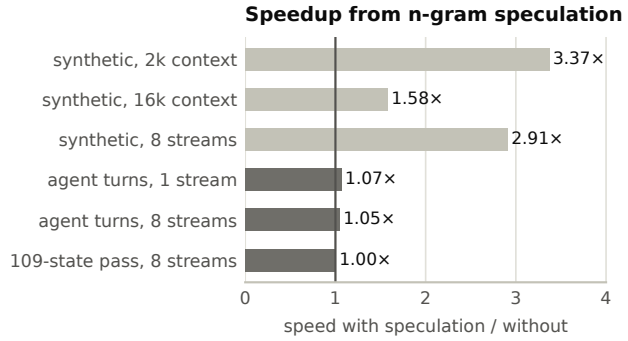


Figure 7: N-gram speculative decoding against plain decoding (full model, same session).

5 Measuring agents under noise

Pairing and the noise floor. Between sessions the same model moved by up to ten tasks and flipped 7-14% of the same unseen tasks. Paired sessions, compared by discordant tasks (exact McNemar), separated adapters. Two identical full-model arms on one server, the A/A floor, flipped 6 of 82 tasks (2/4), as many as across sessions. Pairing controls load and time of day but leaves the flips, so only lopsided splits such as 8/1 carry signal.

Exploratory and confirmatory. Single-session p-values near 0.04, among about twenty adapter comparisons, are exploratory, and we claim only directions that held across sessions or mechanisms. The same-session, role and speculation tests are confirmatory, with analysis set, primary test and gates fixed before each run.

6 Related work

Fine-tuning on a model's own filtered successes dates to expert iteration [3], STaR [50] and ReST-EM [40]. SWE-Gym [34] found it weak for software agents. SWE-smith [48], R2E-Gym [18] and SWE-rebench [5] supply tasks. Cuadron et al. [9] measured overthinking in agents, and On the Clock [44] agents under wall-clock budgets. Our preference stages use DPO [35] and IPO [4]. *Teacher-DPO*'s collapse matches likelihood displacement [36].

Perplexity misses what compression breaks [19], for agents too (ACBench [11], worst on JSON outputs), and flips and KL track it better [12]. Quantization amplifies agents' existing failures [20], and we trace them to call syntax. Our channel score is a structured Wanda [41], FLAP's Wanda-sp [2]. Reasoning models are pruned with calibration on their own chains (RAC [27], SSGR [46], RESP [45], OBC-Prune [32]), without tools or a clock. Concurrent work, SKIM [8], prunes tool-calling agents by per-role saliency and heals on-policy, under a grammar that enforces the format.

Minitron [31] is our cut-then-distil template. LLM-Pruner [28] retrains, D-Pruner [52] calibrates on a target domain, and self-data distillation [43] heals with the unpruned model's outputs. We heal with an off-policy forward KL [on-policy: 1, 15] and merge by stochastic rounding, whereas QA-LoRA [47] trains merge-ready adapters and PEQA [23] tunes the quantization scales. Speculative decoding [7, 25] speeds decoding without changing the model, and SuffixDecoding [33] targets agents. On error bars, see Miller [30]. Agent reruns vary by 2-6 points [6].

Further related work. Nested models such as MatFormer [10] and Star Elastic [42], which also works in 4 bits, are trained to be cut. Ours was cut post hoc. Pruning degrades tool-call arguments before intent [51]. In the study of Jang et al. [20], agents' scores stay flat while 4-bit quantization amplifies their existing failures. Under our clock, the amplified failure cost tasks. Scale-QLoRA [26] also finds that stochastic re-rounding collapses QAT-LoRA adapters, but those adapters are trained for a nearest-rounding grid, a different case from our single unbiased merge of an adapter trained in floating point. ActionOPD [49] distils a black-box teacher's decisions at the states a student visits. Kaggle's staff call competitions the gold standard of evaluation [39], and Google deploys repair agents under latency limits [53].

7 Limitations and conclusion

With one model, harness and competition, the mechanisms (supervised actions condition reasoning length, cuts break rare syntax tokens, preference terms move stopping) may

generalize but the numbers need not. The fine-tuning gain held on development repositories only. We did not try policy-gradient training. Each cut has one mask and one healing run. The token-level tests cover short-reasoning turns within 8,192 tokens, on held-out tasks that share repositories with training rows. No affordable control changes time with behaviour fixed. The healed cut's result is one session of 112 tasks, at our own load of 8 tasks at a time, not a documented scorer setting.

Before asking what a faster model buys an agent, measure the agent: its tokens per step, which fine-tuning moves first, and its time per token, which follows the bytes read. Before any long run, check cheaply whether it still writes its calls and stops as it did. On a clock, those decided every result we measured. Healed by its full model, the 70% cut chosen by the agent's use stayed within noise of the full model's task rate at 1.15 times its decode speed, but the 55% cut did not.

Code and data

The code, the result files and this paper's sources are at https://github.com/wilmerhenao/under-the-clock: the code that builds the training rows, trains the adapters, scores, cuts, heals and serves the pruned models, and analyses the runs; the small result files behind every number here; and the script that draws the figures from them. Every experiment ran as a Kaggle notebook. Appendix B lists them, and the repository's README maps each number to a notebook version and a result file. Task data, agent trajectories and model weights are not redistributed: the notebooks rebuild or load them from their sources.

Disclosure

This work was done independently, outside the author's role at Invesco, and used no Invesco resources. The views expressed are the author's own and not necessarily those of Invesco.

References

[1] Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. On-Policy Distillation of Language Models: Learning from Self-Generated Mistakes, 2023. URL https://arxiv.org/abs/2306.13649.

[2] Yongqi An, Xu Zhao, Tao Yu, Ming Tang, and Jinqiao Wang. Fluctuation-based Adaptive Structured Pruning for Large Language Models, 2023. URL https://arxiv.org/abs/2312.11983.

[3] Thomas Anthony, Zheng Tian, and David Barber. Thinking Fast and Slow with Deep Learning and Tree Search, 2017. URL https://arxiv.org/abs/1705.08439.

[4] Mohammad Gheshlaghi Azar, Mark Rowland, Bilal Piot, Daniel Guo, Daniele Calandriello, Michal Valko, and Rémi Munos. A General Theoretical Paradigm to Understand Learning from Human Preferences, 2023. URL https://arxiv.org/abs/2310.12036.

[5] Ibragim Badertdinov, Alexander Golubev, Maksim Nekrashevich, Anton Shevtsov, Simon Karasik, Andrei Andriushchenko, Maria Trofimova, Daria Litvintseva, and Boris Yangel. SWE-rebench: An Automated Pipeline for Task Collection and Decontaminated Evaluation of Software Engineering Agents, 2025. URL https://arxiv.org/abs/2505.20411.

[6] Bjarni Haukur Bjarnason, André Silva, and Martin Monperrus. On Randomness in Agentic Evals, 2026. URL https://arxiv.org/abs/2602.07150.

[7] Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating Large Language Model Decoding with Speculative Sampling, 2023. URL https://arxiv.org/abs/2302.01318.

[8] Moonseok Choi, Jongwon Jeong, Minki Kang, Giung Nam, and Juho Lee. SKIM: Pruning Large Language Model Agents via Selective Knowledge Informed Masking, 2026. URL https://arxiv.org/abs/2611.07558.

[9] Alejandro Cuadron, Dacheng Li, Wenjie Ma, Xingyao Wang, Yichuan Wang, Siyuan Zhuang, Shu Liu, Luis Gaspar Schroeder, Tian Xia, Huanzhi Mao, Nicholas Thumiger, Aditya Desai, Ion Stoica, Ana Klimovic, Graham Neubig, and Joseph E. Gonzalez. The Danger of Overthinking: Examining the Reasoning-Action Dilemma in Agentic Tasks, 2025. URL https://arxiv.org/abs/2502.08235.

[10] Devvrit, Sneha Kudugunta, Aditya Kusupati, Tim Dettmers, Kaifeng Chen, Inderjit Dhillon, Yulia Tsvetkov, Hannaneh Hajishirzi, Sham Kakade, Ali Farhadi, and Prateek Jain. MatFormer: Nested Transformer for Elastic Inference, 2023. URL https://arxiv.org/abs/2310.07707.

[11] Peijie Dong, Zhenheng Tang, Xiang Liu, Lujun Li, Xiaowen Chu, and Bo Li. Can Compressed LLMs Truly Act? An Empirical Evaluation of Agentic Capabilities in LLM Compression, 2025. URL https://arxiv.org/abs/2505.19433.

[12] Abhinav Dutta, Sanjeev Krishnan, Nipun Kwatra, and Ramachandran Ramjee. Accuracy is Not All You Need, 2024. URL https://arxiv.org/abs/2407.09141.

[13] Gemma Team. Gemma 4 Technical Report, 2026. URL https://arxiv.org/abs/2607.02770.

[14] Google. Tunix: A Lightweight LLM Post-Training Library. GitHub repository, 2025. URL https://github.com/google/tunix. Accessed 2026-11-09.

[15] Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. MiniLLM: On-Policy Distillation of Large Language Models, 2023. URL https://arxiv.org/abs/2306.08543.

[16] Suyog Gupta, Ankur Agrawal, Kailash Gopalakrishnan, and Pritish Narayanan. Deep Learning with Limited Numerical

Precision, 2015. URL https://arxiv.org/abs/1502.02551.

[17] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-Rank Adaptation of Large Language Models, 2021. URL https://arxiv.org/abs/2106.09685.

[18] Naman Jain, Jaskirat Singh, Manish Shetty, Liang Zheng, Koushik Sen, and Ion Stoica. R2E-Gym: Procedural Environments and Hybrid Verifiers for Scaling Open-Weights SWE Agents, 2025. URL https://arxiv.org/abs/2504.07164.

[19] Ajay Jaiswal, Zhe Gan, Xianzhi Du, Bowen Zhang, Zhangyang Wang, and Yinfei Yang. Compressing LLMs: The Truth is Rarely Pure and Never Simple, 2023. URL https://arxiv.org/abs/2310.01382.

[20] Jiwon Jang, Kisu Yang, Heuiseok Lim, and Hyunwoo Park. Flat Score, Amplified Failures: How the Error Budget Masks Damage in Quantized LLM Agents, 2026. URL https://arxiv.org/abs/2607.27275.

[21] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. SWE-bench: Can Language Models Resolve Real-World GitHub Issues?, 2023. URL https://arxiv.org/abs/2310.06770.

[22] Kaggle. Kaggle Benchmarks. https://www.kaggle.com/benchmarks; Python library https://github.com/Kaggle/kaggle-benchmarks, 2025. URL https://www.kaggle.com/benchmarks. Accessed 2026-11-09.

[23] Jeonghoon Kim, Jung Hyun Lee, Sungdong Kim, Joonsuk Park, Kang Min Yoo, Se Jung Kwon, and Dongsoo Lee. Memory-Efficient Fine-Tuning of Compressed Large Language Models via sub-4-bit Integer Quantization, 2023. URL https://arxiv.org/abs/2305.14152.

[24] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention, 2023. URL https://arxiv.org/abs/2309.06180.

[25] Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast Inference from Transformers via Speculative Decoding, 2022. URL https://arxiv.org/abs/2211.17192.

[26] Tung-Ling Li, Jiale Huang, Lee-Chi Wang, and Janaki Ram Gotei. Scale-QLoRA: Code-Invariant Adapter Merging for Native 4-bit Microscaling LLMs, 2026. URL https://arxiv.org/abs/2609.04526.

[27] Ryan Lucas, Kayhan Behdin, Zhipeng Wang, Qingquan Song, Shao Tang, and Rahul Mazumder. Reasoning Models Can be Accurately Pruned Via Chain-of-Thought Reconstruction, 2025. URL https://arxiv.org/abs/2509.12464.

[28] Xinyin Ma, Gongfan Fang, and Xinchao Wang. LLM-Pruner: On the Structural Pruning of Large Language Models, 2023. URL https://arxiv.org/abs/2305.11627.

[29] Xin Men, Mingyu Xu, Qingyu Zhang, Bingning Wang, Hongyu Lin, Yaojie Lu, Xianpei Han, and Weipeng Chen. ShortGPT: Layers in Large Language Models are More Redundant Than You Expect, 2024. URL https://arxiv.org/abs/2403.03853.

[30] Evan Miller. Adding Error Bars to Evals: A Statistical Approach to Language Model Evaluations, 2024. URL https://arxiv.org/abs/2411.00640.

[31] Saurav Muralidharan, Sharath Turuvekere Sreenivas, Raviraj Joshi, Marcin Chochowski, Mostofa Patwary, Mohammad Shoeybi, Bryan Catanzaro, Jan Kautz, and Pavlo Molchanov. Compact Language Models via Pruning and Knowledge Distillation, 2024. URL https://arxiv.org/abs/2407.14679.

[32] Ha Lan Nguyen, Huy Hoang Tran, Trac-Duy Tran, and Dung D. Le. OBC-Prune: Outcome-Based Calibration for Large Reasoning Model Pruning, 2026. URL https://arxiv.org/abs/2609.17890.

[33] Gabriele Oliaro, Zhihao Jia, Daniel Campos, and Aurick Qiao. SuffixDecoding: Extreme Speculative Decoding for Emerging AI Applications, 2024. URL https://arxiv.org/abs/2411.04975.

[34] Jiayi Pan, Xingyao Wang, Graham Neubig, Navdeep Jaitly, Heng Ji, Alane Suhr, and Yizhe Zhang. Training Software Engineering Agents and Verifiers with SWE-Gym, 2024. URL https://arxiv.org/abs/2412.21139.

[35] Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct Preference Optimization: Your Language Model is Secretly a Reward Model, 2023. URL https://arxiv.org/abs/2305.18290.

[36] Noam Razin, Sadhika Malladi, Adithya Bhaskar, Danqi Chen, Sanjeev Arora, and Boris Hanin. Unintentional Unalignment: Likelihood Displacement in Direct Preference Optimization, 2024. URL https://arxiv.org/abs/2410.08847.

[37] Google Research and The Gemma Team. Google - The Gemma 4 Developer Agent Competition. Kaggle competition, 2026. URL https://www.kaggle.com/competitions/gemma-4-developer-agent. Accessed 2026-11-09.

[38] Apoorv Saxena. Prompt Lookup Decoding, November 2023. URL https://github.com/apoorvumang/prompt-lookup-decoding/. Implemented in vLLM as the n-gram speculative method.

[39] D. Sculley, Will Cukierski, Phil Culliton, Sohier Dane, Maggie Demkin, Ryan Holbrook, Addison Howard, Paul Mooney, Walter Reade, Megan Risdal, and Nate Keating. Position: AI Competitions Provide the Gold Standard for Empirical Rigor in GenAI Evaluation, 2025. URL https://arxiv.org/abs/2505.00612.

[40] Avi Singh, John D. Co-Reyes, Rishabh Agarwal, Ankesh Anand, Piyush Patil, Xavier Garcia, Peter J. Liu, James Harrison, Jaehoon Lee, Kelvin Xu, Aaron Parisi, Abhishek Kumar, Alex Alemi, Alex Rizkowsky, Azade Nova, Ben

Adlam, Bernd Bohnet, Gamaleldin Elsayed, Hanie Sedghi, Igor Mordatch, Isabelle Simpson, Izzeddin Gur, Jasper Snoek, Jeffrey Pennington, Jiri Hron, Kathleen Kenealy, Kevin Swersky, Kshiteej Mahajan, Laura Culp, Lechao Xiao, Maxwell L. Bileschi, Noah Constant, Roman Novak, Rosanne Liu, Tris Warkentin, Yundi Qian, Yamini Bansal, Ethan Dyer, Behnam Neyshabur, Jascha Sohl-Dickstein, and Noah Fiedel. Beyond Human Data: Scaling Self-Training for Problem-Solving with Language Models, 2023. URL https://arxiv.org/abs/2312.06585.

[41] Mingjie Sun, Zhuang Liu, Anna Bair, and J. Zico Kolter. A Simple and Effective Pruning Approach for Large Language Models, 2023. URL https://arxiv.org/abs/2306.11695.

[42] Ali Taghibakhshi, Ruisi Cai, Saurav Muralidharan, Sharath Turuvekere Sreenivas, Aditya Vavre, Ameya Sunil Mahabaleshwarkar, Bilal Kartal, Sheldon Liang, Marcin Chochowski, Zijia Chen, Akhiad Bercovich, Ran Zilberstein, Ran El-Yaniv, Yonatan Geifman, Daniel Korzekwa, Yoshi Suhara, Oluwatobi Olabiyi, Ashwath Aithal, Nima Tajbakhsh, and Pavlo Molchanov. Star Elastic: Many-in-One Reasoning LLMs with Efficient Budget Control, 2026. URL https://arxiv.org/abs/2605.07182.

[43] Vithursan Thangarasa, Ganesh Venkatesh, Mike Lasby, Nish Sinnadurai, and Sean Lie. Self-Data Distillation for Recovering Quality in Pruned Large Language Models, 2024. URL https://arxiv.org/abs/2410.09982.

[44] Aaron Wang, Neelabh Madan, Vlad Sobal, Matthew Trager, Michael Kleinman, Elman Mansimov, Wei Xia, and Stefano Soatto. On the Clock: Towards Punctual and Productive Time-Budgeted AI Agents, 2026. URL https://arxiv.org/abs/2610.10833.

[45] Ziyan Wang, Enmao Diao, Qi Le, Pu Wang, Guanchu Wang, Minwoo Lee, Shu ping Yeh, and Li Yang. Think Before You Prune: Self-Reflective Structured Pruning for Reasoning Language Models, 2025. URL https://arxiv.org/abs/2512.02185.

[46] Yang Xiang, Yixin Ji, Juntao Li, and Min Zhang. Think Before You Prune: Selective Self-Generated Calibration for Pruning Large Reasoning Models, 2025. URL https://arxiv.org/abs/2511.18864.

[47] Yuhui Xu, Lingxi Xie, Xiaotao Gu, Xin Chen, Heng Chang, Hengheng Zhang, Zhengsu Chen, Xiaopeng Zhang, and Qi Tian. QA-LoRA: Quantization-Aware Low-Rank Adaptation of Large Language Models, 2023. URL https://arxiv.org/abs/2309.14717.

[48] John Yang, Kilian Lieret, Carlos E. Jimenez, Alexander Wettig, Kabir Khandpur, Yanzhe Zhang, Binyuan Hui, Ofir Press, Ludwig Schmidt, and Diyi Yang. SWE-smith: Scaling Data for Software Engineering Agents, 2025. URL https://arxiv.org/abs/2504.21798.

[49] Huining Yuan, Xiangmin Yi, Zelai Xu, Zixu Wang, Xinlei Chen, Xiao-Ping Zhang, Yu Wang, and Chao Yu. ActionOPD: Distilling Decisions, Not Tokens, 2026. URL https://arxiv.org/abs/2610.19820.

[50] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah D. Goodman. STaR: Bootstrapping Reasoning With Reasoning, 2022. URL https://arxiv.org/abs/2203.14465.

[51] Congjing Zhang, Vashishtha Patil, Henning Lange, and Usman Aleem. What Breaks Under Pruning in Smart Homes, and When? Evaluating LLM Degradation Across Architectures and Task Complexity, 2026. URL https://arxiv.org/abs/2609.17515.

[52] Nan Zhang, Yanchi Liu, Xujiang Zhao, Wei Cheng, Runxue Bao, Rui Zhang, Prasenjit Mitra, and Haifeng Chen. Pruning as a Domain-specific LLM Extractor, 2024. URL https://arxiv.org/abs/2405.06275.

[53] Celal Ziftci, Spencer Greene, Ray Liu, Livio Dalloro, and Lorenzo Dini. Catching Developers in the Flow: Low-Latency Agentic Program Repair at Google Scale, 2026. URL https://arxiv.org/abs/2610.07289.

A Real 4-bit cuts

Table 2 gives the measurements behind Figure 3. The model is Gemma 4 31B in W4A16 (compressed-tensors, group 32), served by vLLM on 4× L4. Decode speed is for one stream at a 2,000-token prompt, and "8 streams" is the total decode rate of eight 2,000-token prompts at once. Damage is the rise in held-out nats per token on the agent's own text (40 trajectories, 25,896 tokens). "Predicted" is the bf16 mask's damage before any 4-bit serving.

Table 2: Real 4-bit cuts: weights read, decode speed and damage. Speeds are relative to the full model's 38.9 tok/s on one stream and 210 tok/s on 8.

		Decode speed		Damage	
MLP kept	GB	1 stream	8 streams	served	predicted
100%	23.5	1.00×	1.00×	0	0
85%	21.6	1.05×	1.03×	+0.025	+0.025
70%	19.6	1.15×	1.09×	+0.084	+0.080
55%	18.0	1.24×	1.14×	+0.188	+0.185
6 layers[a]	21.6	1.07×	1.09×	+0.925	+0.970

[a]Removed by block influence [29]. The other rows keep that share of MLP channels in every layer.

B Notebooks

Each experiment ran as a Kaggle notebook at https://www.kaggle.com/code/verracodeguacas/ followed by the name below (each name links to its notebook). The repository's README gives the version behind each number and its result files.

Fine-tuning (Section 3). The compaction simulator: g4dev-train-mix4-cpu. The training rows are private Kaggle datasets (g4dev-g11-data, g4dev-g13-data), since they hold agent trajectories; the repository's scripts render them from the agent's runs. The teacher's labels: g4dev-g17-labels-cpu. Trainers: *Imitation*, g4dev-train-g2b-gpu (also its evaluation); *Thought-first*, g4dev-train-g6-gpu; *Every-call*, gemma-4-31b-agent-lora-compaction-aware-trainer; *Short-thought*, gemma-4-31b-agent-lora-short-thought-trainer; *Short-thought+*, gemma-4-31b-agent-lora-short-thought-trainer-v3; *Teacher-DPO*, gemma-4-31b-agent-teacher-guided-step-preferences; *Teacher-DPO-2*, gemma-4-31b-agent-in-step-teacher-preferences. Paired sessions on the development repositories: g4dev-eval-g6-gpu, g4dev-eval-g10a-gpu, g4dev-eval-g11a-gpu, g4dev-eval-g11g13-gpu. On unseen repositories: g4dev-eval-rg-base-g11a-gpu, g4dev-eval-rg-g11g13-gpu, g4dev-eval-rg-g17-gpu, g4dev-eval-rg-g17v2a-gpu, g4dev-eval-rg-g17v2b-gpu. The A/A floor: g4dev-eval-rg-aa-gpu.

Pruning (Section 4). Channel scores and damage: g4dev-prune-score-gpu, g4dev-prune-score3-gpu; the role score: g4dev-prune-score4-gpu. Real 4-bit cuts and decode speed: g4dev-prune-serve-gpu. Healing: gemma-4-31b-agent-pruned-model-teacher-healing (70%), gemma-4-31b-agent-healing-a-deeper-pruning-cut (55%). The LoRA serving path: g4dev-prune-serve2b-gpu. Merged healing and the next-action test: g4dev-prune-serve5-gpu. The role score's test: g4dev-prune-serve6-gpu. Speculative decoding: g4dev-prune-serve7-gpu. Same-session comparisons: g4dev-eval-rg-same4-gpu (70%), g4dev-eval-rg-same55-gpu (55%).