RPMGLOBAL

AMT EPF Adapter SDK

Part & Price 9.0

© 2025 RPMGLOBAL | All Rights Reserved

Contents

1 Business Background 6

2 Considerations and Assumptions 6

3 Decision Points and Configuration Options 7

4 Prerequisites 8

5 Integration Patterns 9

5.1 Supported Functions 9

5.2 Integration Service Address 9

5.3 Synchronous Transaction Patterns 11

5.4 Asynchronous transaction patterns 13

6 Field Descriptions 14

6.1 Part Identification 14

6.2 Part 14

6.3 Part Price 15

6.4 Part Inventory 15

6.5 Part Inventory Search and Validation 16

7 Error Handling 17

8 Integration Functions 18

8.1 ProcessPart 18

8.2 CancelPart 20

8.3 SyncPart 21

8.4 ProcessPartPrice 22

8.5 GetPartAndPrice 25

8.6 Process SupersededPart 27

8.7 ProcessPartInventory 29

8.8 GetPartInventory 31

8.9 SendPartInventoryValidation 33

8.10 SendPartInventorySearch 35

9 Response Formats 37

9.1 ShowPartAndPrice 37

9.2 RespondPart 37

9.3 RespondPartAndPrice 38

9.4 ShowPartInventory 39

9.5 RespondPartInventoryValidation 39

9.6 RespondPartInventorySearch 41

9.7 SendPartInventorySearchResponse 42

9.8 SendPartInventoryValidationResponse 43

Document History

Version	Date	Description	Author
1.0	14-Sep-2017	Initial Document	Andre Britz
1.1	14-Nov-2017	Updated with comments from Darryl Smith review.	Andre Britz
1.2	29-Jan-2018	Updated Part Inventory processing rules.	Andre Britz
1.3	30-Jan-2018	Added SendPartInventoryValidation.	Andre Britz
1.3.1	30-Aug-2018	Refactoring.	Grant Johnson
2.0.0	5-Sep-2018	Reformat/Rename.	Grant Johnson
2.0.1	9-Dec-2020	EPF 2.3/2.4 Support.	Grant Johnson
2.2.5	01-Jun-2022	Added setting auto_populate_manufacturer_part_number. Added part expense code and updated data structure diagrams.	Wayne Simpkins
2.2.6	27-Feb-2023	Documented fields Colloquial and Description in inventory search as deprecated. Add setting‘‘CreatePOWebServiceXMLParamete’’ to the configuration options. Add extra filter criteria called‘‘ManufacturerNam’’ to SendPartInventorySearch() and SendPartInventoryValidaton()	Wayne Simpkins
8.25	11-Sep-2023	Added details for ASYNC processing.	Wayne Simpkins
8.26	01-Nov-2023	Added chunk processing to ASYNC.	Wayne Simpkins
8.27	01-Jun-2024	In CancelPart, corrected Suspended Flag to Superseded Flag.	Wayne Simpkins
8.28	01-Oct-2024	Added ASYNC support for more integration functions. Add support for OAuth2 authentication.	Wayne Simpkins
8.28.2	10-Apr-2025	Added PartLastModifiedDateUTC and PartPriceLastModifiedDateUTC to filters for GetPartAndPrice.	Wayne Simpkins
9.0	17-Jul-2025	All inbound functions now support ASYNC processing. Moved details of synchronous/asynchronous processing, and authentication options to central overview document. Added reference to correct XSD and WSDL for outbound integration.	

Version Amendments

The following modifications were made to this document since 1.2.

Item	Description
5.3	Schematic updated
8.9	Added SendPartInventoryValidation
8.10	Modified business rules to remove Validation Logic
9.5	Section Added

1 Business Background

AMT uses parts and associated prices to perform various functions related to work order management and lifecycle costing. Parts and associated costs can be managed in AMT, but it is common that parts and procurement are done in an ERP system. The interfaces described in this document facilitate the synchronisation of parts between the ERP system and AMT.

2 Considerations and Assumptions

A Part in AMT is uniquely identified by a combination of the Organisation, the Source of Supply and the Part Number.

Organisation is the AMT organisation the part belongs to, is used in multi-tenanted AMT deployments. Even in a single-tenanted environment, the value must be used.

The Source of Supply usually identifies the different material OEMs, although AMT does not restrict this to OEMs alone, and a user-defined list of sources can be maintained.

The Part Number is either the Manufacturer's Part Number or the Stock Keeping Unit (SKU) for the inventory from which Parts are imported.

For a given Organisation, when the Part Number is the SKU, the Part Number alone is sufficient to uniquely identify a part in AMT. If the Part Number corresponds to the Manufacturer's Part Number, uniqueness is only guaranteed in the realm of the Manufacturer. It is, therefore, necessary to reference the Source of Supply to guarantee part uniqueness across the AMT inventory.

3 Decision Points and Configuration Options

AMT Configuration Settings	Description
UseStdJobPartsMargin	This setting affects how the costs for standard jobs are calculated. There is no direct impact on the interface, but will affect subsequent calculation routines within AMT.
PartPriceDays	The price for parts can be set to expire after a certain number of days. This does not have a direct impact on the interface, but should be considered to ensure that data is refreshed in a timely manner.
Auto_populate_manufacturer_part_number	If this is set to true, when importing Parts into AMT, the Part_Number field and the Manufacturer_Part_Number field are both populated with the same value. If this is set to false, it is assumed that users are manually maintaining Manufacturer_Part_Number.
CreatePOWebServiceXMLParameter	This parameter is relevant for part inventory search and lookup integration and controls the format of what is sent to the target service. The setting is shared with the work order adapter for creating PO work orders. Valid values are 0 and 1. 0 means the target service expects an object, and 1 means the target service expects XML. The recommended/default setting is 1.

4 Prerequisites

The following AMT configuration items must be completed prior to using these integration endpoints:

- Organisation
- Source of Supply
- Part Type
- Part Warranty
- Price Group
- Currency
- Branch
- Site

5 Integration Patterns

5.1 Supported Functions

Function	Description
ProcessPart	Add a new part to AMT, or update an existing part if it already exists.
CancelPart	Update a part's Superseded status flag.
SyncPart	Single interface that allows Process and Cancel of parts.
ProcessPartPrice	Add new prices to a part, or edit existing prices.
GetPartAndPrice	List parts and associated prices.
ProcessSupersededPart	Replaces superseded parts with new parts.
ProcessPartInventory	Updates the inventory for existing parts.
GetPartInventory	List parts and associated inventory values.
SendPartInventorySearch	Sends some search criteria for parts to an external system, and expects a list of parts as a response.
SendPartInventoryValidation	Sends part information to an external system and expects confirmation that the parts exist.

5.2 Integration Service Address

More details regarding the general features of the integration service can be found in the Service Overview documentation. In order to use this service, the following endpoints are available for various authentication scenarios. These may not all be available, depending on the deployment configurations at a specific site.

Basic authentication	Domain, username and password provided when establishing the connection
https://<Server>:<port>/PartsIntegrationService/PartsIntegration/BasicHttpBinding_Https_Basic	
http://<Server>:<port>/PartsIntegrationService/PartsIntegration/BasicHttpBinding_Http_Basic	

Windows authentication	The Windows credentials of the current Windows account are used to establish the connection. This is the default method if no binding is specified in the URL.
https://<Server>:<port>/PartsIntegrationService/PartsIntegration/	
http://<Server>:<port>/PartsIntegrationService/PartsIntegration/	

OAUTH2 authentication	Client authentication is used to retrieve an OAUTH2 access token. The token is passed in the SOAP header when calling the AMT EPF Adapters.
https://<Server>:<port>/PartsIntegrationService/PartsIntegration/BasicHttpBinding_Https_Token	
http://<Server>:<port>/PartsIntegrationService/PartsIntegration/BasicHttpBinding_Http_Token	

<Server> is the fully qualified name of the server hosting the service.

Note that Windows authentication is being deprecated.

5.3 Synchronous Transaction Patterns

Synchronous integration should align with the transaction pattern as shown in Figure 1.

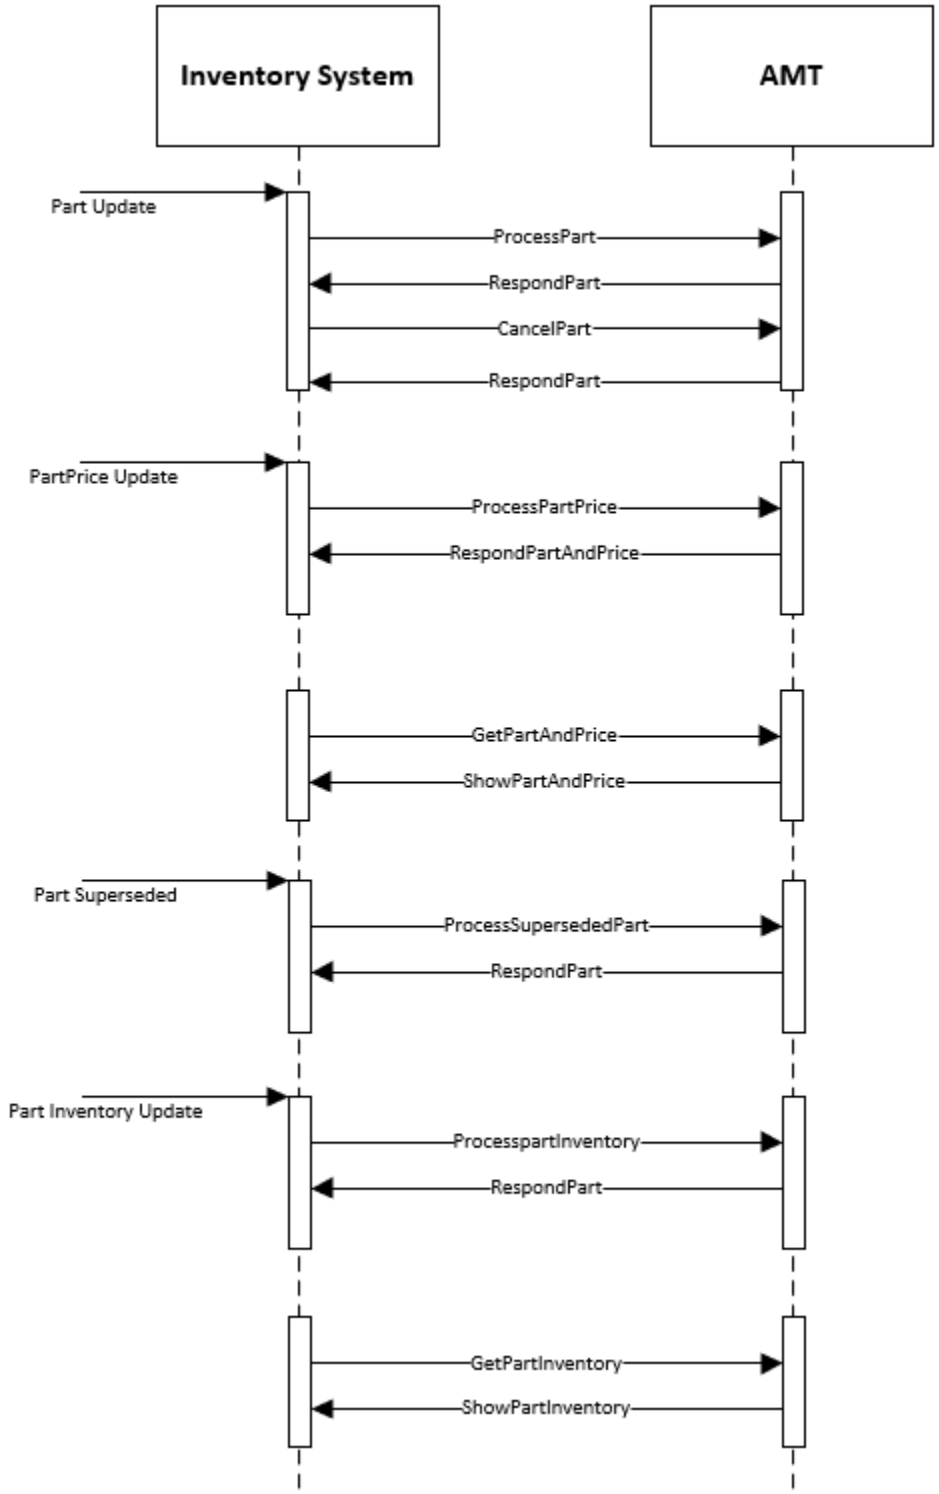


Figure 1 Synchronous Integration – Part Management

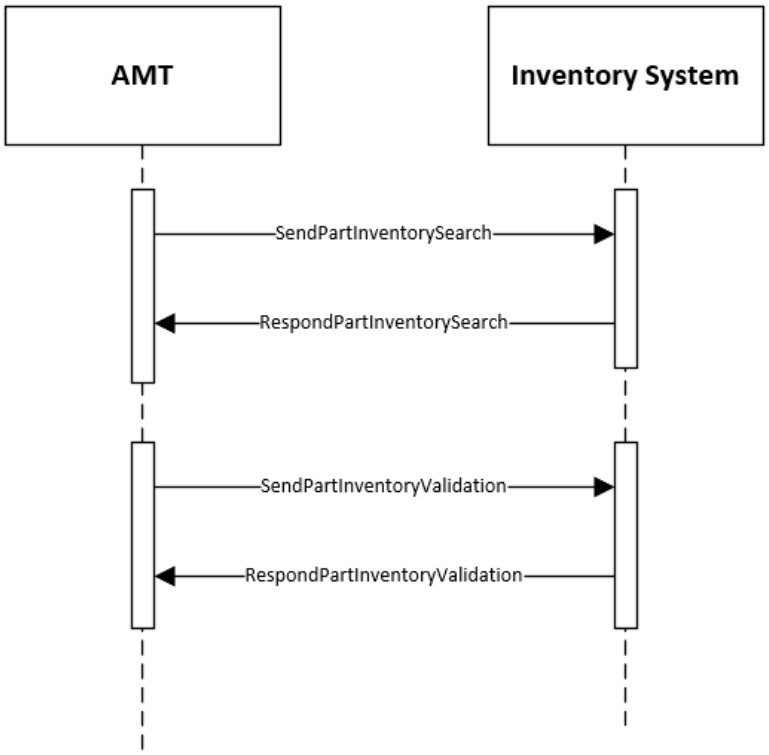


Figure 2 Synchronous Integration – Part Search and Validation

5.4 Asynchronous transaction patterns

Asynchronous integration using a message broker should align with the transaction pattern as shown in Figure 3.

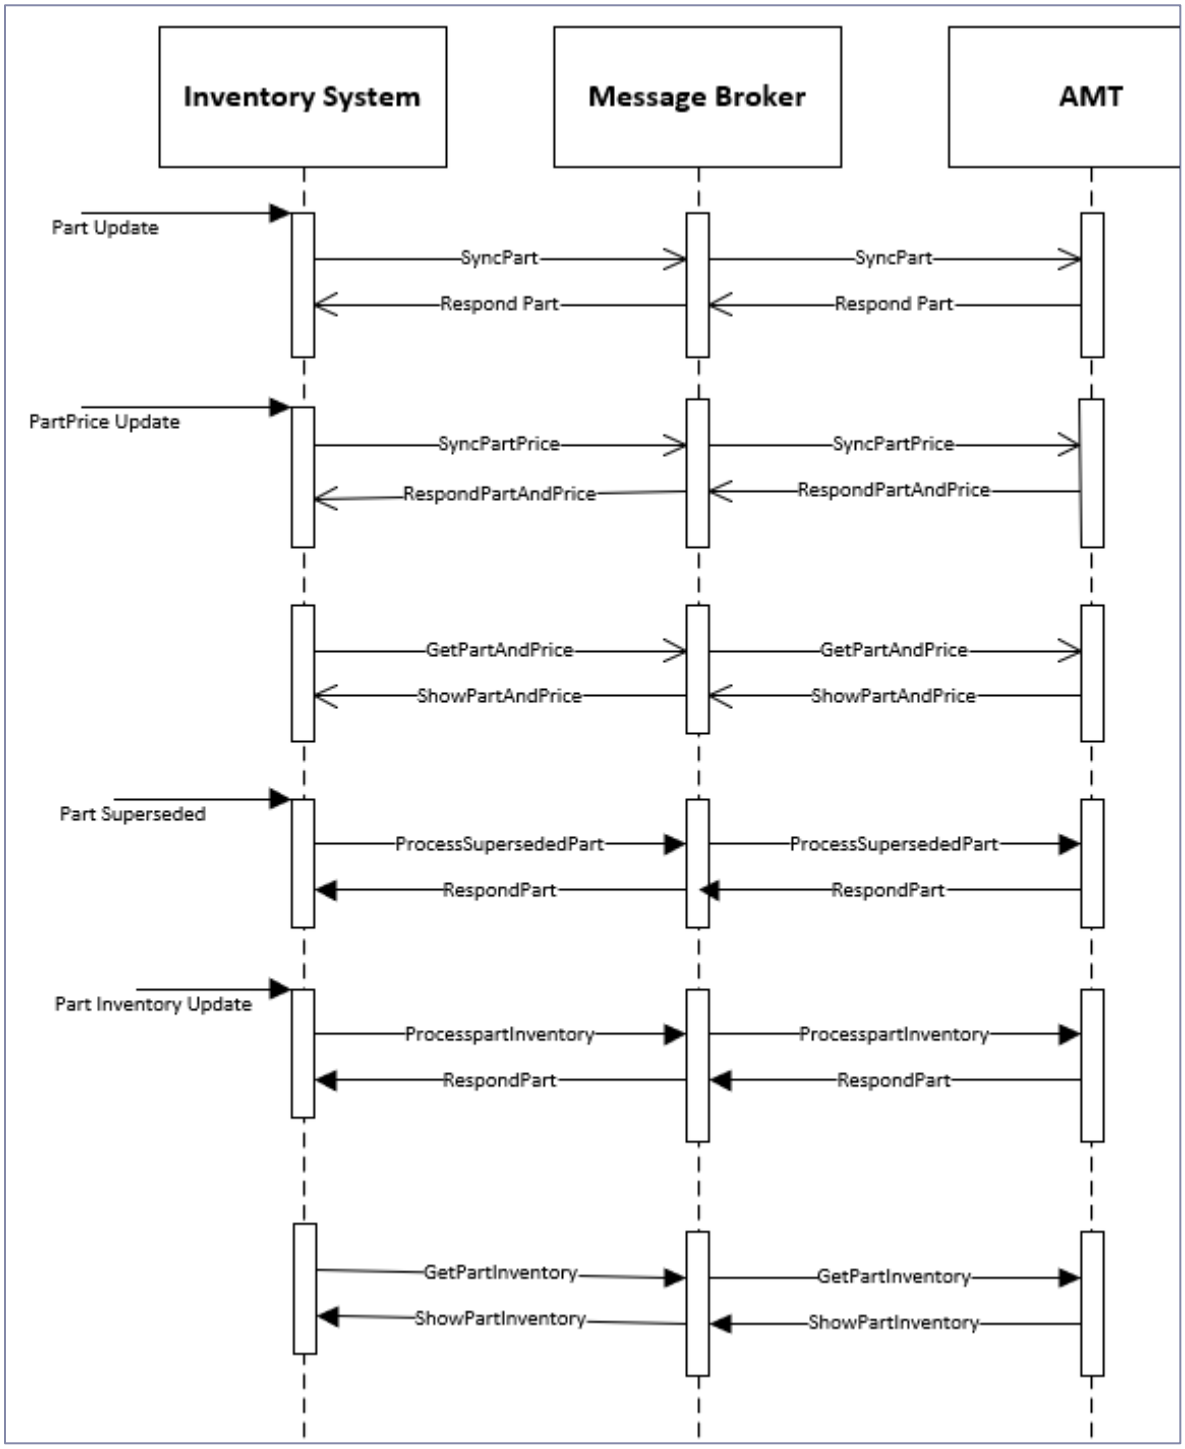


Figure 3 Asynchronous Integration

6 Field Descriptions

The fields in the following tables are used for this integration. The data types for each field are described in the relevant XML schema definition.

6.1 Part Identification

These fields are always used to identify parts in AMT.

Field Name	Description	Sample Values
OrganisationCode	The AMT Organisation code for the relevant organisation in a multi-tenancy environment.	WesTrac
SourceOfSupplyCode	The AMT Source of Supply Code for the Part.	CAT
PartNumber	The Part Number. This is the field that a Part in AMT is referenced by (in conjunction with the SOS) and is usually either the SKU or the Manufacturer Part Number.	9T3493

6.2 Part

Field Name	Description	Sample Values
PartDescription	Description for the Part.	PISTON
PartTypeCode	The AMT Part Type Code is used to group similar parts together.	LUBE
ManufacturerPartNumber	This defines the OEM Part Number, which may be the same as PartNumber.	9T3493
DefaultComponentCode	The AMT Component Code used for this part.	3700
BudgetDeliveryTimeToWorkshopDays	Expected time until the part is expected in the workshop.	31
BudgetTimeWaitingForRebuildDays	Budget time expected until rebuild occurs.	45
BudgetDeliveryTimeToWarehouseDays	Expected time until the part is expected in the warehouse.	22
BudgetRebuildDurationDays	Expected time for a rebuild operation of the asset.	17
BudgetTotalTurnDays	Expected time of complete rebuild maintenance activity till the part is available again.	82
PartRating	The AMT Part Rating which is a category that can be applied to a part for analysis purposes.	275kW
PartWarrantyGroupCode	The AMT Warranty Code used for this part.	NOWAR
PartSupersededIndicator	Shows if a part has been superseded by another part.	1

Field Name	Description	Sample Values
DefaultComponentCode	Identifies the default component for this part.	
FluidPartIndicator	A value of zero is used.	
PartExpenseCode	The expense code of this stock code for Standard Job cost allocations.	

6.3 Part Price

Field Name	Description	Sample Values
PriceGroupCode	The Price Group Code as configured in AMT.	DEFAULT
PartPriceCurrencyCode	The AMT Currency Code used for the part price information.	AUD
PartCostAtSellValue	Cost@Sell of the Part for this price group and currency.	48.90
PartCostAtCostValue	Cost@Cost of the Part for this price group and currency.	46.20
FullCreditCostAtSellValue	Amount credited when Full Credit is selected for this price group and currency.	46.20
FullCreditCostAtCostValue	Amount credited when Full Credit is selected for this price group and currency.	46.20
PartialCreditCostAtSellValue	Amount credited when Partial Credit is selected for this price group and currency.	24.40
PartialCreditCostAtCostValue	Amount credited when Partial Credit is selected for this price group and currency.	21.70
PartPriceExpiryDate	The date on which the part price is no longer valid. Based on the PartPriceDays system setting.	
PriceGroupCode	The Price Group Code as configured in AMT.	DEFAULT

6.4 Part Inventory

Field Name	Description	Sample Values
BranchCode	The AMT Branch Code against which the inventory is recorded.	Mining
ExternalIdentifier	The unique identifier of the part in the external system.	A112233
LocationDescription	The location of the inventory.	Warehouse

Field Name	Description	Sample Values
QuantityOnHandValue	Quantity on Hand.	3
QuantityOnOrderValue	Quantity on Order.	1
QuantityBeingRebuiltValue	Quantity being Rebuilt.	1
RebuildSiteCode	The AMT Site Code where the part is being rebuilt.	MARC
ExpectedDeliveryDate	Next expected delivery date for parts on order.	01-09-2017
Comments	Additional comments as specified by the user.	Alternative supplier arranged

6.5 Part Inventory Search and Validation

Field Name	Description	Sample Values
SourceOfSupplyCode	The Source of Supply Code for the Part.	CAT
PartNumber	The Manufacturer's Part number used to identify the part.	A112233
StockCode	The inventory system's stock code.	X11223
PartName	The part name.	Oli Filter
PartDescription	A free-format description of the part code.	
SupplierCode	The supplier code as stored in the external system.	
ColloquialName	Deprecated.	
Description	Deprecated.	
PreferredSupplierIndicator	Shows if this part is from a preferred supplier.	1
LeadTimeDays	The time required to procure this part.	3
OnHandSite	The number of units available at the current site.	9
OnHandTotal	The number of units available.	22

7 Error Handling

Error Condition	Description
The provided document has an unrecognised format. Various XML format errors are returned.	Check the format of the schema document against those provided. Errors can be related to well-formed XML issues, or failure to validate the document against the XSD.
The provided value for <ElementCode> does not have the correct datatype.	Check datatypes of elements, especially date formats. Note that date and datetime conventions are used.
Mandatory element <ElementName> not provided.	An expected XML element has not been provided.
Mandatory attribute <AttributeName> not provided.	An expected XML attribute has not been provided.
The provided code for <ElementCode> does not have a corresponding AMT configuration item.	AMT makes extensive use of pre-configured code lists. Relevant codes must be preconfigured before using the interface.
A part price update has been requested, but no corresponding part has been found with: OrganisationCode: <OrganisationCode> SourceOfSupplyCode: <SourceOfSupplyCode> PartNumber: <PartNumber>	This results when the external system tries to update the pricing information for a part that does not exist in AMT yet.
A part inventory update has been requested, but no corresponding part has been found with: OrganisationCode: <OrganisationCode> SourceOfSupplyCode: <SourceOfSupplyCode> PartNumber: <PartNumber>	This results when the external system tries to update the inventory information for a part that does not exist in AMT yet.
A part supersede has been requested, but no corresponding part has been found with: OrganisationCode: <OrganisationCode> SourceOfSupplyCode: <SourceOfSupplyCode> PartNumber: <PartNumber>	This results when the external system tries to supersede parts that do not exist in AMT yet.

8 Integration Functions

Only fields with specific rules have been listed. All other fields should conform to the datatype rules as defined in the schema definition files, and are optional.

8.1 ProcessPart

This interface is used to add new parts to AMT or edit existing parts.

8.1.1 Business Rules

Field Name	Business Rules	Required/ Optional
OrganisationCode	The value provided should match a configured **Organisation** code within AMT. This field is used together with PartNumber and SourceOfSupply to uniquely identify the part within AMT.	R
SourceOfSupplyCode	The value provided should match a configured **Source of Supply** code within AMT. This field is used together with PartNumber and OrganisationCode to uniquely identify the part within AMT.	R
PartNumber	This field is used together with SourceOfSupplyCode and OrganisationCode to uniquely identify the part within AMT.	R
PartDescription	Although not required, it is recommended that this field be provided to facilitate part searches in AMT.	O
PartTypeCode	The value provided should match a configured **Part Type** code within AMT. If not provided, the AMT system default will be used.	O
DefaultComponentCode	The value provided should match a configured **Component** code within AMT.	O
FluidPartIndicator	A value of 0 is used.	O
PartWarrantyGroupCode	The value provided should match a configured **Warranty Group** code within AMT.	O
PartSupersededIndicator	The provided value is ignored, and this is set to 1.	
PartExpenseCode	The provided value should match a configured E**xpense Element** code with AMT.	

8.1.2 Processing Rules

1. One or more parts can be included in the same message.
2. Each part is processed individually. Failure of a single part load is reported, and processing continues.
3. Organisation, SourceOfSupply and PartNumber are used to determine if the part exists in AMT.
4. If the part does not exist:
   a. The part is created as a new part.
   b. Any value against a provided optional tag is used.
   c. If an optional tag is not provided, the value is not set in AMT unless a specific business rule exists to manage this case.
5. If the part does exist:
   a. The part will be updated with the new provided values.
   b. Any value against a provided tag will be overwritten.
   c. If no tag is provided, the existing values will remain as-is.
6. Parts can be duplicated - the part processed last will take precedence.
7. The Organisation, PartNumber and SourceOfSupply cannot be updated using the interface.
8. **RespondPart** is returned upon completion of processing

8.1.3 Data Structure

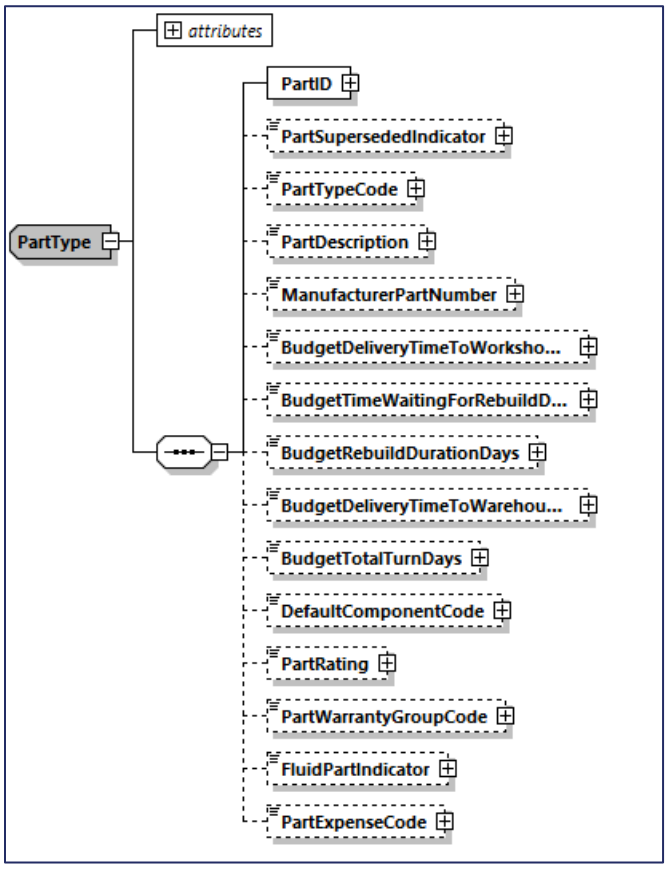


Figure 4 ProcessPart DataArea

8.2 CancelPart

This interface is used to remove parts from AMT. Rather than deleting the part within AMT, the **Part Superseded** flag is set to **True**.

8.2.1 Business Rules

Field Name	Business Rules	Required/ Optional
SourceOfSupplyCode	This field is used together with PartNumber to uniquely identify the part within AMT.	R
OrganisationCode	The value provided should match a configured **Organisation** code within AMT. This field is used together with PartNumber and SourceOfSupply to uniquely identify the part within AMT.	R
PartNumber	This field is used together with SourceOfSupplyCode to uniquely identify the part within AMT.	R

8.2.2 Processing Rules

1. One or more parts can be included in the same message.
2. Each part is cancelled individually. Failure of a single part is reported, and processing continues.
3. **Organisation**, **SourceOfSupply** and **PartNumber** are used to determine if the part exists in AMT.
4. Parts can be duplicated within the message.
5. If the part does exist, the **Part Superseded** flag is set to **True**.
6. If the part does not exist in AMT, an error is returned.
7. **RespondPart** is returned upon completion of the process.

8.2.3 Data Structure

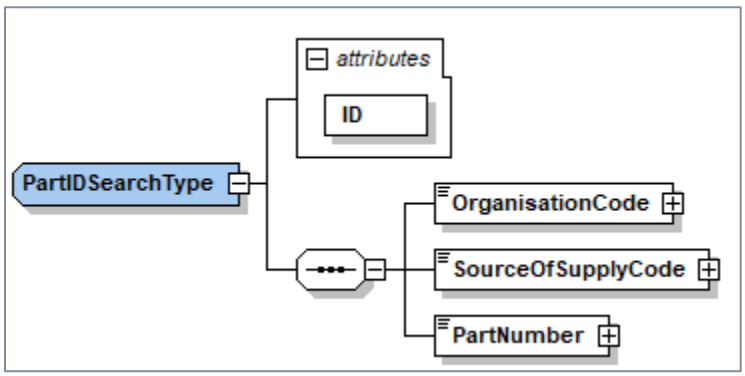


Figure 5 CancelPart DataArea

8.3 SyncPart

This interface combines the functionality of **ProcessPart** and **CancelPart**. This is useful for asynchronous operations using a message broker.

8.3.1 Processing Rules

1. The field and processing rules used for **ProcessPart** and **CancelPart** are applied.
2. ***Process*** actions are performed first, followed by ***Cancel*** actions.
3. **ProcessPart** is handled first, followed by **CancelPart**.
4. **RespondPart** is returned upon completion of the process.

8.4 ProcessPartPrice

This interface is used to add or update costs against existing AMT equipment.

8.4.1 Business Rules

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Required/ Optional</th></tr>
<tr><td>OrganisationCode</td><td>The value provided should match a configured Organisation code within AMT.

This field is used together with PartNumber and SourceOfSupply to uniquely identify the part within AMT.</td><td>R</td></tr>
<tr><td>SourceOfSupplyCode</td><td>The value provided should match a configured Source of Supply code within AMT.

This field is used together with PartNumber and OrganisationCode to uniquely identify the part within AMT.</td><td>R</td></tr>
<tr><td>PartNumber</td><td>This field is used together with SourceOfSupplyCode and OrganisationCode to uniquely identify the part within AMT.</td><td>R</td></tr>
<tr><td>PriceGroupCode</td><td>The value provided should match a configured PriceGroup code within AMT.

If a value is not provided, the default PriceGroup, as configured in AMT, is used.</td><td>O</td></tr>
<tr><td>PartCurrencyCode</td><td>The value provided should match a configured Currency code within AMT.

If a value is not provided, the Currency Code from the PriceGroup is used.</td><td>O</td></tr>
<tr><td>PartCostAtSellValue</td><td>If no selling price exists, this value should be the same as PartCostPrice.

Check AMT CONFIGURATION

<table><tr><th colspan="2">UseStdJobPartsMargin</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>0</td><td>The Margin of the standard job will be used to calculate this value. Provided value will be ignored.</td></tr><tr><td>1</td><td>Provided value will be used.</td></tr></table></td><td>PartCostAtSellValue</td></tr>
<tr><td>PartCostAtCostValue</td><td></td><td>R</td></tr>
</table>

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Required/ Optional</th></tr>
<tr><td>FullCreditCostAtSellValue</td><td>If no selling price exists, this value should be the same as FullCreditCostPrice.
Check AMT CONFIGURATION
<table>
<tr><th colspan="2">UseStdJobPartsMargin</th></tr>
<tr><th>Value</th><th>Action</th></tr>
<tr><td>0</td><td>The Margin of the standard job will be used to calculate this value. Provided value will be ignored.</td></tr>
<tr><td>1</td><td>Provided value will be used.</td></tr>
</table></td><td>R</td></tr>
<tr><td>FullCreditCostAtCostValue</td><td></td><td>R</td></tr>
<tr><td>PartialCreditCostAtSellValue</td><td>If no selling price exists, this value should be the same as PartialCreditCostPrice
Check AMT CONFIGURATION
<table>
<tr><th colspan="2">UseStdJobPartsMargin</th></tr>
<tr><th>Value</th><th>Action</th></tr>
<tr><td>0</td><td>The Margin of the standard job will be used to calculate this value. Provided value will be ignored.</td></tr>
<tr><td>1</td><td>Provided value will be used.</td></tr>
</table></td><td>R</td></tr>
<tr><td>PartialCreditCostAtCostValue</td><td></td><td>R</td></tr>
</table>

8.4.2 Processing Rules

1. One or more parts prices can be included in the same message.
2. Each part is processed individually. Failure of a single part is reported, and processing continues.
3. Parts price updates can be duplicated - the part price processed last will take precedence.
4. Organisation, SourceOfSupply and PartNumber are used to determine if the part exists in AMT.
5. If the part does exist, a check is made to see if Part Prices exist against a Price Group.
   a. If Part Prices exist for the Price Group, the relevant prices are updated.
   b. If Part Prices do not exist for the price group, new price values are added against the Price Group.

6. If no part exists, the Part Prices will not be updated and treated as an error condition **RespondPartAndPrice** is returned upon completion of the process.

8.4.3 Data Structure

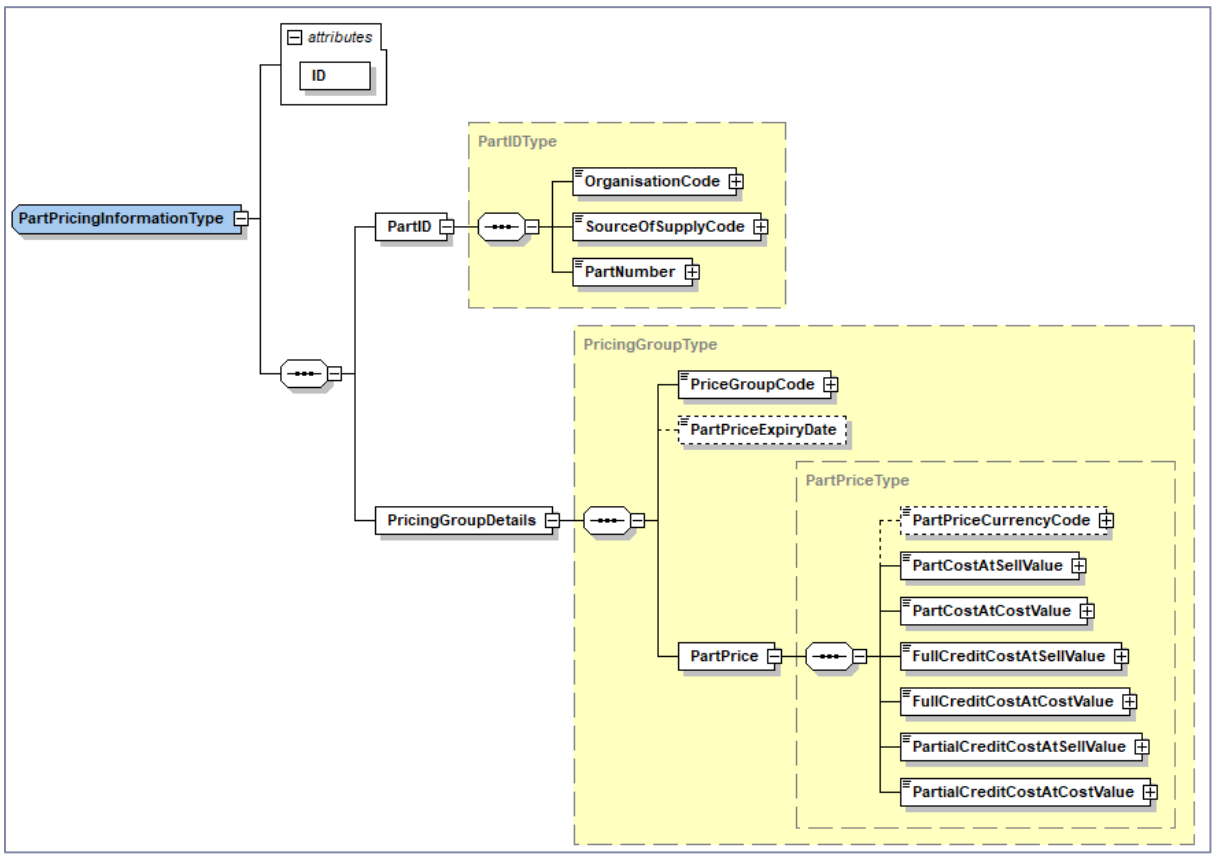


Figure 6 ProcessPartCosts DataArea

8.5 GetPartAndPrice

This interface is used to retrieve a list of parts and associated prices from AMT.

8.5.1 Business Rules

Field Name	Business Rules	Required/ Optional
PartNumber		O
SourceOfSupplyCode	The value provided should match a configured **Source of Supply** code within AMT.	O
OrganisationCode	The value provided should match a configured **Organisation** code within AMT.	O
PriceGroupCode	The value provided should match a configured **PriceGroup** code within AMT.	R
CurrencyCode	The value provided should match a configured **Currency** code within AMT.	R
PartTypeCode	The value provided should match a configured **Part Type** code within AMT.	O
PartDescription	The complete **PartDescription** is matched.	O
ManufacturerPartNumber	The complete ManufacturerPartNumber is matched.	O
DefaultComponentCode	The value provided should match a configured **Component** code within AMT.	O
PartRating	The value provided should match a configured **Part Rating** code within AMT.	O
PartWarrantyGroupCode	The value provided should match a configured **Warranty Group** code within AMT.	O
PartNumber		O
PartLastModifiedDateUTC	The value provided should be in the past. Only PartsAndPrice records where the part definition has been modified since this date will be returned in the payload.	O
PartPriceLastModifiedDateUTC	The value provided should be in the past. Only PartsAndPrice records where the part price has been modified since this date will be returned in the payload.	O

8.5.2 Processing Rules

1. Any provided fields will be matched with existing Parts in AMT.
2. All items within a list element are considered as a logical OR

   Each list is considered as a logical AND.
3. The use of a non-existent code will result in an error condition.
4. **ShowPartAndPrice** is returned upon completion of the process.

8.5.3 Data Structure

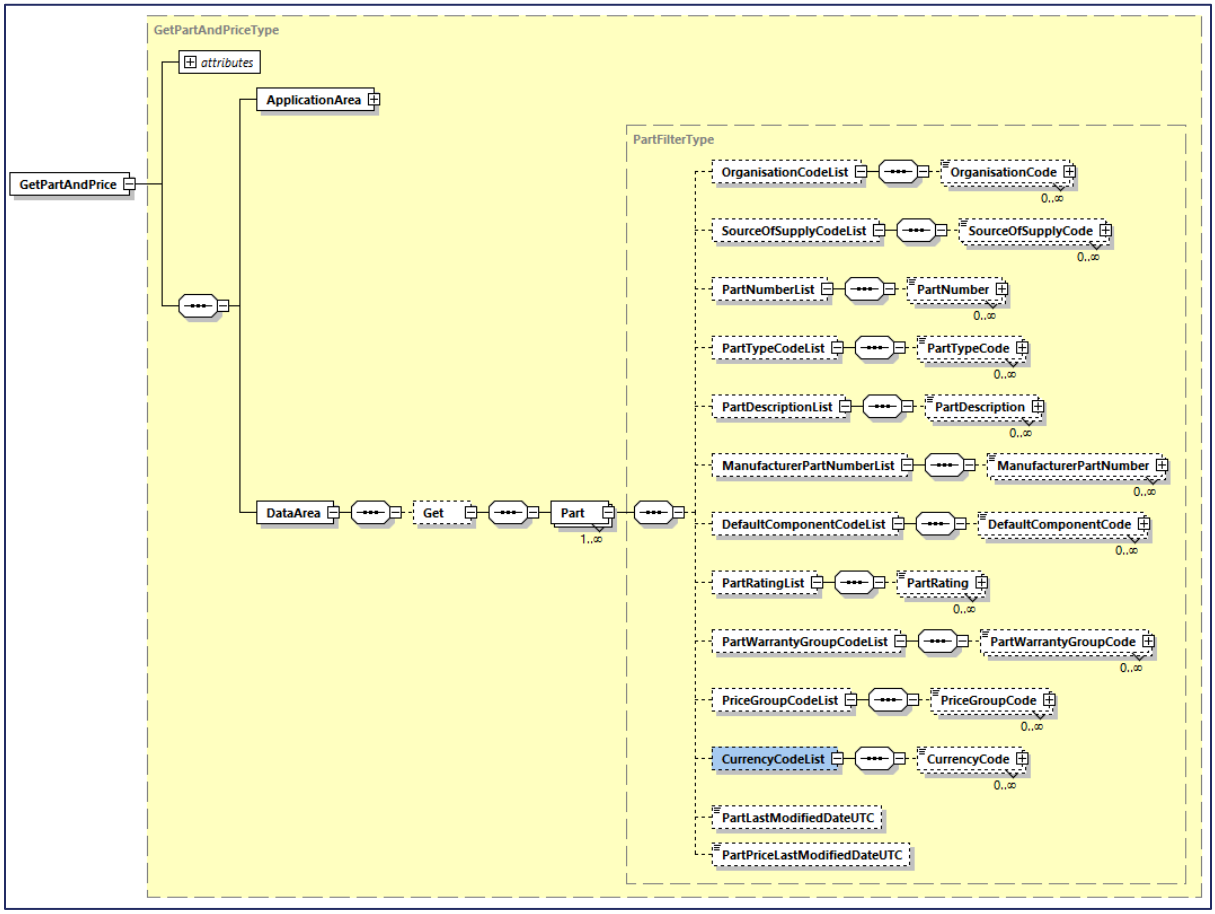


Figure 7 GetPartAndCosts DataArea

8.6 Process SupersededPart

This interface is used to supersede old parts with new parts in AMT. This interface is used when it is known which parts will be replaced by other parts. Otherwise, the **CancelPart** interface should be used. All parts must already exist in AMT before using this interface.

Field Name	Business Rules	Required/ Optional
Superseded Part		
OrganisationCode	The value provided should match a configured **Organisation** code within AMT. This field is used together with PartNumber and SourceOfSupply to uniquely identify the part within AMT. The same Organisation Code should be used for both the superseded part and the new part.	R
SourceOfSupplyCode	The value provided should match a configured **Source of Supply** code within AMT. This field is used together with PartNumber and OrganisationCode to uniquely identify the part within AMT.	R
PartNumber	This field is used together with SourceOfSupplyCode and OrganisationCode to uniquely identify the part within AMT.	R
New Part		
OrganisationCode	The value provided should match a configured **Organisation** code within AMT. This field is used together with PartNumber and SourceOfSupply to uniquely identify the part within AMT. The same Organisation Code should be used for both the superseded part and the new part.	R
SourceOfSupplyCode	The value provided should match a configured **Source of Supply** code within AMT. This field is used together with PartNumber and OrganisationCode to uniquely identify the part within AMT.	R
PartNumber	This field is used together with SourceOfSupplyCode and OrganisationCode to uniquely identify the part within AMT.	R

8.6.1 Processing Rules

1. One or more Supersedes can be included in the same message.
2. Each Supersede is processed individually. Failure of a single part is reported, and processing continues.
3. Both Parts must belong to the same organisation.
4. Supersede updates can be duplicated – the last action will take precedence.
5. SourceOfSupply and PartNumber are used to determine if all parts exist in AMT.
6. If all parts exist, the superseded part is replaced with the new part in Strategy Tasks and Standard Jobs.
7. The Superseded Part is not removed, only marked as Superseded.
8. If either part does not exist, an error is returned.
9. **RespondPart** is returned upon completion of the process.

8.6.2 Data Structure

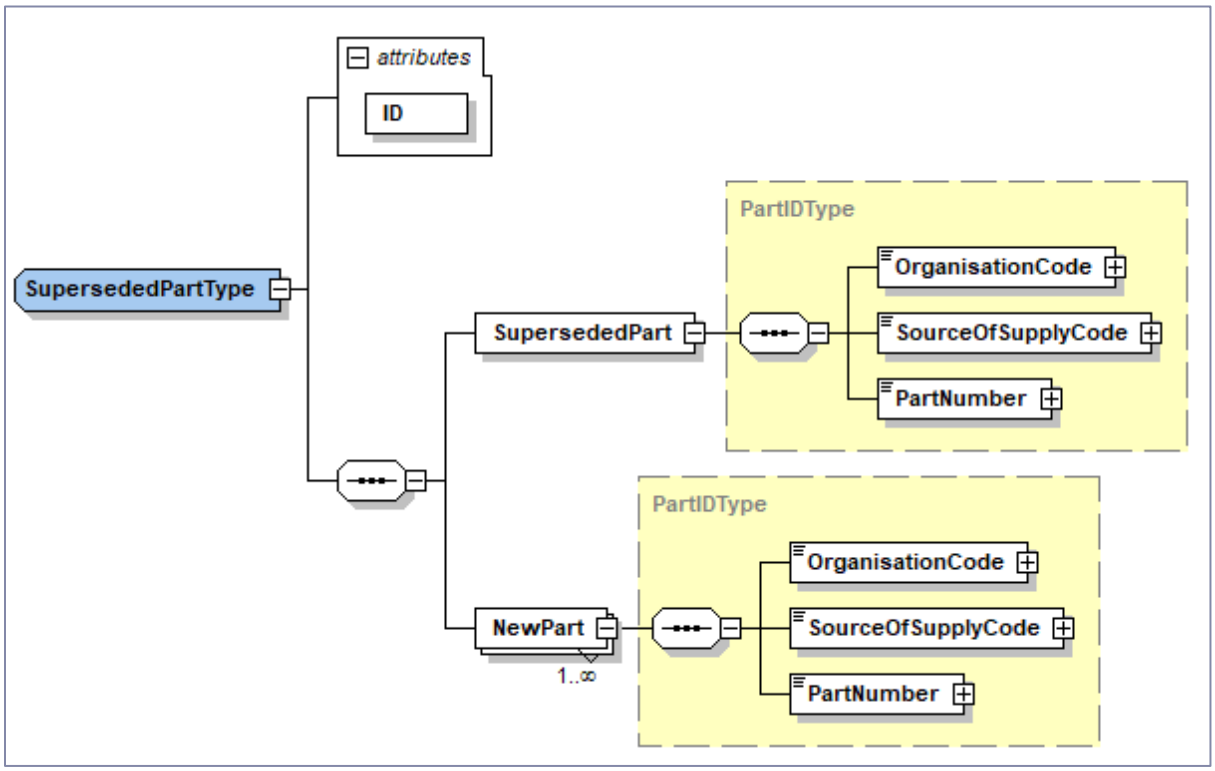


Figure 8 ProcessSupersededPart DataArea

8.7 ProcessPartInventory

This interface is used to add inventory information to existing parts in AMT.

8.7.1 BusinessRules

Field Name	Business Rules	Required/ Optional
ExternalID	This value is used to identify the record in AMT.	R
PartNumber	This field is used together with SourceOfSupplyCode and OrganisationCode to uniquely identify the part within AMT. No validation is done on this field.	R
OrganisationCode	The value provided should match a configured **Organisation** code within AMT. This field is used together with PartNumber and SourceOfSupply to uniquely identify the part within AMT.	R
SourceOfSupplyCode	The value provided should match a configured **SourceOfSupply** code within AMT. This field is used together with Partnumber and OrganisationCode to uniquely identify the part within AMT.	R
BranchCode	The value provided should match a configured **Branch** code within AMT.	R
QuantityOnHandValue		R
RebuildSiteCode	The value provided should match a configured **Site** code within AMT.	O

8.7.2 Processing Rules

1. One or more Inventory updates can be included in the same message.
2. Each Inventory update is processed individually. Failure of a single update is reported, and processing continues.
3. Inventory updates can be duplicated – the last action will take precedence.
4. The ExternalID is used to determine if the Part exists in AMT.
5. If the part exists, the inventory value will be updated.
6. Any value against a provided tag will be added or overwritten.
7. If no tag is provided, the existing values will remain as-is.
8. If no part exists, the Part Inventory will not be updated and will be treated as an error condition.
9. **RespondPart** is returned upon completion of the process.

8.7.3 Data Structure

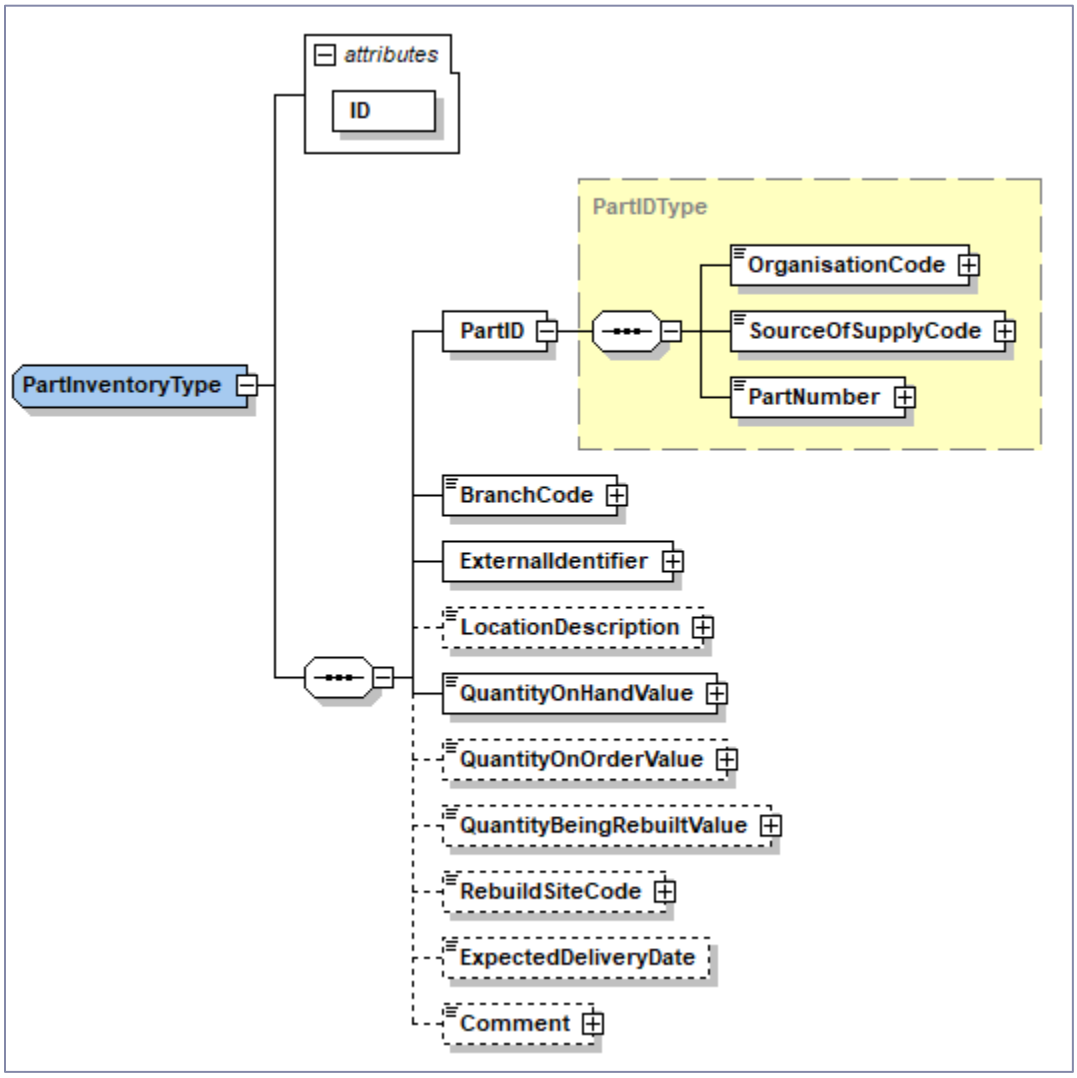


Figure 9 ProcessPartInventory Data Area

8.8 GetPartInventory

The interface is used to retrieve a list of parts and associated inventory from AMT.

8.8.1 Business Rules

Field Name	Business Rules	Required/ Optional
PartNumber		O
SourceOfSupplyCode	The value provided should match a configured **Source of Supply** code within AMT.	O
OrganisationCode	The value provided should match a configured **Organisation** code within AMT.	O
PartTypeCode	The value provided should match a configured **Part Type** code within AMT.	O
PartDescription		O
ManufacturerPartNumber		O
DefaultComponentCode	The value provided should match a configured **Component** code within AMT.	O
PartRating	The value provided should match a configured **Part Rating** code within AMT.	O
PartWarrantyGroupCode	The value provided should match a configured **Warranty Group** code within AMT.	O

8.8.2 Processing Rules

1. Any provided fields will be matched with existing Part Inventory items in AMT.
2. All items within a list element are considered as a logical OR

   Each list is considered as a logical AND.
3. The use of a non-existent code will result in an error condition.
4. **ShowPartInventory** is returned upon completion of the process

8.8.3 Data Structure

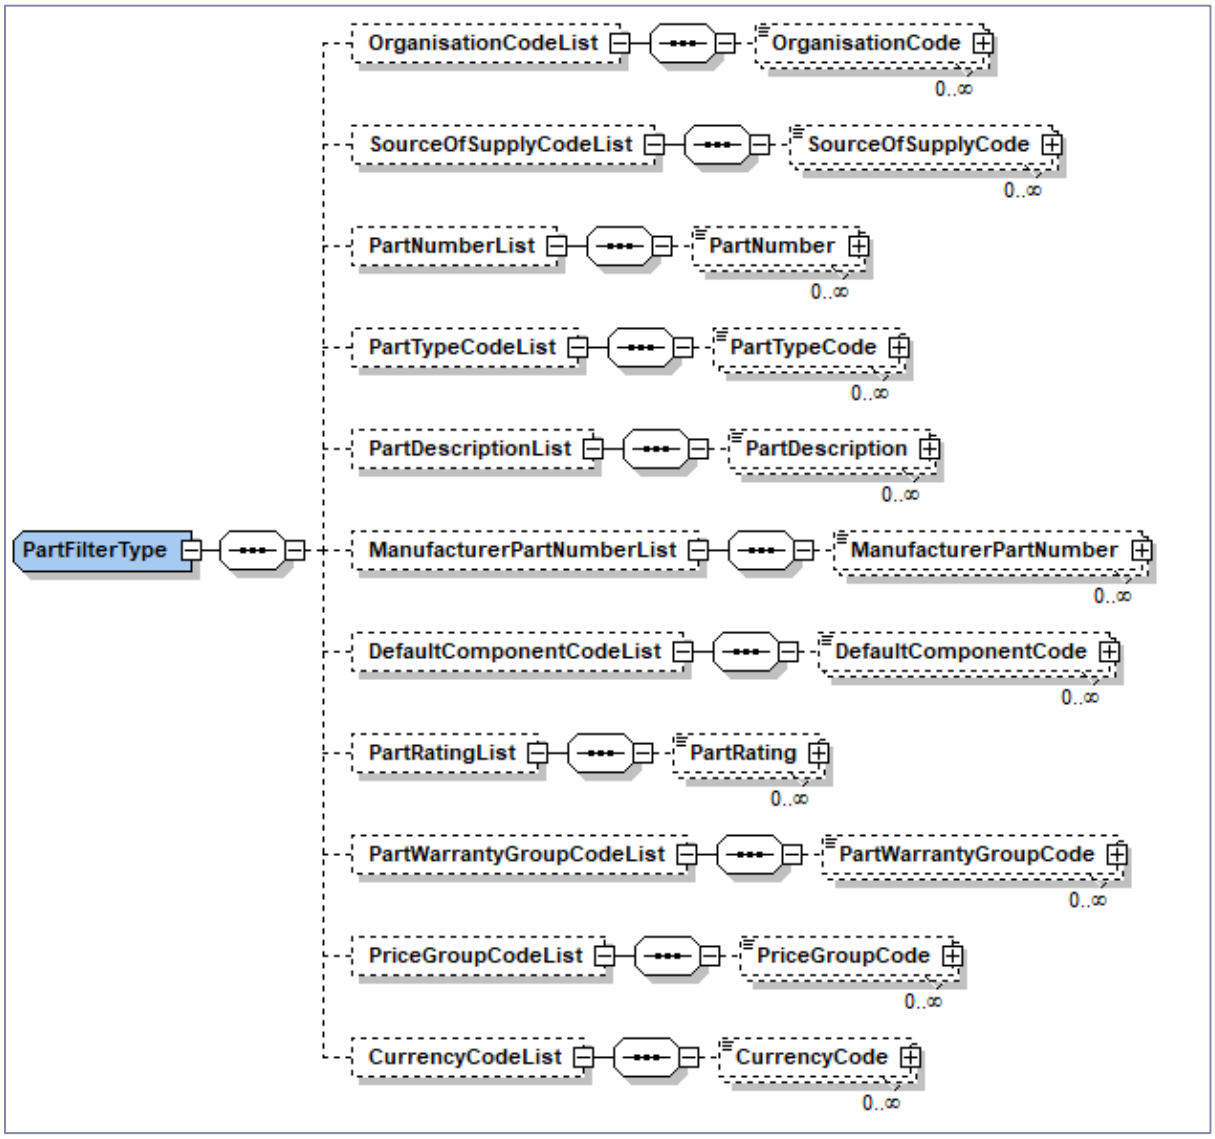


Figure 10 GetPartAndPrice DataArea

8.9 SendPartInventoryValidation

This interface is an outgoing interface used to validate that a part exists in an external system.

SendPartInventoryValidationMessages.xsd and **SendPartInventoryValidation.wsdl** are the relevant schema files to use when developing the external integration client for this function. These define the correct message that will be received externally from AMT and must be responded to AMT. The postman collection provides example messages.

8.9.1 Business Rules

Field Name	Business Rules	Required/ Optional
PartNumber	The external system should do an exact match of the Part Number.	R
SourceOfSupplyCode	The value provided matches a configured **Source of Supply** code within AMT. The external system should do an exact match of this code.	R
StockCode	The external system should do an exact match of this code.	O
PartName	The external system should do an exact match of this code.	O
SupplierCode	The external system should do an exact match of this code.	O
SiteCode	The value provided matches a configured **Site** code within AMT. The external system should do an exact match of this code.	O
ManufacturerName	This field is for use by internal AMT services to support mobile functionality. The external system should match on manufacturers with this name.	O

8.9.2 Processing Rules

1. One or more validation requests can be included in the same message.
2. Each element in the message is to be considered as a logical AND

   Exact matches must be made.
3. Only one part should be returned for each validation request. An error should be returned if a single match cannot be made.
4. The external system should respond with **SendPartInventoryValidationResponse** upon completion of the process.

8.9.3 Data Structure

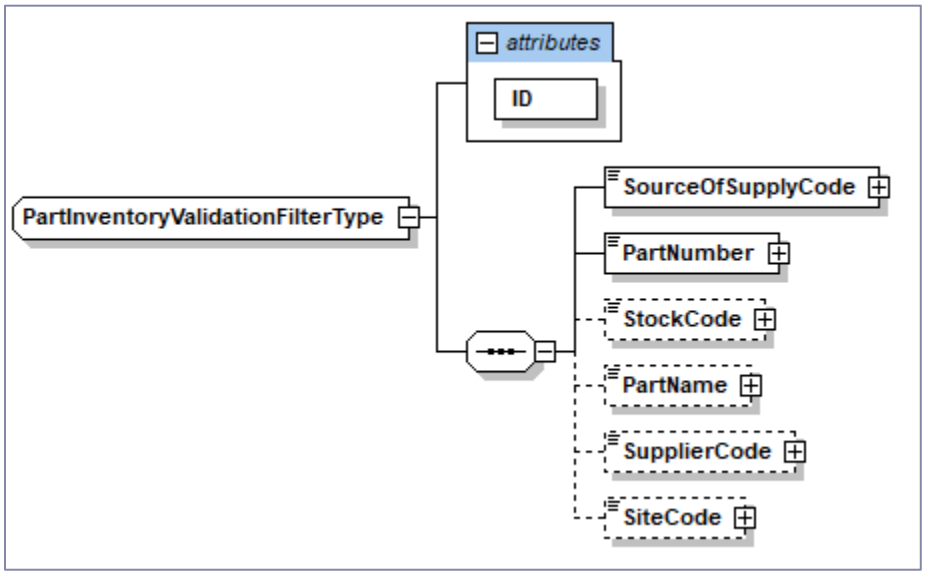


Figure 11 PartInventorySearch DataArea

8.10 SendPartInventorySearch

This interface is an outgoing interface used to request a list of parts from an external system, based on search criteria.

SendPartInventorySearchMessages.xsd and **SendPartInventorySearch.wsdl** are the relevant schema files to use when developing the external integration client for this function. These define the correct message that will be received externally from AMT and must be responded to AMT. The postman collection provides example messages.

8.10.1 Business Rules

Field Name	Business Rules	Required/ Optional
PartNumber	The external system can do a wildcard match of the Part Number.	O
SourceOfSupplyCode	The value provided matches a configured **Source of Supply** code within AMT. The external system can do a wildcard match of this code.	O
StockCode	The external system can do a wildcard match of the StockCode.	O
PartName	The external system can do a wildcard match of the PartName.	O
PartDescription	The external system can do a wildcard match of the PartDescription.	O
SupplierCode	The external system can do a wildcard match of the SupplierCode.	O
SiteCode	The value provided should match a configured **Site** code within AMT. The external system can do a wildcard match of the SiteCode.	O
ManufacturerName	This field is for use by internal AMT services to support mobile functionality. The external system should match on manufacturers with this name.	O

8.10.2 Processing Rules

1. Only one search request can be included in the same message.
2. Each element in the message is to be considered as a logical AND

   Many parts can be returned for this search query.
3. The external system should respond with **SendPartInventorySearchResponse** upon completion of the process.

8.10.3 Data Structure

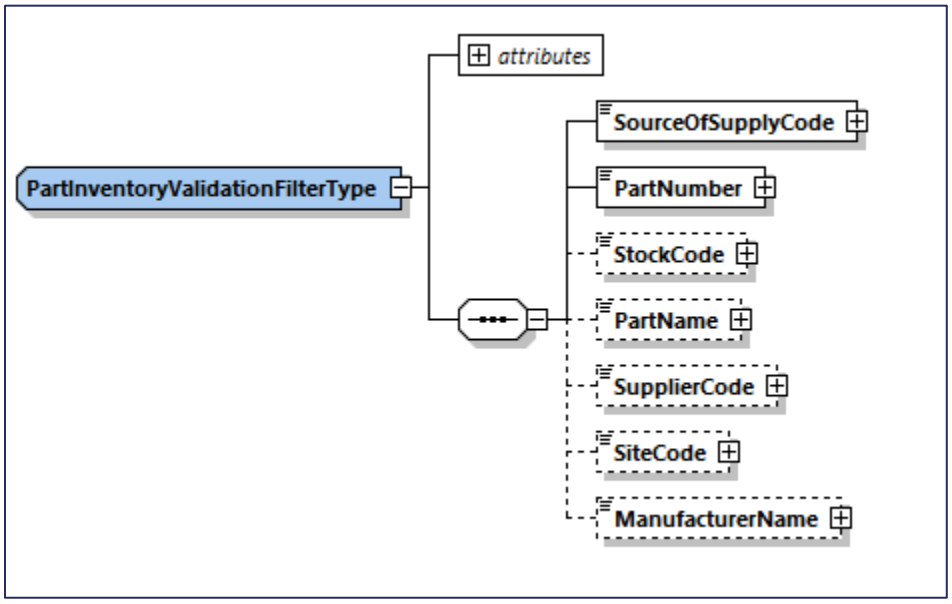


Figure 12 PartInventorySearch DataArea

9 Response Formats

9.1 ShowPartAndPrice

This payload is returned in response to the following interfaces.

- GetPartAndPrice

9.1.1 Data Structure

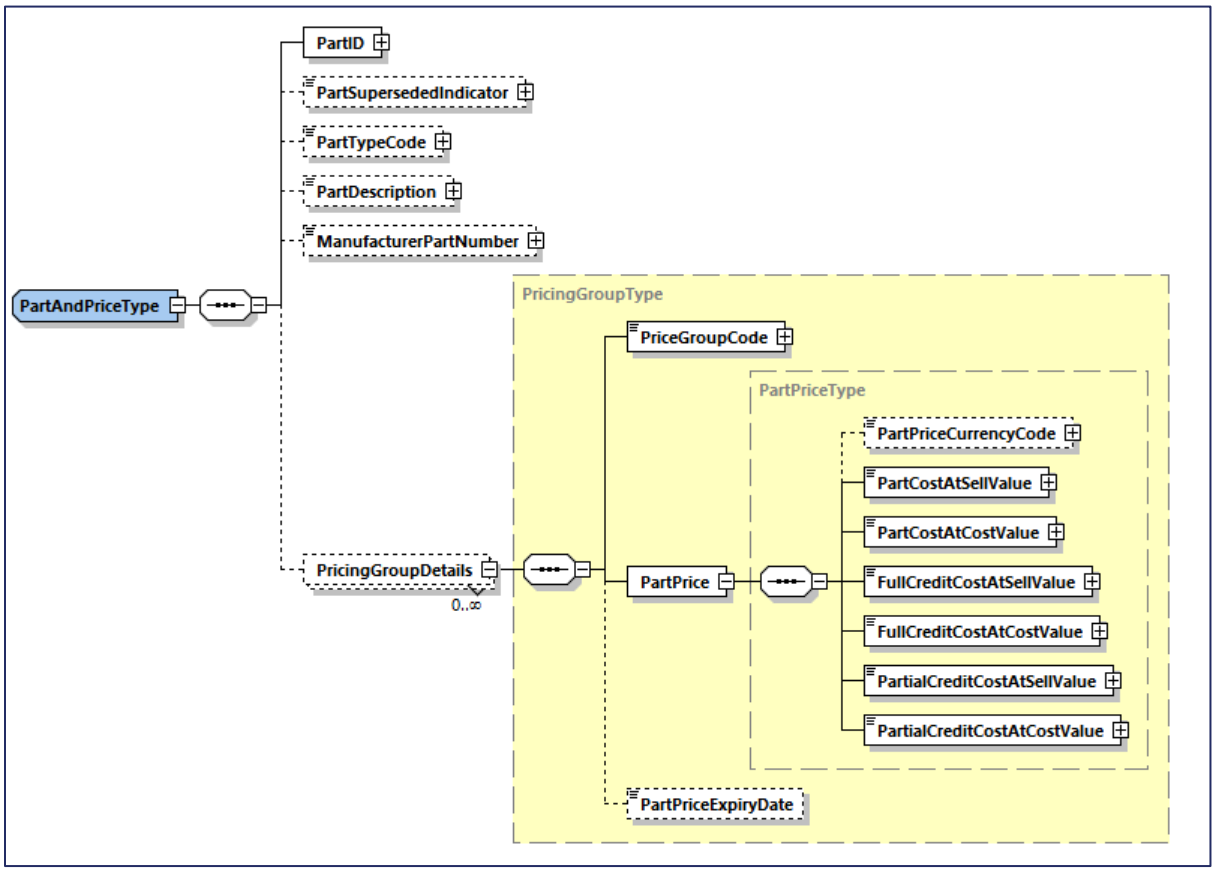


Figure 13 ShowPartAndPrice

9.2 RespondPart

This payload is returned in response to the following interfaces:

- ProcessPart
- CancelPart
- SyncPart
- ProcessSupersededPart
- ProcessPartInventory

9.2.1 Data Structure

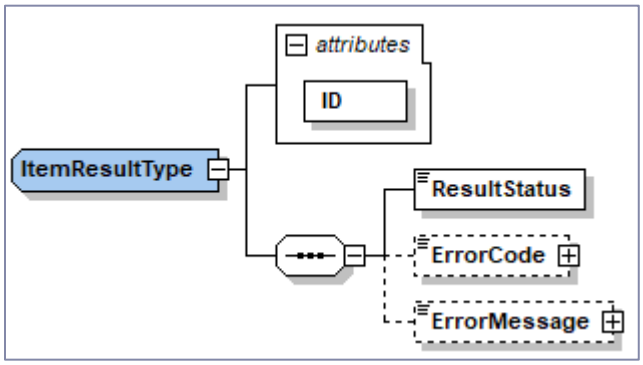


Figure 14 RespondPart

9.3 RespondPartAndPrice

This payload is returned in response to the following interfaces:

- ProcessPartPrice
- SyncPartPrice

9.3.1 Data Structure

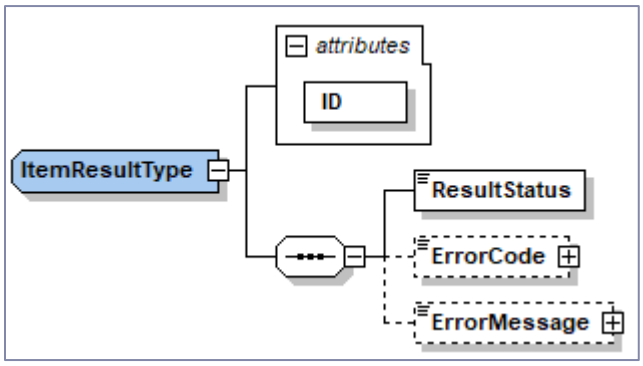


Figure 15 RespondPartAndPrice

9.4 ShowPartInventory

This payload is returned in response to the following interfaces:

- GetPartInventory

9.4.1 Data Structure

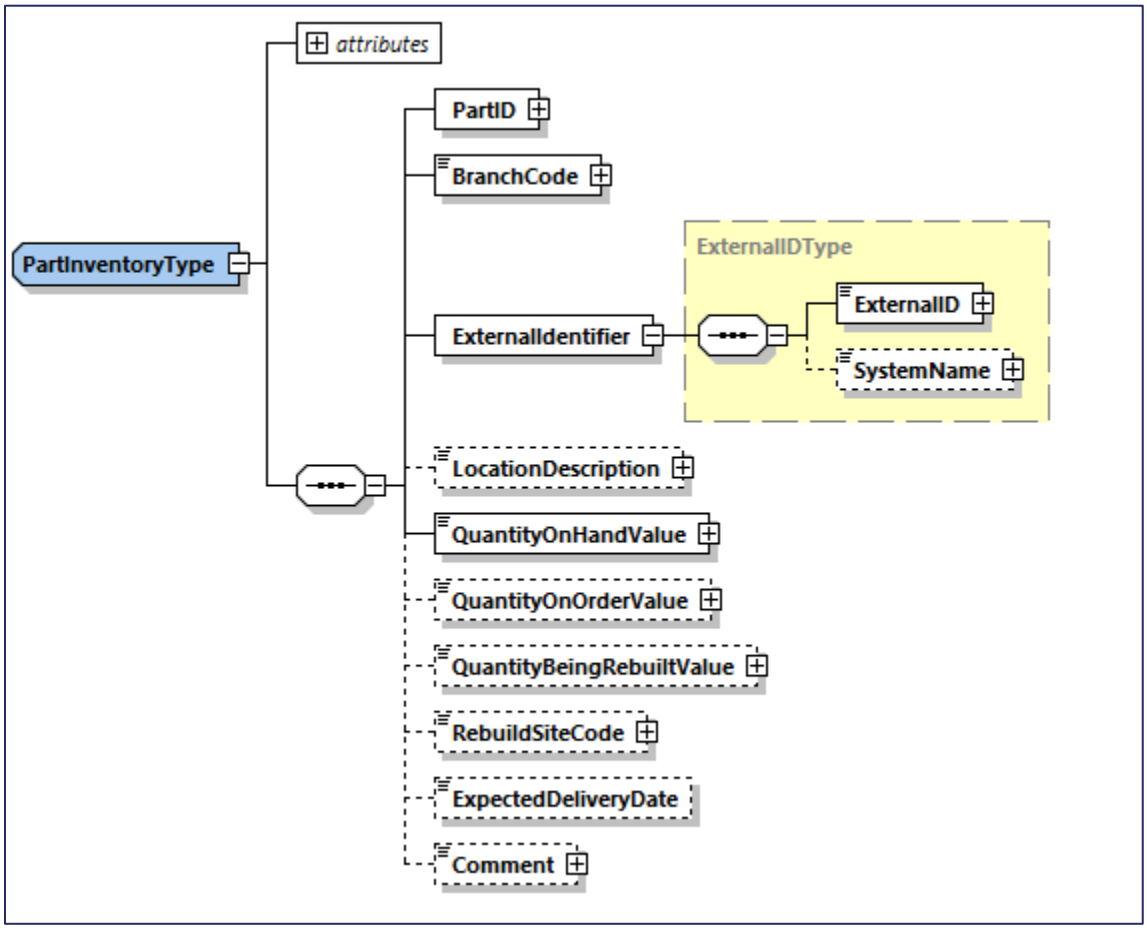


Figure 16 ShowPartInventory

9.5 RespondPartInventoryValidation

This payload is returned in response to the following interfaces:

- SendPartInventoryValidation

9.5.1 Data Structure

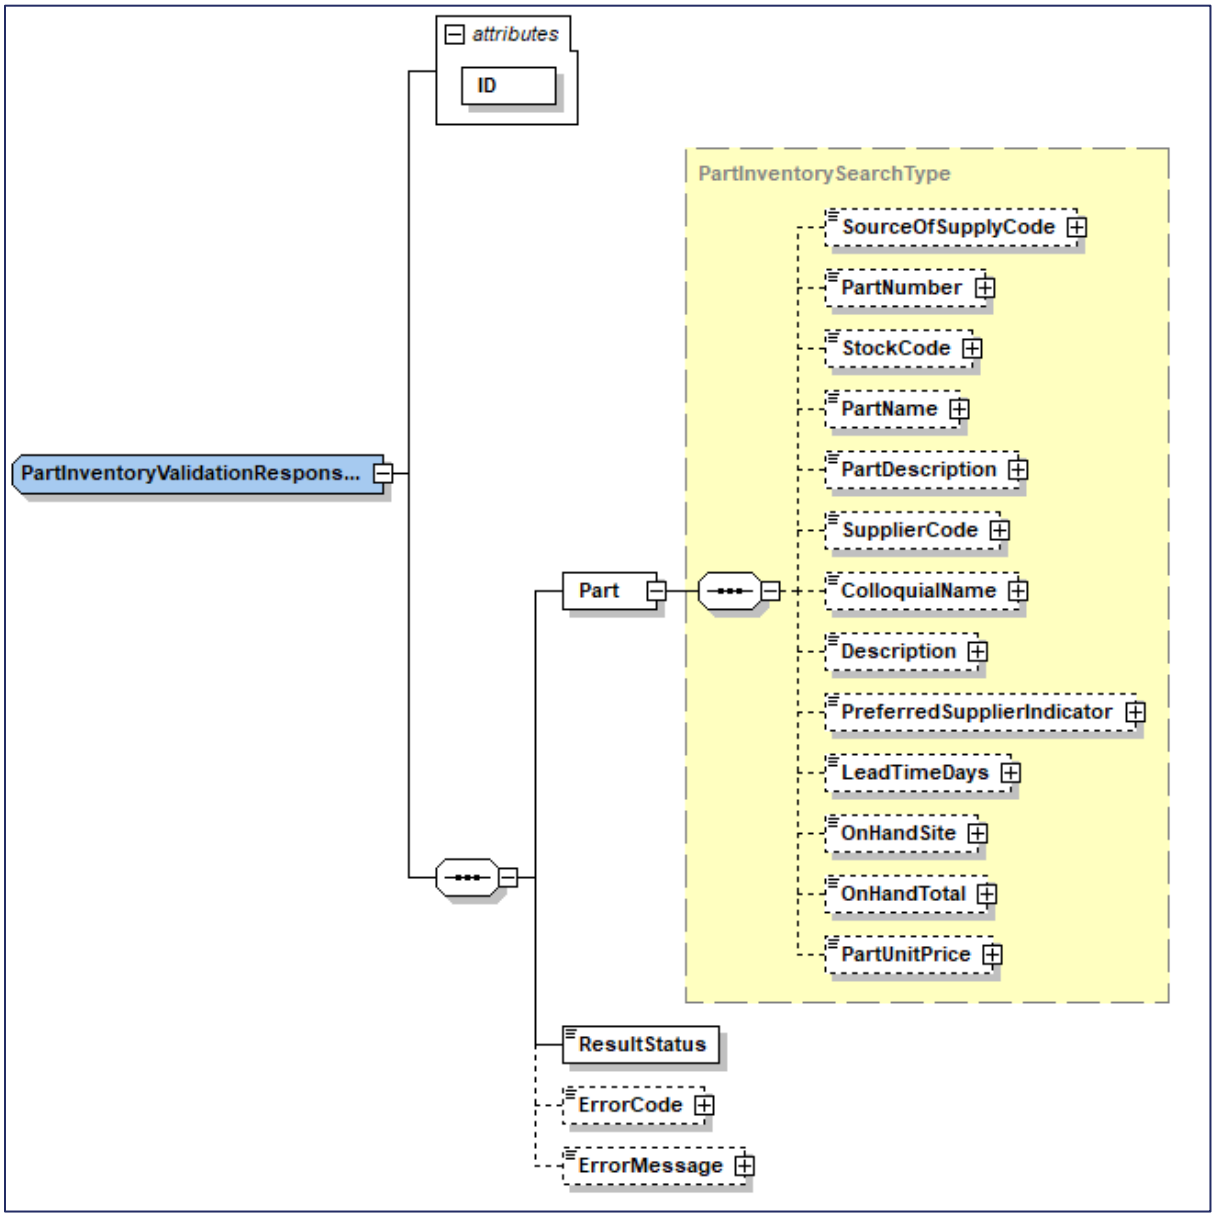


Figure 17 RespondPartInventorySearch

9.6 RespondPartInventorySearch

This payload is returned in response to the following interfaces:

- SendPartInventorySearch

9.6.1 Data Structure

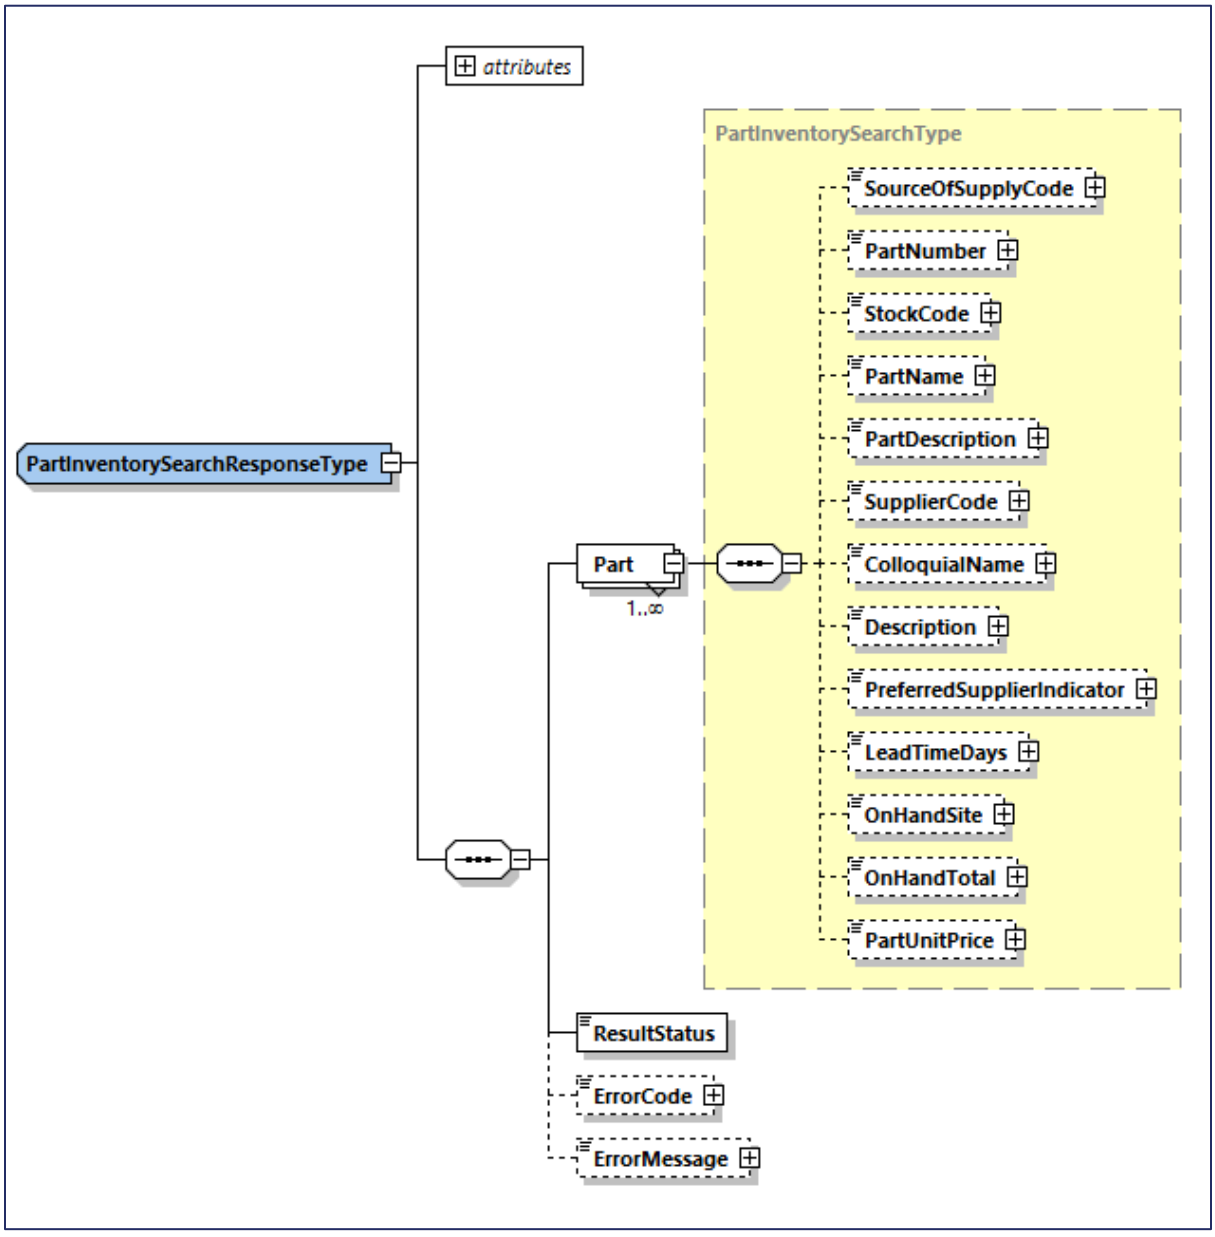


Figure 18 RespondPartInventorySearch

9.7 SendPartInventorySearchResponse

This payload is returned in response to the following interfaces:

- SendPartInventorySearch

9.7.1 Data Structure

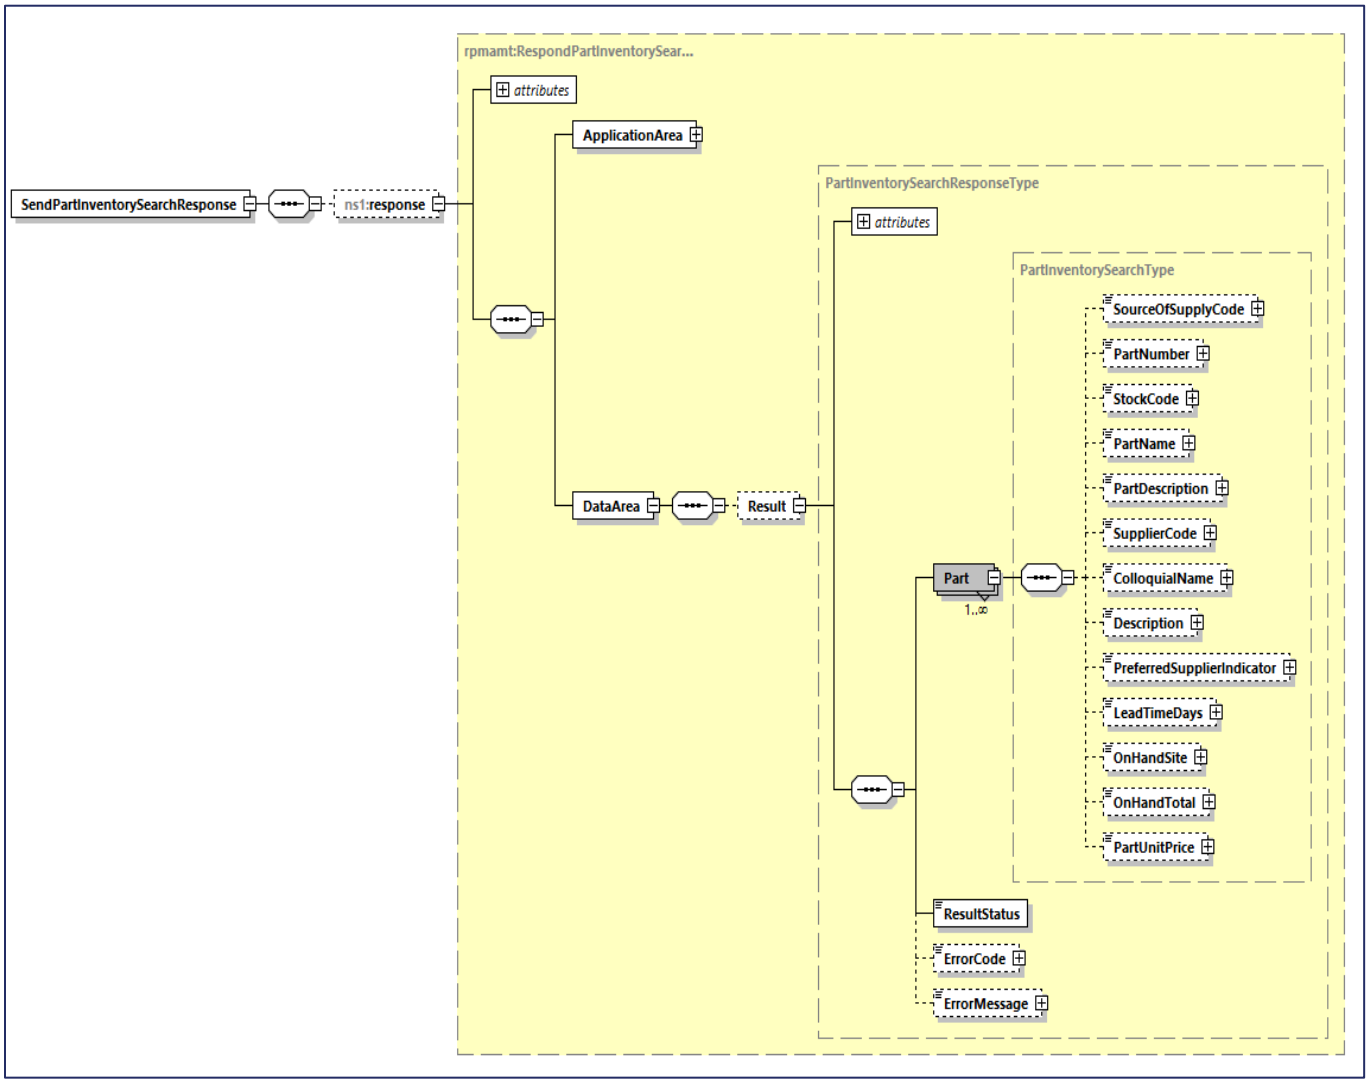


Figure 19 SendPartInventorySearchResponse

9.8 SendPartInventoryValidationResponse

This payload is returned in response to the following interfaces:

- SendPartInventoryValidation

9.8.1 Data Structure

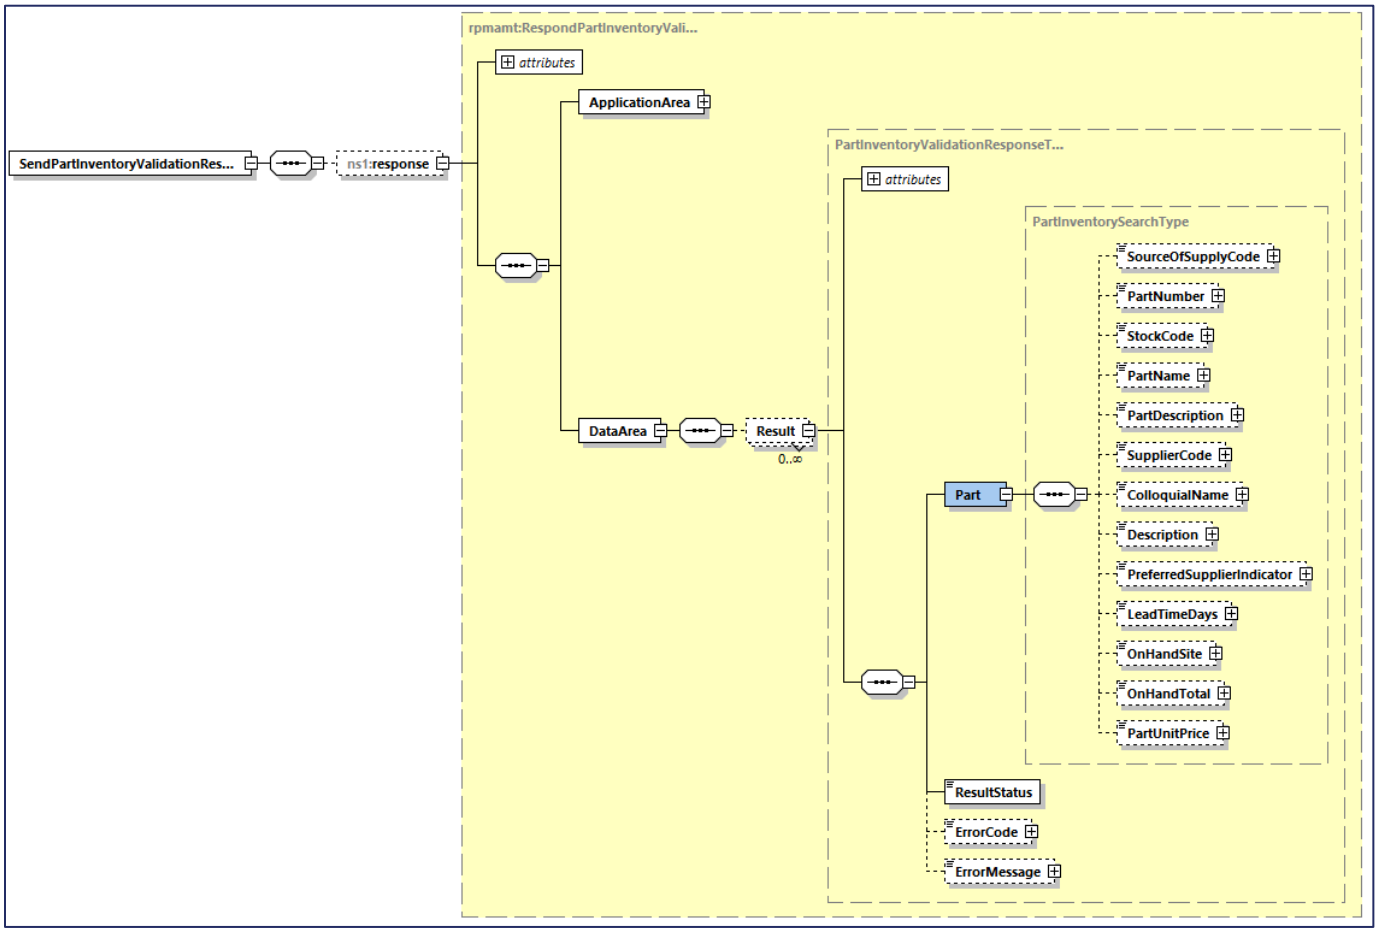


Figure 20 SendPartInventoryValidationResponse