RPMGLOBAL

# AMT EPF Adapter SDK

## Strategy Task 9.0

© 2025 RPMGLOBAL | All Rights Reserved

# Contents


1 Business Background ..... 5
2 Considerations and Assumptions ..... 5
3 Decision Points and Configuration Options ..... 6
4 Prerequisites ..... 7
5 Integration Patterns ..... 8
5.1 Supported Functions ..... 8
5.2 Integration Service Address ..... 9
5.3 Synchronous Transaction Patterns ..... 10
6 Field Descriptions ..... 12
6.1 Strategy Task Identification ..... 12
6.2 Asset Identification ..... 12
6.3 Functional Location Identification ..... 13
6.4 Strategy Task ..... 13
6.5 StrategyTaskJob ..... 17
6.6 Strategy Task Job Cost Identification ..... 18
6.7 Strategy Task Job Cost Header ..... 18
6.8 Strategy Task Cost Detail ..... 19
6.9 Strategy Task Next Due ..... 19
7 Error Handling ..... 20
8 Integration Functions ..... 21
8.1 ProcessStrategyTask ..... 21
8.2 ProcessStrategyTaskJobCost ..... 32
8.3 GetStrategyTaskNextDue ..... 35
8.4 ProcessStrategyTaskNextDue ..... 37
9 RespondStrategyTask ..... 39
9.2 RespondStrategyTaskJobCost ..... 39
9.3 RespondStrategyTaskNextDue ..... 40
9.4 ResponseStrategyTaskUpdateNext Due ..... 40

# Document History

| Version | Date | Description | Author |
|---|---|---|---|
| 1.0 | 04-Dec-2017 | Initial Document | Monisankar Baruah |
| 1.1 | 15-Dec-2017 | Updated document with review comments from Darryl Smith | Monisankar Baruah |
| 1.2 | 18-Jan-2018 | Significantly overhauled the design and the document | Darryl Smith<br>Andre Britz |
| 1.3 | 24-Jan-2018 | Add missing prerequisites, clarified Job Cost identification, split Job Cost into Header and Details | Darryl Smith |
| 1.4 | 5 Sep 2018 | Reformat/Rename | Grant Johnson |
| 1.5 | 10 Jan 2019 | Update Service References | Andre Britz |
| 2.0.0 | 23 Sep 2020 | Added GetStrategyTaskNextDueUpdates | Grant Johnson |
| 2.0.1 | 9 Dec 2020 | EPF 2.3/2.4 Support | Grant Johnson |
| 2.0.1 | 21 Dec 2020 | Minor naming corrections for GetStrategyTaskNextDue | Wayne Simpkins |
| 2.2.5 | 13 May 2022 | Added new function ProcessStrategyTaskNextDue. Added new fields to ProcessStrategyTask function.<br>Added new filters to GetStrategyTaskNextdue<br>Removed ability for Strategy tasks to create new assets in AMT | Wayne Simpkins |
| 2.2.6 | 24-Feb-2023 | Added 'UseProcessStrategyTaskV2' to configuration options<br><br>Added ObsoleteStrategyTask to ProcessStrategyTask() | Wayne Simpkins |
| 2.3 | 20-Jul-2023 | Added new filter, ExternalIdentifier, to GetStrtategyTaskNextDue | Wayne Simpkins |
| 8.25 | 11-Sep-2023 | Added details for ASYNC processing | Wayne Simpkins |
| 8.26 | 01-Nov-2023 | Added new business rule for Strategy Task next due for when review status = confirmed.<br>Added chunking details for ASYNC processing. | Wayne Simpkins |
| 8.27 | 01-Jun-2024 | Modified note on ImportStrategyTaskUseExternalIdentifier to now support option 1 and 2. | Wayne Simpkins |
| 8.28 | 01-Oct-2024 | Update processing rules for ProcessStrategyTaskNextDue to reflect only one of next due usage, or next due date can be used for each record. | Wayne Simpkins |

| Version | Date | Description | Author |
|---|---|---|---|
| | | Made use of asset id consistent in field definitions.<br>Added more details to business rules Process strategy task about currency and strategy task jobs.<br>Added support for OAuth2 Authentication<br>Added ASYNC support for GetStrategyTaskNextDue | |
| 8.28.2 | 10-Apr-2025 | Corrected definition of ShopLabourIndicator to match AMT | Wayne Simpkins |
| 9.0 | 17-Jul-2025 | All inbound integration functions now supported for ASYNC processing.<br>Moved details of synchronous/asynchronous processing, and authentication options to central overview document. | Wayne Simpkins |

# Version Amendments

The following modifications were made to this document since v1.1.

| Item | Description |
|---|---|
| General | Complete new document |
| 1,2 | Clarified content |
| 4 | Added missing prerequisites |
| 6.6 | Clarified identification of Strategy Task Job Cost |
| 6.7,6.8 | Split Strategy Task Job Cost into Header and Details |
| 8.1.1 | Changes in Business Rules for ProjectionTypeCode |
| 5.2 | Update the Service Addresses |

# 1 Business Background

An asset can have one or more projections. Each projection is a life cycle cost model. A projection consists of strategy tasks. Each strategy task represents a cost line item in a projection. A strategy task can be used to track and forecast costs and, in some cases, to drive work planning processes.

For some installations of AMT, maintenance plans and maintenance activities held in an external system are loaded into AMT as strategy tasks and updates are sent to AMT on an ongoing basis. The most common type of strategy tasks are maintenance tasks, such as preventive maintenance (PM) services or component changeouts. There are other types of strategy tasks, such as unassigned tasks (provision for maintenance costs) and financial tasks (for example, depreciation, finance).

Costs associated with strategy tasks can also be imported from an external system in separate messages, and a "key" establishes the relationship between the strategy task and its cost records.

# 2 Considerations and Assumptions

A strategy task is identified within a projection by Component Code, Modifier Code, Task Type and Task Counter (CC, MC, TT, TC). In a typical configuration, the link between the strategy task in AMT and the equivalent strategy task in the external system is defined in the external identifier field (see Configuration Options).

Commonly, strategy tasks imported from an external system will be for the current projections of real assets. A "real" asset in AMT is an operational asset. Tasks identified as "planning tasks" are tasks that require advanced notice in order to plan for resources. Typically, if a task contains a frequency and estimated cost in the external system, it will be loaded and flagged in AMT as a planning task. Tasks with no frequency are normally flagged in AMT as non-planning tasks and are loaded in AMT as date-based tasks with a frequency of 99,999 (users will need to update the frequency in AMT). Non-planning tasks exist to capture costs or to forecast cost provisions.

Strategy tasks can be imported into AMT for centreline assets ("centrelines"). Centrelines are templates for assets and are usually maintained at a model and geographic location (for example, site) level.

Strategy tasks can be imported for modelling assets. Modelling assets are used to model specific scenarios (for example, evaluating the purchase of new trucks) and are specific to an application. Strategy tasks within a modelling asset define the life cycle costs. Users may create many versions of estimates. For OEMs, modelling assets could be used to assist with contract tendering. For mining customers, modelling assets could be used to evaluate tenders from different suppliers or to make purchase decisions by comparing different asset classes and/or manufacturers.

In each of the scenarios above (real, centreline, modelling), costs associated with a strategy task can also be imported into AMT from an external system.

This document only covers importing normal and unassigned tasks into AMT.

Tasks that represent other operating costs and capital costs are not covered by this document.

# 3 Decision Points and Configuration Options

The following AMT configuration settings affect the behaviour of these interfaces.

| Configuration | Description |
|---|---|
| EnableStrategyTaskImportHolding | Setting this to **1** will divert imported strategy tasks through a "holding" table, which has functionality and a user interface to modify the import records based on rules and flags set by the user to ignore various parts of the import record. The UI for this in AMT is called **Strategy Task Import Wizard**. |
| DefaultProjTaskJobCodeId | Defines the job code that a strategy task is created with if the import strategy task interface does not specify a job code. |
| PlanningDaysDefault | Defines the planning lead days that a strategy task is created with if the import strategy task interface does not specify planning lead days for a planned strategy task. |
| DaysToCleanupImport | Used to clean up "holding" table records that are more than this number of days old. |
| Strategy_Reschedule | If enabled, the non-planning strategy task will be automatically rescheduled by AMT when it becomes overdue (this prevents a "bow wave" of overdue tasks building up in the current month). |
| Pct_Frequency_Reschedule | If strategy reschedule is enabled, this is the percentage of the task's frequency by which overdue occurrences are moved into the future. |
| ImportStrategyTaskUseExternalIdentifier | Determines if an external identifier is used as the key to identify records when importing strategy tasks. There are three options:<br>• **0** means the codes (as in 6.1.1) are used to match strategy tasks (not the external identifier), and if the external identifier is supplied in the import, the strategy task's external identifier value is updated.<br>• **1** means the external identifier is used to match strategy tasks, and if codes are provided in the import, the strategy task's codes are updated.<br>• **2** means the external identifier is used to match strategy tasks, and if codes are provided in the import, the strategy task's codes are not updated. |
| UseProcessStrategyTaskV2 | Used by the **ProcessStrategyTask()** function to determine which processing logic to use.<br>• When set to True the ProcessStrategyTask() executes a version of the function with performance improvements.<br>• When set to False, the original version of the function executes.<br>This setting is located in the adapter configuration file **StrategyTaskIntegrationService.exe.config**.<br><br>**Important Note:** This setting is currently only supported when the setting for ImportStrategyTaskUseExternalIdentifier is 1 and 2. |

# 4 Prerequisites

The following AMT configuration items must be completed prior to using these integration endpoints:

- Asset
- Projection Type Code
- Component Code
- Modifier Code
- Task Type
- Task Counter
- Operational Criticality
- Source of Supply
- Part Number
- Part Rating
- Part Classification
- Site (Location for Rebuild)
- Unit of Measure
- Suppression Group
- Dependency Group
- Performance Strategy
- Functional Location
- Escalation Index (Part, Labour, Miscellaneous)
- Job Code
- Currency Code
- Standard Job
- Cost Bearer
- Cost Centre
- Work Group
- Expense Element (Part, Labour, Miscellaneous)
- Part Type
- Occupational Health And Safety Code
- Labour Activity

# 5 Integration Patterns

## 5.1 Supported Functions

This integration provides support for the following functions:

| Function | Description |
|---|---|
| **ProcessStrategyTask** | Adds new strategy tasks to AMT or updates existing strategy tasks in AMT.<br>If the "holding" table is in use, AMT users will decide whether strategy tasks are actually created and/or updated in AMT.<br>The response to this function is RespondStrategyTask. |
| **ProcessStrategyTaskJobCost** | Adds costs to strategy tasks in AMT or updates existing strategy task costs in AMT.<br>This interface is significantly impacted by AMT user configuration.<br>The **Cost Allocation Interface Details** screen in AMT can be used by AMT users to configure which fields in the imported job costs update job costs in AMT.<br>The response to this function is RespondStrategyTaskJobCost. |
| **GetStrategyTaskNextDue** | Returns strategy tasks whose Next Due dates were changed since a given date/time.<br>The response to this function is RespondStrategyTaskNextDue. |
| **ProcessStrategyTaskNextDue** | Updates next due details for the next occurrence of a strategy task. |

## 5.2 Integration Service Address

More details regarding the general features of the integration service can be found in the Service Overview documentation. In order to use this service, the following endpoints are available for various authentication scenarios. These may not all be available, depending on the deployment configurations at a specific site.

| **Basic authentication** | Domain, username and password provided when establishing the connection |
|---|---|
| https://<Server>:<port>/StrategyTaskIntegrationService/StrategyTaskIntegration/BasicHttpBinding_Https_Basic | |
| http://<Server>:<port>/StrategyTaskIntegrationService/StrategyTaskIntegration/BasicHttpBinding_Http_Basic | |

| **Windows authentication** | The Windows credentials of the current Windows account are used to establish the connection. This is the default method if no binding is specified in the URL. |
|---|---|
| https://<Server>:<port>/StrategyTaskIntegrationService/StrategyTaskIntegration/ | |
| http://<Server>:<port>/StrategyTaskIntegrationService/StrategyTaskIntegration/ | |

| **OAUTH2 authentication** | Client authentication is used to retrieve an OAUTH2 access token. The token is passed in the SOAP header when calling the AMT EPF Adapters. |
|---|---|
| https://<Server>:<port>/StrategyTaskIntegrationService/StrategyTaskIntegration/BasicHttpBinding_Https_Token | |
| http://<Server>:<port>/StrategyTaskIntegrationService/StrategyTaskIntegration/BasicHttpBinding_Http_Token | |

<Server> is the fully qualified name of the server hosting the service.

Note that Windows authentication is being deprecated.

## 5.3 Synchronous Transaction Patterns

Note that if the "holding" table is in use, the logic for adding or updating strategy tasks from the "holding" table is controlled by users in AMT. The diagrams shown below assume that the "holding" table is not in use and strategy tasks are being directly updated via the integration messages.

Synchronous integration should align with the transaction pattern as shown in Figure 1 below.

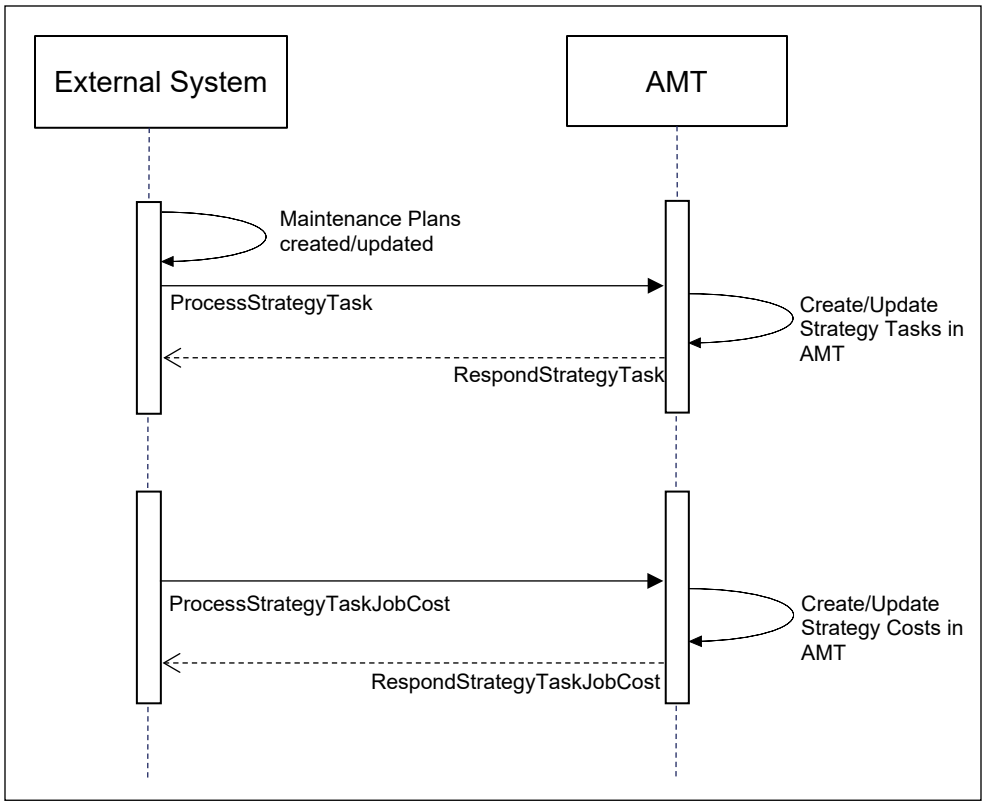



**Figure 1: Synchronous Integration**

Asynchronous integration using a message broker should align with the transaction pattern as shown below.

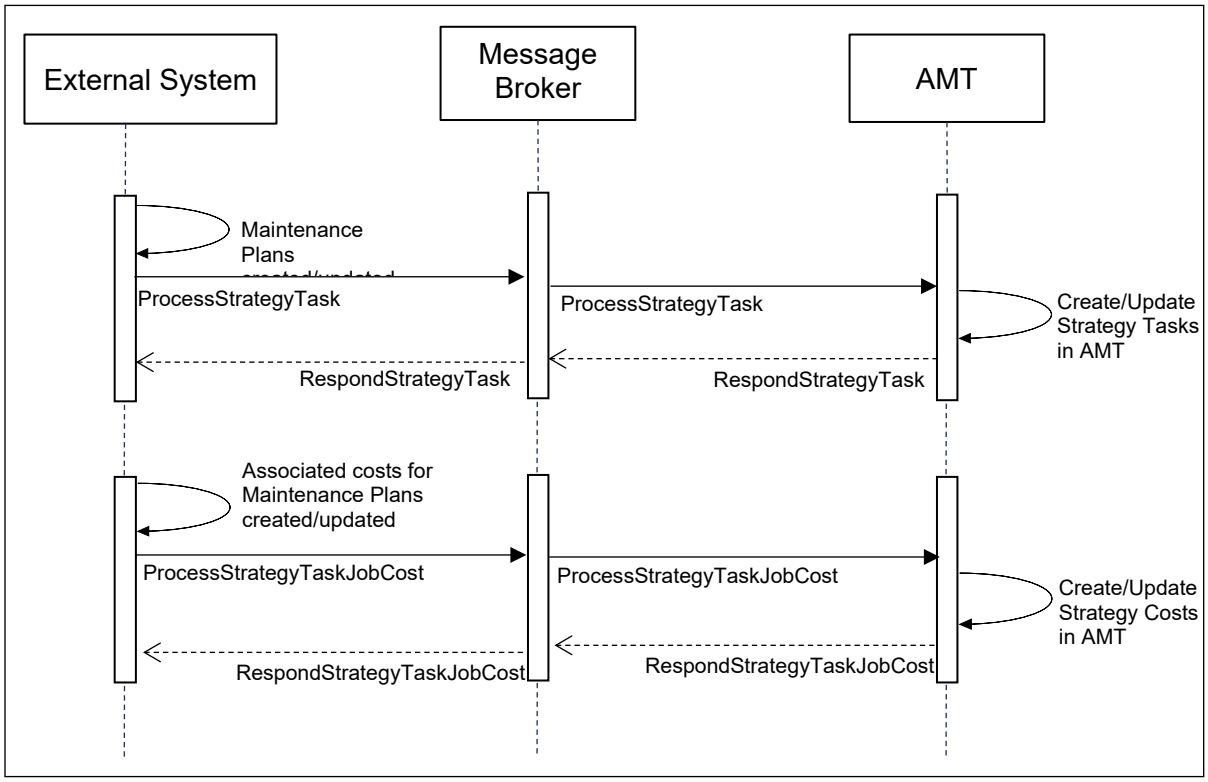



**Figure 2: Asynchronous Integration**

# 6 Field Descriptions

This integration uses the following fields. The data types for each field are described in the relevant XML schema definition.

## 6.1 Strategy Task Identification

The AMT Configuration setting ImportStrategyTaskUseExternalIdentifier modifies how AMT processes messages and identifies strategy tasks, so this setting should be considered when designing the integration solution

### 6.1.1 ImportStrategyTaskUseExternalIdentifier = 0

| Field Name | Description | Sample Values |
|---|---|---|
| ComponentCode | The configured AMT component code for the strategy task.<br>Even for tasks that do not represent components, component code is one of the codes used to identify the task (for example, a component code is required for a specific PM service). | 7307 |
| ModifierCode | The configured AMT modifier code for the strategy task.<br>This typically identifies a position for a component (for example left turbo, right wheel). | LEFT |
| TaskTypeCode | The configured AMT task type code for the strategy task.<br>This typically defines the activity (for example PM, general repair, component changeout). | General Repair |
| TaskCounterCode | The configured AMT task counter code for the strategy task.<br>The task counter is used where a combination of component code, modifier code and task type is not unique. | 1 |

### 6.1.2 ImportStrategyTaskUseExternalIdentifier = 1 or 2

| Field Name | Description | Sample Values |
|---|---|---|
| ExternalIdentifier | This is the unique identifier that links an external system's maintenance plan to an AMT strategy task. | EXID0001 |

## 6.2 Asset Identification

An asset is identified by:

| Field Name | Description | Sample Values |
|---|---|---|
| ModelCode | The asset model code as configured in AMT. | 777D |
| SerialNumber | Manufacturer's serial number for the asset or any other identifier for the Asset. | ABC123456 |
| RegistrationCounter | Registration counter of the asset. Sometimes called "contract enrolment number". | Contract1 |

## 6.3 Functional Location Identification

| Field Name | Description | Sample Values |
|---|---|---|
| **FunctionalLocationID** | A unique identifier for the functional location. | |
| **FunctionalLocationName** | The functional location name. | |

## 6.4 Strategy Task

| Field Name | Description | Sample Values |
|---|---|---|
| AssetID | Asset identification as per section 6.2. | |
| AssetName | Name of the AMT asset the strategy task belongs to. | TR01 |
| AssetReference | External system asset reference. | Truck 1 |
| ProjectionTypeCode | The configured AMT projection type code.<br>A projection in AMT represents a life cycle costing for an asset. An asset can have a number of projections:<br>• Budget projection (initial forecast).<br>• Current projection (current forecast).<br>• Alternate projection (a copy of a projection for short-term "what if" analysis).<br>• Archive projection (read-only snapshot of a projection taken at a point in time).<br>• Centreline projection (associated with centreline assets).<br>• Estimate-Current, Estimate-Draft projection (associated with modelling assets). | Cur |
| Description | Description of the strategy task. | Engine Change Out |
| DeleteTaskIndicator | Determines if a task is to be deleted in AMT. | 0 |
| UnassignedTaskIndicator | Indicator to define a strategy task as an unassigned task. | 0 |
| PlanningTaskIndicator | Indicator to define a task as planning or non-planning. | 1 |
| PlanningLeadDaysValue | For planning tasks, this is the number of days prior to the forecast execution of a strategy task at which time the strategist/planner should be alerted that a decision needs to be made as to when to execute. Also referred to as the "planning window" or "planning horizon". | 90 |
| OperationalCriticalityCode | The configured AMT operational criticality code for the strategy task. | Critical |
| PrimaryPartManufacturerName | The manufacturer of the primary part in the strategy task. | Caterpillar |

| Field Name | Description | Sample Values |
|---|---|---|
| PrimaryPartSourceOfSupplyCode | The source of supply of the primary part in the strategy task. | SOS1 |
| PrimaryPartNumber | The part number of the primary part in the strategy task. | ABC123 |
| PrimaryPartGroupNumber | The group number of the primary part in the strategy task. | GRP123 |
| PrimaryPartRatingCode | The part rating code of the primary part in the strategy task. | Major |
| PrimaryPartDefaultClassification | The default part classification code of the primary part in the strategy task. | Reman |
| PrimaryPartDefaultLocationForRebuild | The default location for the rebuild of the primary part in the strategy task.<br>This is a configured site in AMT. | SiteA |
| ComponentBasedDepreciationIndicator | Defines if the task represents a component-based depreciation (CBD) item (set to 1 for CBD items). | 0 |
| PrimaryPartStartingSerialNumber | The starting serial number of the primary part in the strategy task.<br>This must be a configured serialised component in AMT. | ABC9876 |
| WarrantyDaysValue | This is the number of days the warranty is valid for the component. | 365 |
| WarrantyUsage | This is the usage (life) for which the warranty is valid for the component. | 5000 |
| UsageBasedIndicator | Determines if the task is usage-based or date-based (set to 1 for usage-based, 0 for date-based). | 1 |
| UnitOfMeasureCode | The configured AMT unit of measure code for the strategy task.<br>This field is only applicable to usage-based tasks. | SMU |
| ScheduleOnLastScheduledIndicator | Indicates if the strategy is scheduled based on "last scheduled" or on "last performed" (set to 0 for last performed, 1 for last scheduled). | 0 |
| FirstOccurrenceUsage | The value at which the strategy task is performed for the first time.<br>For usage-based tasks, this is a value in the "Unit Of Measure". For date-based tasks, this is the number of days. | 20000 |
| FrequencyValue | The frequency of an occurrence.<br>Life, interval and frequency are used interchangeably and refer to the life of a component.<br>For usage-based tasks, this is a value in the "Unit Of Measure". For date-based tasks, this is the number of days. | 20000 |

| Field Name | Description | Sample Values |
|---|---|---|
| FinalOccurrenceUsage | This is the usage value at which the strategy is performed for the last time.<br>For usage-based tasks, this is a value in the "Unit Of Measure". For date-based tasks, this is the number of days. | 60000 |
| LastChangeUsage | Last change usage prior to the asset start. This is used when the asset has had a previous life (that is, a used asset as opposed to a new asset). | 0 |
| LastChangeDate | Last change date prior to the asset start. This is used when the asset being loaded has had a previous life (that is, a used asset as opposed to a new asset). | 1-Jan-2018 |
| SchedulingModeIndicator | Defines the AMT mode used for scheduling:<br>• Standard<br>• Dependency<br>• ParentSuppression<br>• SiblingSuppression<br>• Inspection Logic | Standard |
| SuppressionGroupCode | Suppression group to which the strategy task belongs. | SuppA |
| SuppressionCounter | Priority level in the suppression group. Lower values have higher priority. | 1 |
| SiblingFrequencyValue | The frequency at which all tasks within the suppression group are performed. All tasks within the group must have a frequency which is a multiple of the value provided in this field. | 5000 |
| DependencyGroupCode | Dependency group to which the strategy belongs. | |
| DependencyCounter | Priority level in the dependency group. | |
| InspectionLogicTaskTypeCode | The AMT configured task type code for inspection offset logic. Tasks with this task type will have an inspection scheduled before them. | |
| InspectionLogicOffsetValue | For inspection offset logic, the usage at which an inspection is scheduled to occur before a matching task. | |
| PerformanceStrategyCode | Must be one of the following:<br>• "1" means on condition<br>• "2" means on schedule<br>• "3" means run to failure | 2 |
| PerformanceStrategyReason | Reason the strategy performance was selected. | Using the manufacturer's recommended frequency |

| Field Name | Description | Sample Values |
|---|---|---|
| ChangeoutGuidelines | Changeout guidelines. | Check for oil leaks when removing component |
| TagID | Additional description for the strategy task. For example, Reference to a sub-component in an external system that the task is linked to. | TagA |
| OldExternalIdentifier | Previous external identifier (in the case where the external identifier is changed for the strategy task).<br>This is used to identify the task and update the external identifier to the value sent in the "ExternalIdentifier" field. | |
| PartEscalationIndexCode | The configured AMT escalation index code for part costs. | PartEscA |
| LabourEscalationIndexCode | The configured AMT escalation index code for labour costs. | LabourEscA |
| MiscEscalationIndexCode | The configured AMT escalation index code for miscellaneous costs. | MiscEscA |
| FunctionalLocation | Functional location to which the strategy task belongs. | |
| IsCapex | Flag to indicate whether the strategy task is related to capital expenditure. A value of 1 is used to indicate True and a value of 0 indicates false. | |
| RequiresSTO | Flag to indicate whether the strategy task requires an STO to perform the work. A value of 1 is used to indicate True, and a value of 0 indicates False. | |
| PlanningGroupCode | Planning group responsible for planning the work. Must be a valid planning group code in AMT. | |
| CalculatedRiskRating | Not Yet Implemented. | |
| RiskGroup | Not Yet Implemented. | |
| RiskGroupOverride | Not Yet Implemented. | |
| AssetCriticalityRating | Not Yet Implemented. | |
| AssetCondtionRating | Not Yet Implemented. | |
| OperationalCriticalityRating | Not Yet Implemented. | |
| MaintenanceOrderCode | AMT maintenance order type. | |
| RegulatoryCode | AMT regulatory code. | |
| ObsoleteStrategyTask | Indicator for whether the strategy in AMT with the matching ExternalIdentifier will be obsoleted. | 0 or 1 |

## 6.5 StrategyTaskJob

A strategy task can have one or more jobs.

| Field Name | Description | Sample Values |
|---|---|---|
| JobCode | The configured AMT job code of the job. | Remove |
| CostSource | Must be one of the following:<br>• "1" means manual<br>• "2" means standard job<br>• "3" means job costs<br>• "4" means consumable | 2 |
| CurrencyCode | The configured AMT currency code of the job. | AUD |
| StandardJobReferenceCode | Reference to the standard job if the strategy task is associated with a standard job.<br>This is ignored unless CostSource = "2" (standard job). | ENGCHANOUT777 |
| CostBearerCode | The configured AMT cost bearer code for the job.<br>Defines who is responsible for the cost. | CBA |
| CostCentreCode | The configured AMT cost centre for the job. | CCA |
| WorkGroupCode | The configured AMT work group for the job. | WGA |
| PartTypeCode | The configured AMT part type for the job. | PTA |
| OccupationalHealthAndSafetyCode | The configured occupational health and safety code for the job. | OHA |
| PricingDate | Date for which the pricing of the job is valid. | 1-Jan-2018 |
| ConsumableQuantityValue | Where cost source = "4" (consumables), the part cost is based on the consumable quantity, top-up value and unit price. | |
| ConsumableTopUpValue | Where cost source = "4" (consumables), the part cost is based on the consumable quantity, top-up value and unit price. | |
| ConsumablePriceValue | Where cost source = "4" (consumables), the part cost is based on the consumable quantity, top-up value and unit price. | |
| PartCostAtSellValue | Parts cost@sell value for the job.<br>This is used where cost source = "1" (manual). | 100000 |
| LabourCostAtSellValue | Labour cost@sell value for the job.<br>This is used where cost source = "1" (manual) or "4" (consumables). | 10000 |
| MiscCostAtSellValue | Labour cost@sell value for the job.<br>This is used where cost source = "1" (manual) or "4" (consumables). | 1000 |
| ShopLabourIndicator | Labour type indicator for the job.<br>If 0, labour is assumed to be "shop" (workshop) and if 1, labour is assumed to be "field". | 1 |

| Field Name | Description | Sample Values |
|---|---|---|
| LabourHoursValue | Labour hours required or consumed when performing the job.<br>This is used where cost source = "1" (manual) or "4" (consumables). | 40 |
| LabourActivityCode | Labour activity for the job. | LabActA |
| DurationHoursValue | Duration (hours) required to perform the job.<br>This is used where cost source = "1" (manual) or "4" (consumables). | 16 |
| PartExpenseElementCode | The configured AMT expense element code for part costs. | ExpA |
| LabourExpenseElementCode | The configured AMT expense element code for labour costs. | ExpA |
| MiscExpenseElementCode | The configured AMT expense element code for miscellaneous costs. | ExpA |

## 6.6 Strategy Task Job Cost Identification

A strategy task job can have one or more "strategy task job costs" where the cost source = "3".

Importing strategy task job costs is only supported for current projections.

In order to import strategy task job costs, a strategy task must have exactly one strategy task job.

Strategy task job costs are linked to strategy tasks (through the strategy task job) based on the field “ExternalIdentifier”.

A Strategy Task Job Cost is identified by:

| Field Name | Description | Sample Values |
|---|---|---|
| ExternalIdentifier | This is the unique identifier that links an external system's maintenance plan costs to an AMT strategy task job cost.<br>**Note**: Only current projections are considered when importing job costs into AMT, so if a job cost exists in AMT (based on this ID) for a non-current projection, it is not updated. | EXID0001 |

## 6.7 Strategy Task Job Cost Header

| Field Name | Description | Sample Values |
|---|---|---|
| AssetID | Asset identification as per section 6.2. | |
| DeleteCostAllocationIndicator | Specifies that the job cost record should be deleted. | 0 |
| CurrencyCode | The configured AMT currency code for the job cost. | AUD |
| ComponentCode | The configured AMT component code for the job cost. | ENG |
| ModifierCode | The configured AMT modifier code for the job cost. | Left |

## 6.8 Strategy Task Cost Detail

Each Strategy Task Job Cost Header can have one or more Strategy Task Job Cost Detail records. These records are used to "split" the costs between different financial dimensions (for example, Cost Centre, Expense Element).

| Field Name | Description | Sample Values |
|---|---|---|
| JobCode | The configured AMT job code for the job cost detail. | J23 |
| WorkGroupCode | The configured AMT work group code for the job cost detail. | CHHOR |
| CostCentreCode | The configured AMT cost centre for the job cost detail. | 675107 |
| CostBearerCode | The configured AMT cost bearer for the job cost detail. | CC |
| PartExpenseElementCode | The configured AMT expense element for part costs. | 2105 |
| LabourExpenseElementCode | The configured AMT expense element for labour costs. | 2105 |
| MiscExpenseElementCode | The configured AMT expense element for miscellaneous costs. | 2105 |
| LabourActivityCode | The configured AMT labour activity for the job cost detail. | FS |
| LabourHoursValue | The total labour hours for the job cost detail. | 11.5 |
| DurationHoursValue | The duration (hours) for the job cost detail. | 0 |
| PartCostAtSellValue | The cost@sell amount for parts for the job cost detail. | 1456.45 |
| LabourCostAtSellValue | The cost@sell amount for labour for the job cost detail. | 100.00 |
| MiscCostAtSellValue | The cost@sell amount for miscellaneous for the job cost detail. | 510.50 |

## 6.9 Strategy Task Next Due

The next-due details for a strategy task can be updated with ProcessStrategyTaskNextDue. The next due details are linked with the strategy task via the ExternalIdentifier.

| Field Name | Description | Sample Values |
|---|---|---|
| AssetID | Asset identification as per section 6.2. | |
| ExternalIdentifier | This is the unique identifier that links an external system's maintenance plan to an AMT strategy task. | |
| AMTUserLoginName | Reviewed by user id. Must be a valid AMT login name. | |
| NextOcc | Usage reading of next occurrence for strategy. | |
| NextOccDate | Date of next occurrence for strategy. | |
| NextOccDateUTC | Date of next occurrence for strategy in UTC. | |
| NextOccLastModifiedDate | Last modified date of next occurrence. | |

| Field Name | Description | Sample Values |
|---|---|---|
| NextOccLastModifiedDateUTC | Last modified date of next occurrence in UTC. | |
| ReviewStatusDescription | AMT Review status for next occurrence date. | Confirmed, Reviewed, Not Reviewed |
| PartClassification | AMT Part classification for the next strategy occurrence. | Exchange, Reman |
| SalesStatus | AMT sales status code. | |
| SalesLostReason | Description of the reason for losing a Sale. | |
| Comments | Comments for the next strategy occurrence. | |
| PONumber | PO number associated with the next occurrence. | |
| STOID | AMT ID for STO (Shutdown, Turnaround, Outage). | |

# 7 Error Handling

| Error Condition | Description |
|---|---|
| The provided document has an unrecognised format. Various XML format errors are returned. | Check the format of the schema document against those provided. Errors can be related to well-formed XML issues, or failure to validate the document against the XSD. |
| The provided value for <ElementCode> does not have the correct datatype. | Check datatypes of elements, especially date formats. Note that date and datetime conventions are used. |
| Mandatory element <ElementName> not provided. | An expected xml element has not been provided. |
| Mandatory attribute <AttributeName> not provided. | An expected XML attribute has not been provided. |
| The provided code for <ElementCode> does not have a corresponding AMT configuration item. | AMT extensively uses a preconfigured code list. Relevant codes must be preconfigured prior to using the interface. |
| Asset does not exist and no AssetName has been provided:<br>SerialNumber: <SerialNumber><br>ModelCode: <ModelCode><br>RegistrationCounter: < RegistrationCounter > | The asset specified does not exist in AMT, and no AssetName has been provided for AMT to generate a dummy asset. |
| Strategy task record rejected: Projection <ProjectionTypeCode> does not exist. | An attempt to create a strategy task was made, but the specified projection does not exist in AMT. |
| Job cost record rejected: Strategy task has more than one job. | A job cost can only be imported and linked to a strategy task that has exactly one job. |
| The PrimaryPartManufacturerName has not been provided, and the asset cannot be determined to derive a manufacturer name:<br>SerialNumber: <SerialNumber><br>ModelCode: <ModelCode><br>RegistrationCounter: < RegistrationCounter ><br>AssetName: <AssetName> | The PrimaryPartManufacturerName has not been provided, and the asset cannot be determined to derive a manufacturer name. |

# 8 Integration Functions

## 8.1 ProcessStrategyTask

This interface is used to add new strategy tasks to AMT or update existing strategy tasks in AMT. A strategy task comprises the strategy task definition and an associated strategy job for the strategy task. Strategy jobs can be defined as a linked standard job, cost allocations, manual costs or consumables. It is recommended to always include the strategy job details in the payload for the strategy task, whether creating a new strategy task or updating an existing strategy task.

When using cost allocations, the cost allocation must be created with ProcessStrategyTaskJobCost before creating the strategy task.

### 8.1.1 Strategy Task – Business Rules

The **Create** and **Update** columns indicate if the field is required (**R**) or optional (**O**).

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>ExternalIdentifier</td><td>Check AMT CONFIGURATION
<table>
<tr><th colspan="2">ImportStrategyTaskUseExternalIdentifier</th></tr>
<tr><th>Value</th><th>Action</th></tr>
<tr><td>0</td><td>For reference only</td></tr>
<tr><td>1</td><td>Used to uniquely identify the strategy task</td></tr>
<tr><td>2</td><td>Used to uniquely identify the strategy task</td></tr>
</table></td><td>R</td></tr>
<tr><td>ComponentCode</td><td>The value provided should match a configured Projection Type Code within AMT.<br>Check AMT CONFIGURATION
<table>
<tr><th colspan="2">ImportStrategyTaskUseExternalIdentifier</th></tr>
<tr><th>Value</th><th>Action</th></tr>
<tr><td>0</td><td>Used to uniquely identify the strategy task</td></tr>
<tr><td>1</td><td>For reference only</td></tr>
<tr><td>2</td><td>For reference only</td></tr>
</table>
This field is used in conjunction with ModifierCode, TaskTypeCode and TaskCounter code to uniquely identify the strategy task based on the configuration settings above.</td><td>R</td></tr>
</table>

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>ModifierCode</td><td>The value provided should match a configured Modifier Code within AMT<br>Check AMT CONFIGURATION<br><table><tr><th colspan="2">ImportStrategyTaskUseExternalIdentifier</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>0</td><td>Used to uniquely identify the strategy task</td></tr><tr><td>1</td><td>For reference only</td></tr><tr><td>2</td><td>For reference only</td></tr></table><br>This field is used in conjunction with ComponentCode, TaskTypeCode and TaskCounter code to uniquely identify the strategy task based on the configuration settings above.</td><td>R</td></tr>
<tr><td>TaskTypeCode</td><td>The value provided should match a configured Task Type Code within AMT<br>Check AMT CONFIGURATION<br><table><tr><th colspan="2">ImportStrategyTaskUseExternalIdentifier</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>0</td><td>Used to uniquely identify the strategy task</td></tr><tr><td>1</td><td>For reference only</td></tr><tr><td>2</td><td>For reference only</td></tr></table><br>This field is used in conjunction with ModifierCode, ComponentCode and TaskCounter code to uniquely identify the strategy task based on the configuration settings above.</td><td>R</td></tr>
<tr><td>TaskCounterCode</td><td>The value provided should match a configured Task Counter Code within AMT<br>Check AMT CONFIGURATION<br><table><tr><th colspan="2">ImportStrategyTaskUseExternalIdentifier</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>0</td><td>Used to uniquely identify the strategy task</td></tr><tr><td>1</td><td>For reference only</td></tr><tr><td>2</td><td>For reference only</td></tr></table><br>This field is used in conjunction with ModifierCode, TaskTypeCode and ComponentCode code to uniquely identify the strategy task based on the configuration settings above.</td><td>R</td></tr>
</table>

| Field Name | Business Rules | Optional/ Required |
|---|---|---|
| ModelCode | The value provided should match a configured **Model** within AMT.<br>Used together with Serial Number and Registration Counter to uniquely identify the asset.<br>If the asset does not exist in AMT, a 'dummy' asset will be created using the **AssetName** field. | O |
| SerialNumber | The value provided should match a configured **Model** within AMT.<br>Used together with ModeCode and Registration Counter to uniquely identify the asset.<br>If the asset does not exist in AMT a 'dummy' asset will be created using the **AssetName** field. | O |
| RegistrationCounter | The value provided should match a configured **Registration Counter** within AMT.<br>Used together with Model and Serial Number to uniquely identify the asset.<br>If this is not provided, the default value will be used. | O |
| AssetName | Must be provided if the asset does not exist in AMT.<br>If this field is not provided, and the asset cannot be identified using the Model, Serial Number and Registration Counter, an error will be returned. | O |
| ProjectionTypeCode | The value provided should match the short description for an AMT Projection Type.<br>Value should not be set to an "**Archive**" projection, as "Archive" projections cannot be created using this interface. | O |
| DeleteTaskIndicator | Only the following values are accepted:<br>• **0** – Active<br>• **1** - Inactive<br>If no value is provided, a value of 0 will be used. | O |
| UnassignedTaskIndicator | Only the following values are accepted:<br>• **0** – Non-unassigned task<br>• **1** – Unassigned task<br>If no value is provided, a value of 0 will be used. | O |
| PlanningTaskIndicator | Only the following values are accepted:<br>• **0** – Non-planned task<br>• **1** – Planning task<br>If no value is provided, a value of 1 will be used. | O |
| PlanningLeadDaysValue | If no value is provided, the value specified by the AMT configuration setting for **PlanningDaysDefault** will be used. | O |
| OperationalCriticalityCode | The value provided should match a configured **Criticality** Code within AMT. | O |

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>PrimaryPartManufacturerName</td><td>If no value is provided, the manufacture of the Asset will be used.<br>If no value is provided, and no corresponding asset exists in AMT, an error is returned.</td><td>O</td></tr>
<tr><td>PrimaryPartSourceOfSupplyCode</td><td>The value provided should match a configured Source of Supply Code within AMT.</td><td>O</td></tr>
<tr><td>PrimaryPartNumber</td><td>The value provided should match an existing PartNumber within AMT.</td><td>O</td></tr>
<tr><td>PrimaryPartRatingCode</td><td>The value provided should match a configured Part Rating Code within AMT.</td><td>O</td></tr>
<tr><td>PrimaryPartDefaultClassification</td><td>The value provided should match a configured Part Classification Code within AMT.</td><td>O</td></tr>
<tr><td>PrimaryPartDefaultLocationForRebuild</td><td>The value provided should match a configured Site Code within AMT.</td><td>O</td></tr>
<tr><td>ComponentBasedDepreciationIndicator</td><td>Only the following values are accepted:<ul><li>0 – Task does not represent a component-based depreciation item</li><li>1 – Task represents a component-based depreciation item</li></ul></td><td>O</td></tr>
<tr><td>UsageBasedIndicator</td><td>Only the following values are accepted:<ul><li>0 – Date-based task</li><li>1 – Usage task</li></ul>If no value is provided, a value of 0 will be used.</td><td>O</td></tr>
<tr><td>UnitOfMeasureCode</td><td>The value provided should match a configured Unit of Measure Code within AMT.<br>Consider the value of the field.<table><tr><th colspan="2">UsageBasedIndicator</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>0</td><td>The value provided will have no effect</td></tr><tr><td>1</td><td>This value is required</td></tr></table></td><td>O</td></tr>
<tr><td>ScheduleOnLastScheduleIndicator</td><td>Only the following values are accepted:<ul><li>0 – Last Performed</li><li>1 – Last Scheduled</li></ul>If no value is provided, a value of 0 will be used.</td><td>O</td></tr>
<tr><td>FirstOccurrenceUsage</td><td></td><td>R</td></tr>
<tr><td>FrequencyValue</td><td></td><td>R</td></tr>
</table>

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>SchedulingModeIndicator</td><td>Only the following values are accepted<ul><li>1 – Standard</li><li>2 – Dependency</li><li>3 – Parent Suppression</li><li>4 – Sibling Suppression</li><li>5 – Inspection Logic</li></ul>If no value is provided, a value of 1 will be used.</td><td>O</td></tr>
<tr><td>SuppressionGroupCode</td><td>The value provided should match a configured Suppression Group Code within AMT.<br>Consider the value of the field<table><tr><th colspan="2">SchedulingModeIndicator</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>Standard</td><td>The value provided will have not been used</td></tr><tr><td>Dependency</td><td>The value provided will have not been used</td></tr><tr><td>Parent Suppression</td><td>This value is required</td></tr><tr><td>Sibling Suppression</td><td>This value is required</td></tr><tr><td>Inspection Logic</td><td>The value provided will have not been used</td></tr></table></td><td>O</td></tr>
<tr><td>SuppressionCounter</td><td>The parent task has the lowest number (lower numbers have higher priority in the group).<br>Number must be from 1 to 99.<br><br>Consider the value of the field.<table><tr><th colspan="2">SchedulingModeIndicator</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>Standard</td><td>The value provided will not have been used</td></tr><tr><td>Dependency</td><td>The value provided will not have been used</td></tr><tr><td>Parent Suppression</td><td>This value is required</td></tr><tr><td>Sibling Suppression</td><td>This value is required</td></tr><tr><td>Inspection</td><td>The value provided will not have been used</td></tr></table></td><td>O</td></tr>
</table>

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>SiblingFrequencyValue</td><td>The interval must be the same for all tasks in the group.<br>All frequencies must be a multiple of the sibling frequency.<br><br>Consider the value of the field.<br><table><tr><th colspan="2">SchedulingModeIndicator</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>Standard</td><td>The value provided will not have been used</td></tr><tr><td>Dependency</td><td>The value provided will not have been used</td></tr><tr><td>Parent Suppression</td><td>The value provided will not have been used</td></tr><tr><td>Sibling Suppression</td><td>This value is required</td></tr><tr><td>Inspection</td><td>The value provided will not have been used</td></tr></table></td><td>O</td></tr>
<tr><td>DependencyGroupCode</td><td>The value provided should match a configured Dependency Group Code within AMT.</td><td>O</td></tr>
<tr><td>DependencyCounter</td><td>The order of tasks in the dependency group.</td><td>O</td></tr>
<tr><td>InspectionLogicTaskTypeCode</td><td>The value provided should match a configured Task Type Code within AMT.</td><td>O</td></tr>
<tr><td>InspectionLogicOffsetValue</td><td></td><td>O</td></tr>
<tr><td>PerformanceStrategyCode</td><td>Only the following values are accepted:<ul><li>1 – On Condition</li><li>2 – On Schedule</li><li>3 – Run to Failure</li></ul>If no value is provided, a value of 1 will be used.</td><td>O</td></tr>
<tr><td>PartEscalationIndexCode</td><td>The value provided should match an existing Part Escalation Index within AMT.<br>For a new strategy task, if no value is provided, the Default for Parts Escalation of the Organisation is used.</td><td>O</td></tr>
<tr><td>LabourEscalationIndexCode</td><td>The value provided should match an existing Labour Escalation Index within AMT.<br>For a new strategy task, if no value is provided, the Default for Misc Escalation of the Organisation is used.</td><td>O</td></tr>
<tr><td>MiscEscalationIndexCode</td><td>The value provided should match an existing Misc Escalation Index within AMT.<br>For a new strategy task, if no value is provided, the Default for Misc Escalation of the Organisation is used.</td><td>O</td></tr>
</table>

| Field Name | Business Rules | Optional/ Required |
|---|---|---|
| IsCapex | Only the following values are accepted:<br>• **0** – False (is not a capex strategy)<br>• **1** – True (is a capex strategy)<br>If no value is provided, a value of **0** will be used. | O |
| RequiresSTO | Only the following values are accepted:<br>• **0** – False (strategy does not require an STO for work to be performed)<br>• **1 –** True (strategy does require an STO for work to be performed)<br>If no value is provided, a value of **0** will be used. | O |
| PlanningGroupCode | The value provided should match a configured **Planning Group** Code within AMT. | O |
| MaintenanceOrderCode | The value provided should match a configured **Maintenance Order Type** Code within AMT. | O |
| RegulatoryCode | The value provided should match a configured **Regulatory Group** Code within AMT. | O |
| ObsoleteStrategyTask | Only the following values are accepted:<br>• **0** – False<br>• **1** – True. **NOTE:** This setting is currently only supported with the setting for ImportSrategyTaskUseExternalIdentifier=1<br>If no value is provided, a value of 0 will be used.<br>Refer to **Processing Rules** below for more information on how this is processed. | O |

## 8.1.2 Strategy Job – Business Rules

| Field Name | Business Rules | Optional/ Required |
|---|---|---|
| JobCode | | O |
| CostSource | Only the following values are accepted:<br>• 1 – Manual<br>• 2 – Standard Job<br>• 3 – Job Costs<br>• 4 – Consumable | R |

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>CurrencyCode</td><td>The value provided should match a configured Currency Code within AMT.<br>If no value is provided, the currency code of the site will be used.<br>Note: If the integration sends a currency when creating a record, it should always send a currency, even when updating the record. Including a currency (e.g., USD) to create a record and then not including the currency when updating the record could result in the currency changing to the AMT site default (e.g., AUD).</td><td>O</td></tr>
<tr><td>StandardJobReferenceCode</td><td>Consider the value of the field.
<table>
<tr><th colspan="2">CostSource</th></tr>
<tr><td>Value</td><td>Action</td></tr>
<tr><td>Manual</td><td>This value is ignored</td></tr>
<tr><td>Standard Job</td><td>The value provided will be used</td></tr>
<tr><td>Job Costs</td><td>This value is ignored</td></tr>
<tr><td>Consumable</td><td>This value is ignored</td></tr>
</table></td><td>O</td></tr>
<tr><td>CostBearerCode</td><td>The value provided should match a configured Cost Bearer Code within AMT.</td><td>O</td></tr>
<tr><td>CostCentreCode</td><td>The value provided should match a configured Cost Centre Code within AMT.</td><td>O</td></tr>
<tr><td>WorkGroupCode</td><td>The value provided should match a configured Workgroup Code within AMT.</td><td>O</td></tr>
<tr><td>PartTypeCode</td><td>The value provided should match a configured Part Type Code within AMT.</td><td>O</td></tr>
<tr><td>OccupationalHealthAndSafetyCode</td><td>The value provided should match a configured Occupational Health and Safety Code within AMT.</td><td>O</td></tr>
</table>

<table>
<tr><th>Field Name</th><th>Business Rules</th><th>Optional/ Required</th></tr>
<tr><td>PricingDate</td><td>Consider the value of the field.<br><table><tr><th colspan="2">CostSource</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>Manual</td><td>The value provided will be used</td></tr><tr><td>Standard Job</td><td>This value is ignored</td></tr><tr><td>Job Costs</td><td>The value provided will be used</td></tr><tr><td>Consumable</td><td>The value provided will be used</td></tr></table><br>Only used for Projection Types of:<ul><li>Current</li><li>Centreline</li><li>Alternate</li></ul>For other projection types, it is ignored, and values entered by users at the projection level are used (for example, budget pricing data for budget projections).</td><td>O</td></tr>
<tr><td>ConsumableQuantityValue</td><td>Consider the value of the field<br><table><tr><th colspan="2">CostSource</th></tr><tr><th>Value</th><th>Action</th></tr><tr><td>Manual</td><td>The value provided will be used</td></tr><tr><td>Standard Job</td><td>This value is ignored</td></tr><tr><td>Job Costs</td><td>The value provided will be used</td></tr><tr><td>Consumable</td><td>The value provided will be used</td></tr></table></td><td>O</td></tr>
<tr><td>ShopLabourIndicator</td><td>Only the following values are accepted:<ul><li>0 – Shop</li><li>1 - Field</li></ul>If no value is provided, a value of 1 will be used.</td><td>O</td></tr>
<tr><td>LabourActivityCode</td><td>The value provided should match a configured Activity Code within AMT</td><td>O</td></tr>
<tr><td>PartExpenseElementCode</td><td>The value provided should match a configured Expense Element Code within AMT</td><td>O</td></tr>
<tr><td>LabourExpenseElementCode</td><td>The value provided should match a configured Expense Element Code within AMT</td><td>O</td></tr>
<tr><td>MiscExpenseElementCode</td><td>The value provided should match a configured Expense Element Code within AMT</td><td>O</td></tr>
</table>

### 8.1.3 Processing Rules

1. One or more Strategy Task records can be included in the same message.
2. Each record is processed individually. Failure of a single strategy task is reported, and processing continues.
3. The configuration setting **ImportStrategyTaskUseExternalIdentifier** will determine what method is used to determine if a Strategy Task exists.
4. Consider the AMT Configuration **EnableStrategyTaskImportHolding**. If this setting is enabled, all records are placed in a holding area, and an AMT user will need to use the appropriate wizard to update AMT Strategy Tasks. Should this setting not be enabled, the following processing rules will be considered.
5. If a Strategy Task does not exist:
    a. The Strategy Task is created as a new Strategy Task.
    b. Any value against a provided optional tag is used.
    c. If an optional tag is not provided, the value is not set in AMT unless a specific business rule exists to manage this case.
6. If the Strategy Task does exist:
    a. The Strategy Task will be updated with the new provided values.
    b. Any value against a provided tag will be overwritten.
    c. If no tag is provided, the existing values in AMT will remain as-is
7. Strategy Tasks can be duplicated in the message. The task processed last will take precedence.
8. The process of 'Obsoleting a Strategy task' when the field 'ObsoleteStrategyTask' is set to 1 is:
    a. Ignore the standard validation that equipment in the message may be different to the strategy task in AMT with the matching external identifier.
    b. Find the strategy in AMT that matches the ExternalIdentifier in the message.
    c. Append the ExternalIdentifier to the strategy task description (for example set description = [Description]_[ExternalIdentifier].
    d. Clear the external identifier.
    e. Set Not After to the current date/time.
9. **RespondStrategyTask** is returned upon completion of processing.

## 8.1.4 Data Structure

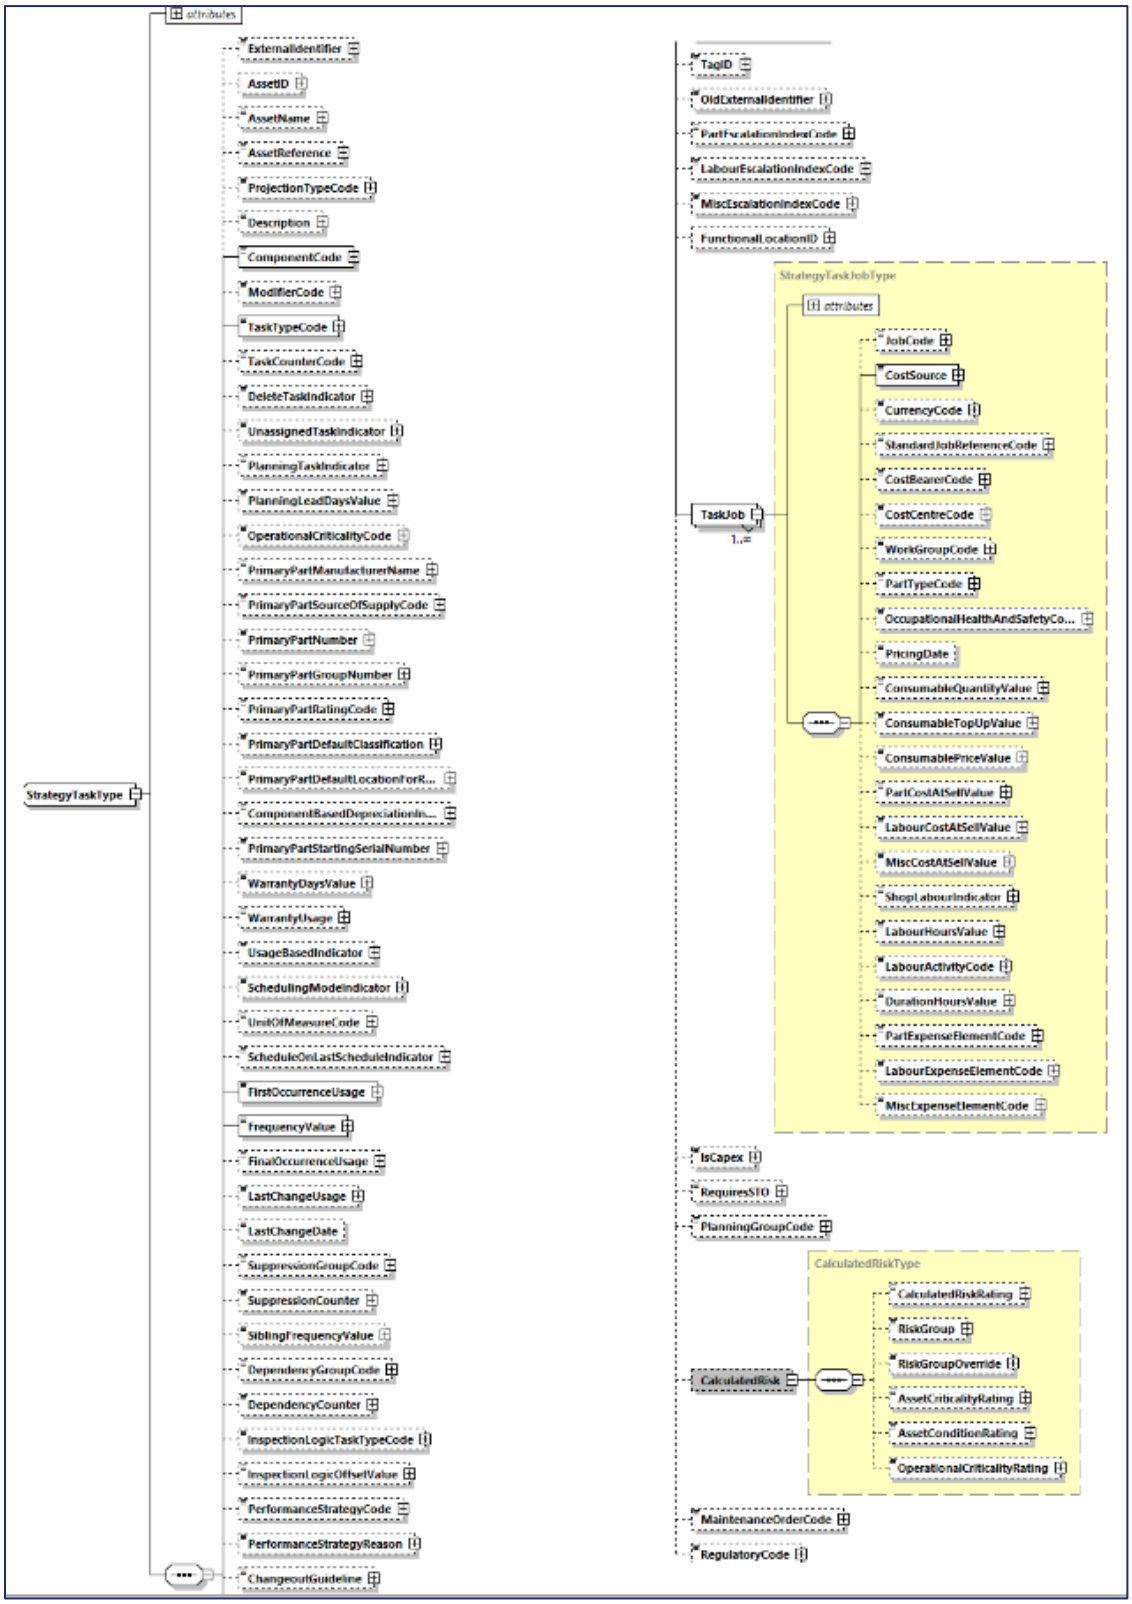



**Figure 3: ProcessStrategyTask**

## 8.2 ProcessStrategyTaskJobCost

This interface is used to get Strategy Task Job Cost (cost allocations) records into AMT and to create and update Job Costs.

Job Costs are only imported for strategy tasks where Cost Source is set to Job Costs.

### 8.2.1 Business Rules

| Field Name | Business Rules | Optional/ Required |
|---|---|---|
| ExternalIdentifier | This is the link between the Strategy Task and the Job Cost record. | R |
| ModelCode | The value provided should match a configured **Model** within AMT.<br>Used together with Serial Number and registration counter to uniquely identify the asset. | R |
| SerialNumber | The value provided should match a configured **Model** within AMT.<br>Used together with ModelCode and registration counter to uniquely identify the asset. | R |
| RegistrationCounter | The value provided should match a configured **Registration Counter** within AMT.<br>Used together with Model and Serial Number to uniquely identify the asset.<br>If this is not provided, the default value will be used. | O |
| SchedulingTaskLinkIndicator | Only the following values are accepted:<br>• **0** – Not Linked<br>• **1** – Linked<br>If no value is provided, a value of 1 will be used. | O |
| DeleteCostAllocationIndicator | Only the following values are accepted:<br>• **0** – Do not delete<br>• **1** – Delete<br>If no value is provided, a value of 0 will be used. | O |
| ComponentCode | The value provided should match a configured **Component** Code within AMT. | R |

## Processing Rules

1. One or more Strategy Task Job Cost records can be included in the same message.
2. Each record is processed individually. Failure of a single Strategy Task Job Cost record is reported, and processing continues.
3. Each Job Cost Record is identified by a combination of:
    - External Identifier
    - Asset
    - Component Code
    - Modifier Code
    - Currency Code
4. If the Job Cost does not exist, a new one is created.
5. If the Job Cost does exist, the details are updated.
6. An AMT configuration interface **Cost Allocation Interface Details** is used to configure which fields are updated in AMT. This does not affect the interface but may affect what is ultimately updated in AMT. This interface can affect:
    - Work Group
    - Cost Centre
    - Cost Bearer
    - Part Cost Expense
    - Labour Cost Expense
    - Misc Cost Expense
    - Labour Activity
    - Job Code
7. The External Identifier will determine if a Strategy Task exists for the costs to link to.
8. If the Strategy Task does exist, create or update the costs for the strategy task, but only when:
    - The Strategy Task has a CostSource =3.
    - The Strategy Task applies to a Current Projection.
9. Strategy Task Job Costs can be duplicated in the message. The task processed last will take precedence.
10. **RespondStrategyTaskJobCost** is returned upon completion of processing.

## 8.2.2 Data Structure

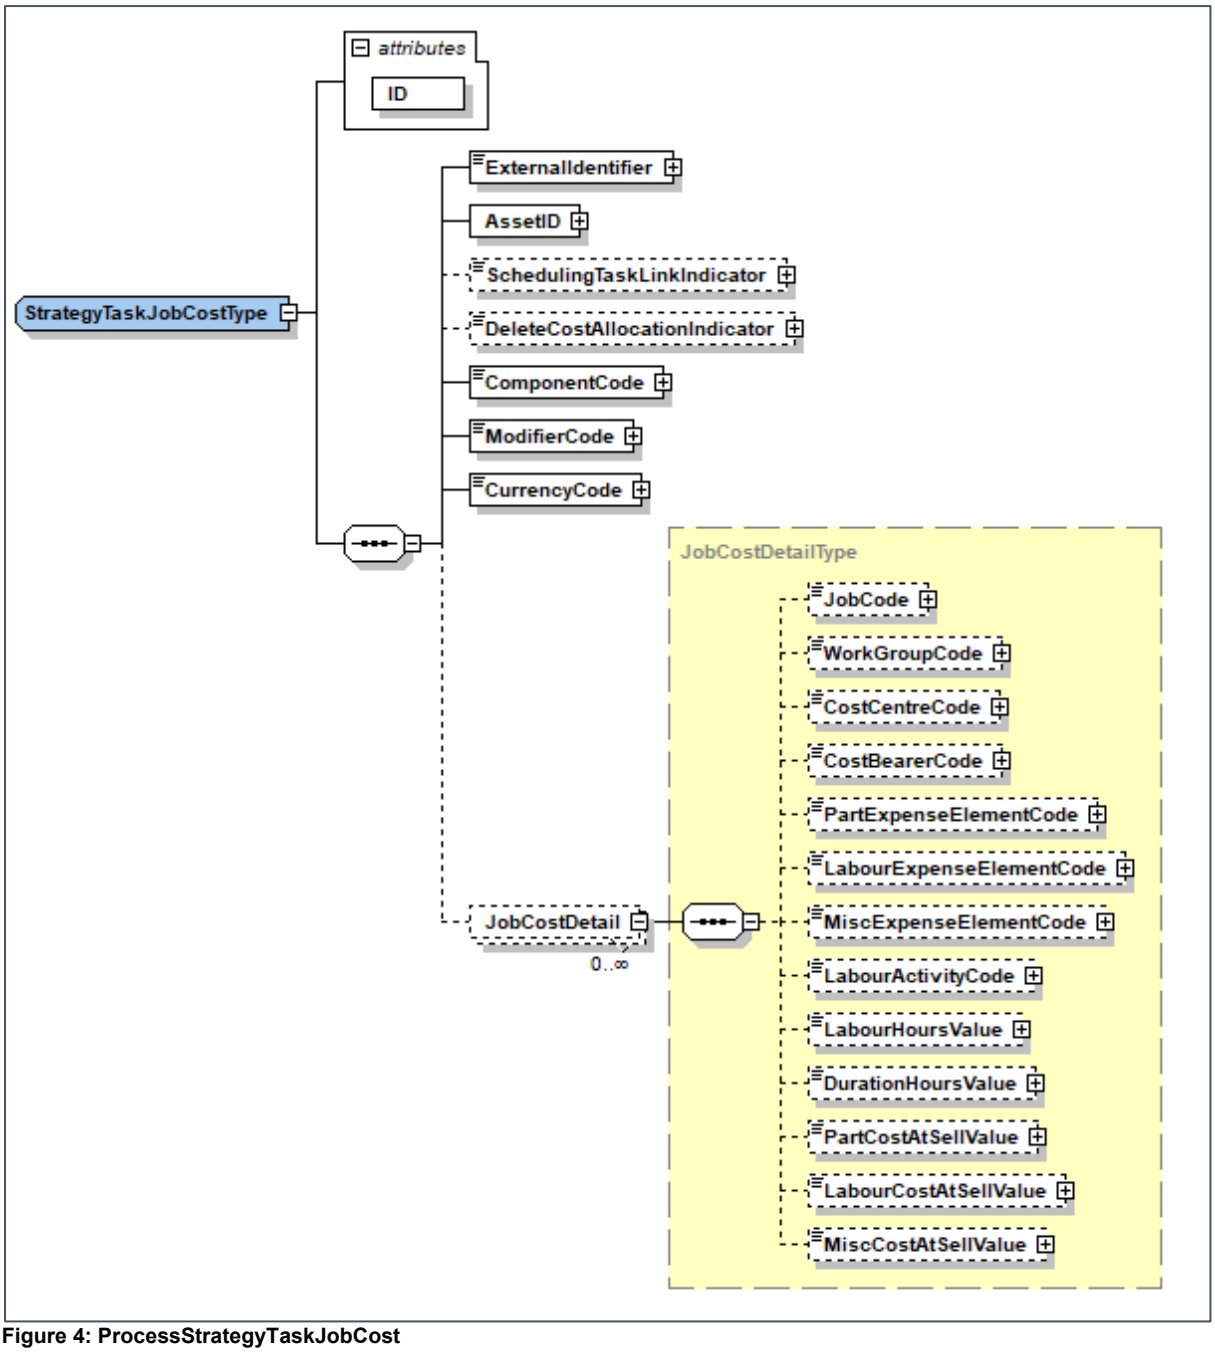



**Figure 4: ProcessStrategyTaskJobCost**

## 8.3 GetStrategyTaskNextDue

This interface is used to retrieve a list of Strategy Tasks whose Next Due date has changed since a given point in time.

The caller will typically store the timestamp of the time this call was made for use in the subsequent call. This pattern will allow the caller to determine which strategy tasks have had their next due date change since the last time the call was made.

### 8.3.1 Business Rules

| Field Name | Business Rules | Optional/ Required |
|---|---|---|
| LastChangedDate | The Date/time from which the function should return Strategy Tasks whose next due dates have changed. | R |
| Site | Limits the results to strategy tasks associated with equipment on the supplied **Site Name**. | O |
| Fleet | Limits the results to strategy tasks associated with equipment in the supplied **Fleet Name**. | O |
| ModelCodeList | A list of Model Codes. Limits the results to strategy tasks associated with equipment with the given **Model Codes**. | O |
| SerialNumberList | A list of Serial Numbers. Limits the results to strategy tasks associated with equipment with the given **Serial Numbers**. | O |
| ComponentCodeList | A list of Component Codes. Limits the results to strategy tasks associated with the given **Component Codes**. | O |
| TaskTypeCodeList | A list of Task Types. Limits the results to strategy tasks associated with the given **Task Types Codes**. | O |
| ReviewStatusDescriptionList | A list of Review Status. Limits the results to strategy task next due dates with a matching review status. | O |
| SystemCalculatedIndicator | Limits the results to strategy task next due dates matching the system calculated indicator. | O |
| StrategyFromDate | Limits the results to strategy task next due dates later than the from StrategyFromDate. | O |
| StrategyToDate | Limits the results to strategy task next due dates before the StrategyToDate. | O |
| ExternalIdentifier | A list of ExternalIdentifier. Limits the results to strategy tasks with the given **ExternalIdentfier**. | O |

### 8.3.2 Processing Rules

1. Any provided fields will be matched with the existing Strategy Task in AMT.
2. All items within a list element are considered as a logical OR.
3. Each list is considered as a logical AND.
4. **RespondStrategyTaskNextDue** is returned upon completion of the call.

### 8.3.3 Data Structure

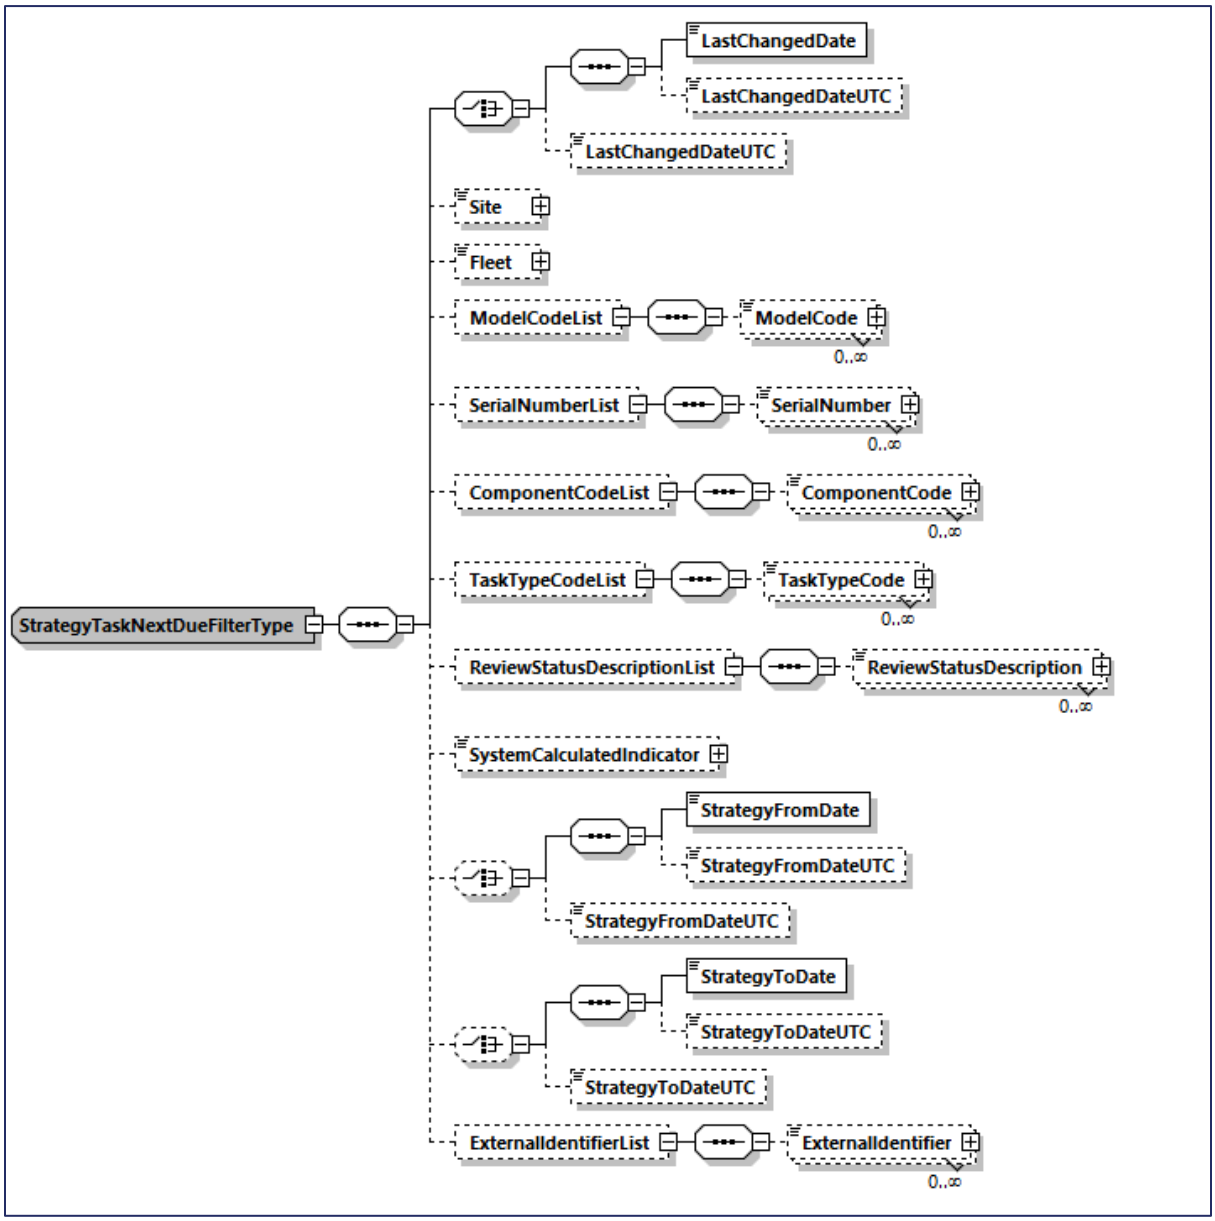



**Figure 5: StrategyTaskNextDueFilterType DataArea**

## 8.4 ProcessStrategyTaskNextDue

This interface is used to update the due date for the next occurrence of a strategy task.

### 8.4.1 Business Rules

| Field Name | Business Rules | Optional/ Required |
|---|---|---|
| ModelCode | The value provided should match a configured **Model** within AMT.<br>Used together with Serial Number and Registration Counter to uniquely identify the asset. | R |
| SerialNumber | The value provided should match a configured **Model** within AMT.<br>Used together with ModeCode and registration counter to uniquely identify the asset.<br>If the asset does not exist in AMT a 'dummy' asset will be created using the AssetName field. | R |
| RegistrationCounter | The value provided should match a configured **Registration Counter** within AMT.<br>Used together with Model and Serial Number to uniquely identify the asset.<br>If this is not provided, the default value will be used. | O |
| ExternalIdentifier | The value provided should match a **strategy task** in AMT. | R |
| AMTUserLoginName | The value provided should match a valid AMT **User ID**. | R |
| ReviewStatusDescription | The value provided should match a valid AMT **review status**. | O |
| PartClassification | The value provided should match a valid AMT **PartClassification**. | O |
| SalesStatus | The value provided should match a valid AMT **Sales Status**. | O |
| SalesLostReason | The **value provided should match a valid Sales** Lost Reason. | O |
| STOID | The value provided should match an AMT **STO ID**. | O |

### 8.4.2 Processing Rules

1. One or more Strategy Task Next Due records can be included in the same message
2. Each record is processed individually. Failure of a single strategy task next due is reported, and processing continues.
3. Strategy Task Next Due details can be duplicated in the message. The task processed last will take precedence.
4. If the Review Status of a Strategy Task in AMT is **'Confirmed'**, an error will be returned, and the **Next Due** details will not be updated.
5. Each record can have either the next due date or the next due usage, not both. If both the next due date and the next due usage are included in a message, an error will be returned.
6. **RespondStrategyTaskUpdateNextDue** is returned upon completion of processing.

### 8.4.3 Data Structure

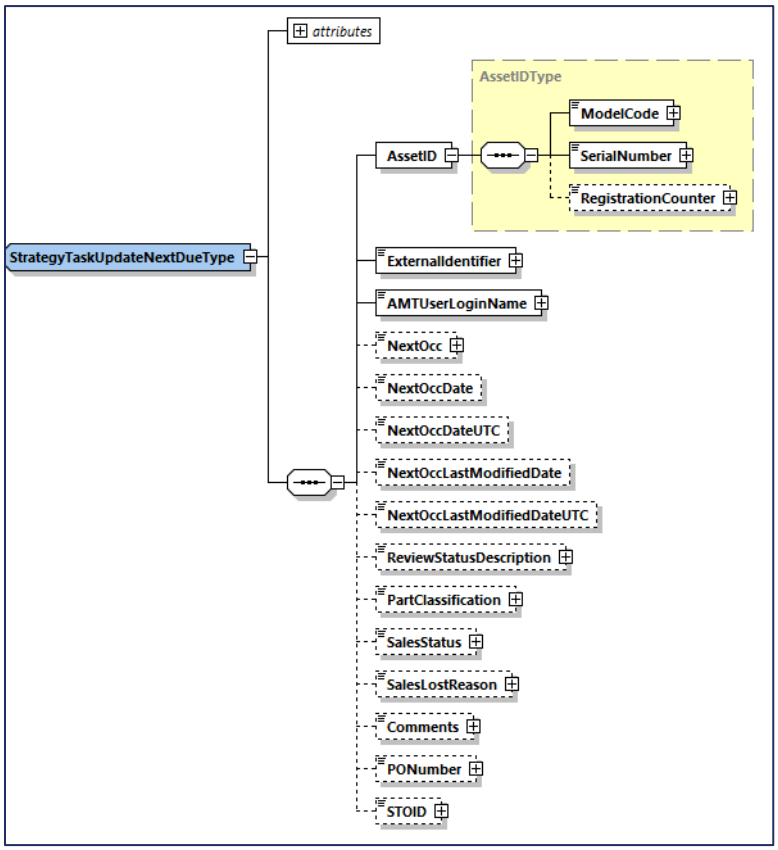



**Figure 6: ProcessStrategyTaskNextDue**

# 9 RespondStrategyTask

This payload is returned in response to the following interfaces:

- ProcessStrategyTaskJobCost

## 9.1.1 Data Structure

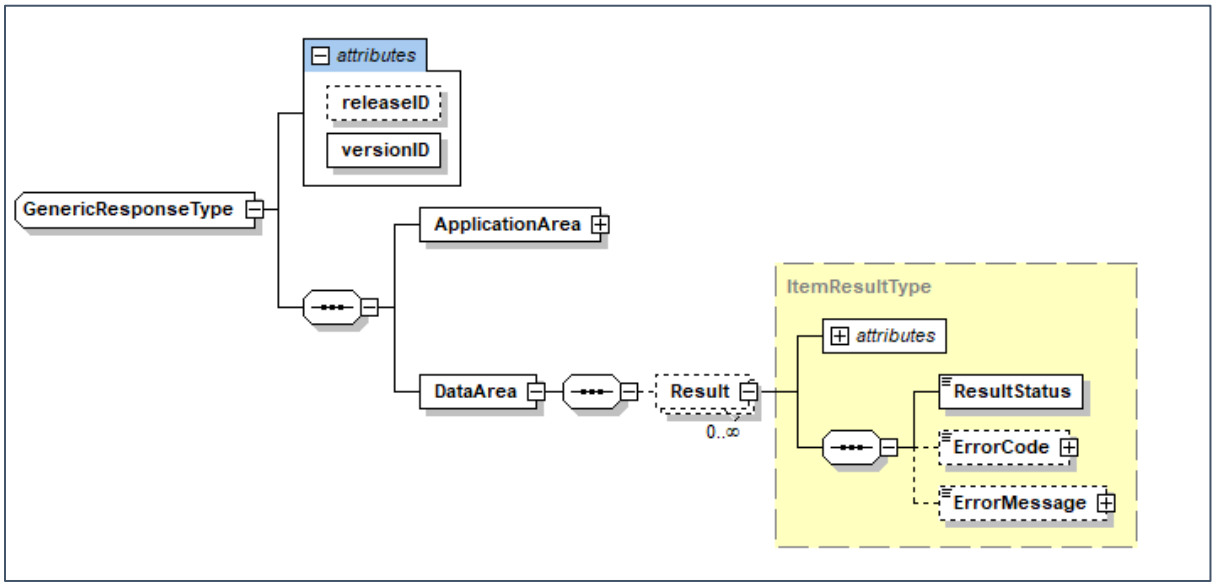



**Figure 7: RespondStrategyTask**

# 9.2 RespondStrategyTaskJobCost

This payload is returned in response to the following interfaces:

- ProcessStrategyTaskjobCost

## 9.2.1 DataStructure

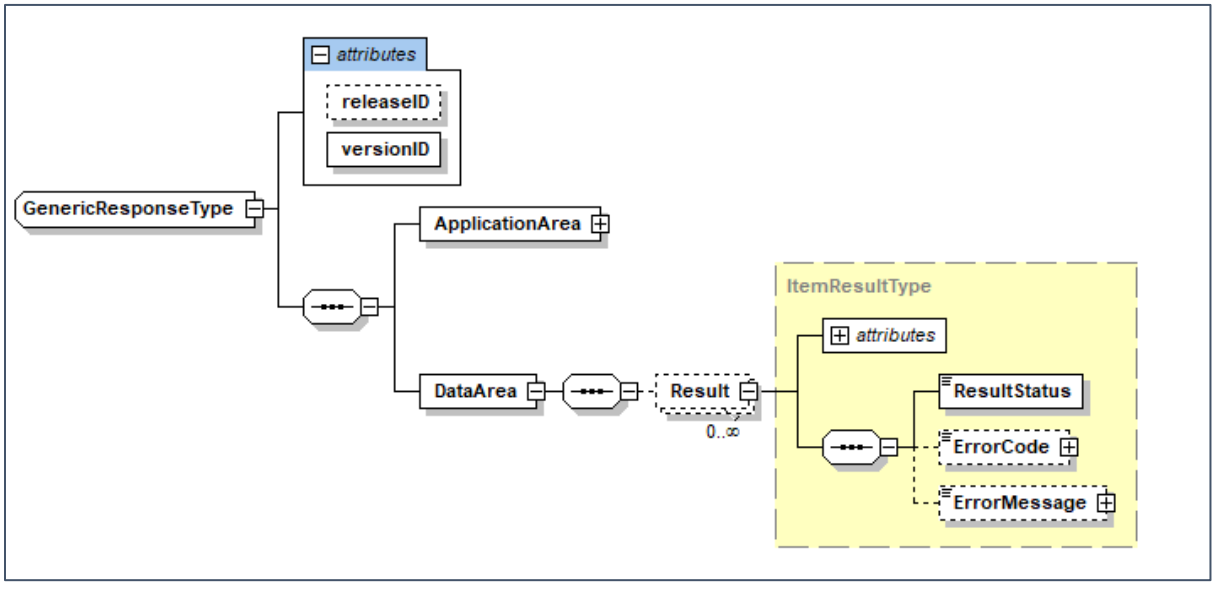



**Figure 8: RespondStrategyTaskJobCost**

## 9.3 RespondStrategyTaskNextDue

This payload is returned in response to the following interfaces:

- GetStrategyTaskNextDue

### 9.3.1 Data Structure

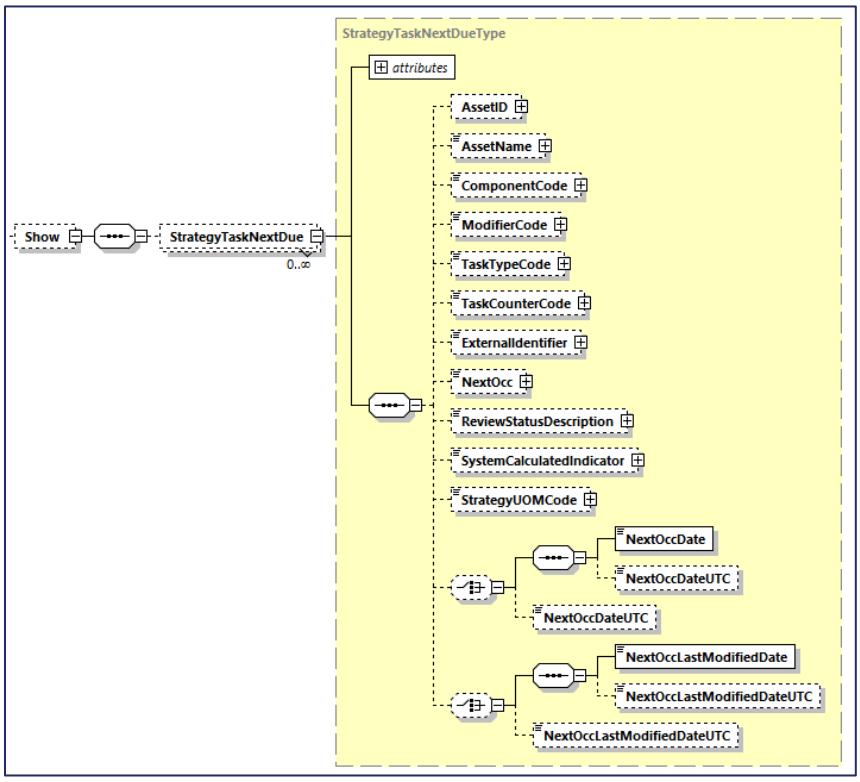



**Figure 9: RespondStrategyTaskNextDue**

## 9.4 ResponseStrategyTaskUpdateNext Due

This payload is returned in response to the following interfaces:

- ProcessStrategyTaskNextDue

### 9.4.1 Data Structure

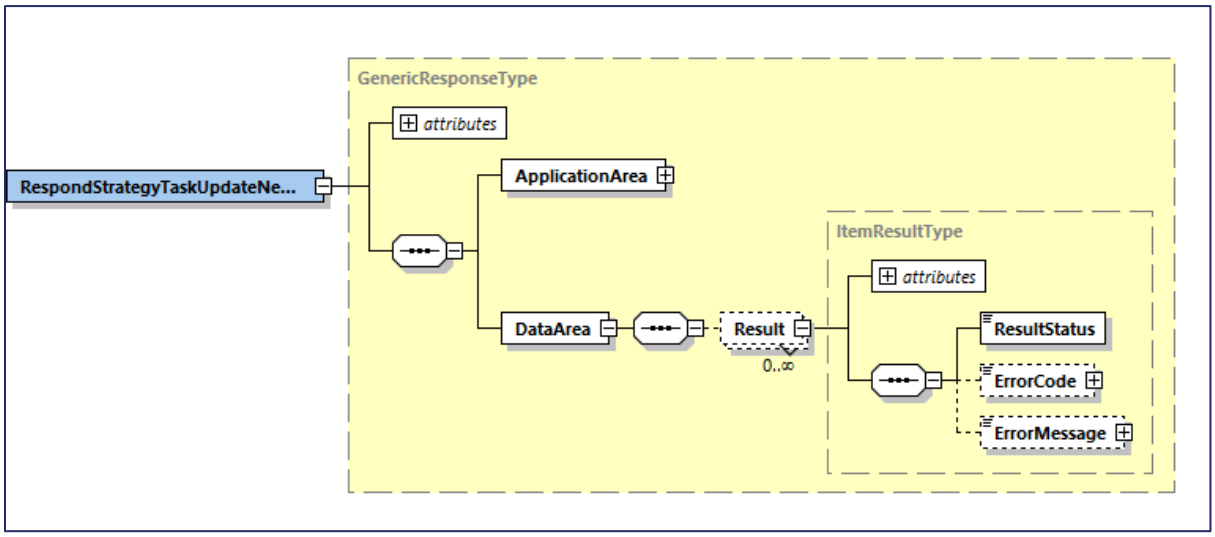



**Figure 10: RespondStrategyTaskUpdateNextDue**