GLENCORE

# Data Standard
# Task List

12

## Document properties

| | |
|---|---|
| Date, Version | 17/01/2021 v1.0 |
| Department, Area | Maintenance, Glencore Copper |
| Prepared by | Ben Hathaway |
| Reviewed by | Regional PM SME's, Regional AM & SAP PM Managers |
| Comment/s | Published |

## Contents

1 Introduction ..... 3
1.1 Master Data Standards - Purpose ..... 3
1.2 Task List Standard – Purpose ..... 3
1.3 Using this document ..... 4
1.4 Governance ..... 4
2 Data Object Description ..... 5
2.1 Definition ..... 5
2.2 Entity Relationship Diagram (ERD) ..... 6
3 Business Requirements ..... 7
3.1 Business Use ..... 7
3.2 Business design Rules & Criteria ..... 8
4 Detail Standard ..... 10
4.1 Data Object Coding Standard ..... 10
4.2 Attributes ..... 10
4.2.1 Task List header description ..... 10
4.2.2 Task List Operation description ..... 10
4.2.3 Planning Plant ..... 11
4.2.4 Planner Group ..... 11
4.2.5 Assembly ..... 12
4.2.6 Work Centre (header) ..... 12
4.2.7 Usage ..... 12
4.2.8 Strategy ..... 13
4.2.9 Status ..... 13
5 Appendices ..... 14
5.1 Complete Field List ..... 14
5.1.1 Task List Header ..... 15
5.1.2 Task List operation ..... 17
5.1.3 Task List component ..... 20
5.1.4 Task List package ..... 21
5.1.5 Task List service ..... 21
5.1.6 Task List Operation Relationship ..... 22
6 Stakeholder Signoff ..... 24

# 1 Introduction

## 1.1 Master Data Standards - Purpose

The Data Standard provides clear and prescriptive definitions and rules that support a consistent and common definition of data entities across all business systems.

It describes:

- What rules / guidelines are applied to determine how many of the relevant data entity will be created.
- What rules will be applied to determine the codes used to create the relevant data entity (eg. Plant code or Material code);
- What rules will be applied to determine the name / short description of the relevant data entity (eg. Plant name or Vendor name);
- Rules for the use of views / sub-entities within the Data Entity;
- Identification of the key Attributes on the data entity whose usage needs to be standardised;
- When multiple values are available for the nominated 'key' attributes, the rules definition should list the criteria to use to determine the appropriate value; and
- If applicable, any rules / guidelines for the association of the relevant data entity with other data entities.

The Data Standard is **NOT** used to document:

- 'Technical' documentation on how the system has been configured and the design rationale for the configuration
- Identifying the operational need on when these Standards should be applied, They are to provide the guidance on how the Standard is applied
- List of actual values for the data entity / attributes within the data entity except where it is required to explain the application of the data standard
- User training or procedural documentation for master data maintenance
- Data migration

## 1.2 Task List Standard – Purpose

The purpose of this Standard is to:

- Identify the minimum Master Data field requirements for SAP Task Lists at Glencore.
- Ensure the alignment with the Solution Building Block SBB_D90 Maintenance Master Data and Asset Management Framework Element 5
- Identify the minimum requirements for creating, maintaining, and retiring Task Lists

- Provide the guiding principles to manage Task List Master Data
- Identify the primary audience for the application of this standard

## 1.3 Using this document

The Data Standard is targeted at the following audience:

- Master Data maintenance teams in order to understand how the object needs to be maintained
- End users supporting the maintenance function whereby appropriate knowledge is required to use the system effectively which include but are not limited to; Planners, Schedulers, Reliability Engineers etc.
- Business Intelligence team to assist with the design of reporting solutions
- Project teams whose scope impacts the data object to ensure the solution design is compliant with the approved data standard
- Transition to support teams to assist in the development of user guides

## 1.4 Governance

Master Data Governance (MDG) is the governance tool used to create, maintain and retire Master Data objects in Plant Maintenance. The Asset Management group provides the governance for all requirements described in this Standard as well as approval of any change to related Master Data.

This Standard shall be reviewed as often as the business requires but at a minimum of every five years.

The Standard is subject to Glencore's Continuous Improvement (CI) processes based on Glencore's shared experiences and Lessons Learned.

Revisions, reviews, and updates to the Standard take place under the guidance and approval of Regional Asset Management and Subject Matter Expert (SME) leaders

# 2 Data Object Description


## 2.1 Definition

Task Lists are used as work templates that describe the work to be performed as a list of operations. They allow repeatable work management tasks to be defined and then reused as required in maintenance work orders.

The operations of a Task List capture the following information:

- Internal labour requirements:
  - Work centre
  - Labour hours
  - Duration
- External labour requirements:
  - Service masters
  - Quantity / Time required
- Materials:
  - Catalogued materials including both Inventory and non-Inventory (Order on Demand) managed
- Tools:
  - Cranes, scaffolding and other shared tools (as work centres)
- Operation Relationships:
  - Finish – Finish, Finish – Start, Start – Finish, Start - Start
- Task Frequency
  - Defined in calendar time or usage (e.g. hours, tonnes, kilometres)
- Documentation
  - Work procedures (as attached documents).
- System Condition
  - Assigned to define whether the equipment needs to be offline to perform the work or it can be performed whilst in operation

## 2.2 Entity Relationship Diagram (ERD)

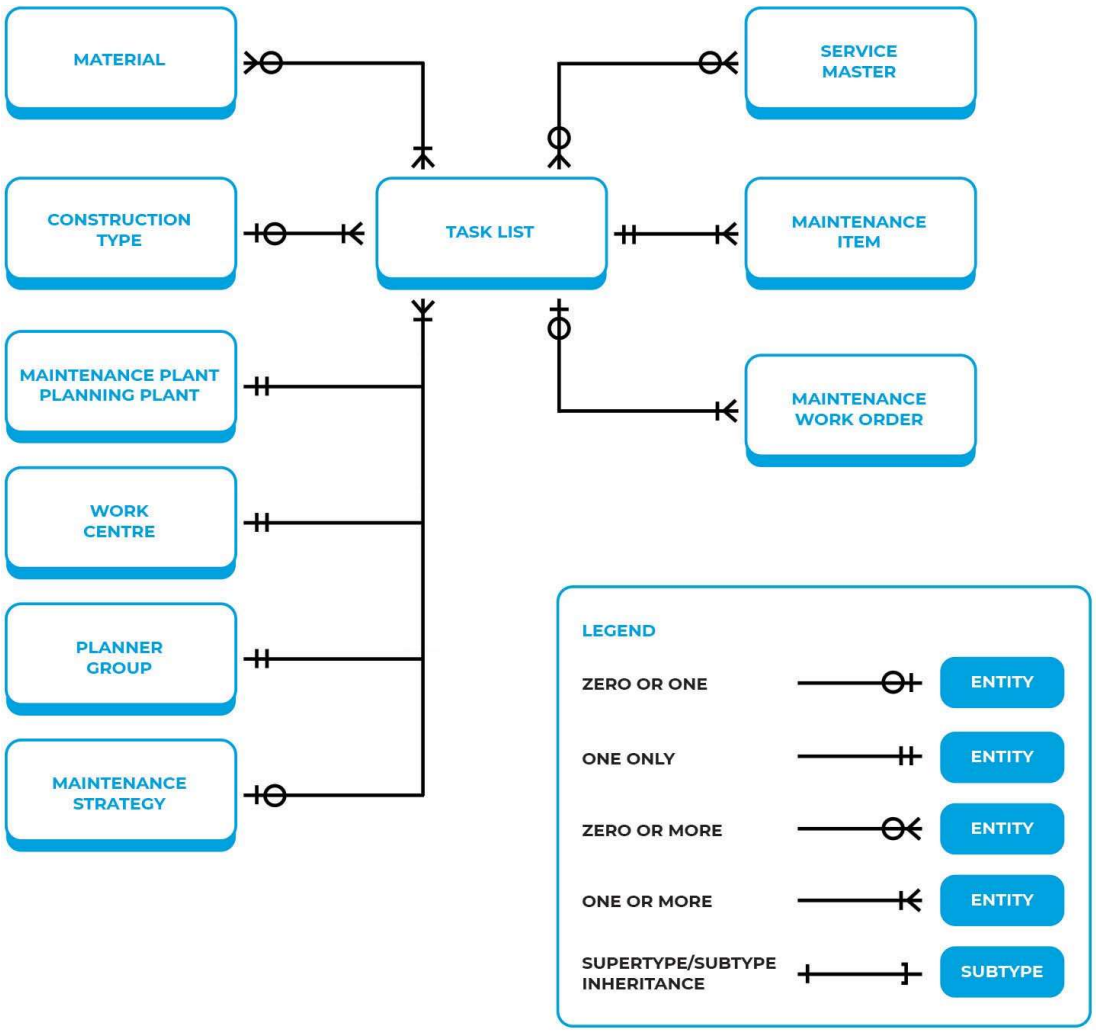

# 3 Business Requirements

## 3.1 Business Use

The purpose of a Task List is to provide a template for a 'Work Package' for both regular and known ad-hoc tasks. Having pre-defined tasks achieves a number of benefits:

- Reduction of the planning effort for repetitive tasks.
    - Allows for additional tool time for Trades
    - Affords Planners to focus on more proactive tasks
- The separation of short-term maintenance planning activities from maintenance strategy activities better supports having a maintenance activity defined completely and correctly.
- Risks are captured to support execution of the tasks
- As planning deficiencies are identified, improvement suggestions can be captured by using the Task List to make updates for future use.
- Overall improvements in equipment reliability

Task Lists can be an output of an equipment maintenance strategy development process.

Task Lists will be used to define maintenance activities including:

- Inspections
- Services
- Component change outs
- Ad-hoc, but anticipated to occur, maintenance activities
- Testing and Calibrations
- Internal Refurbishment
- Shutdown Tasks
- Statutory / Regulatory Tasks
- Critical Controls
- General tasks

Task Lists are also a key component of a zero-based budgeting process. They can be costed individually, including all labour, materials and services, or as part of a maintenance plan with a defined frequency.

| Process Area | Integration Points | Relationship |
|---|---|---|
| **Plant Maintenance** | ▪ Equipment Maintenance Strategy Deployment<br>▪ Work order planning<br>▪ Shutdown planning<br>▪ Asset Master Data Maintenance | ▪ C<br>▪ R<br>▪ R<br>▪ C,R,U,D |

Relationship "C" – Create, "R" – Read, "U" – Update, "D" - Delete

## 3.2 Business design Rules & Criteria

The following business and design rules are to be applied in determining how to structure a Task List.

If a maintenance activity meets one or more of the following criteria, it is to be defined as a Task List:

- It is likely to be performed more than twice
- The task has a complexity that warrants planning to be carried out independently to work order planning.
- The task is a critical control or statutory task.
- General Task Lists will be used at all times to minimise the number of Task Lists that must be created and maintained for like physical assets.
- Task Lists will be Plant dependent.
- All Task Lists associated with routine maintenance must have a strategy assigned. Task Lists associated with ad-hoc tasks will have no value assigned in the strategy field to indicate this.
- To reduce the potential for inconsistent versions of the same maintenance activity, the same task should not be defined multiple times in different Task Lists where possible. Exceptions to this will be:
    - The same tasks with different material requirements (e.g. for a different model or series of the same vehicle).

**Task List Groups / Group Counters**

Task List groups and group counters will be generated using the specific business unit standard for General Configuration.

**Task List header**

All Task Lists are associated with a Functional Location or Equipment by populating the Task List header Assembly field with the Construction Type from the Functional Location or Equipment Master record. This simplifies searching for Task Lists that are valid for a specific Functional Location or Equipment.

Within the header data the Usage field enables Task Lists to be distinguished from each other (i.e. 1 denotes Production Task Lists and 4 denotes Plant Maintenance).

**Task List Operations**

A separate operation must be defined for each Resource Work Centre performing an activity as part of a larger task.

In general, a separate operation is to be defined whenever scheduling or measuring the activity as a discrete piece of work is required. This is independent of whether the same or different Resource Work Centres will be performing the activity.

Task List operations must use one of the following control keys.

| Type | Code | Description |
|---|---|---|
| Internal | PM01 | For operations that describe maintenance activities to be carried out by internal resources. These may be employees or contractors occupying a position in the organisational structure.<br><br>All operations with a control key of PM01 must be time confirmed. |
| External Subcontract Refurbishment | PM02 | For operations that describe maintenance refurbishment activities to be carried out by external resources.<br><br>Can only be used for non strategy tasklists (should not be used on a Task List attached to a Maintenance Plan as this would create a PM02 Work order when it needs to be a PM04 Work order). |
| External Service | PM03 | For operations that describe a maintenance activity to be performed as an external service. For example, fire systems inspections by an external vendor or crane hire. |
| Internal (contractors) | PM04 | This control key is not currently used.<br><br>For operations that describe maintenance activities to be carried out by a group of contractors across multiple work orders. Discrete services will utilise the service control key PM03.<br><br>All operations with a control key of PM04 must be confirmed. |

All operations of a Strategy based Task List are to be assigned to a single frequency.

Detailed procedures are to be attached to the operation via document link to a controlled document system depository.

**Task List Components**

Components may be directly entered (as a Standard BOM component).

# 4 Detail Standard

## 4.1 Data Object Coding Standard

A Task List is uniquely identified by a combination of Task List type, group and group counter in the following sequence:

1. Task List Type,

2. Key for Task List group Number

3. Task List group Counter

The Task List Group and Task List Group Counter will be defined by outline of business unit standard. Task List type for General Task Lists are type 'A'

## 4.2 Attributes

### 4.2.1 Task List header description

| | |
|---|---|
| **Application Definition** | Description of the activities to be performed. |
| **Guiding Principles** | No reference should be made to specific Equipment in the description of the Task List.<br>The description should follow a pre-defined sequence that clearly shows the purpose of the Task List. |
| **Application Coding Convention** | 40 character alphanumeric |
| **Naming Convention** | Refer to Data Standard - General Configuration |

### 4.2.2 Task List Operation description

| | |
|---|---|
| **Application Definition** | Description of the activities to be performed. |
| **Guiding Principles** | No reference should be made to a specific Equipment in the description of the Task List operation.<br>The description should follow a pre-defined sequence that clearly shows the activity to be performed.<br>The Task List operation description describes 'What' is to be done, not 'How'. |
| **Application Coding Convention** | 40 character alphanumeric |
| **Naming Convention** | Refer to Data Standard - General Configuration |

### 4.2.3 Planning Plant

| | |
|---|---|
| **Application Definition** | A Plant in which maintenance tasks are planned and prepared.<br><br>Maintenance planning Plants are standard Plants that are indicated as maintenance planning Plants in Customizing. |
| **Guiding Principles** | Task List Planning Plant will be the Plant that is responsible for planning maintenance activities. |
| **Application Coding Convention** | 4 character alphanumeric |
| **Naming Convention** | 0370 – Mutanda (Africa)<br>0580 – KCC (Africa)<br>5030 – Cobar (Australia)<br>7490 – Ernest Henry (Australia)<br>8110 – Mount Isa Mine (Australia)<br>8111 – Townsville Port (Australia)<br>8240 – Antapaccay (Peru)<br>8630 – Altonorte (Chile)<br>9730 – Lomas Bayas (Chile)<br>9830 – Copper Refinery (Australia)<br>9900 – Horne (Canada)<br>9980 – CCR (Canada) |

### 4.2.4 Planner Group

| | |
|---|---|
| **Application Definition** | A group of employees responsible for planning and processing maintenance tasks in a Plant. |
| **Application Guiding Principles** | Planner groups or maintenance planning groups must be defined separately for each Maintenance Planning Plant.<br><br>Depending on the size and structure of your company, a maintenance planning group may be an individual department (for central work preparation), a group of skilled craftsmen or a workshop.<br>Every piece of equipment and functional location can be allocated to a maintenance planning group. |
| **Guiding Principles** | Each Planner Group represents a logical grouping for the task of planning and scheduling work orders. A Planner Group may represent one or more individuals whose primary function is to plan and schedule maintenance work orders, however a planner should normally only be responsible for one planner group.<br><br>The Planner Group should be changed from the default Planner Group from the associated Functional Locations and Equipment as required. For example, a Task List specifically for an Shutdown may have a different Planner Group. |

| | |
|---|---|
| **Application Coding Convention** | 3 character alphanumeric |
| **Naming Convention** | Refer to Data Standard - General Configuration |

### 4.2.5 Assembly

| | |
|---|---|
| **Application Definition** | A part of a technical object.<br>A technical object can be divided into assemblies to separate it into more clearly defined units.<br>An assembly is not an object. It is an object category, similar to a material in the SAP System. |
| **Application Guiding Principles** | Assemblies are used to group maintenance Task Lists.<br>By making an entry in this field, you can identify specifically the maintenance Task List as being for a particular assembly. |
| **Guiding Principles** | An Assembly is used to link a Task List to the equipment and functional locations for which it is valid. |
| **Application Coding Convention** | Internally (SAP system) generated IBAU material number. |
| **Naming Convention** | Refer to Data Standard – Construction Type and PM Assembly |

### 4.2.6 Work Centre (header)

| | |
|---|---|
| **Application Definition** | Used at a higher level and represent the group responsible for work management activities. They are assigned to technical objects in the Functional Location Structure as well as the header of Work Orders, Task Lists and Maintenance Items. |
| **Guiding Principles** | The Work Centre in a Task List header represents the group that has primary responsibility for the activities in the Task List. |
| **Application Coding Convention** | 8 character alphanumeric |
| **Naming Convention** | Refer to Data Standard – General Configuration |

### 4.2.7 Usage

| | |
|---|---|
| **Application Definition** | Key specifying the areas in which the Task List can be used (for example, in Production or Plant Maintenance). |
| **Application Guiding Principles** | There is one usage in standard SAP to define Plant Maintenance Task Lists. |
| **Guiding Principles** | Use the standard SAP usage '4' for Plant Maintenance |

| | |
|---|---|
| **Application Coding Convention** | 2 character alphanumeric. |
| **Naming Convention** | Usage '4' represents Plant Maintenance (General) Task |

### 4.2.8 Strategy

| | |
|---|---|
| **Application Definition** | A rule for the sequence of planned maintenance and inspection tasks. |
| **Application Guiding Principles** | A maintenance strategy contains the maintenance packages that define the cycle in which the tasks must be performed, e.g. every two months, every 5,000km, every 500 operating hours. It contains additional scheduling parameters such as shift factor, preliminary and follow-up buffers, and hierarchy. Maintenance strategies are obligatory in strategy plans. |
| **Guiding Principles** | See Data Standard - Maintenance Strategy |
| **Application Coding Convention** | 6 character alphanumeric |
| **Naming Convention** | Refer to Data Standard – Maintenance Strategy |

### 4.2.9 Status

| | |
|---|---|
| **Application Definition** | The status of the Task List determines in which other application areas the respective Task List may be used. |
| **Application Guiding Principles** | The status controls the following functions:<br>• Release for use as a reference by other Task Lists (for Task Lists that can be referenced)<br>• Release for costing<br>• Release for use in the order<br>• Consistency checks are not used for PM Task Lists<br>The status is used for automatic level selection within costing and capacity planning. |
| **Guiding Principles** | When the Task List has been completed, status '4' (Released general) will be set. |
| **Application Coding Convention** | 1 character alphanumeric |
| **Naming Convention** | 1 Created (not generally used)<br>2 Released for order (not generally used)<br>3 Released for costing (not generally used)<br>4 Released (general) |

# 5 Appendices

## 5.1 Complete Field List

**Legend for Attribute Table**

- **Table –** SAP table where data object appears
- **Field –** SAP data attribute field
- **Field Name –** SAP field name of data object
- **Description –** Description of input required
- **Data Type –** SAP data type (CHAR=Character, DATS=Date, CUKY=Currency key, UNIT=Measurement type, NUMC=Number)
- **Length –** Character length of field
- **MOCI –** Data requirement (M=Mandatory, O=Optional, C=Conditionally Mandatory, I=Internally Populated)
- **Field Validation Type –** Entry type allowed (e.g. Free text, List selection) and additional information

### 5.1.1 Task List Header

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLKO | PLNNR | Task List Group | Task List Group and Group Counter uniquely identify the Task List | CHAR | 8 | M | Externally generated number by business unit defined guidlines |
| PLKO | PLNAL | Group Counter | Together with Task List Group, uniquely identifies the Task List | CHAR | 2 | M | Externally generated number by business unit defined guidlines |
| PLKO | KTEXT | Task List header description | Description of all tasks in the Task List | CHAR | 40 | M | Refer to Data Standard - General Configuration |
| PLKO | ARBPL | Work Centre | Organisational unit that has primary responsibility for all the activities described in a Task List. | CHAR | 8 | M | Table Selection |
| PLKO | WERKS | Maintenance Planning Plant | A Plant in which maintenance tasks are planned and prepared. | CHAR | 4 | M | See Header Assembly in the attributes section of this document. |
| PLKO | VERWE | Task List usage | Key specifying the areas in which the Task List can be used (for example, in Production or Plant Maintenance). | CHAR | 3 | M | Usage '4' represents Plant Maintenance (General) Task Lists |
| PLKO | VAGRP | Responsible planner group/department | A group of employees responsible for planning and processing maintenance tasks in a Plant. | CHAR | 3 | M | Table Selection. |
| PLKO | STATU | Status | The status of the Task List determines in which other application areas the respective Task List may be used. | CHAR | 3 | M | Status '4' – Released General will be used as soon as the Task List is available for use. |

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLKO | STRAT | Maintenance strategy | A rule for the sequence of planned maintenance and inspection tasks. | CHAR | 6 | M | Mandatory for all Task Lists associated with a maintenance item. Those Task Lists not associated with a maintenance item shall be permitted to have no value. |
| PLKO | ANLZU | System Condition | The system condition assigned to an operation determines, for example, whether the system must be<br>• in operation<br>• not in operation during execution. | CHAR | 1 | M | 0 – Not in Operation<br>1 – In Operation |
| PLKO | ISTRU | Assembly | Link to Construction Type on the Functional Location or Equipment. Also controls BOM selection for General Task Lists. | CHAR | 18 | M | See Header Assembly in the attributes section of this document. |
| PLKO | STTAG | Key Date | Date from which Task List is valid. | CHAR | 10 | M | All Task Lists created as part of the initial load will use the load date, otherwise use the current date. |
| PLKO | AWERK | Work Centre Plant | Maintenance Plant at which the Work Centre resides. | CHAR | 4 | M | Table Selection. |
| PLKO | TL_EXTID | External ID | Legacy number for Task List | CHAR | 20 | O | May be used when transferring data from a legacy system as a validation of the load. This will be the Legacy system number. |

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| | | | | | | | This ID can also be used to link to other important Business information, i.e. BSAFE Critical Control No. |
| PLKO | DELKZ | Delete flag | Indicator used to specify that the Task List will be deleted with a deletion program during the next archiving run.<br><br>You can reset the deletion flag any time before the next archiving run. | CHAR | 1 | O | Check box |

### 5.1.2 Task List operation

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLPO | VORNR | Operation/Activity Number | External number representing the sequence in which each Task List operation is displayed. The default scheduling of FS will follow the sequence in which the operations are defined. | CHAR | 4 | M | Use default numbering sequence of increments of 10. For example 0010, 0020, 0030 etc. |
| PLPO | ARBPL | (Resource) Work Centre | Organizational unit that defines where and by whom an operation is performed. | CHAR | 8 | M | Table selection.<br><br>Represents the work group that will perform the maintenance task. |
| PLPO | STEUS | Control key | Designates either internal labour or external service | CHAR | 4 | M | PM01 – Plant Maintenance – Internal<br><br>PM02 – Plant Maintenance – External – Subcontract |

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| | | | | | | | PM03 – Plant Maintenance – External (Services)<br><br>PM04 – Plant Maintenance – Internal (Service) – currently not used |
| PLPO | WERKS | Plant | Maintenance Plant to which the work group belongs. | CHAR | 4 | M | Table selection. Selected in conjunction with the resource work centre. |
| PLPO | LTXA1 | Operation short text | Description of the activities to be performed. | CHAR | 40 | M | Refer to Data Standard - General Configuration |
| PLPO | PREIS | Net Price in Purchasing Info Record | Price arrived at after taking all discounts and surcharges into account. | CHAR | 14 | I | Net Price will be determined automatically by summing up the service line items. For External Services using PM03 control key |
| PLPO | WAERS | Currency Key | Determines the currency in which the item or service will be procured. | CHAR | 5 | I | Currency will be determined automatically. For External Services using PM03 control key |
| PLPO | SAKTO | Cost Element | Classification of the organization's valuated consumption of production factors within a controlling area. | CHAR | 10 | C | Table selection. If PM03 control key, enter cost element if known |
| PLPO | EKORG | Purchasing Organization | | CHAR | 4 | C | If PM03 control key, purchasing organisation must be filled |
| PLPO | EKGRP | Purchasing group for external processing | | CHAR | 3 | C | If PM03 control key, purchasing group must be filled |
| PLPO | MATKL | Material Group | | CHAR | 9 | C | If PM03 control key, material group must be filled. |

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLPO | DAUNO | Normal Operation Duration | | CHAR | 7 | C | For PM01 and PM04 control keys only.<br><br>If work is calculated from duration (INDET = 2), a value must be entered.<br><br>If duration is calculated manually (INDET = 0), a value must be entered.<br><br>(Default is to calculate Work from Duration.) |
| PLPO | DAUNE | Normal duration/unit | Unit in which the normal duration of the activity is expressed. | CHAR | 3 | C | Normal duration is calculated in hours. |
| PLPO | ARBEI | Operation Work | Amount of work involved in performing the activity. | CHAR | 9 | C | For PM01 and PM04 control keys only. |
| PLPO | ARBEH | Unit for work | Unit in which the work effort of the activity is expressed. | CHAR | 3 | C | Entered in all cases. Normal work is calculated in hours. |
| PLPO | ANZZL | No. of Required Capacity | Number of the capacities required of the capacity category to carry out the operation. | CHAR | 3 | C | For PM01 and PM04 control keys only. |
| PLPO | INDET | Key for calculation | Calculation key for duration, work or number of required capacities in the activity. | CHAR | 1 | C | For PM01 and PM04 control keys only. Default for this is 2, but enter<br><br>0: Maintain manually<br><br>1: Calculate duration<br><br>2: Calculate work |

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLPO | LARNT | Activity Type | Activity types describe the activity produced by a cost centre and are measured in units of time or quantity. | CHAR | 6 | M | Use default value from work centre unless another activity. |
| PLPO | ANLZU | System Condition | Key for the system condition of an operational system | CHAR | 1 | M | 0 – Not in Operation<br><br>1 – In Operation |
| PLPO | AUFKT | Execution Factor | Number of times the processing of an operation or sub-operation is repeated during order processing. | CHAR | 3 | M | Always 1 |

### 5.1.3 Task List component

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLMZ | IDNRK | Material Number | | CHAR | 18 | O | If material components are required, they may be directly entered to the tasklist component |
| PLMZ | MENGE | Quantity | | CHAR | 17 | C | Quantity of material component required |

### 5.1.4 Task List package

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLWP | PAKET | Maintenance Package | Describes the frequency at which a maintenance operation will be carried out. | CHAR | 2 | O | Will only be used if a maintenance strategy is used on the Task List header.<br><br>Packages selected must be valid for the strategy. |

### 5.1.5 Task List service

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| ESLL | SRVPOS | Activity Number | Specifies the number of the service master record that is a repository for the descriptions of all services that a firm frequently procures. | CHAR | 18 | M | Table Selection (this is automatically populated) |
| ESLL | EXTROW | External row number | Number that uniquely identifies a line within a set of service specifications. | CHAR | 10 | M | Use default numbering in increments of 10 (this is automatically populated) |
| ESLL | EXTSRVNO | Vendor's Service Number ('Service Number' in MDG) | Code assigned to the service by the vendor/supplier/subcontractor. | CHAR | 18 | O | |
| ESLL | BRTWR | Gross Price | Price of the service (activity or work). | CURR | 11 | M | |
| ESLL | KTEXT1 | Short Text | Short description of the service (activity or work). | CHAR | 40 | M | |

| Table | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| ESLL | MATKL | Material Group | Key that you use to group together several materials or services with the same attributes, and to assign them to a particular material group. | CHAR | 9 | M | Table selection or default value from Service Master. |

### 5.1.6 Task List Operation Relationship

| Table / Structure | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLABD | VORNR | Operation number | | CHAR | 4 | M | Valid operation on the Task List that is not the operation for which relationships are being created. |
| PLABD | DAUER | Offset | You can maintain the time interval as:<br>• an absolute<br>• a percent based on the duration of the predecesor<br>• a percent based on the duration of the successor<br><br>The type of calculation used for the time interval is determined via the field time interval key in the relationship detail screen. | QUAN | 5/ 1 | O | |
| PLABD | ZEINH | Unit of Measure | | CHAR | 3 | C | If an offset has been included, then the Unit of Measure must also be populated.<br><br>Table Select: Unit of Measure that is a time dimension. |

| Table / Structure | Field | Field Name | Description | Data Type | Len | M/O/C/I | Field Validation Type |
|---|---|---|---|---|---|---|---|
| PLABD | AOBAR | Type of Relationship | The following types of relationships are defined in the system:<br>• FS relationship<br>• SS relationship<br>• FF relationship<br>• SF relationship | CHAR | 2 | M | Note: If the relationship between ALL operations in a Task List is FS, then relationships are NOT to be additionally defined as this is the default relationship. |

# 6 Stakeholder Signoff

| Stakeholder Name | Role | Contact | Stakeholder Sign-off |
|---|---|---|---|
| Lawrence Hlatshwayo | Regional Manager – Asset Management & SAP PM Business Process (AFR) | Lawrence.Hlatshwayo@glencore.co.za | |
| Anthony Green | Regional Manager – Asset Management & SAP PM Business Process (AU) | anthony.green@glencore.com.au | |
| Karl Nicolosi | Regional PM SME (AU) | karl.nicolosi@glencore.com.au | |
| Akeem Araoye | Regional Manager – Asset Management & SAP PM Business Process (NA) | Akeem.Araoye@glencore.ca | |
| Jean-Yves Beaulieu | Maintenance Systems Coordinator (NA) | Jean-Yves.Beaulieu@glencore.ca | |
| Yuri Yurac | Regional Manager – Asset Management & SAP PM Business Process (SA) | yuri.yurac@glencore.cl | |
| Erick Vicencio | Regional PM SME (SA) | Erick.Vicencio@glencore.cl | |
| Ghislain Bisson | Global SAP Business Process Owner | Ghislain.Bisson@glencore.ca | |
| Dino Moll | Senior Manager - Asset Management | Dino.Moll@glencore.com.au | |

**The Regional Team would like to acknowledge the efforts of the AM Network and Australian SAP PM Business Support Teams in the development of the Master Data Design Standards.**

Anthony Green
Regional Manager – Asset Management & SAP PM Business Process
Glencore Copper Operational Excellence
M: +61 438907225
anthony.green@glencore.com.au
160 Ann St, Brisbane Qld 4000