

Mass Spectrometry Data Analysis via Graph Machine Learning

Edwin Alvarez-Mamani^{1,2}, Deybis Paucar Pinto^{1, 2}, Florian Buettner³, Alfredo J. Ibañez¹, Madina Mansurova¹

¹Institute for Omics Sciences and Applied Biotechnology, Pontificia Universidad Católica del Perú

²Department of Informatics, Universidad Nacional de San Antonio Abad del Cusco

³German Cancer Research Center, Goethe University Frankfurt and German Cancer Consortium

June, 2026

Problem formulation

The mass spectrometry analysis includes two approach: **targeted** analysis and **untargeted** analysis.

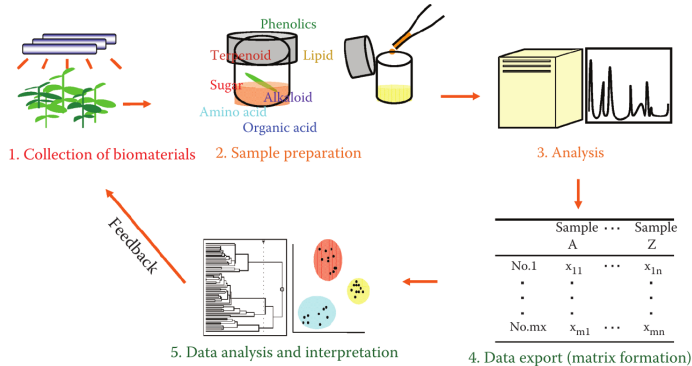


Figure 1: Metabolomics workflow.

Source: [1]

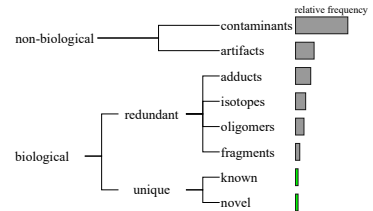


Figure 2: Untargeted composition.

Source: Adapted from [2]

Our objectives

Filter mass spectrometry data via graph machine learning models.

Graph Neural Network (GNN)

It is a function $f: (A, X) \rightarrow Z$ that maps each node $v \in V$ of a graph $G = (V, E)$ to a low-dimensional embedding $z_v \in \mathbb{R}^d$ ($d \ll |V|$).

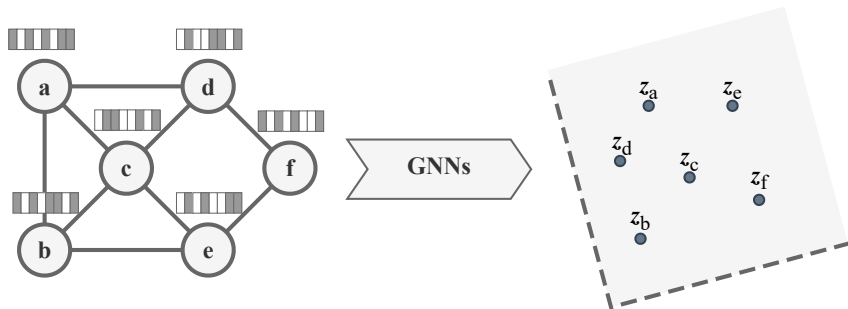


Figure 3: GNNs scheme.

Base GNN models

- VGAE: Variational graph auto-encoders [3]
- ARGVA: Adversarially regularized graph autoencoder for graph embedding [4]
- DGI: Deep graph infomax [5]
- LVGAE Simple and effective graph autoencoders with one-hop linear models [6]
- T-GAE: Transferable Graph Autoencoder for Network Alignment [7].

Mass spectrometry data

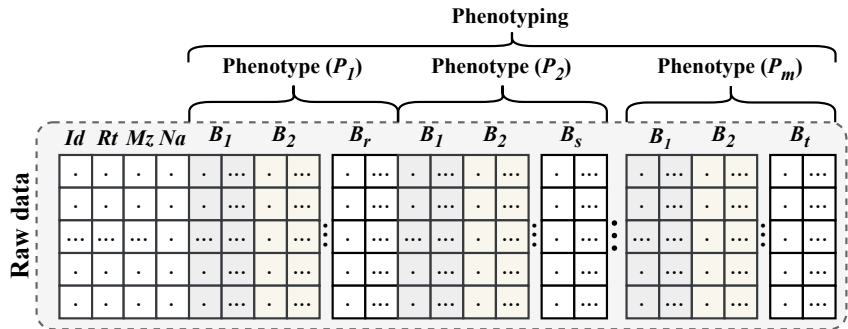


Figure 4: Dataset format.

Approach 1 (metabolomics changes)

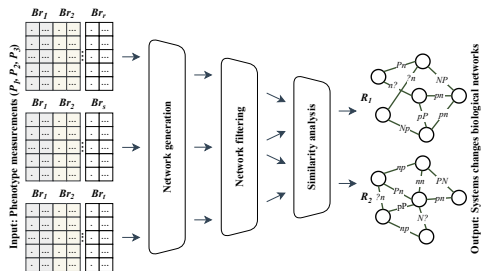


Figure 5: Our workflow.



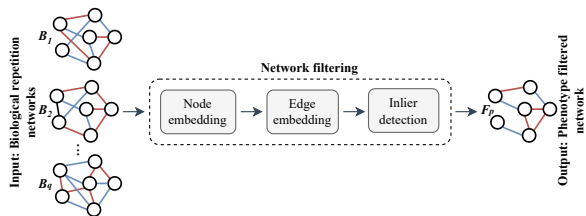


Figure 6: Network filtering.


Approach 1



(a) Node embeddings.



(b) Edge embeddings.



(c) Outliers.

Figure 7: Embeddings manipulation for *Warming-treated* phenotype on the Leaf.

Approach 2 (network alignment)



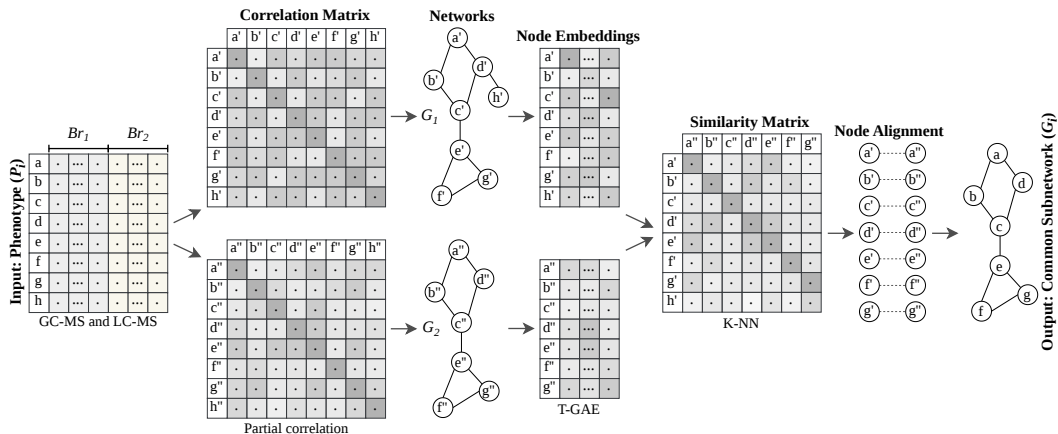


Figure 8: Our workflow.

Approach 2

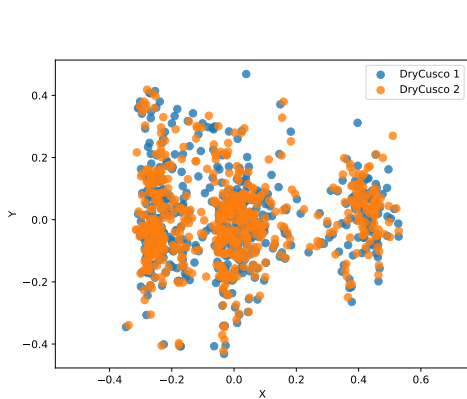

(a) For Cocoa (DryCusco).

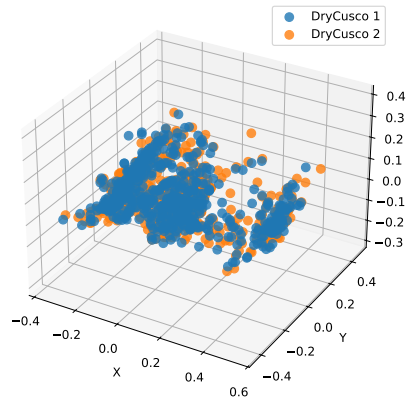

(b) For Cocoa (DryCusco).

Figure 9: Embeddings manipulation.

Datasets

These 5 datasets were used in the experiments.

- Mutant [8]
- Leaf [9]
- Mentos [10]
- Cacao (from ICOBA-PUCP)
- Synthetic

Approach 1

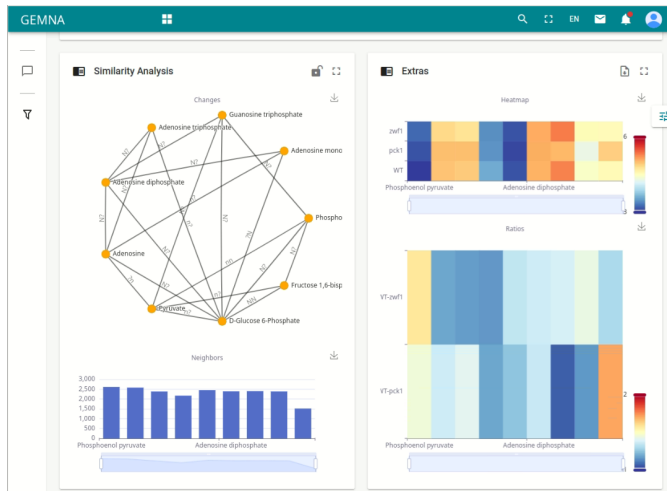


Figure 10: Visualization of analysis MS data.

Approach 2

Table 1: Node alignment (DryCusco).

ID 1	ID 2
0	93
2	2
4	57
5	5
7	93
...	...
542	542
551	551
556	509
557	550
558	530

Table 2: Node filtered **294/559** (DryCusco).

ID	Rt	Mz	Metabolite name
2	0.097	172.95681	Unknown
5	0.201	144.98254	Unknown
15	1.871	118.08675	Betaine
30	1.949	446.88860	Unknown
46	2.110	118.08671	Betaine
531	29.792	374.30350	Docosahexaenoic acid ethyl ester
532	29.794	352.32167	Unknown
537	29.838	454.42642	N-Hexacosanoylglycine
538	29.839	150.12816	2,6-Diethylaniline
542	29.860	398.23344	Drotaverine
551	29.954	150.12807	2,6-Diethylaniline

What is next?

- Perform exhaustive experiments.
- Model metabolomic networks as signed networks.
- Develop a web application.

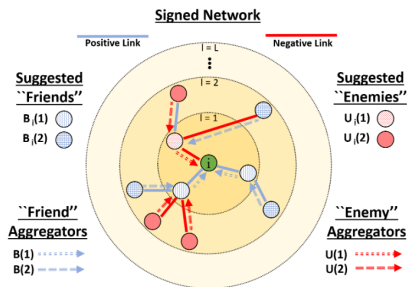


Figure 11: Signed graph convolutional network (SGCN) [11].

- [1] S.P. Putri and E. Fukusaki.
Mass Spectrometry-Based Metabolomics: A Practical Guide.
Taylor & Francis, 2014.
- [2] Miriam Sindelar and Gary J Patti.
Chemical discovery in the era of metabolomics.
Journal of the American Chemical Society, 142(20):9097–9105, 2020.
- [3] Thomas N Kipf and Max Welling.
Variational graph auto-encoders.
arXiv preprint arXiv:1611.07308, 2016.
- [4] Shirui Pan, Ruiqi Hu, Guodong Long, Jing Jiang, Lina Yao, and Chengqi Zhang.
Adversarially regularized graph autoencoder for graph embedding.
arXiv preprint arXiv:1802.04407, 2018.

- [5] Petar Velickovic, William Fedus, William L Hamilton, Pietro Liò, Yoshua Bengio, and R Devon Hjelm.
Deep graph infomax.
stat, 1050:21, 2018.
- [6] Guillaume Salha, Romain Hennequin, and Michalis Vazirgiannis.
Simple and effective graph autoencoders with one-hop linear models.
In Joint European conference on machine learning and knowledge discovery in databases, pages 319–334. Springer, 2020.
- [7] Jiashu He, Charilaos Kanatsoulis, and Alejandro Ribeiro.
T-gae: Transferable graph autoencoder for network alignment.
In The Third Learning on Graphs Conference, 2024.
- [8] Florian Buettner, Kyle Jay, Harry Wischnewski, Thomas Stadelmann, Shady Saad, Konstantins Jefimovs, Madina Mansurova, Juan Gerez, Claus M Azzalin, Reinhard Dechant, et al.
Non-targeted metabolomic approach reveals two distinct types of metabolic responses to telomerase dysfunction in *s. cerevisiae*.
Metabolomics, 13(5):1–10, 2017.

- [9] Marcia González-Teuber, Valeria Palma-Onetto, Carolina Aguirre, Alfredo J Ibáñez, and Axel Mithöfer.
Climate change-related warming-induced shifts in leaf chemical traits favor nutrition of the specialist herbivore *battus polydamas archidamas*.
Frontiers in Ecology and Evolution, 11:1152489, 2023.
- [10] Edwin Alvarez-Mamani, Florian Buettner, Cesar A Beltran-Castanon, and Alfredo J Ibanez.
Exploratory analysis of metabolic changes using mass spectrometry data and graph embeddings.
Scientific reports, 14(1):29570, 2024.
- [11] Tyler Derr, Yao Ma, and Jiliang Tang.
Signed graph convolutional networks.
In *2018 IEEE international conference on data mining (ICDM)*, pages 929–934. IEEE, 2018.

Thanks!
∞

edwin.alvarez@pucp.edu.pe
<https://github.com/win7>