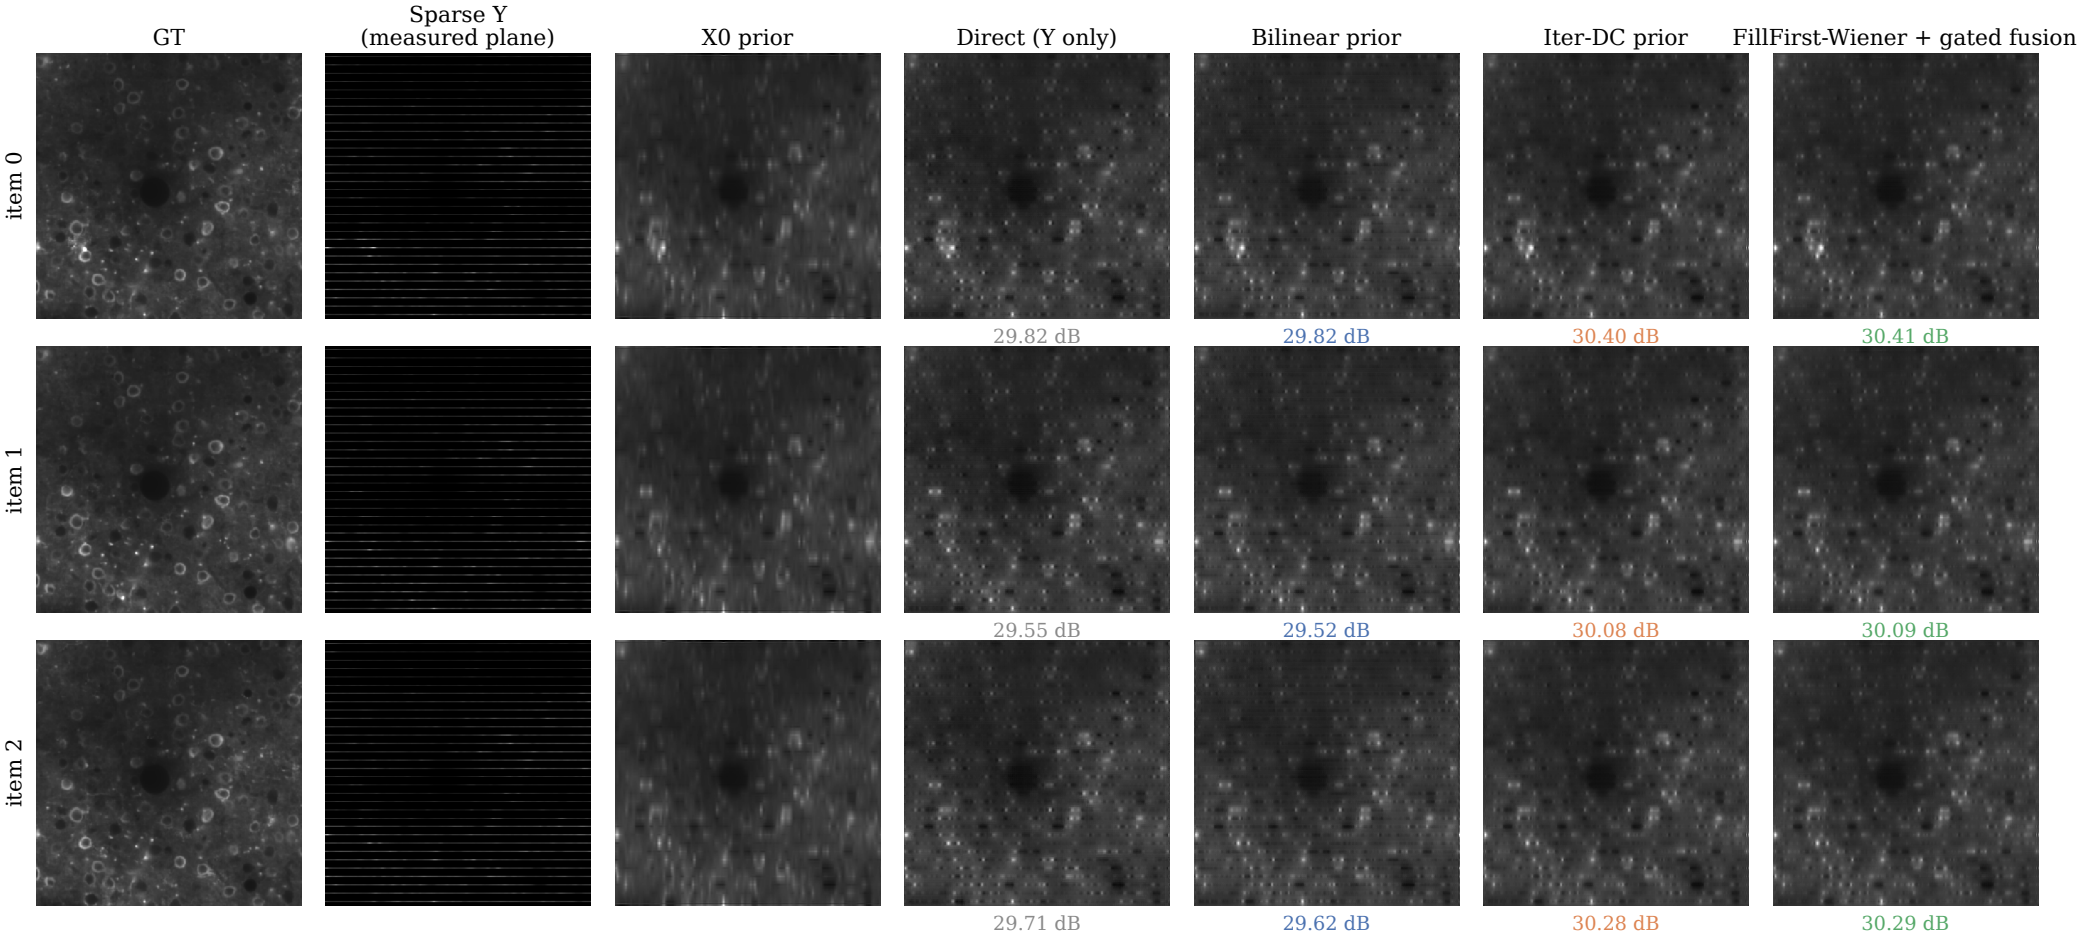

EXP-024 YZ (k_y,k_z)=(8,2) — query plane between measured planes (object u, val split)
GT
Sparse Y (measured plane)
X0 prior
Direct (Y only)
Bilinear prior
Iter-DC prior
FillFirst-Wiener + gated fusion
item 0
item 1
item 2
29.82 dB
29.82 dB
30.40 dB
30.41 dB
29.55 dB
29.52 dB
30.08 dB
30.09 dB
29.71 dB
29.62 dB
30.28 dB
30.29 dB
b1 = Direct / Y-only input (y, mask) | b2 = bilinear warm-start prior (y, mask, x0) | b4i = Iter-DC warm-start prior (y, mask, x0, C_s, U_p) | b4f = FillFirst-Wiener warm-start prior (y, mask, x0, C_s, U_p)