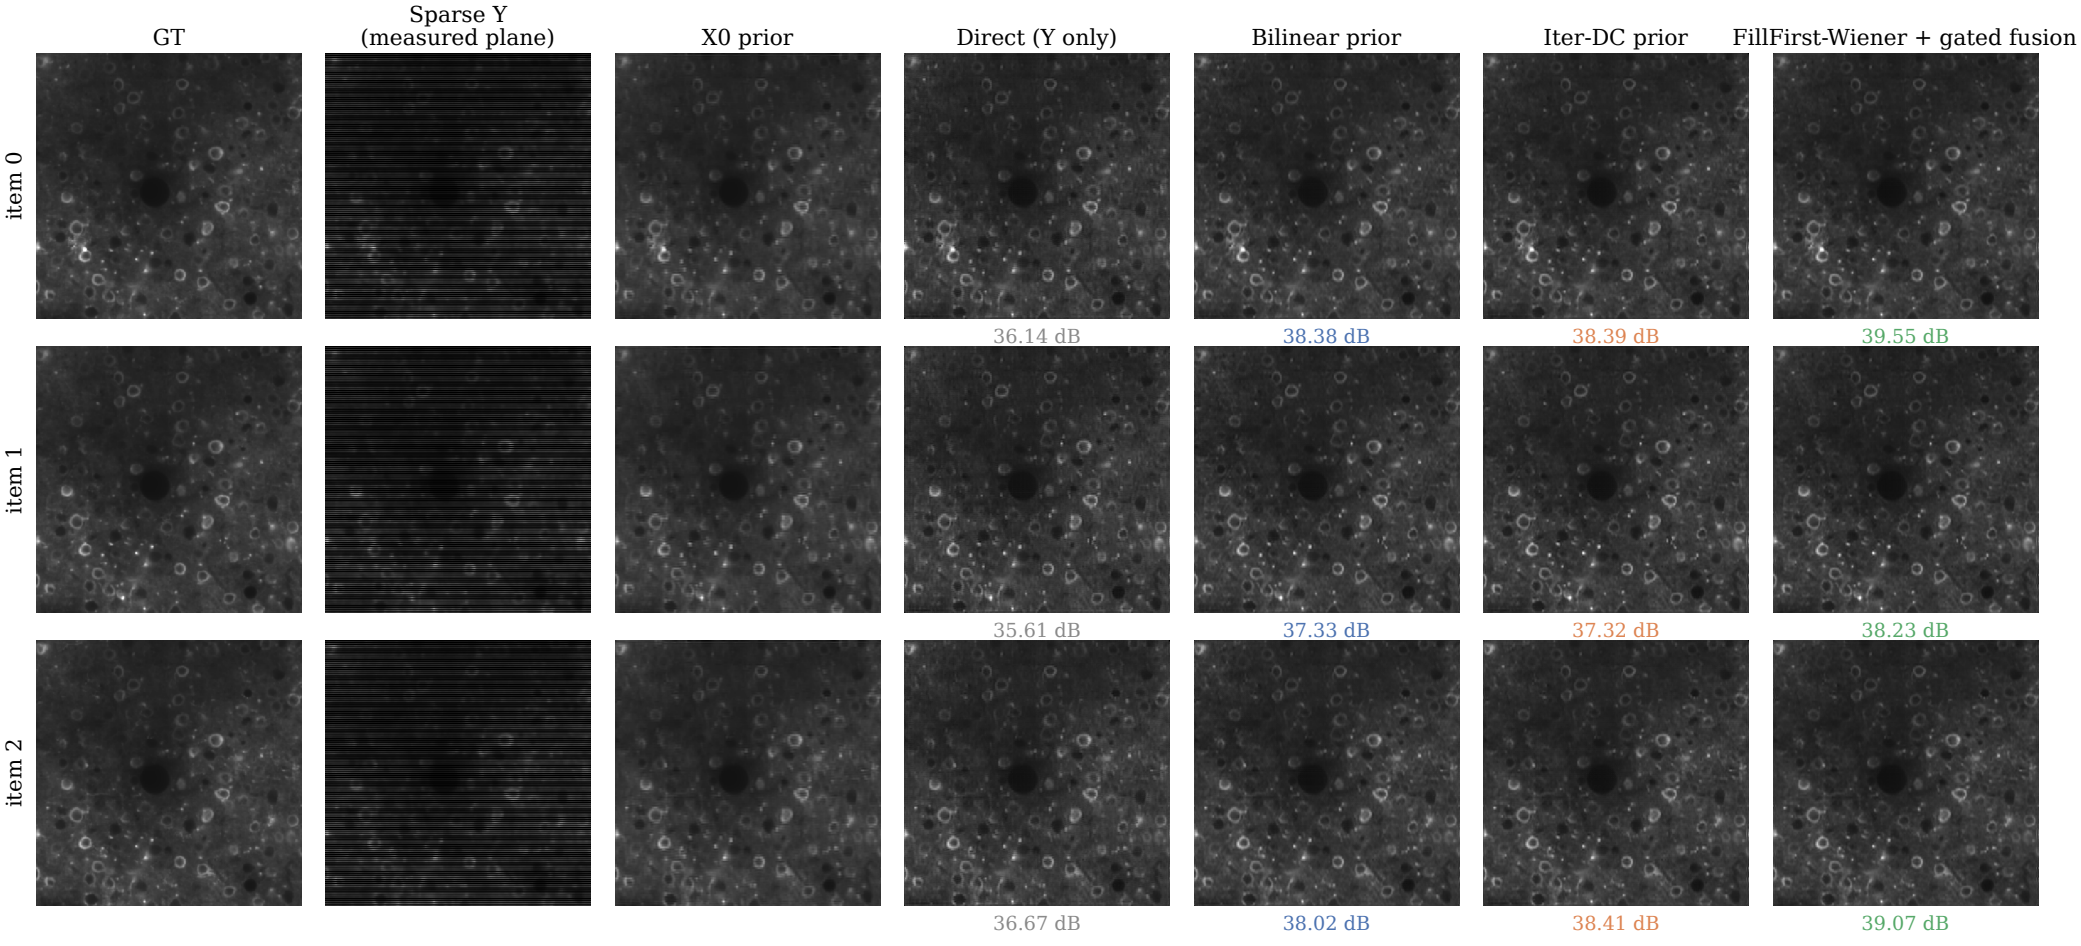

EXP-024 YZ (k_y,k_z)=(2,8) — query plane between measured planes (object u, val split)
GT
Sparse Y (measured plane)
X0 prior
Direct (Y only)
Bilinear prior
Iter-DC prior
FillFirst-Wiener + gated fusion
item 0
item 1
item 2
36.14 dB
38.38 dB
38.39 dB
39.55 dB
35.61 dB
37.33 dB
37.32 dB
38.23 dB
36.67 dB
38.02 dB
38.41 dB
39.07 dB
b1 = Direct / Y-only input (y, mask) | b2 = bilinear warm-start prior (y, mask, x0) | b4i = Iter-DC warm-start prior (y, mask, x0, C_s, U_p) | b4f = FillFirst-Wiener warm-start prior (y, mask, x0, C_s, U_p)