Xxl-job编译步骤


源码下载地址

https://github.com/xuxueli/xxl-job/releases/tag/2.4.0

自己选对应地址

下载后, 修改对应的配置文件

Vim xxl-job-admin/src/main/resources/application.properties

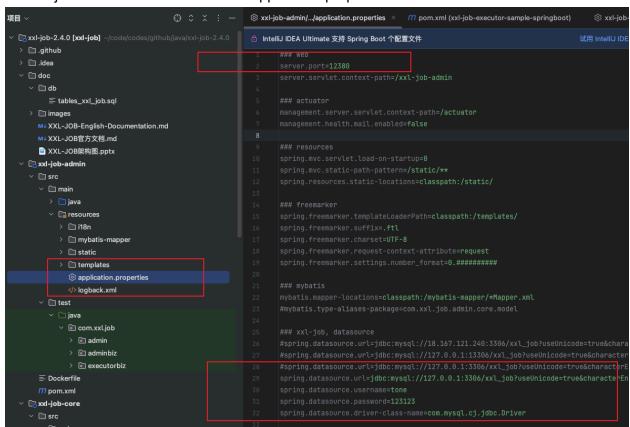

12380 是服务的启动端口 即对应现有的30808

需要配置mvn

Maven编译xxl-job

https://dlcdn.apache.org/maven/maven-3/3.9.6/binaries/apache-maven-3.9.6-bin.tar.gz tar -zxvf apache-maven-3.9.6-bin.tar.gz -C /usr/local/

cat>>/etc/profile<< 'EOF' export M2_HOME=/usr/local/apache-maven-3.9.10 export PATH=\$PATH:\$M2_HOME/bin EOF


root@debian:/home/hroot/works/xxljob/xxljob240# mvn clean install 如果你不需要 GPG 签名(比如只是本地构建测试),可以跳过签名步骤: mvn clean install -Dgpg.skip

cd /home/hroot/work232/codes/xxl-job-2.4.0/
mvn clean install

nohup java -jar /home/hroot/work232/codes/xxl-job-2.4.0/xxl-job-admin/target/xxl-job-admin-2.4.0.jar >/dev/null 2>&1 &cd /home/hroot/work232/codes/xxl-job-2.4.0/

nohup java -jar /home/hroot/work232/codes/xxl-job-2.4.0/xxl-job-admin/target/xxl-job-admin-2.4.0.jar >/dev/null 2>&1

数据库文件

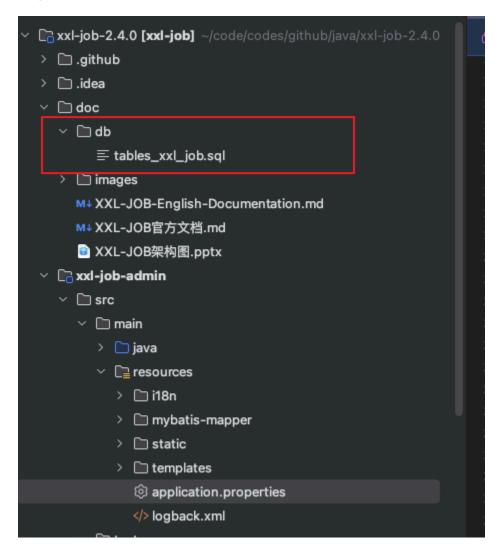

服务器go配置文件

XXL-JOB配置 xxlJob:

adminServer: http://172.31.46.123:30808/xxl-job-admin

#accessToken:

accessToken: CZ3e2i4yZ8fa2024ws

executorName: liveExecutor

executorlp: 127.0.0.1 executorPort: 9999

XXL-JOB数据库

xxlJobDB:

address: [172.31.46.123:3306]

username: xxljobuser password: 123456 database: xxl_job maxOpenConn: 1000 maxldleConn: 100 maxLifeTime: 60 logLevel: 4


slowThreshold: 500

adminServer 即为 xxl-job的运行网址

accessToken

此项 由 开发提供 其他项自由发挥

20250319补充

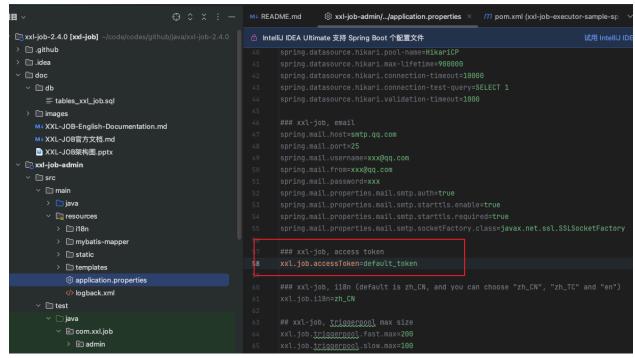

这里的accessToken和项目中的 accessToken一致

实际使用编译后的文件

cp /home/hroot/libs/xxl-job-3.1.1/xxl-job-admin/target/xxl-job-admin-3.1.1.jar .

cat /lib/systemd/system/coder-xxl-job39270.service [Unit]
Description=XXL-Job Admin Service
After=network.target

[Service]

Type=simple

ExecStart=/usr/bin/java -jar /home/hroot/libs/xxl-job-3.1.1/xxl-job-admin-3.1.1.jar

Restart=always

RestartSec=5

StandardOutput=null

StandardError=null

[Install]

WantedBy=multi-user.target