

COMMUNICATE DATA


quarto


{{ quarto }}

markdown

+

R

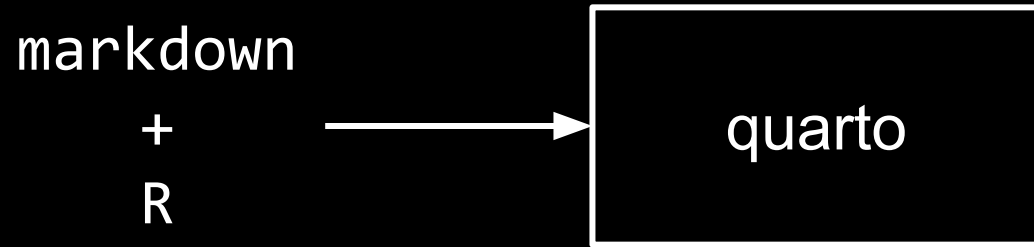

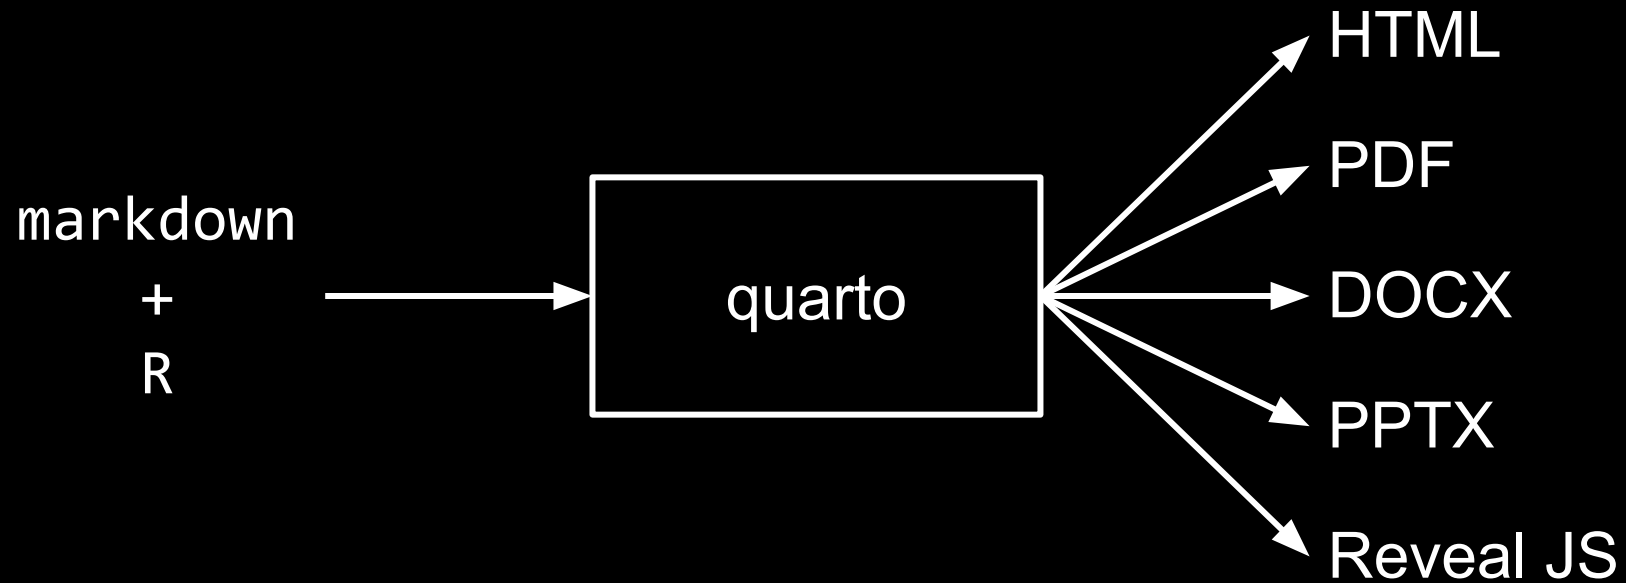

markdown

Heading 1

Heading 2

Heading 3

Heading 4

This is **italic**,

and this ****bold****

This is rendered
as `code`.

- List item A
- List item B
- List item C

1. First

2. Second

3. Third

`![Image title](path/to/image.png)`

```
! [Image title](path/to/image.png){width=200}
```

```
![Image title](path/to/image.png){#fig-myimage}
```

For more details see [@fig-myimage](#).

[Linked text](https://quarto.org)

...{r}

1 + 1

...

code options

```
` `` {r}
```

```
#| echo: false
```

```
1 + 1
```

```
` ``
```

```
` `` {r}
```

```
#| eval: false
```

```
x <- 1 + 1
```

```
` ``
```

```
` `` {r}
```

```
#| include: false
```

```
library(tidyverse)
```

```
` ``
```

```
` `` {r}
```

```
#| message: false
```

```
data <- read_csv("data.csv")
```

```
` ``
```

```
` `` {r}
```

```
#| warning: false
```

```
data <- read_csv("data.csv")
```

```
` ``
```

figures


```
` `` {r}  
#| label: fig-tweets-per-user  
#| fig-cap: "Tweets per User"  
tweets |>  
  ggplot() +  
  aes(x = screen_name) +  
  geom_bar()  
` ``
```

```
` `` {r}  
#| code-fold: true  
#| code-summary: "Show code"  
tweets |>  
  ggplot() +  
  aes(x = screen_name) +  
  geom_bar()  
` ``
```

cross references

```
```\{r}  
#| label: fig-tweets-per-user
#| fig-cap: "Tweets per User"
...
```\
```

In `@fig-tweets-per-user` you can see an overview of the number of tweets per user in the data set.

```
# Introduction {#sec-introduction}
```

```
...
```

```
# Analysis
```

```
As stated in @sec-introduction, the goal of this paper is  
to analyze the user behavior with regard to the content  
they tweet.
```

citation & bibliography

<https://quarto.org/docs/authoring/citations.html>

output formats

format: html

format:

html: default

pdf: default

format:

html:

code-fold: true

pdf: default