




wingfoil

**the ultra low latency data streaming
framework**

Jake Mitchell

August 2026

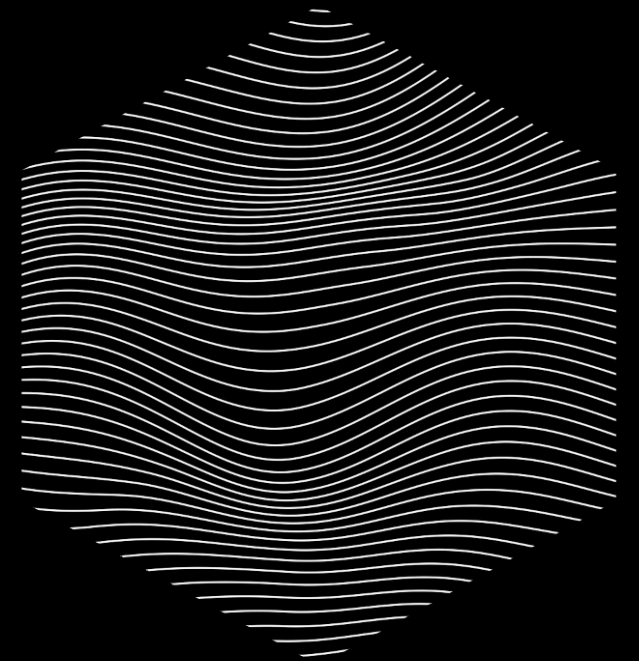

THE PROBLEM

Everything ticks at a different rate


market data



orders




fills

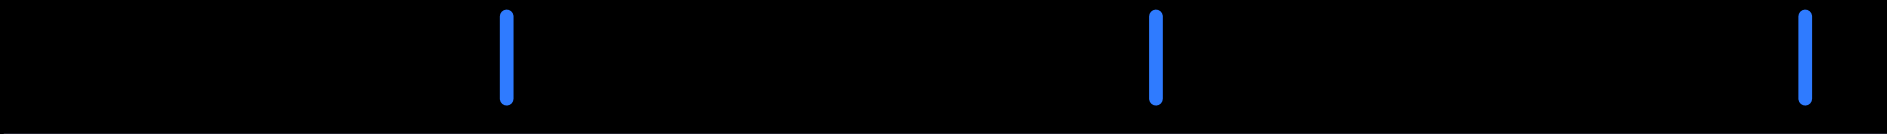

THE SOLUTION

Wire a graph of calculations

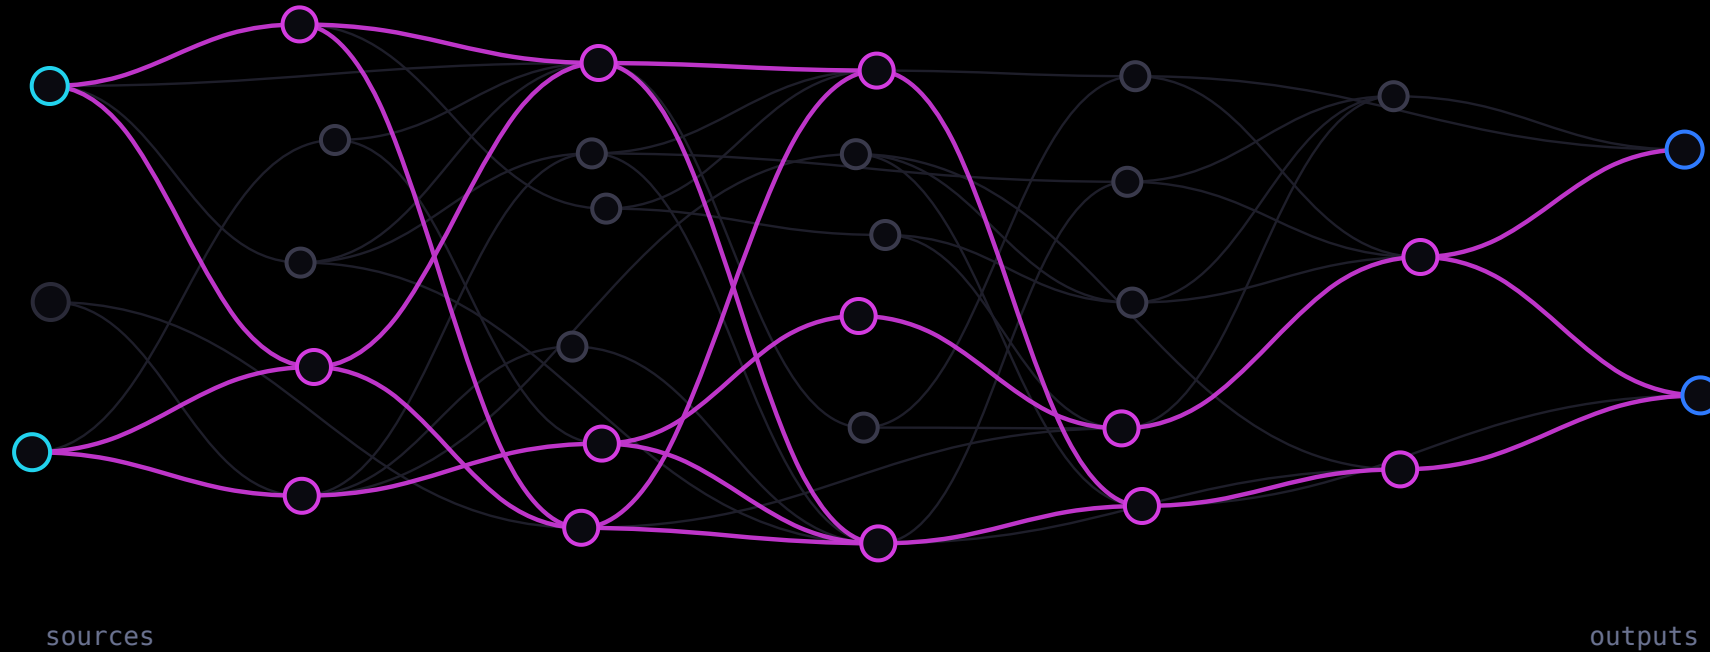

- The framework abstracts over **what needs to tick, and when**.
- **Split and recombine** freely — it stays one graph.
- **Modulate the frequency** — window, throttle, sample.
- And it has to be **efficient**.

Wire it, build it, run it

```
let g = GraphBuilder::new();

let printed = g
    .ticker(Duration::from_millis(100))
    .count()
    .map(|i| format!("tick {i}"))
    .for_each(|msg: &String| { println!("{}", msg); Ok(()) });

g.build().run(RunMode::HistoricalFrom(NanoTime::ZERO), RunFor::Cycles(5));
```

```
historical run (instant):
```


```
tick 1
tick 2
tick 3
tick 4
tick 5
```

```
cargo run -p wingfoil --example hello_graph
```

MOTIVATION, NOT THESIS

A real graph: NASDAQ limit orders → book → prices + fills

```
let (fills, prices) =  
  csv_read(&g, &src, get_time, true, None)?  
    .map(move |chunk: &Burst<Message>| {  
      process_orders(chunk, &book)  
    })  
    .split();  
  
prices.filter_none().distinct()  
  .csv_write(&prices_path)?;  
fills.csv_write(&fills_path)?;
```

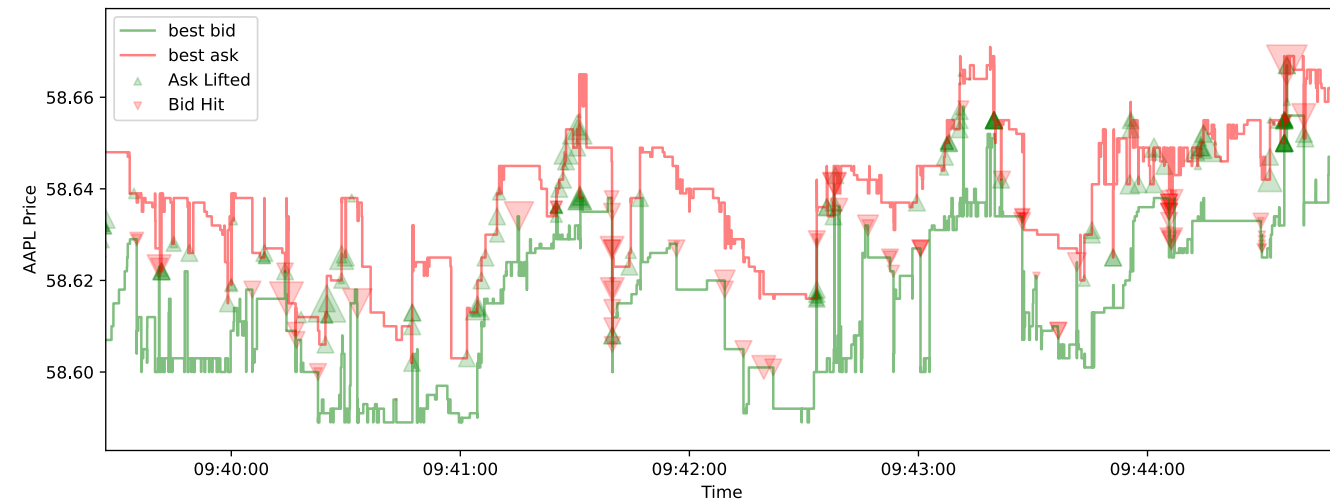

RUN MODES

Backtest it, then run it live

● ● ● RunMode::HistoricalFrom(NanoTime::ZERO) — the whole hour

```
$ cargo run --release --example top_of_book
```

0.021_311	bid	585.33	ask	585.91	spread	0.58	mid	585.62
0.197_502	bid	585.33	ask	585.92	spread	0.59	mid	585.62
0.197_540	bid	585.33	ask	585.93	spread	0.60	mid	585.63
0.201_332	bid	585.36	ask	585.93	spread	0.57	mid	585.64
0.267_498	bid	585.73	ask	585.74	spread	0.01	mid	585.74

● ● ● RunMode::RealTime — a three-second window of the same file · animation slowed 12×

```
$ cargo run --release --example top_of_book -- realtime
```

1,787,777,083.871_535	bid	585.33	ask	585.91	spread	0.58	mid	585.62
1,787,777,084.048_929	bid	585.33	ask	585.92	spread	0.59	mid	585.62
1,787,777,084.049_141	bid	585.33	ask	585.93	spread	0.60	mid	585.63
1,787,777,084.053_476	bid	585.36	ask	585.93	spread	0.57	mid	585.64
1,787,777,084.119_906	bid	585.73	ask	585.74	spread	0.01	mid	585.74

I/O

Sixteen adapters, three patterns

MESSAGING

Kafka · ZeroMQ · Fluvio · Redis · etcd

LOW-LATENCY TRANSPORT

Aeron · iceoryx2

TRADING

FIX

STORAGE & FILES

kdb+ · PostgreSQL · CSV · lines

WEB

WebSocket client · WebSocket server


TELEMETRY

Prometheus · OpenTelemetry

Pattern	Latency	Example
Busy loop	nanoseconds	iceoryx2
Worker thread	microseconds	ZeroMQ
Async	microseconds	kdb+

SURFACES

Three languages, one engine

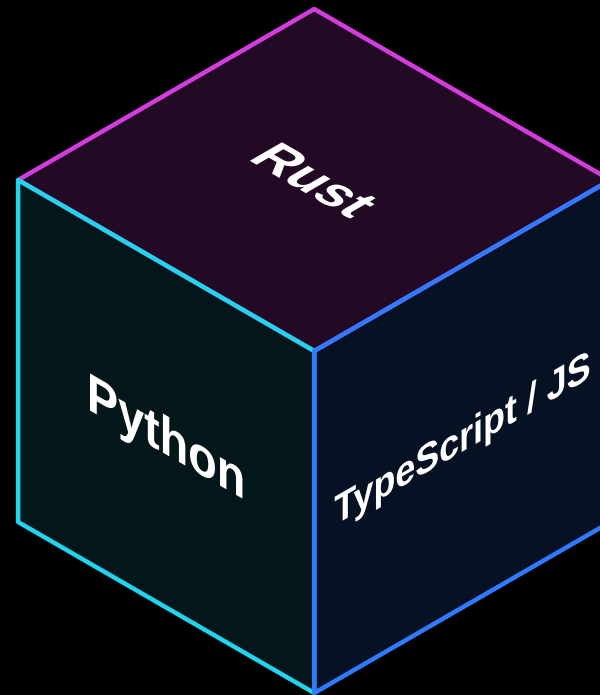

PART TWO

Nitro

Performance, the wall we hit chasing it,
and the pattern that got us through.

THE ENGINEERING PROBLEM

What we wanted Nitro to factor out

Per node, per cycle, interpreted

a `Box<dyn FnMut>` call

a trip through a value slot

a dirty-list walk to decide what runs

What we wanted instead

a direct call the optimiser can inline

a local variable

straight-line code, in topological order

THE FRONT DOOR

You write the wiring once, in plain Rust

```
wingfoil::nitro! {  
    fn odds_evens(g: &GraphBuilder) -> Stream<String> {  
        let count      = g.ticker(PERIOD).count();  
        let is_even     = count.map(|i| i.is_multiple_of(2));  
        let is_odd      = is_even.map(|b| !b);  
        let odd_str     = count.filter(&is_odd).map(|i| format!("{i} is odd"));  
        let even_str    = count.filter(&is_even).map(|i| format!("{i} is even"));  
        let labelled    = odd_str.merge(&even_str);  
        labelled  
    }  
}
```

...AND THIS IS WHAT IT BECOMES

One function. One local per node. No dyn.

```
let mut __k = Kernel::new(run_mode, run_for);

let mut __cfg_wf_anon_1    = PERIOD;
let mut __state_wf_anon_1 = __wf_op_ticker_seed_state(&__cfg_wf_anon_1);
let mut __v_wf_anon_1     = __wf_op_ticker_seed_value(&__cfg_wf_anon_1);
// ... one cfg / state / value local per node, 11 nodes ...

let mut __dirty = [false; 11usize];
while __k.begin_cycle(&mut __dirty) {
    let __t_wf_anon_1 = /* activation */ && {
        let mut __ctx = Ctx::new(&mut __k, 0usize);
        match __wf_op_ticker_cycle(&mut __cfg_wf_anon_1,
                                   &mut __state_wf_anon_1, (), &mut __ctx)
            .context("node 0 (wf_anon_1: ticker) cycle")? {
            Tick::Value(__val) => { __v_wf_anon_1 = __val; true }
            Tick::Silent(__val) => { __v_wf_anon_1 = __val; false }
            Tick::Quiet       => false,
        }
    };
};
// ... 10 more, emitted in topological order ...
}
```

abridged · elisions marked · all 1,730 lines committed verbatim beside the example:
github.com/wingfoil-io/wingfoil → [examples/core/dual_mode/expanded/](https://github.com/wingfoil-io/wingfoil/blob/main/examples/core/dual_mode/expanded/)

THE ONE DECISION EVERYTHING FOLLOWS FROM

Semantics became an associated function

```
trait Op {  
    type Cfg;           // construction-time config; closures live here  
    type State;         // engine-owned mutable state  
    type In<'a>;        // typed inputs, passed in per cycle  
    type Out;           // the produced value  
    const ACTIVATION: Activation;  
  
    fn cycle(cfg: &mut Self::Cfg, state: &mut Self::State,  
            input: Self::In<'_>, ctx: &mut Ctx<'_>) -> Result<Tick<Self::Out>>;  
}
```

Read what is *absent*. Nothing here says how state is stored, where inputs come from, or who calls it.

THE SAME NODE, BOTH WAYS

The node changed completely. The wiring barely moved.

legacy — the node owns everything

```
#[node(active = [upstream], output = value: f64)]
impl MutableNode for ScaleStream {
    fn cycle(&mut self, _state: &mut GraphState)
        -> Result<bool>
    {
        self.value =
            self.upstream.peek_value() * self.factor;
        Ok(true)
    }
}
```

owns: its upstream handles, its state, its output slot

```
let count = ticker(Duration::from_millis(10))
    .count();
count.run(RunMode::RealTime, RunFor::Cycles(100))?;
```

now — the engine owns everything

```
#[op(build = scale, fluent)]
impl Op for Scale {
    type Cfg    = f64;           // config
    type State  = ();           // engine-owned
    type In<'a> = (&'a f64,);    // passed in
    type Out    = f64;
    const ACTIVATION: Activation = Activation::NONE;

    fn cycle(cfg: &mut f64, _state: &mut (),
        input: (&f64,), _ctx: &mut Ctx<'_>)
        -> Result<Tick<f64>>
    {
        Ok(Tick::Value(input.0 * *cfg))
    }
}
```

owns: nothing — cfg, state and inputs all arrive as arguments

```
let g = GraphBuilder::new();
let count = g.ticker(Duration::from_millis(10))
    .count();
g.build().run(RunMode::RealTime, RunFor::Cycles(100))?;
```


RESULTS

The 10×10 graph: 16.6 ns → 0.31 ns per node cycle

10×10 fan-out	per node cycle		
legacy engine	16.55 ns		
interpreted	11.64 ns	1.4×	
compiled	0.31 ns	53×	
nested island	1.39 ns	12×	

103 nodes, every one ticking, 10 000 cycles — all four measured back to back in one run.

And the shape that separates execution models: branch and recombine, where **paths double every level**. Rx and async streams pay per path — measured slopes **2.01×** and **1.94×**. Every wingfoil tier stays flat.

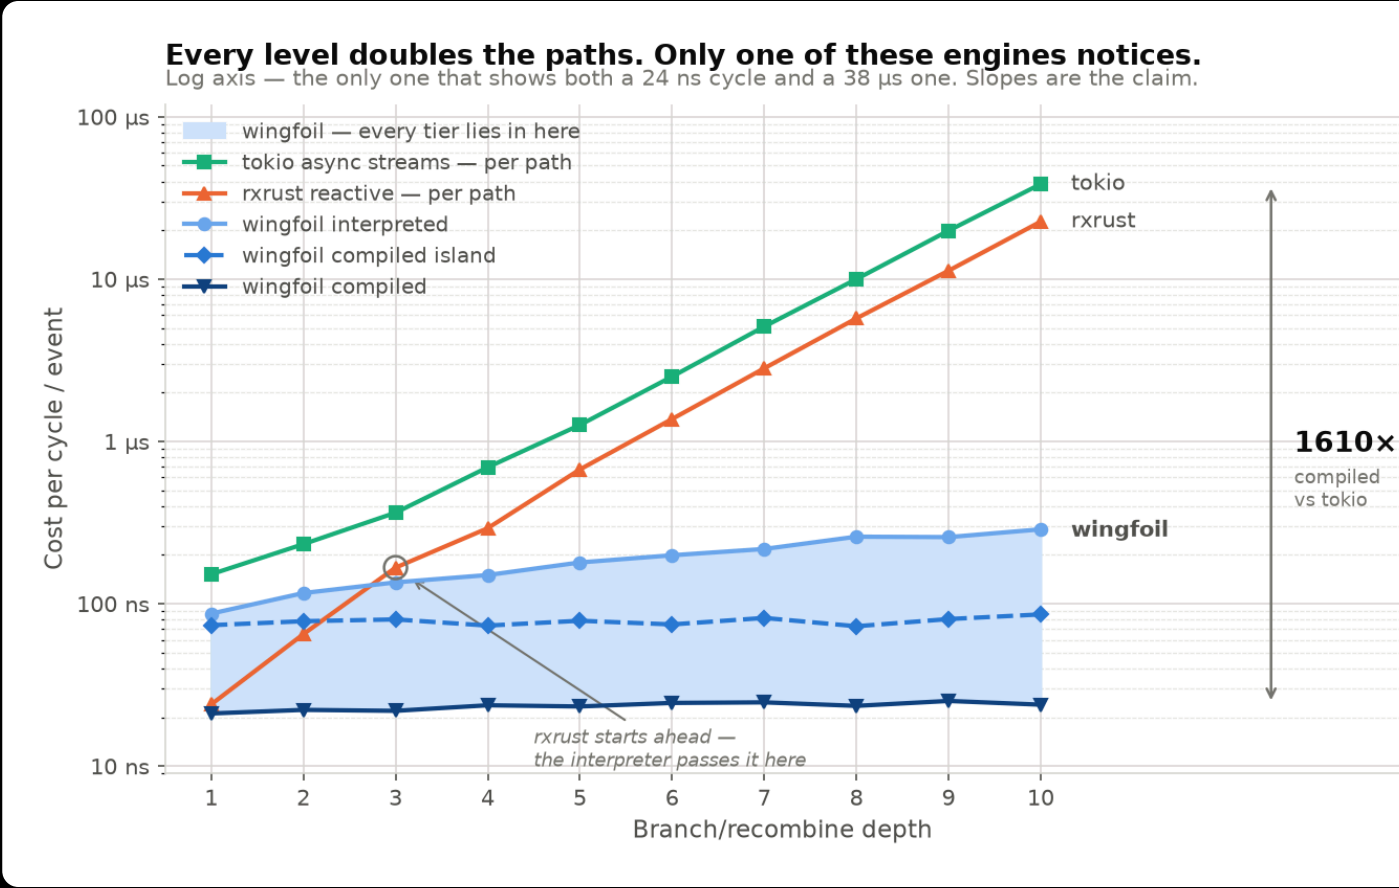

PART THREE

What's next

Down the stack, up the stack,
and where we could use help.

DOWN THE STACK

Closer to the metal

- 1 **Core pin** — the graph thread on an isolated core.
- 2 **Kernel bypass** — Onload, then ef_vi/DPDK. This is the one that buys the wire-to-trade number we currently decline to claim.
- 3 **Zero-allocation I/O** — no allocator on the hot path.
- 4 **Verilog / FPGA** — the graph as gateware, with the backtest as its testbench.

Same graph definition. Further down.

UP THE STACK

A platform, not just an engine

The missing layer

Simulated exchange · OMS / EMS · position
keeping · risk · trade booking · venue adapters

None of it is a new kind of thing

Position keeping is a *fold*. Risk is a *filter*. PnL is a *join*.
The simulated venue is just an *op*.

HELP WANTED

We'd love contributors

- Around **20 people** so far.
- **Good first issues** that really are — each names the file to change and code to copy.
- The bigger projects are separable, and each links to a design rather than a blank page.

Also genuinely useful

Where the docs lost you. The benchmark you don't believe. A project wingfoil would suit — or plainly wouldn't.

THANK YOU



If you work in financial services — or want to build a system to trade your own account — **please do reach out.**

github.com/wingfoil-io/wingfoil · Apache-2.0

```
cargo add wingfoil · pip install wingfoil
```

hello@wingfoil.io · [Discord](#) · [GitHub Discussions](#)

