



ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Engineering Center
B° Ventas 35
20305 Irún (Gipuzkoa)
Spain

Original Date: September 2012

Document: SMARTAIR SOAP API
rev22.docx

Project Number: 0

Sheet: Page 1 of 342

Last Update Date: 2023/06/02

TESA Smartair SOAP API

DISTRIBUTION: Per document TPDP00003 – Distribution level 0

ORIGINAL APPROVAL:

Prepared By:	(Signature and date)	Approved By:	(Signature and date)
Mikel Izagirre	<i>izagimik</i>	Julia Vila	<i>J. Vila 08/02/13</i>

REVISION APPROVAL RECORD:

Rev #	Rev Date (yyyy/mm/dd)	Revised By:	Approved By:	(Signature and date)
1				
22	2023/06/02	J.Vila	J. Vila	
3				
4				
5				
6				

(Revision history on second page)

This work and the information it contains are the property of TESA S.A. It is delivered to others on the express condition that it will be used only for, or on behalf of, TESA; that neither it nor the information it contains will be reproduced or disclosed, in whole or in part, without the prior written consent of TESA; and that on demand it and any copies will be promptly returned to TESA.



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 2 of 342

REVISION HISTORY:

Rev #	Rev Date (yyyy/mm/dd)	Revised By:	Changes
1	2013/01/23		-Added doorGetInfo method on DoorsWebService. -Updated doorGetAll results showing door state info -Added new error codes for door operations -Updated DoorsWebService WSDL and XSDHidden text - Changed the logos and corporate image of the template
2	2013/01/25		-Added userAuthenticate method on UsersWebService
3	2013/02/04		-Added activeAlarmsGetAll and activeAlarmsDeleteAll on EventsWebService
4	2013/11/13		-Changed reference from TesaSmartairPlatform to ServerPlatform (compatible with Smartair and Tesa Inhova) -Command toggle block replaced by block and unblock -Updated services for sw version 6.01: UsersWebService (create/delete/modify users), LockingPlanWebService (create/delete/modify timetables, changes, calendars, updatingModes). -Examples corrected.
5	2014/02/26		OpeningsGetAll: new parameter "fromOpeningId"
6	2015/06/04		Added getUserByCardId method on UsersWebService (version 6.03)
7	2015/09/03		- Added getDoorByCardId method on UsersWebService (version 6.03a) - Added DoorsDataWebService (sw version 6.04)
8	2015/10/09		- Added SystemConfigWebService with commonPin query and change methods



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 3 of 342

9	2016/09/27		- Correction. Missing 'externalId' field added to user data - Added updateRequired field on UserInfo - Added userGetByExternalId method on UsersWebService (included with software version 6.04.05)
10	2017/03/28		New WirelessMobileAppWebService added (sw version 6.06.01 or higher)
11	2017/06/07		Correction. openingsGetAll parameters and examples fixed
12	2017/08/24		WirelessMobileAppWebService adapted to support the new Openow BLE mobile app (MOBILE_APP_TYPE_BLE)
13	2017/10/24		- UsersGetAll extended with pagination parameters. - DoorsGetAll. New method added.
14	2018/04/18		- Recommendations for users synchronization
15	2018/05/02		- Recommendations for event querying - assignedCommonPins parameter added to DoorInfo
16	2019/02/15		- Updated examples for extended CommonPins
17	2019/09/25		- doorGetAllByLockdownArea and siteLockdown methods added (sw version 7.02.01)
18	2020/03/20		- mobileAppGetInfo: appType parameter addition - SOAP API feature must be enabled in site's license: explanation and error example - DoorType enumeration update - siteLockdown. New method added. - GetVersion. New method added on SystemConfigWebService (sw version 7.02.01)
19	2020/10/07		- New EncoderWebService added (sw version 7.03)
20	2021/05/12		- New GuestsWebService added (sw version 7.04) - userCancelCard method added
21	2022/07/11		- UID data added in (Pre)Checkin/Copy operation results - New PCToLock service added (sw version 8.00)

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 4 of 342
---	--

22	2023/04/18		- EncoderZero support - New OperatorsWebService service added - Multiple precheckin support added (sw version 8.01.00)
----	------------	--	---

Table of Contents

1	SCOPE	7
2	OVERVIEW	8
2.1	High level diagram	8
2.2	Common request parameters: Authentication parameters	8
2.3	Common response format	8
3	API REFERENCE	11
3.1	DoorsWebService	11
3.1.1	Data type information for DoorsWebService	11
3.1.2	doorClose	13
3.1.3	doorDiagnostic	14
3.1.4	doorGetAll	15
3.1.5	doorGetInfo	17
3.1.6	doorOpen	19
3.1.7	doorPassage	20
3.1.8	doorRetrieveOpenings	21
3.1.9	doorSetTime	23
3.1.10	doorBlock	24
3.1.11	doorUnblock	25
3.1.12	doorUpdate	26
3.1.13	doorGetAllByLockdownAreas	27
3.1.14	siteLockdown	30
3.2	UsersWebService	31
3.2.1	Data type information for UsersWebService	31
3.2.1	userAdd	32
3.2.2	userAuthenticate	35
3.2.3	userCancelCard	37
3.2.1	userDelete	38
3.2.2	usersGetAll	39
3.2.3	userGetById	42
3.2.4	userGetByName	47
3.2.5	userGetByCardId	51
3.2.6	userGetByExternalId	55
3.2.7	userModify	59
3.3	DoorsDataWebService	60
3.3.1	Data type information for DoorsDataWebService	60
3.3.2	doorAdd	64
3.3.3	doorDelete	65
3.3.4	doorsGetAll	66
3.3.5	doorGetById	70
3.3.1	doorGetByName	73

3.3.2	doorModify	77
3.4	EventsWebService	78
3.4.1	Data type information for EventsWebService	78
3.4.2	openingsGetAll	81
3.4.3	activeAlarmsGetAll	83
3.4.4	activeAlarmsDeleteAll	85
3.5	LockingPlanWebService	86
3.5.1	Data type information for LockingPlanWebService	86
3.5.2	lockingPlanGet	90
3.5.3	lockingPlanModify	92
3.5.4	timetableGet	93
3.5.5	timetableModify	95
3.5.6	timetableDelete	97
3.5.7	changeGet	98
3.5.8	changeAdd	100
3.5.9	changeModify	102
3.5.10	changeDelete	103
3.5.11	updatingModeGet	105
3.5.12	updatingModeAdd	107
3.5.13	updatingModeModify	108
3.5.14	updatingModeDelete	110
3.5.15	calendarGet	111
3.5.16	calendarAdd	112
3.5.17	calendarChangeName	113
3.5.18	calendarAddHolidays	114
3.5.19	calendarDeleteHolidays	115
3.5.20	calendarDelete	116
3.6	SystemConfigWebService	117
3.6.1	Data type information for SystemConfigWebService	117
3.6.1	getVersion	118
3.6.2	commonPinsGet	119
3.6.3	commonPinsSet	120
3.7	WirelessMobileAppWebService	121
3.7.1	Data type information for WirelessMobileAppService	121
3.7.2	mobileAppGetInfo	121
3.7.3	mobileAppWrite	123
3.7.4	mobileAppRevoke	124
3.8	EncoderWebService	126
3.8.1	Data type information for EncoderWebService	126
3.8.2	encoderGetByNameOrIP	126
3.8.3	read	128
3.8.4	encode	131
3.8.5	delete	134
3.9	GuestsWebService	135
3.9.1	Data type information for GuestsWebService	135
3.9.2	checkin	137
3.9.3	checkinCopy	141
3.9.1	checkinModifyDate	144
3.9.2	checkinModifyGrants	145
3.9.3	checkout	147
3.9.4	precheckin	148
3.9.1	precheckinCopy	150
3.9.2	preckeckinModifyDate	153
3.9.1	preckeckinModifyGrants	154



3.9.2	precheckinCancel	155
3.9.3	findAllRooms	156
3.9.4	findAllOccupiedRooms	160
3.10	PCToLockWebService	163
3.10.1	Data type information for PCToLockWebService	163
3.10.1	pcToLockUploadFile	164
3.10.2	pcToLockDownloadFile	166
3.11	OperatorsWebService	169
3.11.1	Data type information for OperatorsWebService	169
3.11.1	operatorAdd	170
3.11.1	operatorGetById	171
3.11.2	operatorModify	172
3.11.3	operatorGetAll	173
3.11.4	operatorDelete	174
DESCRIPTORS AND SCHEMAS		176
DoorsWebService WSDL		176
DoorsWebService XSD		183
UsersWebService WSDL		196
UsersWebService XSD		199
DoorsDataWebService WSDL		211
DoorsDataWebService XSD		215
EventsWebService WSDL		226
EventsWebService XSD		227
LockingPlanWebService WSDL		238
LockingPlanWebService XSD		247
SystemConfigWebService WSDL		258
SystemConfigWebService XSD		260
WirelessMobileAppWebService WSDL		264
WirelessMobileAppWebService XSD		267
EncoderWebService WSDL		271
EncoderWebService XSD		276
GuestsWebService WSDL		286
GuestsWebService XSD		293
PCToLockFileWebService WSDL		307
PCToLockFileWebService XSD		310
OperatorsWebService WSDL		317
OperatorsWebService XSD		320
4	RECOMMENDATIONS FOR SYNCHRONIZATION	329
4.1	USERS synchronization	329
4.2	Example for users synchronization	329
4.3	EVENTS querying and synchronization	340
4.4	Example for events synchronization	340



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 7 of 342

1 SCOPE


The purpose of this document is to describe the SOAP interface of the Smartair Server Platform System and to show some sample example requests and responses for common operations.

2 OVERVIEW

The Smartair SOAP API provides programmatic access to Smartair Access Control System features and services using an API that is based on open standards such as Simple Object Access Protocol (SOAP), Web Services Definition Language (WSDL), XML Schema Definition language (XSD) and HTTP over SSL/TLS.

These standards are supported by a wide range of development tools on a variety of platforms and allow integrators to easily and securely connect their systems to the Smartair Access Control System.

2.1 High level diagram

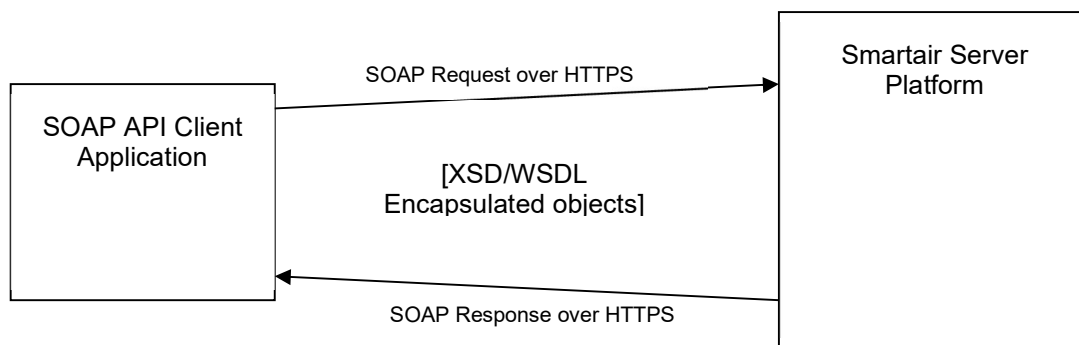

2.2 Common request parameters: Authentication parameters

Every operation described in this document contains the following common parameters that are needed for authentication purposes.

Parameter	Description	Mandatory
operatorName	Operator name	YES
operatorPassword	Operator password	YES

2.3 Common response format

All responses are returned in an `operationResult` object in which the `type` property shows whether the operation was carried out successfully (`RESULT_OK`) or not (`RESULT_ERROR`).

- `RESULT_OK` responses can include optional operation data and `warningType` and `warningCode` information.
- `RESULT_ERROR` responses always return the `errorType` and `errorCode` information and can include an optional `errorDetail` information.

Please see Appendix A for detailed reference and XSD schemas of the object types.



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 9 of 342

Type	warningType	warningCode
RESULT_OK		
RESULT_OK	WARNING_RF_LOW_SIGNAL	600
RESULT_OK	WARNING_DOOR_WAS_ALREADY_OPEN	601

Type	errorType	errorCode
RESULT_ERROR	ERROR_SERVICE_AUTHENTICATION	500
RESULT_ERROR	ERROR_SERVICE_AUTHORIZATION	501
RESULT_ERROR	ERROR_OPERATION_TIMEOUT	502
RESULT_ERROR	ERROR_OPERATION_DOOR_UNKNOWN	503
RESULT_ERROR	ERROR_OPERATION_HUB_UNKNOWN	504
RESULT_ERROR	ERROR_OPERATION_DOOR_NOT_WIRELESS	505
RESULT_ERROR	ERROR_OPERATION_MODULE_NOT_CONFIGURED	506
RESULT_ERROR	ERROR_OPERATION_HUB_BUSY	507
RESULT_ERROR	ERROR_OPERATION_UNKNOWN_ERROR	508
RESULT_ERROR	ERROR_OPERATION_DOOR_NOT_INITIALIZED	509
RESULT_ERROR	ERROR_FORMAT_ERROR	510
RESULT_ERROR	ERROR_HUB_MODULE_LIST_FULL	C0
RESULT_ERROR	ERROR_HUB_MODULE_ALREADY_EXISTS	C1
RESULT_ERROR	ERROR_HUB_MODULE_LIST_EMPTY	C2
RESULT_ERROR	ERROR_HUB_MODULE_NOT_IN_LIST	C3
RESULT_ERROR	ERROR_COMMUNICATION_MODULE_LOCK	C4
RESULT_ERROR	ERROR_COMMUNICATION_NO_ANSWER	C5
RESULT_ERROR	ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP	C6
RESULT_ERROR	ERROR_COMMUNICATION_HUB_MODULE	C7
RESULT_ERROR	ERROR_COMMUNICATION_BAD_SYNTAX	C8
RESULT_ERROR	ERROR_COMMUNICATION_RF_1	CA
RESULT_ERROR	ERROR_COMMUNICATION_RF_2	CB
RESULT_ERROR	ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY	CC
RESULT_ERROR	ERROR_COMMUNICATION_RF_4	CD
RESULT_ERROR	ERROR_COMMUNICATION_RF_COLLISION	CE
RESULT_ERROR	ERROR_DOOR_WRONGINIT	EC
RESULT_ERROR	ERROR_DOOR_WRONGSYS	E1
RESULT_ERROR	ERROR_DOOR_WRONGDOOR	E8
RESULT_ERROR	ERROR_DOOR_LOWBATT	EB
RESULT_ERROR	ERROR_DOOR_WRONGDIALOG	E2
RESULT_ERROR	ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN	600
RESULT_ERROR	ERROR_NOT_AUTHORIZED_OUT_OF_TIME	601
RESULT_ERROR	ERROR_NOT_AUTHORIZED_MISSING_GRANT	602
RESULT_ERROR	ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED	603
RESULT_ERROR	ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE	604
RESULT_ERROR	ERROR_BAD_PARAMETERS	700
RESULT_ERROR	ERROR_DATA_ERROR	800

In case of having a RESULT_OK response, additional data can be returned depending on the operation (doors list, opening information, etc...). RESULT_OK responses can also include an optional warning information field.



When having an **RESULT_ERROR** response, **errorType** and **errorCode** are returned. Additional **errorDetail** information can be included.

Example RESULT_OK response:

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorOpenResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorOpenResponse>
  </S:Body>
</S:Envelope>
```

Example RESULT_ERROR response:

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorOpenResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>503</errorCode>
        <errorType>ERROR_OPERATION_DOOR_UNKNOWN</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:doorOpenResponse>
  </S:Body>
</S:Envelope>
```

In order to use the SOAP API, sites must have this feature enabled in their site's licence. Otherwise, all method calls will return an **ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE** error.

Example RESULT_ERROR response:

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorOpenResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>604</errorCode>
        <errorType>ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:doorOpenResponse>
  </S:Body>
</S:Envelope>
```



3 API Reference

3.1 DoorsWebService

This service contains methods that perform operations related with functional aspects of wireless doors such as opening, closing, blocking, reading their openings trail, etc.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	WirelessDoorsServicePortBinding
Location	https://host:8181/ServerPlatform/DoorsWebService
Descriptor	https://host:8181/ServerPlatform/DoorsWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.1.1 Data type information for DoorsWebService

The main datatypes used by this service are the `rfModuleInfo` and `wirelessDoorInfo`. Please see XSD reference for detailed description of dataTypes.

- `rfModuleInfo`: Contains diagnostic information of the wireless communications module of a door

rfModuleInfo		
Field	SOAP Type	Description
doorName	String	Name of wireless door
hubName	String	Name of hub where the door is connected
macAddress	String	MAC address of wireless module
signal	Integer	Signal strength value from 0 to 100
status	RFStatusType enumeration	Wireless module internal status
	ALWAYS_AWAKE	
	SLEEP_AWAKE	
	ALWAYS_SLEEP	
version	String	Wireless module version
tSleep	Integer	Sleep time in seconds

- `wirelessDoor`: Contains complete information of a wireless door

wirelessDoor		
Field	SOAP Type	Description
doorId	Integer	Door Id
doorName	String	Door name
doorStateInfo	DoorStateInfo	See table below
doorVersion	String	Door firmware version
groupName	String	Door group name
hubIPAddress	String	IP address of hub where the door is connected
hubName	String	Name of hub where the door is connected

Document:
Document Title:SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 12 of 342

hubVersion	String	Version of hub where the door is connected				
rfMacAddress	String	Door wireless module MAC address				
rfSignal	Integer	Signal strength from 0 to 100				
rfState	<table><tr><td>RFStatusType enumeration</td></tr><tr><td>ALWAYS_AWAKE</td></tr><tr><td>SLEEP_AWAKE</td></tr><tr><td>ALWAYS_SLEEP</td></tr></table>	RFStatusType enumeration	ALWAYS_AWAKE	SLEEP_AWAKE	ALWAYS_SLEEP	Wireless module internal status
RFStatusType enumeration						
ALWAYS_AWAKE						
SLEEP_AWAKE						
ALWAYS_SLEEP						
rfVersion	String	Door wireless module firmware version				
updateRequired	Boolean	Indicates whether door needs updating or not				

doorStateInfo type										
Field	SOAP Type	Description								
batteryPercentage	Integer	Battery level from 0 to 100								
batteryStatus	<table><tr><td>BatteryStatusType enumeration</td></tr><tr><td>OK</td></tr><tr><td>LOW_BATTERIES</td></tr><tr><td>VERY LOW BATTERIES</td></tr></table>	BatteryStatusType enumeration	OK	LOW_BATTERIES	VERY LOW BATTERIES	Battery level as state				
BatteryStatusType enumeration										
OK										
LOW_BATTERIES										
VERY LOW BATTERIES										
cabinetState	<table><tr><td>CabinetStatusType enumeration</td></tr><tr><td>FREE</td></tr><tr><td>IN USE</td></tr></table>	CabinetStatusType enumeration	FREE	IN USE	Status info for cabinets					
CabinetStatusType enumeration										
FREE										
IN USE										
emergency mode	Boolean	Door emergency mode indicator								
	<table><tr><td>BlockModeType enumeration</td></tr><tr><td>BLOCKED</td></tr><tr><td>UNBLOCKED</td></tr></table>	BlockModeType enumeration	BLOCKED	UNBLOCKED	Door blocking mode					
BlockModeType enumeration										
BLOCKED										
UNBLOCKED										
physicalState	<table><tr><td>PhysicalStateType enumeration</td></tr><tr><td>DOOR_CLOSED</td></tr><tr><td>INTRUSION</td></tr><tr><td>DOOR_LEFT_OPEN</td></tr><tr><td>DOOR_CLOSED_NOT_SECURED</td></tr></table>	PhysicalStateType enumeration	DOOR_CLOSED	INTRUSION	DOOR_LEFT_OPEN	DOOR_CLOSED_NOT_SECURED	Door physical state			
PhysicalStateType enumeration										
DOOR_CLOSED										
INTRUSION										
DOOR_LEFT_OPEN										
DOOR_CLOSED_NOT_SECURED										
privacy	Boolean	Privacy indicator								
state	<table><tr><td>StateType enumeration</td></tr><tr><td>CARD</td></tr><tr><td>PASSAGE</td></tr><tr><td>FIRST_USER</td></tr><tr><td>KEYPAD</td></tr><tr><td>CARD_PIN</td></tr><tr><td>DUAL_USER</td></tr><tr><td>PIN_CARD</td></tr></table>	StateType enumeration	CARD	PASSAGE	FIRST_USER	KEYPAD	CARD_PIN	DUAL_USER	PIN_CARD	Door state information
StateType enumeration										
CARD										
PASSAGE										
FIRST_USER										
KEYPAD										
CARD_PIN										
DUAL_USER										
PIN_CARD										

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 13 of 342
---	---

lockdownRequest type		
Field	SOAP Type	Description
mode	LockdownMode Enumeration	Lockdown mode options
	LOCKDOWN OFF	
	LOCKDOWN OPEN	
	LOCKDOWN CLOSE	
	LOCKDOWN BLOCK	
areaId	Integer	Lockdown area identifiers

Please see XSD reference for detailed information on dataTypes.

3.1.2 doorClose

Sends a close request to a Wireless door.

3.1.2.1 doorClose Request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	One of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:doorClose> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> <doorName>door1</doorName> </soap:doorClose> </soapenv:Body> </soapenv:Envelope></pre>

Example Request. Door identified by id
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:doorClose> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> <doorId>125</doorId> </soap:doorClose> </soapenv:Body> </soapenv:Envelope></pre>



3.1.2.2 doorClose Response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorCloseResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorCloseResponse>
  </S:Body>
</S:Envelope>
```

3.1.3 doorDiagnostic

Sends a door diagnostic request to a Wireless door.

3.1.3.1 doorDiagnostic request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	On of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorDiagnostic>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorDiagnostic>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorDiagnostic>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>125</doorId>
    </soap:doorDiagnostic>
  </soapenv:Body>
</soapenv:Envelope>
```



3.1.3.2 doorDiagnostic response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorDiagnosticResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResultRFDiagnostic>
        <type>RESULT_OK</type>
        <warningType>WARNING_RF_LOW_SIGNAL</warningType>
        <warningCode>601</warningCode>
        <rfModuleInfo>
          <macAddress>0.0.5.164</macAddress>
          <signal>48</signal>
          <status>SLEEP_AWAKE</status>
          <version>03.00</version>
          <tSleep>5</tSleep>
        </rfModuleInfo>
      </operationResultRFDiagnostic>
    </ns2:doorDiagnosticResponse>
  </S:Body>
</S:Envelope>
```

3.1.4 doorGetAll

Returns the list of wireless doors available on the system.

3.1.4.1 doorGetAll request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
    </soap:doorGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.4.2 doorGetAll response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResultAssignedRFModules>
        <type>RESULT_OK</type>
        <wirelessDoor>
          <doorId>23</doorId>
          <doorName>door1</doorName>
          <doorVersion>00.08</doorVersion>
          <groupName/>
          <hubIPAddress>10.248.196.217</hubIPAddress>
          <hubName>HUB 1 CORRIDOR</hubName>
          <rfMacAddress>0.0.11.70</rfMacAddress>
          <rfSignal>103</rfSignal>
          <rfState>SLEEP_AWAKE</rfState>
          <rfVersion>xx.xx</rfVersion>
          <updateLockPlan>false</updateLockPlan>
          <updateRequired>false</updateRequired>
          <updateTimeTable>false</updateTimeTable>
        </wirelessDoor>
        <wirelessDoor>
          <doorId>24</doorId>
          <doorName>doorCabinet</doorName>
          <doorStateInfo>
            <batteryPercentage>100</batteryPercentage>
            <batteryStatus>OK</batteryStatus>
            <cabinetState>
              <state>FREE</state>
            </cabinetState>
            <mode>UNBLOCKED</mode>
            <physicalState>DOOR_LEFT_OPEN</physicalState>
            <privacy>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorVersion>00.08</doorVersion>
          <groupName/>
          <hubIPAddress>10.248.196.218</hubIPAddress>
          <hubName>HUB 4 BASEMENT</hubName>
          <hubVersion>xx.xx</hubVersion>
          <rfMacAddress>0.0.4.79</rfMacAddress>
          <rfSignal>84</rfSignal>
          <rfState>SLEEP_AWAKE</rfState>
          <rfVersion>03.00</rfVersion>
          <updateLockPlan>false</updateLockPlan>
          <updateRequired>false</updateRequired>
          <updateTimeTable>false</updateTimeTable>
        </wirelessDoor>
      </operationResultAssignedRFModules>
    </ns2:doorGetAllResponse>
  </S:Body>
```


	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 17 of 342
---	---

It is recommended to use the `doorId` to identify a door since `doorName` can be changed in Tesa Smartair system.

3.1.5 doorGetInfo

Returns the details of a selected wireless door.

3.1.5.1 doorGetInfo request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	On of them is mandatory. If setting both <code>doorId</code> will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorGetInfo>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorGetInfo>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorGetInfo>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>125</doorId>
    </soap:doorGetInfo>
  </soapenv:Body>
</soapenv:Envelope>
```



3.1.5.2 doorGetInfo response

Door information is returned in a `wirelessDoor` type object.

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetInfoResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResultAssignedRFModules>
        <type>RESULT_OK</type>
        <wirelessDoor>
          <doorId>125</doorId>
          <doorName>Puerta 3</doorName>
          <doorStateInfo>
            <batteryStatus>OK</batteryStatus>
            <mode>BLOCKED</mode>
            <physicalState>DOOR_CLOSED</physicalState>
            <privacy>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorVersion>00.09</doorVersion>
          <groupName>Grupol</groupName>
          <hubIPAddress>10.248.196.221</hubIPAddress>
          <hubName>HUB ENTRANCE</hubName>
          <hubVersion>03.00</hubVersion>
          <rfMacAddress>0.0.5.27</rfMacAddress>
          <rfSignal>76</rfSignal>
          <rfState>SLEEP_AWAKE</rfState>
          <rfVersion>03.00</rfVersion>
          <updateRequired>false</updateRequired>
        </wirelessDoor>
      </operationResultAssignedRFModules>
    </ns2:doorGetInfoResponse>
  </S:Body>
</S:Envelope>
```



3.1.6 doorOpen

Sends an opening request to a door.

3.1.6.1 doorOpen request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	Oe of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorOpen>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorOpen>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorOpen>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>125</doorId>
    </soap:doorOpen>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.6.2 doorOpen response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorOpenResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorOpenResponse>
  </S:Body>
</S:Envelope>
```



3.1.7 doorPassage

Sends a door passage request to a door.

3.1.7.1 doorPassage request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	Oe of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorPassage>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorPassage>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorPassage>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>125</doorId>
    </soap:doorPassage>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.7.2 doorPassage response

Example Response



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorPassageResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorPassageResponse>
  </S:Body>
</S:Envelope>
```

3.1.8 doorRetrieveOpenings

Sends a door openings retrieval request.

3.1.8.1 doorRetrieveOpenings request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	Oe of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorRetrieveOpenings>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorRetrieveOpenings>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorRetrieveOpenings>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>door1</doorId>
    </soap:doorRetrieveOpenings>
  </soapenv:Body>
</soapenv:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 22 of 342
---	---

3.1.8.2 doorRetrieveOpenings response

Example Response
<pre><S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/"> <S:Body> <ns2:doorRetrieveOpeningsResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/"> <operationResult> <type>RESULT_OK</type> </operationResult> </ns2:doorRetrieveResponse> </S:Body> </S:Envelope></pre>



3.1.9 doorSetTime

Sends a time setting request to a door using system's current time.

3.1.9.1 doorSetTime request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	Oe of them is mandatory. If setting both doorId will be used
doorId	

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorSetTime>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorSetTime>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorSetTime>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorSetTime>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.9.2 doorSetTime response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorSetTimeResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorSetTimeResponse>
  </S:Body>
</S:Envelope>
```



3.1.10 doorBlock

Sends a door blocking request to a door.

3.1.10.1 doorBlock request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	one of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorBlock>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorBlock>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorBlock>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <doorId>125</doorId>
    </soap:doorBlock>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.10.2 doorBlock response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorBlockResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorBlockResponse>
  </S:Body>
</S:Envelope>
```




3.1.11 doorUnblock

Sends a door unblocking request to a door.

3.1.11.1 doorUnblock request

Parameter	Mandatory
operatorName	
operatorPassword	yes
doorName	one of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorUnblock>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorUnblock>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorUnblock>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <doorId>125</doorId>
    </soap:doorUnblock>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.11.2 doorUnblock response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorUnblockResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorUnblockResponse>
  </S:Body>
</S:Envelope>
```



3.1.12 doorUpdate

Sends a door update request to a door.

3.1.12.1 doorUpdate request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes
doorName	Oe of them is mandatory. If setting both doorId will be used
doorId	

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorUpdate>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorName>door1</doorName>
    </soap:doorUpdate>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Door identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorUpdate>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>125</doorId>
    </soap:doorUpdate>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.12.2 doorUpdate response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorUpdateResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorUpdateResponse>
  </S:Body>
</S:Envelope>
```



3.1.13 doorGetAllByLockdownAreas

Returns the list of defined lockdown areas and the wireless doors belonging to them.

3.1.13.1 doorGetAllByLockdownAreas Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:doorGetAllByLockdownArea>  
      <operatorName>myOperator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
    </soap:doorGetAllByLockdownArea>  
  </soapenv:Body>  
</soapenv:Envelope>
```

3.1.13.2 doorGetAllByLockdownAreas Responses

Example Response. List of lockdown areas and doors



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetAllByLockdownAreaResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResultAssignedRFModules>
        <type>RESULT_OK</type>
        <areas>
          <areaHasPendingDoors>true</areaHasPendingDoors>
          <areaId>1</areaId>
          <areaInExecution>true</areaInExecution>
          <areaName>AREA1</areaName>
          <wirelessDoors>
            <wirelessDoor>
              <batteryLevel>60</batteryLevel>
              <doorId>657</doorId>
              <doorName>wireless_door1</doorName>
              <doorStateInfo>
                <batteryPercentage>60</batteryPercentage>
                <batteryStatus>OK</batteryStatus>
                <cabinetState/>
                <emergency>false</emergency>
                <mode>UNBLOCKED</mode>
                <physicalState>DOOR_LEFT_OPEN</physicalState>
                <privacy>false</privacy>
                <state>CARD</state>
              </doorStateInfo>
              <doorType>TYPE_ESCUTCHEON_UOL</doorType>
              <doorVersion>05.61</doorVersion>
              <groupName>A</groupName>
              <hubIPAddress>10.246.83.21</hubIPAddress>
              <hubName>HUB 2</hubName>
              <hubVersion>05.20</hubVersion>
              <lockdownAreaId>1</lockdownAreaId>
              <lockdownState>4</lockdownState>
              <rfMacAddress>255.0.87.120</rfMacAddress>
              <rfSignal>118</rfSignal>
              <rfState>SLEEP_AWAKE</rfState>
              <rfVersion>05.15</rfVersion>
              <updateRequired>false</updateRequired>
            </wirelessDoor>
          </wirelessDoors>
        </areas>
        <areas>
          <areaHasPendingDoors>true</areaHasPendingDoors>
          <areaId>2</areaId>
          <areaInExecution>true</areaInExecution>
          <areaName>AREA2</areaName>
          <wirelessDoors>
            <wirelessDoor>
              <batteryLevel>100</batteryLevel>
              <doorId>644</doorId>
              <doorName>door2</doorName>
              <doorStateInfo>
                <batteryPercentage>100</batteryPercentage>
                <batteryStatus>OK</batteryStatus>
```

```
<cabinetState/>
<emergency>false</emergency>
<mode>UNBLOCKED</mode>
<physicalState>DOOR_CLOSED</physicalState>
<privacy>false</privacy>
<state>CARD</state>
</doorStateInfo>
<doorType>TYPE_SPY_DUAL_UOL</doorType>
<doorVersion>xx.xx</doorVersion>
<groupName>A</groupName>
<hubIPAddress>10.246.83.21</hubIPAddress>
<hubName>HUB mesa mikel</hubName>
<hubVersion>05.20</hubVersion>
<lockdownAreaId>2</lockdownAreaId>
<lockdownState>4</lockdownState>
<rfMacAddress>255.0.87.109</rfMacAddress>
<rfSignal>78</rfSignal>
<rfVersion>05.00</rfVersion>
<updateRequired>true</updateRequired>
</wirelessDoor>
<wirelessDoor>
  <batteryLevel>100</batteryLevel>
  <doorId>2</doorId>
  <doorName>door3</doorName>
  <doorStateInfo>
    <batteryPercentage>100</batteryPercentage>
    <batteryStatus>OK</batteryStatus>
    <emergency>false</emergency>
    <mode>UNBLOCKED</mode>
    <physicalState>DOOR_CLOSED</physicalState>
    <privacy>false</privacy>
    <state>CARD</state>
  </doorStateInfo>
  <doorType>TYPE_ESCUTCHEON_UOL</doorType>
  <doorVersion>xx.xx</doorVersion>
  <groupName/>
  <hubIPAddress>10.246.83.21</hubIPAddress>
  <hubName>HUB 2</hubName>
  <hubVersion>05.20</hubVersion>
  <lockdownAreaId>2</lockdownAreaId>
  <lockdownState>4</lockdownState>
  <rfMacAddress>255.0.85.235</rfMacAddress>
  <rfSignal>0</rfSignal>
  <rfVersion>05.00</rfVersion>
  <updateRequired>true</updateRequired>
</wirelessDoor>
<wirelessDoor>
  <batteryLevel>100</batteryLevel>
  <doorId>4</doorId>
  <doorName>ateax3</doorName>
  <doorStateInfo>
    <batteryPercentage>100</batteryPercentage>
    <batteryStatus>OK</batteryStatus>
    <emergency>false</emergency>
    <mode>UNBLOCKED</mode>
```

```

        <physicalState>DOOR_CLOSED</physicalState>
        <privacy>false</privacy>
        <state>FIRST_USER</state>
    </doorStateInfo>
    <doorType>TYPE_ESCUTCHEON_UOL</doorType>
    <doorVersion>xx.xx</doorVersion>
    <groupName/>
    <hubIPAddress>10.246.83.21</hubIPAddress>
    <hubName>HUB 2</hubName>
    <hubVersion>05.20</hubVersion>
    <lockdownAreaId>2</lockdownAreaId>
    <lockdownState>4</lockdownState>
    <rfMacAddress>255.0.85.237</rfMacAddress>
    <rfSignal>0</rfSignal>
    <rfVersion>05.00</rfVersion>
    <updateRequired>true</updateRequired>
    </wirelessDoor>
</wirelessDoors>
</areas>
</operationResultAssignedRFModules>
</ns2:doorGetAllByLockdownAreaResponse>
</S:Body>
</S:Envelope>

```

3.1.14 siteLockdown

Begins a site lockdown process according to the specified parameters. If no area is specified, all areas will be affected.

3.1.14.1 siteLockdown Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
lockdownInfo	LockdownRequest	Yes

Example Request. Close lockdown operation on ALL areas

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:siteLockDown>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
      <lockdownInfo>
        <mode>LOCKDOWN_CLOSED</mode>
      </lockdownInfo>
    </soap:siteLockDown>
  </soapenv:Body>
</soapenv:Envelope>

```

**Example Request. Close lockdown operation on areas 1 and 2.**

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:siteLockDown>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
      <lockdownInfo>
        <mode>LOCKDOWN_CLOSED</mode>
        <areaId>1</areaId>
        <areaId>2</areaId>
      </lockdownInfo>
    </soap:siteLockDown>
  </soapenv:Body>
</soapenv:Envelope>
```

3.1.14.2 siteLockdown Responses

Example Response. Successful lockdown execution

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorModifyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorModifyResponse>
  </S:Body>
</S:Envelope>
```

3.2 UsersWebService

This service contains methods that perform operations related with system users.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	UsersServicePortBinding
Location	https://host:8181/ServerPlatform/UsersWebService
Descriptor	https://host:8181/ServerPlatform/UsersWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.2.1 Data type information for UsersWebService

The main datatype used by this service is the `userInfo` type, which represents a user. Please see XSD reference for detailed description of data types.

- `userInfo`: Contains complete information of a user

Field	SOAP Type	Description
<code>userId</code>	Integer	UserId

username	String	User name
userGroup	String	User Group
userCarrier	CarrierType enumeration CAR_LLAVE CAR_TARJETA CAR_LLAVE_MEC CAR_PROX CAR_MAG_PROX CAR_KEY_PROX CAR_KEY_MAG	User carrier type
userCardId	String	User card ID
data1	String	Additional data field 1 of a user
data2	String	Additional data field 2 of a user
data3	String	Additional data field 3 of a user
data4	String	Additional data field 4 of a user
dateActivation	DateTime	Activation date for a user
dateExpiration	DateTime	Expiration date for a user
dateIssue	DateTime	Card Issue date for a user
dateUpdate	DateTime	Card update date for a user
userEmailAddress	String	E-mail address or unique string identifier
externalId	String	Modifiable user Id value
grants	String (multiple occurrences)	List of grant names
keyPad	String	Defined keypad PIN for a user
operator	Boolean	User is linked to an operator
openBlockedDoors	Boolean	User can open blocked doors
track1	String	Additional track data for magnetic cards
track2	String	Additional track data for magnetic cards
UOAccess	Boolean	Update on Card system: access enabled
UOAudit	Boolean	Update on Card system: auditing enabled
UOCDays	Integer	Update on Card system: number of update days
UOOverflow	Boolean	Update on Card system: overflow enabled
UORevalidate	Boolean	Update on Card system: revalidation enabled
updateRequired	Boolean	User data or format is not synchronized
userEncoded	Boolean	User encoded on card
userPhoneNumber	String	User phone Number

3.2.1 userAdd

Adds a user to the system. Added user will be of type USER_STANDARD.

3.2.1.1 userAdd Request

Parameter	Mandatory
operatorName	Yes
operatorPassword	Yes
userData	Yes. UserData section must include a valid user information type, otherwise ERROR_DATA_ERROR (800) error is returned.



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 33 of 342

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userAdd>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <userData>
        <dateActivation>2006-06-06T00 :00 :00+02 :00</dateActivation>
        <dateExpiration>2013-09-22T00 :00 :00+02 :00</dateExpiration>
        <userCardId>ACB3B64B</userCardId>
        <userCarrier>CAR_PROX</userCarrier>
        <userGroup>tesa</userGroup>
        <userName>Natalia</userName>
        <userType>USER_STANDARD</userType>
        <grants>Grantname1</grants>
        <grants>Grantname2</grants>
        <externalID>14.144.144</externalID>
      </userData>
    </soap:userAdd>
  </soapenv:Body>
</soapenv:Envelope>
```



3.2.1.2 userAdd Response examples

Example Response. Correct Addition

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:userAddResponse>
  </S:Body>
</S:Envelope>
```

3.2.1.2.1 ERROR_DATA_ERROR inner errors for userData

UserData inner error values

USERNAME_ALREADY_EXIST

USERNAME_IS_EMPTY

USER_TECHNOLOGY_NOT_SUPPORTED

USER_NOT_FOUND

DATABASE_ERROR

UNKNOWN_ERROR

VALIDATION_ERROR_EXPIRATION_DATE_IN_THE_PAST

VALIDATION_ERROR_EXPIRATION_DATE_BEFORE_ACTIVATION

VALIDATION_ERROR

Example Response. Validation error example. User exists

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>800</errorCode>
        <errorDetail>USERNAME_ALREADY_EXISTS</errorDetail>
        <errorType>ERROR_DATA_ERROR</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:userAddResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Validation error example. Expiration date invalid

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>800</errorCode>
      <errorDetail>VALIDATION_ERROR_EXPIRATION_DATE_IN_THE_PAST</errorDetail>
      <errorType>ERROR_DATA_ERROR</errorType>
      <type>RESULT_ERROR</type>
    </operationResult>
  </ns2:userAddResponse>
</S:Body>
</S:Envelope>
```

3.2.2 userAuthenticate

Authenticates a user and returns the user's authorized operations list.

3.2.2.1 userAuthenticate Request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userAuthenticate>
      <operatorName>testUser</operatorName>
      <operatorPassword>testPassword1</operatorPassword>
    </soap:userAuthenticate>
  </soapenv:Body>
</soapenv:Envelope>
```

3.2.2.2 userAuthenticate Response

Example Response. Bad user or password

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userAuthenticateResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <userAuthorizedOperations>
        <errorCode>500</errorCode>
        <errorType>ERROR_SERVICE_AUTHENTICATION</errorType>
        <type>RESULT_ERROR</type>
      </userAuthorizedOperations>
    </ns2:userAuthenticateResponse>
  </S:Body>
</S:Envelope>
```



Example Response. User authenticated

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userAuthenticateResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userAuthorizedOperations>
        <type>RESULT_OK</type>
        <authorizedOperationList>
          <authorizedOperation>1</authorizedOperation>
          <authorizedOperation>2</authorizedOperation>
          <authorizedOperation>3</authorizedOperation>
          <authorizedOperation>4</authorizedOperation>
          <authorizedOperation>6</authorizedOperation>
          <authorizedOperation>8</authorizedOperation>
          <authorizedOperation>14</authorizedOperation>
          <authorizedOperation>15</authorizedOperation>
          <authorizedOperation>18</authorizedOperation>
          <authorizedOperation>20</authorizedOperation>
          <authorizedOperation>25</authorizedOperation>
          <authorizedOperation>27</authorizedOperation>
          <authorizedOperation>31</authorizedOperation>
          <authorizedOperation>36</authorizedOperation>
          <authorizedOperation>37</authorizedOperation>
          <authorizedOperation>38</authorizedOperation>
          <authorizedOperation>39</authorizedOperation>
          <authorizedOperation>40</authorizedOperation>
          <authorizedOperation>41</authorizedOperation>
          <authorizedOperation>44</authorizedOperation>
          <authorizedOperation>201</authorizedOperation>
          <authorizedOperation>202</authorizedOperation>
          <authorizedOperation>210</authorizedOperation>
          <authorizedOperation>211</authorizedOperation>
          <authorizedOperation>46</authorizedOperation>
          <authorizedOperation>47</authorizedOperation>
          <authorizedOperation>48</authorizedOperation>
          <authorizedOperation>49</authorizedOperation>
          <authorizedOperation>50</authorizedOperation>
          <authorizedOperation>212</authorizedOperation>
          <authorizedOperation>43</authorizedOperation>
          <authorizedOperation>213</authorizedOperation>
          <authorizedOperation>45</authorizedOperation>
          <authorizedOperation>30</authorizedOperation>
          <authorizedOperation>42</authorizedOperation>
        </authorizedOperationList>
      </userAuthorizedOperations>
    </ns2:userAuthenticateResponse>
  </S:Body>
</S:Envelope>
```



3.2.3 userCancelCard

Cancels user credentials for the specified user including mobile application credentials sent to mobile phone devices.

3.2.3.1 userCancelCard Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
userId	Integer	YES

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:mobileAppRevoke>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <userId>546</userId>
    </soap:mobileAppRevoke>
  </soapenv:Body>
</soapenv:Envelope>
```

3.2.3.2 userCancelCard Response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:mobileAppRevokeResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <return>
        <type>RESULT_OK</type>
      </return>
    </ns2:mobileAppRevokeResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 38 of 342
---	---

3.2.1 userDelete

Deletes a user from the system.

3.2.1.1 userDelete Request

Parameter	Mandatory
operatorName	Yes
operatorPassword	Yes
userId	Yes

Example Request. Delete user with id 89
<pre> <soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:userDelete> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> <userId>89</userId> </soap:userDelete> </soapenv:Body> </soapenv:Envelope> </pre>

3.2.1.2 userDelete Response example

Example Response. Correct Addition
<pre> <S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/"> <S:Body> <ns2:userDeleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/"> <operationResult> <type>RESULT_OK</type> </operationResult> </ns2:userDeleteResponse> </S:Body> </S:Envelope> </pre>



3.2.2 usersGetAll

Returns a list of users of a certain type. Data can be retrieved partially using pagination parameters defining page size (amount of results per page) and the number of page requested.

3.2.2.1 usersGetAll Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
numPage	Integer	No
pageSize	Integer	No

3.2.2.2 usersGetAll Responses

Example Request. Get all users. No pagination
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:usersGetAll> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> </soap:usersGetAll> </soapenv:Body> </soapenv:Envelope></pre>



Example Response. All users returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:usersGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00 :00 :00+02 :00</dateActivation>
          <dateExpiration>2014-01-28T00 :00 :00+01 :00</dateExpiration>
          <dateIssue>2000-01-01T00 :00 :00+01 :00</dateIssue>
          <dateUpdate>2000-01-01T00 :00 :00+01 :00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2013-01-28T00:00:00+01:00</dateActivation>
          <dateIssue>2013-09-11T14 :51 :18.218+02 :00</dateIssue>
          <dateUpdate>2000-01-01T00 :00 :00+01 :00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>61</userId>
          <userName>UserNameyy</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2013-01-28T00:00:00+01:00</dateActivation>
          <dateIssue>2013-09-11T14 :51 :18.218+02 :00</dateIssue>
          <dateUpdate>2000-01-01T00 :00 :00+01 :00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>65</userId>
          <userName>UserNamezz</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:usersGetAllResponse>
  </S:Body>
</S:Envelope>
```




Example Request. Get all guest information using pagination values

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:usersGetAllResponse>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <numPage>1</numPage>
      <pageSize>2</pageSize>
    </soap:usersGetAllResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. First page with 2 users returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:usersGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00 :00 :00+02 :00</dateActivation>
          <dateExpiration>2014-01-28T00 :00 :00+01 :00</dateExpiration>
          <dateIssue>2000-01-01T00 :00 :00+01 :00</dateIssue>
          <dateUpdate>2000-01-01T00 :00 :00+01 :00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
      <userData>
        <dateActivation>2013-01-28T00 :00 :00+01 :00</dateActivation>
        <dateIssue>2013-09-11T14 :51 :18.218+02 :00</dateIssue>
        <dateUpdate>2000-01-01T00 :00 :00+01 :00</dateUpdate>
        <updateRequired>true</updateRequired>
        <userCardId/>
        <userCarrier>CAR_TARJETA</userCarrier>
        <userEncoded>true</userEncoded>
        <userGroup/>
        <userId>61</userId>
        <userName>UserNameyy</userName>
        <userType>USER_STANDARD</userType>
        <operator>false</operator>
      </userData>
    </ns2:usersGetAllResponse>
  </S:Body>
</S:Envelope>
```



3.2.3 userGetByld

Gets user information by its id.

3.2.3.1 userGetByld Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
userId	Integer (multiple occurrences allowed)	No

3.2.3.2 userGetByld Responses

Example Request. Get information of user with id 89

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:userGetById>  
      <operatorName>operator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
      <userId>89</userId>  
    </soap:userGetById>  
  </soapenv:Body>  
</soapenv:Envelope>
```



Example Response. User 89 returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <userCardId/>
          <updateRequired>true</updateRequired>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByIdResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get information of users with id 89 and id 90

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetById>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <userId>89</userId>
      <userId>61</userId>
    </soap:userGetById>
  </soapenv:Body>
</soapenv:Envelope>
```



Example Response. User 89 and 61 returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>61</userId>
          <userName>UserNameyy</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByIdResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get all users information (no userId provided)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetById>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:userGetById>
  </soapenv:Body>
</soapenv:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 45 of 342

Example Response. All users returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>61</userId>
          <userName>UserNameyy</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>65</userId>
          <userName>UserNamezz</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByIdResponse>
  </S:Body>
</S:Envelope>
```



Example Request. Get all guest information (no userId provided and USER_GUEST type specified)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetById>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <type>USER_GUEST</type>
    </soap:userGetById>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. All guests returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2013-10-08T00:00:00</dateActivation>
          <dateExpiration>2013-10-09T00:00:00</dateExpiration>
          <dateIssue>2013-10-08T15:49:50</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>true</updateRequired>
          <userCardId>5E227058</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>18</userId>
          <userName>_door1</userName>
          <userType>USER_GUEST</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByIdResponse>
  </S:Body>
</S:Envelope>
```



3.2.4 userGetByName

Gets user information by its name.

3.2.4.1 userGetByName Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
userName	String (multiple occurrences allowed)	No

3.2.4.2 userGetByName Responses

Example Request. Get information of user with name UserNamexx

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByName>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <userName>UserNamexx</userName>
    </soap:userGetByName>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. UserNamexx returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByNameResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByNameResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get information of users with names UserNamexx and UserNameyy



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 48 of 342

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByName>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <userName>UserNamexx</userName>
      <userName>UserNameyy</userName>
    </soap:userGetByName>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. UserNamexx andUserNameyy returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByNameResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2013-01-28T00:00:00</dateActivation>
          <dateIssue>2013-09-11T14:51:18</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>61</userId>
          <userName>UserNameyy</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByNameResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get all users information (no userName provided)



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 49 of 342

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:userGetByName>  
      <operatorName>operator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
    </soap:userGetByName>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Example Response. All users returned



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByNameResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>61</userId>
          <userName>UserNameyy</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_TARJETA</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>65</userId>
          <userName>UserNamezz</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByNameResponse>
  </S:Body>
</S:Envelope>
```



3.2.5 userGetByCardId

Gets user information by its cardId

3.2.5.1 userGetByCardId Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
cardId	String (multiple occurrences allowed)	No

3.2.5.2 userGetByCardId Responses

Example Request. Get information of user with CardId 1226006514510724

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByCardId>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
      <cardId>1226006514510724</cardId>
    </soap:userGetByCardId>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. User with card 1226006514510724 returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByCardIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateIssue>2015-02-19T12:21:34</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>9001275</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510724</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>1500</userId>
          <userName>9001275</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByCardIdResponse>
  </S:Body>
</S:Envelope>
```



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 52 of 342

Example Request. Get information of users with cardIDs 1226006514510724 and 1226006514510725

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByCardId>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
      <cardId>1226006514510724</cardId>
      <cardId>1226006514510725</cardId>
    </soap:userGetByCardId>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Users with cards 1226006514510724 and 1226006514510725 returned



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByCardIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateIssue>2015-02-19T12:21:34</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>9001275</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510724</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>1500</userId>
          <userName>9001275</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2014-03-24T00:00:00</dateActivation>
          <dateExpiration>2017-07-01T23:50:00</dateExpiration>
          <dateIssue>2014-03-26T14:40:46</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>001</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510725</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>Craft</userGroup>
          <userId>26</userId>
          <userName>Rokas Gulvinikas</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByCardIdResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get all users information (no cardID provided)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByCardId>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:userGetByCardId>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. All users returned



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 54 of 342

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByCardIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateIssue>2015-02-19T12:21:34+01:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>9001275</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510724</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>1500</userId>
          <userName>9001275</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2014-03-24T00:00:00</dateActivation>
          <dateExpiration>2017-07-01T23:50:00</dateExpiration>
          <dateIssue>2014-03-26T14:40:46</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>001</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510725</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>Craft</userGroup>
          <userId>26</userId>
          <userName>Rokas Gulvinikas</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByCardIdResponse>
  </S:Body>
</S:Envelope>
```



3.2.6 userGetByExternalId

Gets user information by its cardId

3.2.6.1 userGetByExternalId Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
externalId	String (multiple occurrences allowed)	No

3.2.6.2 userGetByExternalId Responses

Example Request. Get information of user with CardId 1226006514510724

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByCardId>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
      <externalId>9001275</cardId>
    </soap:userGetByCardId>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. User with externalId 9001275 returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByCardIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateIssue>2015-02-19T12:21:34</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>9001275</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510724</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>1500</userId>
          <userName>9001275</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByCardIdResponse>
  </S:Body>
</S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 56 of 342

Example Request. Get information of users with externalIds 9001275 and 001

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByCardId>
      <operatorName>operator1</operatorName>
      <operatorPassword>mypassword1</operatorPassword>
      <cardId>9001275</cardId>
      <cardId>001</cardId>
    </soap:userGetByCardId>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Users with externalIds 9001275 and 001 returned



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByCardIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateIssue>2015-02-19T12:21:34</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>9001275</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510724</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>1500</userId>
          <userName>9001275</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2014-03-24T00:00:00</dateActivation>
          <dateExpiration>2017-07-01T23:50:00</dateExpiration>
          <dateIssue>2014-03-26T14:40:46</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>001</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510725</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>Craft</userGroup>
          <userId>26</userId>
          <userName>Rokas Gulvinikas</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByCardIdResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get all users information (no userName provided)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userGetByCardId>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:userGetByCardId>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. All users returned



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 58 of 342

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByCardIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <dateActivation>2006-06-06T00:00:00</dateActivation>
          <dateExpiration>2014-01-28T00:00:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <updateRequired>false</updateRequired>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>I+D</userGroup>
          <userId>89</userId>
          <userName>UserNamexx</userName>
          <userType>1</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateIssue>2015-02-19T12:21:34</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>9001275</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510724</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>1500</userId>
          <userName>9001275</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
        <userData>
          <dateActivation>2014-03-24T00:00:00</dateActivation>
          <dateExpiration>2017-07-01T23:50:00</dateExpiration>
          <dateIssue>2014-03-26T14:40:46</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <externalId>001</externalId>
          <updateRequired>false</updateRequired>
          <userCardId>1226006514510725</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEncoded>true</userEncoded>
          <userGroup>Craft</userGroup>
          <userId>26</userId>
          <userName>Rokas Gulvinikas</userName>
          <userType>USER_STANDARD</userType>
          <operator>false</operator>
        </userData>
      </userInfo>
    </ns2:userGetByCardIdResponse>
  </S:Body>
</S:Envelope>
```



3.2.7 userModify

Modifies user information.

3.2.7.1 userModify Request

Parameter	Mandatory
operatorName	Yes
operatorPassword	Yes
userData	Yes. UserData section must include a valid user information type, otherwise ERROR_DATA_ERROR (800) error is returned.

Example Request. Modify expiration date and username for user id 89

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userModify>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <userId>89</userId>
      <userData>
        <dateExpiration>2014-12-12</dateExpiration>
        <userName>NAME_CHANGED</userName>
      </userData>
    </soap:userModify>
  </soapenv:Body>
</soapenv:Envelope>
```

3.2.7.2 userModify Response example

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userModifyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:userModifyResponse>
  </S:Body>
</S:Envelope>
```

3.3 DoorsDataWebService

This service contains methods that perform operations related with system doors.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	DoorsServicePortBinding
Location	https://host:8181/ServerPlatform/DoorsDataWebService
Descriptor	https://host:8181/ServerPlatform/DoorsDataWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.3.1 Data type information for DoorsDataWebService

The main datatype used by this service is the `DoorInfo` type, which represents a door. Please see XSD reference for detailed description of data types.

- `DoorInfo`: Contains complete information of a door

DoorInfo type				
Field	SOAP Type		Description	Writable
antiPassbackArea	APBAreaType enumeration		Antipassback area configuration	Yes
	APB_AREA_1			
	APB_AREA_2			
antiPassbackEntry	APBEntryType enumeration		Antipassback mode configuration	Yes
	TYPE APB_NONE			
	TYPE APB_ENTRY			
	TYPE APB_EXIT			
assignedCommonPins	String List		Name of Common Pins that this door is using	Yes
cabinetOpenAfterHours	Boolean		Open cabinet after specified period	Yes
calendarId	Integer		Calendar Id	Yes
changeId	Integer		Automatic change Id	Yes
data1	String		Additional data field 1 of a door	Yes
data2	String		Additional data field 2 of a door	Yes
data3	String		Additional data field 3 of a door	Yes
data4	String		Additional data field 4 of a door	Yes
dateActu	DateTime		Door update date	No
doorId	Integer		Door Id	No
doorName	String		Door name	Yes
doorStateInfo	DoorStateInfo		Door state info	No
doorType	DoorType		Door type	Yes
doorVersion	DateTime		Door version	No
groupName	String		Group name	Yes



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 61 of 342

highTraffic	Boolean	High traffic door	Yes
keyPad	String	Door keypad PIN	Yes
privacyOverPassage	Boolean	Enable privacy over passage	Yes
pushButton	Boolean	Enable pushbutton	Yes
registerHandle	Boolean	Enable handle events	Yes
relaySetupMode	Integer	Relay setup mode. Accepted values: 0: disabled, 1: relay1, 2: sensor, 3: pushbutton, 4:sensor+tamper, 5:bypass alarm)	Yes
requiredGrantIndex	Integer	Required grant for door specifying its grant index number	Yes
roomType	RoomType	Type of room	No
roomOccupied	Boolean	Room is checked-in	No
roomPreassigned	Boolean	Room is preassigned	No
preAssignations	DoorInfo (multiple occurrences)	Room preassignments	No
updatingModeId	Integer	Updating mode Id	Yes
updateRequired	Integer	Shows if door requires update or not	No
tEscReturn	Integer	Esc/Return time	Yes
tOpen	Integer	Opening time	Yes

doorStateInfo type							
Field	SOAP Type	Description					
batteryPercentage	Integer	Battery level from 0 to 100					
batteryStatus	<table><tr><td>BatteryStatusType enumeration</td></tr><tr><td>OK</td></tr><tr><td>LOW_BATTERIES</td></tr><tr><td>VERY_LOW_BATTERIES</td></tr></table>	BatteryStatusType enumeration	OK	LOW_BATTERIES	VERY_LOW_BATTERIES	Battery level as state	
BatteryStatusType enumeration							
OK							
LOW_BATTERIES							
VERY_LOW_BATTERIES							
cabinetState	<table><tr><td>CabinetStatusType enumeration</td></tr><tr><td>FREE</td></tr><tr><td>IN_USE</td></tr></table>	CabinetStatusType enumeration	FREE	IN_USE	Status info for cabinets		
CabinetStatusType enumeration							
FREE							
IN_USE							
mode	<table><tr><td>BlockModeType enumeration</td></tr><tr><td>BLOCKED</td></tr><tr><td>UNBLOCKED</td></tr></table>	BlockModeType enumeration	BLOCKED	UNBLOCKED	Door blocking mode		
BlockModeType enumeration							
BLOCKED							
UNBLOCKED							
physicalState	<table><tr><td>PhysicalStateType enumeration</td></tr><tr><td>DOOR_CLOSED</td></tr><tr><td>INTRUSION</td></tr><tr><td>DOOR_LEFT_OPEN</td></tr><tr><td>DOOR_CLOSED NOT SECURED</td></tr></table>	PhysicalStateType enumeration	DOOR_CLOSED	INTRUSION	DOOR_LEFT_OPEN	DOOR_CLOSED NOT SECURED	Door physical state
PhysicalStateType enumeration							
DOOR_CLOSED							
INTRUSION							
DOOR_LEFT_OPEN							
DOOR_CLOSED NOT SECURED							



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 62 of 342

privacy	Boolean		Privacy indicator
state	StateType enumeration		Door state information
	CARD		
	PASSAGE		
	FIRST_USER		
	KEYPAD		
	CARD_PIN		
	DUAL_USER		
	PIN_CARD		

DoorType enumeration
TYPE_ZERO
TYPE_CYLINDER
TYPE_LOCK
TYPE_READER
TYPE_SAFE_MAG
TYPE_CYLINDER_MEC
TYPE_READER_ONLINE
TYPE_ESCUTCHEON_PROX
TYPE_READER_PROX_OFF
TYPE_LOCK_DUAL
TYPE_ELEVATOR
TYPE_ELEVATOR_PROX
TYPE_READER_DUAL
TYPE_SAFE_KEYBOARD
TYPE_SAFE_PROX
TYPE_READER_UPDATER
TYPE_ELEVATOR_DUAL
TYPE_ESCUTCHEON_UOL
TYPE_CABINET
TYPE_READER_UOL
TYPE_READER_DUAL_UOL
TYPE_SPY_MAG
TYPE_VISUALIZER
TYPE_SPY_DUAL_UOL
TYPE_SPY_MAG_UOL
TYPE_READER_MAG_UOL
TYPE_KNOB_CYLINDER
TYPE_KNOB_CYLINDER_UOL
TYPE_ENERGYSaver_PROX
TYPE_ENERGYSaver_MAG
TYPE_ENERGYSaver_DUAL
TYPE_ELEVATOR_UOL
TYPE_ELEVATOR_PROX_UOL
TYPE_ELEVATOR_DUAL_UOL



ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 63 of 342

RoomType enumeration
TYPE_DOOR_STANDARD
TYPE_DOOR_ROOM
TYPE_DOOR_SUITE
TYPE_DOOR_CORRIDOR
TYPE_DOOR_HIGH_TRAFFIC
TYPE_DOOR_SAFE



3.3.2 doorAdd

Creates a door with the specified parameters

3.3.2.1 doorAdd Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
doorInfo	DoorInfo (writable properties only)	Yes

3.3.2.2 doorAdd Responses

Example Request. Add door

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorAdd>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorData>
        <doorName>myNewDoor</doorName>
        <doorType>TYPE_ESCUTCHEON_PROX</doorType>
      </doorData>
    </soap:doorAdd>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Correct Addition

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorAddResponse>
  </S:Body>
</S:Envelope>
```




3.3.3 doorDelete

Deletes a door with the specified parameters

3.3.3.1 doorDelete Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
doorId	Door id to delete	Yes

3.3.3.2 doorDelete Responses

Example Request. Delete door

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:doorDelete>  
      <operatorName>operator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
      <doorId>1529</doorId>  
    </soap:doorDelete>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Example Response. Correct Deletion

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">  
  <S:Body>  
    <ns2:doorDeleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">  
      <operationResult>  
        <type>RESULT_OK</type>  
      </operationResult>  
    </ns2:doorDeleteResponse>  
  </S:Body>  
</S:Envelope>
```



3.3.4 doorsGetAll

Gets door information. Data can be retrieved partially using pagination parameters defining page size (amount of results per page) and the number of page requested.

3.3.4.1 doorsGetAll Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
type	DoorType enumeration	No
numPage	Integer	No
pageSize	Integer	No

3.3.4.2 doorsGetAll Responses

Example Request. Get information of all doors

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:doorsGetAll>  
      <operatorName>operator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
    </soap:doorsGetAll>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Example Response. Door information



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 67 of 342

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <doorInfo>
        <type>RESULT_OK</type>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1492</doorId>
          <doorName>000000000000</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1497</doorId>
          <doorName>000000MEKANIKK</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName>lkkk</groupName>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1499</doorId>
          <doorName>another door</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
        </doorData>
      </doorInfo>
    </ns2:doorGetByIdResponse>
  </S:Body>
</S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 68 of 342

```
<doorVersion>xx.xx</doorVersion>
<groupName>lkkk</groupName>
<highTraffic>>false</highTraffic>
<privacyOverPassage>>false</privacyOverPassage>
<pushButton>>false</pushButton>
<registerHandle>>false</registerHandle>
<relaySetupMode>0</relaySetupMode>
<requiredGrantIndex>0</requiredGrantIndex>
<upatingModeId>0</upatingModeId>
<updateRequired>>true</updateRequired>
<tEscReturn>0</tEscReturn>
<tOpen>4</tOpen>
</doorData>

</doorInfo>
</ns2:doorGetByIdResponse>
</S:Body>
</S:Envelope>
```

Example Request. Get information. Paginated (one result per page, first page)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <numPage>1</numPage>
      <pageSize>1</pageSize>
    </soap :doorsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Door information. No pagination

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorsGetAll xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <doorInfo>
        <type>RESULT_OK</type>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1492</doorId>
          <doorName>000000000000</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1497</doorId>
          <doorName>000000MEKANIKK</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName>lkkk</groupName>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
      </ns2:doorsGetAll>
    </S:Body>
  </S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 70 of 342

3.3.5 doorGetById

Gets door information by its id.

3.3.5.1 doorGetById Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
doorId	Integer (multiple occurrences allowed)	No

3.3.5.2 doorGetById Responses

Example Request. Get information of door with Id 172

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorGetById>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>172</doorId>
    </soap:doorGetById>
  </soapenv:Body>
</soapenv:Envelope>
```



Example Response. Door information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <doorInfo>
        <type>RESULT_OK</type>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>172</doorId>
          <doorName>t162</doorName>
          <doorStateInfo>
            <batteryPercentage>100</batteryPercentage>
            <batteryStatus>OK</batteryStatus>
            <mode>UNBLOCKED</mode>
            <physicalState>DOOR_CLOSED</physicalState>
            <privacy>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorType>TYPE_ESCUTCHEON_UOL</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
      </doorInfo>
    </ns2:doorGetByIdResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get information of all doors (no Id specified)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorGetById>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:doorGetById>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Door information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <doorInfo>
        <type>RESULT_OK</type>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1492</doorId>
          <doorName>0000000000000</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>

        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1497</doorId>
          <doorName>000000MEKANIKK</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName>lkkk</groupName>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
      </doorInfo>
    </ns2:doorGetByIdResponse>
  </S:Body>
</S:Envelope>
```




3.3.1 doorGetByName

Gets user information by its name.

3.3.1.1 doorGetByName Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
doorName	String (multiple occurrences allowed)	No

3.3.1.2 doorGetByName Responses

Example Request. Get information of door name myDoor
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:doorGetById> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> <doorName>myDoor</doorName> </soap:doorGetById> </soapenv:Body> </soapenv:Envelope></pre>

**Example Response. Door information**

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <doorInfo>
        <type>RESULT_OK</type>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>173</doorId>
          <doorName>myDoor</doorName>
          <doorStateInfo>
            <batteryPercentage>100</batteryPercentage>
            <batteryStatus>OK</batteryStatus>
            <mode>UNBLOCKED</mode>
            <physicalState>DOOR_CLOSED</physicalState>
            <privacy>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorType>TYPE_ESCUTCHEON_UOL</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>false</highTraffic>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
          <registerHandle>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
      </doorInfo>
    </ns2:doorGetByIdResponse>
  </S:Body>
</S:Envelope>
```

Example Request. Get information of all doors (no name specified)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorGetById>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:doorGetById>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Door information



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <doorInfo>
        <type>RESULT_OK</type>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>1492</doorId>
          <doorName>0000000000000</doorName>
          <doorType>TYPE_CYLINDER_MEC</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>>false</highTraffic>
          <privacyOverPassage>>false</privacyOverPassage>
          <pushButton>>false</pushButton>
          <registerHandle>>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
        <doorData>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <cabinetOpenAfterHours>>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <doorId>173</doorId>
          <doorName>myDoor</doorName>
          <doorStateInfo>
            <batteryPercentage>100</batteryPercentage>
            <batteryStatus>OK</batteryStatus>
            <mode>UNBLOCKED</mode>
            <physicalState>DOOR_CLOSED</physicalState>
            <privacy>>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorType>TYPE_ESCUTCHEON_UOL</doorType>
          <doorVersion>xx.xx</doorVersion>
          <groupName/>
          <highTraffic>>false</highTraffic>
          <privacyOverPassage>>false</privacyOverPassage>
          <pushButton>>false</pushButton>
          <registerHandle>>false</registerHandle>
          <relaySetupMode>0</relaySetupMode>
          <requiredGrantIndex>0</requiredGrantIndex>
          <upatingModeId>0</upatingModeId>
          <updateRequired>>true</updateRequired>
          <tEscReturn>0</tEscReturn>
          <tOpen>4</tOpen>
        </doorData>
      </doorInfo>
    </ns2:doorGetByIdResponse>
  </S:Body>
</S:Envelope>
```



ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 76 of 342

```
</doorInfo>  
</ns2:doorGetByIdResponse>  
</S:Body>  
</S:Envelope>
```



3.3.2 doorModify

Modifies a door with the specified parameters

3.3.2.1 doorModify Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
doorId	Door id to modify	Yes
doorInfo	DoorInfo (writable properties only)	Yes

3.3.2.2 doorModify Responses

Example Request. Modify name of door 1433

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:doorModify>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <doorId>1433</doorId>
      <doorData>
        <doorName>newModifiedName</doorName>
      </doorData>
    </soap:doorModify>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Response. Correct Modification

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:doorModifyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:doorModifyResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 78 of 342
---	--

3.4 EventsWebService

This service contains methods to retrieve system event data.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	EventsServicePortBinding
Location	https://host:8181/ServerPlatform/EventsWebService
Descriptor	https://host:8181/ServerPlatform/EventsWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.4.1 Data type information for EventsWebService

The main datatypes used by this service are `openingInfo` and `activeAlarmInfo`, which represent events. Please see XSD reference for detailed description of data types.

- `openingInfo`: Contains complete information of an opening event

openingInfo		
Field	SOAP Type	Description
<code>aproxDate</code>	Boolean	Indicates if approximate date flag is enabled
<code>copyNumber</code>	Integer	Number of copy used in the event
<code>doorId</code>	Integer	Door id involved in the event
<code>doorName</code>	String	Door name involved in the event
<code>eventType</code>	EventType	See table below
<code>exit</code>	Boolean	Indicates if exit reader flag is enabled
<code>id</code>	Integer	Event id
<code>openingDate</code>	DateTime	Event date
<code>userId</code>	Integer	User id involved in the event
<code>userName</code>	String	User name involved in the event

EventType enumerated
OPENING_ACCESS_GRANTED
OPENING_ACCESS_GRANTED_CARDPIN
OPENING_ACCESS_GRANTED_COMMONKEYPAD
OPENING_ACCESS_GRANTED_NEWCARD
ENCODING_NEW_CARD
ENCODING_KEY_AUTH
SAFE_OPEN_AFTER_INCOMPLETE_CLOSE
OPENING_DOOR_OPEN_BY_PC_PP
OPENING_ACCESS_GRANTED_DUALUSER
GUEST_ENTERED_NEW_PIN
SAFE_CLOSE
EMERGENCY_OPEN
EMERGENCY_CLOSE
EMERGENCY_END
DUAL_USER_FIRST_ACCEPTED
CABINET_LOCKED
CABINET_LOCKED_NEWCARD
DENIAL_CABINET_USER_ALREADY_LOCKED_ANOTHER



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 79 of 342

DENIAL_CABINET_IN_USE
DENIAL_THUMBTURN_DEACTIVATED
DENIAL_ANTIPASSBACK
DENIAL_USER_WITHDRAWN
DOOR_CLOSED_BY_PC_PP
DENIAL_COULD_NOT_ADD_USER
DENIAL_KEY_DAMAGED
DENIAL_CARD_WITHDRAWN
OPENINGS_OVERFLOW
DENIAL_KEY_FORMAT_ERROR
DENIAL_KEY_NOT_ACTIVE
DENIAL_KEY_EXPIRED
DENIAL_PIN_INVALID
DENIAL_ANOTHER_USER_REQUIRED
DENIAL_USER_NOT_ENABLED
DENIAL_GRANT_MISSING
DENIAL_KEY_CANCELLED
DENIAL_KEYPAD_BLOCKED
DENIAL_OUT_OF_TIME
DENIAL_NO_PRIVACY_OVERRIDE
DENIAL_CANNOT_OPEN_BLOCKED
DENIAL_KEY_NOT_AUTHORIZED
DENIAL_DOOR_EMERGENCY_CLOSE
DENIAL_CLOCK_STOPPED
DENIAL_VERY_LOW_BATTERIES
MODE_DUAL_USER
MODE_CARD_PIN
MODE_STANDARD
MODE_COMMON_KEYPAD
MODE_FIRST_USER
MODE_OPEN
MODE_OPEN_END
MODE_BLOCKED
MODE_BLOCKED_END
MODE_CANCELLED
RF_MODULE_AWAKEN
START_ESC_RETURN
END_ESC_RETURN
RF_MODULE_ALWAYS_AWAKE
INTERNAL_HANDLE
DOOR_OPENED_BY_PUSHBUTTON
REALTIME_CLOCK_UNSETTLED
LOW_BATTERIES
CARD_WITHDRAWN
RF_COULD_NOT_UPLINK_AUDIT
WARNING_INTRUSSION
WARNING_DOOR_LEFT_OPEN
DST_CHANGE
DOOR_DATA_UPDATED_BY_PC_PP
DOOR_OPENINGS_READ
TEST
MECHANIC_KEY_OVERRIDE



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 80 of 342

DOOR_INITIALIZED
POWER_ON_RESET
WATCHDOG_RESET
UNKNOWN_RESET
DISCONNECTED
RTC_UPDATED_BY_PC_PP
FIRMWARE_UPDATED
USER_ADD
USER_MODIFY
USER_DELETE
OPENINGS_OVERFLOW_RECORDS_LOST
MEMORY_ERROR_CANNOT_OPEN_RECORD
USER_CARD_UPDATED
USER_PLAN_UPDATED
CABINET_PARTIALLY_OPENED
CABINET_OPENED_AFTER_INCOMPLETE_OPENCLOSE
DOOR_NOT_OPEN_DURING_OPENING_TIME
MODE_PIN_CARD
OPENING_ACCESS_GRANTED_PIN_CARD
LOCK_ERROR_RF_STUCK,
LOCK_ERROR_INCOMPLETE_MEMORY_UPDATE
LOCK_ERROR_MECHANICAL_WRONG_KNOB_POSITION
LOCK_ERROR_SECURE_AREA_COMMUNICATION
WARNING_INCORRECT_ANTIPASSBACK_DATA
DOOR_CLOSED_BUT_NOT_SECURED
WARNING_INTRUDER_WANDERING
WARNING_INTRUDER_STANDING

- **activeAlarmInfo:** Contains complete information of an alert event

activeAlarmInfo		
Field	SOAP Type	Description
aproxDate	Boolean	Indicates if approximate date flag is enabled
copyNumber	Integer	Number of copy used in the event
doorId	Integer	Door id involved in the event
doorName	String	Door name involved in the event
eventType	EventType	See table above
exit	Boolean	Indicates if exit reader flag is enabled
id	Integer	Event id
openingDate	DateTime	Event date
userId	Integer	User id involved in the event
userName	String	User name involved in the event



3.4.2 openingsGetAll

Retrieves openings from the system.

3.4.2.1 openingsGetAll request

Parameter	Type	Mandatory						
operatorName	String	YES						
operatorPassword	String	YES						
sortField	<table><tr><th>SortField values</th></tr><tr><td>USER_NAME</td></tr><tr><td>DOOR_NAME</td></tr><tr><td>EVENT_TYPE_ID</td></tr><tr><td>EVENT_ID</td></tr><tr><td>DATE</td></tr></table>	SortField values	USER_NAME	DOOR_NAME	EVENT_TYPE_ID	EVENT_ID	DATE	NO
SortField values								
USER_NAME								
DOOR_NAME								
EVENT_TYPE_ID								
EVENT_ID								
DATE								
sortOrder	<table><tr><th>SortOrder values</th></tr><tr><td>ASCENDING</td></tr><tr><td>DESCENDING</td></tr></table>	SortOrder values	ASCENDING	DESCENDING	NO			
SortOrder values								
ASCENDING								
DESCENDING								
fromDate	Date (includes time)	NO						
toDate	Date (includes time)	NO						
doorID	Integer (multiple occurrences)	NO						
userID	Integer (multiple occurrences)	NO						
operationType	EventType enumerated	NO						
fromOpeningId	Id of the last collected opening							

Example Request: All events for user 20

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:openingsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <userID>20</userID>
    </soap:openingsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```



Example Request: All events for user 20 on door 24

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:openingsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <doorID>20</doorID>
      <userID>20</userID>
    </soap:openingsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request: OPENING_DOOR_OPEN_BY_PC_PP operations for user 546 on door 1413, between 31/03/2017 09:50 and 31/03/2017 14:30, having the last identifier higher than 270000 and ordered by door name in ascending order

```
<<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:openingsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <sortField>DOOR_NAME</sortField>
      <sortOrder>ASCENDING</sortOrder>
      <fromDate>2017-03-31T09:50:00+02:00</fromDate>
      <toDate>2017-03-31T14:30:00+02:00</toDate>
      <doorID>1413</doorID>
      <userID>546</userID>
      <operationType>OPENING_DOOR_OPEN_BY_PC_PP</operationType>
      <fromOpeningId>270000</fromOpeningId>
    </soap:openingsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request: All openings from the last identified by '1111'

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:openingsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <fromOpeningId>1111</fromOpeningId>
    </soap:openingsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```



3.4.3 activeAlarmsGetAll

Retrieves active alarm events from the system.

3.4.3.1 activeAlarmsGetAll request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:activeAlarmsGetAll>  
      <operatorName>operator</operatorName>  
      <operatorPassword>password</operatorPassword>  
    </soap:activeAlarmsGetAll>  
  </soapenv:Body>  
</soapenv:Envelope>
```

3.4.3.2

3.4.3.3 activeAlarmsGetAll response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:activeAlarmsGetAllResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <activeAlarmInfo>
          <aproxDate>>false</aproxDate>
          <copyNumber>0</copyNumber>
          <doorId>10</doorId>
          <doorName>Door 3</doorName>
          <eventType>WARNING_INTRUDER_STANDING</eventType>
          <exit>>false</exit>
          <id>223</id>
          <openingDate>2013-02-04T12:52:48+01:00</openingDate>
          <userId>60</userId>
          <userName>Security Guard</userName>
        </activeAlarmInfo>
        <activeAlarmInfo>
          <aproxDate>>false</aproxDate>
          <copyNumber>0</copyNumber>
          <doorId>11</doorId>
          <doorName>Door 4</doorName>
          <eventType>WARNING_INTRUDER_STANDING</eventType>
          <exit>>false</exit>
          <id>224</id>
          <openingDate>2013-02-04T12:52:50+01:00</openingDate>
          <userId>62</userId>
          <userName>Cleaning Staff</userName>
        </activeAlarmInfo>
      </operationResult>
    </ns2:activeAlarmsGetAllResponse>
  </S:Body>
</S:Envelope>
```



3.4.4 activeAlarmsDeleteAll

Deletes active alarms from the system.

3.4.4.1 activeAlarmsDeleteAll request

Parameter	Mandatory
operatorName	yes
operatorPassword	yes

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:activeAlarmsDeleteAll>
      <operatorName>mikel</operatorName>
      <operatorPassword>mikell1234z</operatorPassword>
    </soap:activeAlarmsDeleteAll>
  </soapenv:Body>
</soapenv:Envelope>
```

3.4.4.2 activeAlarmsDeleteAll response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:activeAlarmsDeleteAllResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:activeAlarmsDeleteAllResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 86 of 342
---	---

3.5 LockingPlanWebService

This service contains methods to manage the system's locking plan and time-related configuration.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	LockingPlanServicePortBinding
Location	https://host:8181/ServerPlatform/LockingPlanWebService
Descriptor	https://host:8181/ServerPlatform/LockingPlanWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.5.1 Data type information for LockingPlanWebService

The main datatypes used by this service are `lockingPlanInfo`, `timetableInfo`, `changeInfo`, `updatingModeInfo` and `calendarInfo`.

Please see XSD reference for detailed description of data types.

- `lockingPlanInfo`: Contains complete information of a locking plan entry

lockingPlanInfo		
Field	SOAP Type	Description
userName	String	Username of the locking plan entry
userId	Integer	User id of the locking plan entry
doorName	String	Door name of the locking plan entry
doorId	Integer	Door id of the locking plan entry
timetableId	Integer	Timetable id of the lockingplan entry
canOpen	Boolean	Indicates if exit reader flag is enabled
privacyOverride	Boolean	Event id
updated	Boolean	Event date

- `timetableInfo`: Contains complete information of a system timetable definition

timetableInfo		
Field	SOAP Type	Description
timetableId	Integer	Identifier of timetable
timetableName	Integer	Name of timetable



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 87 of 342

timetableColor	timetableColor	Color of timetable
	enumerated	
	MAROON	
	GREEN	
	OLIVE	
	NAVY	
	PURPLE	
	TEAL	
	GRAY	
	SILVER	
	RED	
	LIME	
	YELLOW	
	BLUE	
	FUCHSIA	
AQUA		
WHITE		
timesAndDaysOption	timeRangeWeekDays type (multiple occurrences: max 10)	Timetable entries

timeRangeWeekDays		
Field	SOAP Type	Description
timeStart	String HH:MM format	Starting time
timeEnd	String HH:MM format	Ending time
days	WeekDays type	Enabled days

WeekDays	
Field	SOAP Type
Monday	Boolean
Tuesday	Boolean
Wednesday	Boolean
Thursday	Boolean
Friday	Boolean
Saturday	Boolean
Sunday	Boolean
holiday	Boolean

- **changeInfo:** Contains complete information of a door automatic change definition

changeInfo		
Field	SOAP Type	Description
changeId	Integer	Identifier of automatic change
changeName	Integer	Name of automatic change
timeModeDaysOption	timeModeWeekDays type (multiple occurrences: max 20)	Automatic change time entries

Document:
Document Title:SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 88 of 342

timeModeWeekDays		
Field	SOAP Type	Description
time	String HH:MM format	Starting time
mode	Integer	Mode identifier (see table below)
days	WeekDays type	Enabled days

Change mode values	
value	Description
1	Passage
2	First Passage
3	PIN
4	Normal
5	Security
6	Double
7	PIN First
17	Passage. Can left open/close
18	First Passage. Can left open/close
19	PIN. Can left open/close
20	Normal. Can left open/close
21	Security. Can left open/close
22	Double. Can left open/close
23	PIN First. Can left open/close

WeekDays	
Field	SOAP Type
Monday	Boolean
Tuesday	Boolean
Wednesday	Boolean
Thursday	Boolean
Friday	Boolean
Saturday	Boolean
Sunday	Boolean
holiday	Boolean

- **updatingModeInfo**: Contains complete information of a updater running mode definition

updatingModeInfo		
Field	SOAP Type	Description
updatingModeId	Integer	Identifier of updating mode
updatingModeName	Integer	Name of updating mode
timeModeDaysOption	timeModeWeekDays type (multiple occurrences: max 20)	Updating mode time entries

timeModeWeekDays		
Field	SOAP Type	Description
time	String HH:MM format	Starting time
mode	Integer	Mode identifier. See table below
days	WeekDays type	Enabled days



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 89 of 342

Updating mode values	
value	Description
0	Online Reader
1	Revalidator
2	Updater

WeekDays	
Field	SOAP Type
Monday	Boolean
Tuesday	Boolean
Wednesday	Boolean
Thursday	Boolean
Friday	Boolean
Saturday	Boolean
Sunday	Boolean
holiday	Boolean

- **calendarInfo:** Contains complete information of a system calendar definition

calendarInfo		
Field	SOAP Type	Description
calendarId	Integer	Calendar identifier
calendarName	Integer	Calendar name
holidaysDateList	String (comma separated YYYY-MM-DD values)	Holidays date list



3.5.2 lockingPlanGet

Retrieves information about the system's locking plan for the given user and doors

3.5.2.1 lockingPlanGet Request

Parameter	Mandatory
operatorName	Yes
operatorPassword	Yes
userId	No. (Multiple occurrences allowed)
doorId	No. (Multiple occurrences allowed)

Example Request. All locking plan entries (no users nor doors specified)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:lockingPlanGet>
      <operatorName>operator</operatorName>
      <operatorPassword>myPassword</operatorPassword>
    </soap:lockingPlanGet>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Locking plan entries for user 19 and 20 on doors 2 and 3

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:lockingPlanGet>
      <operatorName>operator</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <userId>19</userId>
      <userId>20</userId>
      <doorId>2</doorId>
      <doorId>3</doorId>
    </soap:lockingPlanGet>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.2.2 lockingPlanGet Response

Example Response. Locking plan entries for user 19 and 20 on doors 2 and 3

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:lockingPlanGetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <lockingPlanInfo>
          <canOpen>false</canOpen>
          <doorId>2</doorId>
          <doorName>Puerta 24</doorName>
          <privacyOverride>false</privacyOverride>
          <timezoneCode>2</timezoneCode>
          <updated>false</updated>
          <userId>19</userId>
          <userName>staff 19</userName>
        </lockingPlanInfo>
        <lockingPlanInfo>
          <canOpen>false</canOpen>
          <doorId>3</doorId>
          <doorName>updaterDoor1</doorName>
          <privacyOverride>false</privacyOverride>
          <timezoneCode>15</timezoneCode>
          <updated>true</updated>
          <userId>20</userId>
          <userName>staff1</userName>
        </lockingPlanInfo>
        <lockingPlanInfo>
          <canOpen>false</canOpen>
          <doorId>2</doorId>
          <doorName>Puerta 24</doorName>
          <privacyOverride>false</privacyOverride>
          <timezoneCode>2</timezoneCode>
          <updated>false</updated>
          <userId>20</userId>
          <userName>staff1</userName>
        </lockingPlanInfo>
        <lockingPlanInfo>
          <canOpen>false</canOpen>
          <doorId>3</doorId>
          <doorName>updaterDoor1</doorName>
          <privacyOverride>false</privacyOverride>
          <timezoneCode>15</timezoneCode>
          <updated>true</updated>
          <userId>19</userId>
          <userName>staff 19</userName>
        </lockingPlanInfo>
      </operationResult>
    </ns2:lockingPlanGetResponse>
  </S:Body>
</S:Envelope>
```



3.5.3 lockingPlanModify

Updates a locking plan entry for the given user and door.

3.5.3.1 lockingPlanModify Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
userId	Integer	Yes
doorId	Integer	Yes
codTimetable	Integer (0 to 15). 0: Indicates NEVER 1..14: Timetable id defined in the system 15: Indicates ALWAYS	Yes
canOpen	Boolean	Yes
privacyOverride	Boolean	Yes

Example Request. Update lockingPlan entry for user 19 on door 2, with timezone 15 (ALWAYS allow)

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:lockingPlanModify>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <userId>19</userId>
      <doorId>2</doorId>
      <canOpen>true</canOpen>
      <codTimetable>15</codTimetable>
      <privacyOverride>true</privacyOverride>
    </soap:lockingPlanModify>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.3.2 lockingPlanModify Response

Example Response.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:lockingPlanModifyResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:lockingPlanModifyResponse>
  </S:Body>
</S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 93 of 342

3.5.4 timetableGet

Retrieves information about timetables defined in the system. From the 14 timetimetables defined in the system, this method will only show the ones that are not empty.

3.5.4.1 timetableGet Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes

Example Request. Retrieve timetable information

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:timetableGet>  
      <operatorName>operator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
    </soap:timetableGet>  
  </soapenv:Body>  
</soapenv:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 94 of 342

3.5.4.2 timetableGet Response

Example Response. Timetable information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:timetableGetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <timetableInfo>
          <color>FUCHSIA</color>
          <id>1</id>
          <name>offices</name>
          <timesAndDaysOption>
            <days>
              <Friday>true</Friday>
              <holiday>false</holiday>
              <Monday>false</Monday>
              <Saturday>true</Saturday>
              <Sunday>true</Sunday>
              <Thursday>true</Thursday>
              <Tuesday>true</Tuesday>
              <Wednesday>true</Wednesday>
            </days>
            <timeEnd>1100</timeEnd>
            <timeStart>1000</timeStart>
          </timesAndDaysOption>
          <timesAndDaysOption>
            <days>
              <Friday>false</Friday>
              <holiday>true</holiday>
              <Monday>false</Monday>
              <Saturday>true</Saturday>
              <Sunday>true</Sunday>
              <Thursday>false</Thursday>
              <Tuesday>false</Tuesday>
              <Wednesday>false</Wednesday>
            </days>
            <timeEnd>2000</timeEnd>
            <timeStart>0400</timeStart>
          </timesAndDaysOption>
        </timetableInfo>
      </operationResult>
    </ns2:timetableGetResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 95 of 342
---	---

3.5.5 timetableModify

Modifies a system timetable entry with the given information.

3.5.5.1 timetableModify Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
timetableDate	timetableInfo	Yes

Example Request. Update name and color of timetable with id 2
<pre> <soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:timetableModify> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> <timetableData> <color>YELLOW</color> <id>6</id> <name>sixthTime</name> </timetableData> </soap:timetableModify> </soapenv:Body> </soapenv:Envelope> </pre>



Example Request. Set time options: enable all days from 10:00 to 11:00 on timetable with id 2

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:timetableModify>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <timetableData>
        <color>YELLOW</color>
        <id>6</id>
        <name>sixthTime</name>
        <timesAndDaysOption>
          <days>
            <Friday>true</Friday>
            <holiday>true</holiday>
            <Saturday>true</Saturday>
            <Sunday>true</Sunday>
            <Thursday>true</Thursday>
            <Tuesday>true</Tuesday>
            <Wednesday>true</Wednesday>
          </days>
          <timeStart>1000</timeStart>
          <timeEnd>1100</timeEnd>
        </timesAndDaysOption>
      </timetableData>
    </soap:timetableModify>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.5.2 timetableModify Response

Example Response. Timetable information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:timetableModifyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:timetableModifyResponse>
  </S:Body>
</S:Envelope>
```




3.5.6 timetableDelete

Deletes the specified system timetable entry.

3.5.6.1 timetableDelete Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
timetableId	Integer	Yes

Example Request. Delete timetable with id 2

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <soap:timetableDelete>  
      <operatorName>operator1</operatorName>  
      <operatorPassword>myPassword1</operatorPassword>  
      <timetableId>1</timetableId>  
    </soap:timetableDelete>  
  </soapenv:Body>  
</soapenv:Envelope>
```

3.5.6.2 timetableDelete Response

Example Response. Timetable information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">  
  <S:Body>  
    <ns2:timetableDeleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">  
      <operationResult>  
        <type>RESULT_OK</type>  
      </operationResult>  
    </ns2:timetableDeleteResponse>  
  </S:Body>  
</S:Envelope>
```



3.5.7 changeGet

Retrieves information about automatic door changes defined in the system.

3.5.7.1 changeGet Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes

Example Request. Retrieve automatic changes information

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:changeGet>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:changeGet>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.7.2 changeGet Response

Example Response. Retrieve automatic changes information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:changeGetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <changeInfo>
          <id>12</id>
          <name>changeName12</name>
          <timeModeDaysOption>
            <days>
              <Friday>false</Friday>
              <holiday>true</holiday>
              <Monday>false</Monday>
              <Saturday>false</Saturday>
              <Sunday>true</Sunday>
              <Thursday>false</Thursday>
              <Tuesday>false</Tuesday>
              <Wednesday>false</Wednesday>
            </days>
            <mode>17</mode>
            <time>1200</time>
          </timeModeDaysOption>
          <timeModeDaysOption>
            <days>
              <Friday>false</Friday>
              <holiday>false</holiday>
              <Monday>false</Monday>
              <Saturday>false</Saturday>
            </days>
          </timeModeDaysOption>
        </changeInfo>
      </operationResult>
    </ns2:changeGetResponse>
  </S:Body>
</S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 99 of 342

```
<Sunday>false</Sunday>
<Thursday>false</Thursday>
<Tuesday>true</Tuesday>
<Wednesday>true</Wednesday>
</days>
<mode>20</mode>
<time>1400</time>
</timeModeDaysOption>
</changeInfo>
<changeInfo>
  <id>22</id>
  <name>Nuevo Modo Actu</name>
  <timeModeDaysOption>
    <days>
      <Friday>false</Friday>
      <holiday>false</holiday>
      <Monday>true</Monday>
      <Saturday>false</Saturday>
      <Sunday>false</Sunday>
      <Thursday>false</Thursday>
      <Tuesday>true</Tuesday>
      <Wednesday>false</Wednesday>
    </days>
    <mode>17</mode>
    <time>0800</time>
  </timeModeDaysOption>
</changeInfo>
</operationResult>
</ns2:changeGetResponse>
</S:Body>
</S:Envelope>
```



3.5.8 changeAdd

Adds new automatic change entry in the system.

3.5.8.1 changeAdd Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
changeData	changeInfo	Yes

Example Request. Add new automatic change entry

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:changeAdd>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <changeData>
        <name>MyNewChange</name>
        <timeModeDaysOption>
          <days>
            <Friday>false</Friday>
            <holiday>true</holiday>
            <Monday>false</Monday>
            <Saturday>false</Saturday>
            <Sunday>false</Sunday>
            <Thursday>false</Thursday>
            <Tuesday>false</Tuesday>
            <Wednesday>false</Wednesday>
          </days>
          <mode>1</mode>
          <time>1300</time>
        </timeModeDaysOption>
      </changeData>
    </soap:changeAdd>
  </soapenv:Body>
</soapenv:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 101 of 342

3.5.8.2 changeAdd Response

Example Response. New automatic change entry added successfully. Entry with its assigned Id is returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:changeAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <changeInfo>
          <id>25</id>
          <name>MyNewChange</name>
          <timeModeDaysOption>
            <days>
              <Friday>false</Friday>
              <holiday>true</holiday>
              <Monday>false</Monday>
              <Saturday>false</Saturday>
              <Sunday>false</Sunday>
              <Thursday>false</Thursday>
              <Tuesday>false</Tuesday>
              <Wednesday>false</Wednesday>
            </days>
            <mode>1</mode>
            <time>1300</time>
          </timeModeDaysOption>
        </changeInfo>
      </operationResult>
    </ns2:changeAddResponse>
  </S:Body>
</S:Envelope>
```



3.5.9 changeModify

Modifies an automatic change entry in the system.

3.5.9.1 changeModify Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
changeId	Integer	Yes
changeData	changeInfo	Yes

Example Request. Modify change id 25 with the specified settings

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:changeModify>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <changeId>25</changeId>
      <changeData>
        <timeModeDaysOption>
          <days>
            <Friday>true</Friday>
            <holiday>true</holiday>
            <Monday>true</Monday>
            <Saturday>true</Saturday>
            <Sunday>true</Sunday>
            <Thursday>true</Thursday>
            <Tuesday>true</Tuesday>
            <Wednesday>true</Wednesday>
          </days>
          <mode>2</mode>
          <time>1200</time>
        </timeModeDaysOption>
      </changeData>
    </soap:changeModify>
  </soapenv:Body>
</soapenv:Envelope>
```



3.5.9.2 changeModify Response

Example Response. Change id 25 modified with the specified settings

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:changeModifyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:changeModifyResponse>
  </S:Body>
</S:Envelope>
```

3.5.10 changeDelete

Deletes the specified system timetable entry.

3.5.10.1 changeDelete Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
changeId	Integer	Yes

Example Request. Delete timetable with id 25

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:changeDelete>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <changeId>25</changeId>
    </soap:changeDelete>
  </soapenv:Body>
</soapenv:Envelope>
```



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 104 of 342

3.5.10.2 changeDelete Response

Example Response. Timetable id 25 deleted

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:changeDeleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:changeDeleteResponse>
  </S:Body>
</S:Envelope>
```


	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 105 of 342
---	--

3.5.11 updatingModeGet

Retrieves information about automatic updating modes defined in the system.

3.5.11.1 updatingModeGet Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes

Example Request. Retrieve updating modes information
<pre> <soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/" <soapenv:Header/> <soapenv:Body> <soap:updatingModeGet> <operatorName>operator1</operatorName> <operatorPassword>myPassword1</operatorPassword> </soap:updatingModeGet> </soapenv:Body> </soapenv:Envelope> </pre>

3.5.11.2 updatingModeGet Response

Example Response. Retrieve updating mode changes information
<pre> <S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/" <S:Body> <ns2:updatingModeGetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/" <operationResult> <type>RESULT_OK</type> <updInfo> <id>8</id> <name>updatingMornings</name> <timeModeDaysOption> <days> <Friday>>false</Friday> <holiday>>false</holiday> <Monday>true</Monday> <Saturday>>false</Saturday> <Sunday>>false</Sunday> <Thursday>>false</Thursday> <Tuesday>>false</Tuesday> <Wednesday>>false</Wednesday> </days> <mode>1</mode> <time>0500</time> </timeModeDaysOption> <timeModeDaysOption> <days> <Friday>>false</Friday> <holiday>>false</holiday> <Monday>>false</Monday> </pre>



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 106 of 342

```
<Saturday>false</Saturday>
<Sunday>false</Sunday>
<Thursday>false</Thursday>
<Tuesday>true</Tuesday>
<Wednesday>false</Wednesday>
</days>
<mode>1</mode>
<time>0501</time>
</timeModeDaysOption>
<timeModeDaysOption>
  <days>
    <Friday>false</Friday>
    <holiday>false</holiday>
    <Monday>false</Monday>
    <Saturday>false</Saturday>
    <Sunday>false</Sunday>
    <Thursday>false</Thursday>
    <Tuesday>false</Tuesday>
    <Wednesday>true</Wednesday>
  </days>
  <mode>2</mode>
  <time>0502</time>
</timeModeDaysOption>
</updInfo>
<updInfo>
  <id>9</id>
  <name>otherMode</name>
  <timeModeDaysOption>
    <days>
      <Friday>false</Friday>
      <holiday>false</holiday>
      <Monday>true</Monday>
      <Saturday>false</Saturday>
      <Sunday>false</Sunday>
      <Thursday>false</Thursday>
      <Tuesday>true</Tuesday>
      <Wednesday>false</Wednesday>
    </days>
    <mode>0</mode>
    <time>0600</time>
  </timeModeDaysOption>
</updInfo>
</operationResult>
</ns2:updatingModeGetResponse>
</S:Body>
</S:Envelope>
```



3.5.12 updatingModeAdd

Adds a new updating mode entry in the system.

3.5.12.1 updatingModeAdd Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
updatingModeData	updatingInfo	Yes

Example Request. Add new updating mode entry

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:updatingModeAdd>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <updatingModeData>
        <name>NEW_UPDMODE</name>
        <timeModeDaysOption>
          <days>
            <Friday>true</Friday>
            <holiday>true</holiday>
            <Monday>false</Monday>
            <Saturday>false</Saturday>
            <Sunday>false</Sunday>
            <Thursday>false</Thursday>
            <Tuesday>false</Tuesday>
            <Wednesday>false</Wednesday>
          </days>
          <mode>0</mode>
          <time>1000</time>
        </timeModeDaysOption>
      </updatingModeData>
    </soap:updatingModeAdd>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.12.2 updatingModeAdd Response

Example Response. New updating mode entry added successfully. Entry with its assigned Id is returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:updatingModeAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
      <updatingInfo>
        <id>15</id>
        <name>NEW_UPDMODE</name>
        <timeModeDaysOption>
          <days>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 108 of 342

```
<Friday>true</Friday>
<holiday>true</holiday>
<Monday>false</Monday>
<Saturday>false</Saturday>
<Sunday>false</Sunday>
<Thursday>false</Thursday>
<Tuesday>false</Tuesday>
<Wednesday>false</Wednesday>
</days>
<mode>0</mode>
<time>1000</time>
</timeModeDaysOption>
</updatingInfo>
</operationResult>
</ns2:updatingModeAddResponse>
</S:Body>
</S:Envelope>
```

3.5.13 updatingModeModify

Modifies an automatic change entry in the system.

3.5.13.1 updatingModeModify Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
changeId	Integer	Yes
updatingModeData	updatingModeInfo	Yes



Example Request. Modify updating mode id 25 with the specified settings

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:updatingModeModify>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <updatingModeId>15</updatingModeId>
      <updatingModeData>
        <name>UPDATED_NAME</name>
        <timeModeDaysOption>
          <days>
            <Friday>true</Friday>
            <holiday>true</holiday>
            <Monday>true</Monday>
            <Saturday>true</Saturday>
            <Sunday>true</Sunday>
            <Thursday>true</Thursday>
            <Tuesday>true</Tuesday>
            <Wednesday>true</Wednesday>
          </days>
          <mode>0</mode>
          <time>1300</time>
        </timeModeDaysOption>
      </updatingModeData>
    </soap:updatingModeModify>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.13.2 updatingModeModify Response

Example Response. Change id 25 modified with the specified settings

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:updatingModeModifyResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:updatingModeModifyResponse>
  </S:Body>
</S:Envelope>
```



3.5.14 updatingModeDelete

Deletes the specified updating mode entry.

3.5.14.1 updatingModeDelete Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
updatingModeId	Integer	Yes

Example Request. Delete updatingMode with id 15

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:updatingModeDelete>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <updatingModeId>15</updatingModeId>
    </soap:updatingModeDelete>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.14.2 updatingModeDelete Response

Example Response. UpdatingMode with id 15 deleted

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:updatingModeDeleteResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:updatingModeDeleteResponse>
  </S:Body>
</S:Envelope>
```



3.5.15 calendarGet

Retrieves information about automatic updating modes defined in the system.

3.5.15.1 calendarGet Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes

Example Request. Retrieve system calendar information

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:calendarGet>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
    </soap:calendarGet>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.15.2 calendarGet Response

Example Response. Retrieve system calendar information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:calendarGetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <calendarInfo>
          <calendarId>1</calendarId>
          <calendarName>calendar_1</calendarName>
          <holidaysDateList/>
        </calendarInfo>
        <calendarInfo>
          <calendarId>4</calendarId>
          <calendarName>kalen a sako</calendarName>
          <holidaysDateList>2300-02-02,2013-01-04,2013-01-05,2013-01-
06,2013-01-11,2013-01-12,2013-01-13,2013-01-14,2013-01-15,2013-01-16,2013-01-
17,2013-01-18,2013-01-21,2013-12-22,2013-12-26,2013-12-28,2013-12-29,2014-01-
15</holidaysDateList>
        </calendarInfo>
        <calendarInfo>
          <calendarId>9</calendarId>
          <calendarName>kalen7</calendarName>
          <holidaysDateList>2013-01-07,2013-06-07,2013-06-08,2013-06-
14,2013-06-21,2013-06-22,2013-06-28,2013-06-29,2013-08-02,2013-08-09,2013-08-
13,2013-08-14,2013-08-15,2013-08-16,2013-08-17,2013-08-18,2013-12-05,2013-12-
17,2013-12-19,2013-12-21</holidaysDateList>
        </calendarInfo>
        <calendarInfo>

```



```
<calendarId>14</calendarId>
<calendarName>calendar_other</calendarName>
<holidaysDateList>2013-03-13</holidaysDateList>
</calendarInfo>
</operationResult>
</ns2:calendarGetResponse>
</S:Body>
</S:Envelope>
```

3.5.16 calendarAdd

Adds a new calendar entry in the system.

3.5.16.1 calendarAdd Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
updatingModeData	updatingInfo	Yes

Example Request. Add new system calendar

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:calendarAdd>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <nameCalendar>NEW_CALEND</nameCalendar>
    </soap:calendarAdd>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.16.2 calendarAdd Response

Example Response. New calendar entry added successfully. Entry with its assigned Id is returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:calendarAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <calendarInfo>
          <calendarId>16</calendarId>
          <calendarName>NEW_CALEND</calendarName>
          <holidaysDateList/>
        </calendarInfo>
      </operationResult>
    </ns2:calendarAddResponse>
  </S:Body>
</S:Envelope>
```




3.5.17 calendarChangeName

3.5.17.1 calendarChangeName Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
calendarId	Integer	Yes
newName	String	Yes

Example Request. Add new system calendar

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:calendarChangeName>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <calendarId>16</calendarId>
      <changeId>nameXXXX</changeId>
    </soap:calendarChangeName>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.17.2 calendarChangeName Response

Example Response. New calendar entry added successfully. Entry with its assigned Id is returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:calendarChangeNameResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:calendarChangeNameResponse>
  </S:Body>
</S:Envelope>
```



3.5.18 calendarAddHolidays

Adds new holiday days in a given calendar. Days are specified by using a comma-separated string of dates in YYYY-MM-DD format.

3.5.18.1 calendarAddHolidays Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
calendarId	Integer	Yes
daysYYYY-MM-DD	String	Yes

Example Request. Add new days in calendar

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:calendarAddHolidays>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <calendarId>40</calendarId>
      <daysYYYY-MM-DD>2014-48-02,2014-01-02</daysYYYY-MM-DD>
    </soap:calendarAddHolidays>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.18.2 calendarAddHolidays Response

Example Response. New days in calendar added successfully.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:calendarAddHolidaysResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:calendarAddHolidaysResponse>
  </S:Body>
</S:Envelope>
```



3.5.19 calendarDeleteHolidays

Deletes holiday days in a given calendar. Days are specified by using a comma-separated string of dates in YYYY-MM-DD format.

3.5.19.1 calendarDeleteHolidays Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
calendarId	Integer	Yes
daysYYYY-MM-DD	String	Yes

Example Request. Deletes holiday days in calendar

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:calendarDeleteHolidays>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <calendarId>64</calendarId>
      <daysYYYY-MM-DD>2013-48-02,2013-01-02</daysYYYY-MM-DD>
    </soap:calendarDeleteHolidays>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.19.2 calendarDeleteHolidays Response

Example Response. New days in calendar added successfully.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:calendarDeleteHolidaysResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:calendarDeleteHolidaysResponse>
  </S:Body>
</S:Envelope>
```



3.5.20 calendarDelete

Deletes holiday days in a given calendar. Days are specified by using a comma-separated string of dates in YYYY-MM-DD format.

3.5.20.1 calendarDelete Request

Parameter	SOAP Type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
calendarId	Integer	Yes

Example Request. Deletes holiday days in calendar

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:calendarDelete>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword1</operatorPassword>
      <calendarId>15</calendarId>
    </soap:calendarDelete>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.20.2 calendarDelete Response

Example Response. New days in calendar added successfully.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:calendarDeleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:calendarDeleteResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 117 of 342
---	--

3.6 SystemConfigWebService

This service contains methods to manage system configuration data.


Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	SystemConfigServicePortBinding
Location	https://host:8181/ServerPlatform/SystemConfigWebService
Descriptor	https://host:8181/ServerPlatform/SystemConfigWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.6.1 Data type information for SystemConfigWebService

The main datatype used by this service is `commonPinsInfo`, which represent common pins configuration. Please see XSD reference for detailed description of data types. Depending on the configuration of the site, the quantity of available pin values can vary from 7 to 128.

- `commonPinsInfo`: Contains complete information of an opening event

commonPinsInfo		
Field	SOAP Type	Description
pinName1	String	Common Pin name 1
pin1	String	Common Pin value 1
pinName2	String	Common Pin name 2
pin2	String	Common Pin value 2
pinName3	String	Common Pin name 3
pin3	String	Common Pin value 3
pinName4	String	Common Pin name 4
pin4	String	Common Pin value 4
pinName5	String	Common Pin name 5
pin5	String	Common Pin value 5
pinName6	String	Common Pin name 6
pin6	String	Common Pin value 6
pinName7	String	Common Pin name 7
pin7	String	Common Pin value 7
...	...	...
pinName128	String	Common Pin name 28
Pin128	String	Common Pin value 28

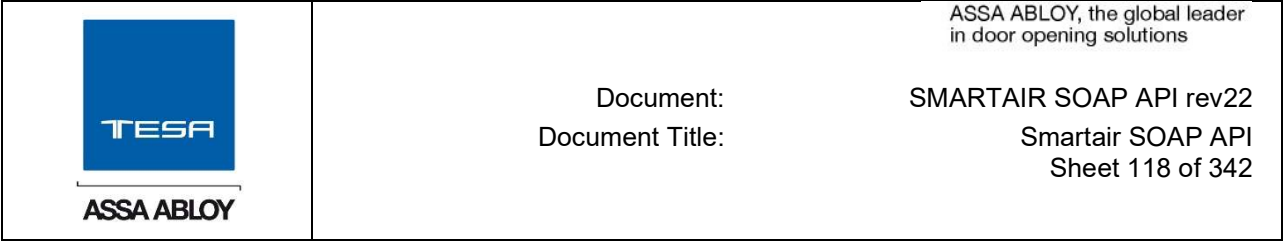

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 118 of 342



3.6.2 commonPinsGet

Retrieves common pin configuration information from the system.

3.6.2.1 commonPinsGet request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES

Example Request: Get system common pin configuration

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:commonPinsGet>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
    </soap:commonPinsGet>
  </soapenv:Body>
</soapenv:Envelope>
```

3.6.2.2 commonPinsGet Response

Example Response: System common pin configuration

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/"
  <S:Body>
    <ns2:commonPinsGetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <type>RESULT_OK</type>
        <commonPinsInfo>
          <pin1>1111</pin1>
          <pin2>2222</pin2>
          <pin3>3333</pin3>
          <pin4>4444</pin4>
          <pin5>5555</pin5>
          <pin6>6666</pin6>
          <pin7>7777</pin7>
          <pinName1>Generic Pin one</pinName1>
          <pinName2>Generic Pin two</pinName2>
          <pinName3>Generic Pin three</pinName3>
          <pinName4>Generic Pin four</pinName4>
          <pinName5>Generic Pin five</pinName5>
          <pinName6>Generic Pin six</pinName6>
          <pinName7>Generic Pin seven</pinName7>
        </commonPinsInfo>
      </operationResult>
    </ns2:commonPinsGetResponse>
  </S:Body>
</S:Envelope>
```



3.6.3 commonPinsSet

Sets system's common pins configuration.

If values contain repeated Pins or there are collisions with duress pin values, `ERROR_DATA_ERROR` will be returned.

3.6.3.1 commonPinsSet request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
commonPinsData	commonPinsInfo	

Example Request: Set system common pin configuration

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:commonPinsSet>
      <operatorName>mikel</operatorName>
      <operatorPassword>mikel1234z</operatorPassword>
      <commonPinsData>
        <pin1>1111</pin1>
        <pin2>2222</pin2>
        <pin3>3333</pin3>
        <pin4>4444</pin4>
        <pin5>5555</pin5>
        <pin6>6666</pin6>
        <pin7>7777</pin7>
        <pinName1>Generic Pin one</pinName1>
        <pinName2>Generic Pin two</pinName2>
        <pinName3>Generic Pin three</pinName3>
        <pinName4>Generic Pin four</pinName4>
        <pinName5>Generic Pin five</pinName5>
        <pinName6>Generic Pin six</pinName6>
        <pinName7>Generic Pin seven</pinName7>
      </commonPinsData>
    </soap:commonPinsSet>
  </soapenv:Body>
</soapenv:Envelope>
```

3.6.3.2 commonPinsSet Response

Example Response: System common pin configuration

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:commonPinsSetResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:commonPinsSetResponse>
  </S:Body>
</S:Envelope>
```


	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 121 of 342
---	--

3.7 WirelessMobileAppWebService

This service contains methods to perform operations related with credentials sent to Smartair mobile phone applications.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	WirelessMobileAppServicePortBinding
Location	https://host:8181/ServerPlatform/WirelessMobileAppWebService
Descriptor	https://host:8181/ServerPlatform/WirelessMobileAppWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.7.1 Data type information for WirelessMobileAppService

This service uses an enumeration type object to identify the target mobile phone application type: Smartair door opening App (MOBILE_APP_TYPE_MOBILEAPP) or Bluetooth app (MOBILE_APP_TYPE_BLE).

MobileAppType enumeration
MOBILE_APP_TYPE_MOBILEAPP
MOBILE_APP_TYPE_BLE

3.7.2 mobileAppGetInfo

Obtains information about a mobile app user identifier. If no appType is defined, the default appType will be MOBILE_APP_TYPE_MOBILEAPP. If the site is using an Openow integration with the server-to-server user registration mode, the value of the userEmailAddress may contain any unique string instead of an e-mail address.

3.7.2.1 mobileAppGetInfo Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
userEmailAddress	String	YES
appType	MobileAppType	NO

Example Request
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/" <soapenv:Header/> <soapenv:Body> <soap:mobileAppGetInfo> <operatorName>tesa</operatorName> <operatorPassword>aaaabbbb</operatorPassword> <appType>MOBILE_APP_TYPE_BLE</appType> <userEmailAddress>tesasmartair2017@gmail.com</userEmailAddress> </soap:mobileAppGetInfo> </soapenv:Body> </soapenv:Envelope></pre>



ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 122 of 342

3.7.2.2 mobileAppGetInfo Response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:mobileAppGetInfoResponse xmlns:ns2=http://soap.ws.ts1000.tesa.es/ >
      <operationResultDeviceInfo>
        <type>RESULT_OK</type>
        <userInfo>
          <active>true</active>
          <confirmationCode>
            d0eb93652d9aa99c9199609cb066deeb
          </confirmationCode>
          <creationDate>2019-01-09T17:05:18+01:00</creationDate>
          <email>tesasmartair2017@gmail.com</email>
        </userInfo>
      </operationResultDeviceInfo>
    </ns2:mobileAppGetInfoResponse>
  </S:Body>
</S:Envelope>
```

3.7.3 mobileAppWrite

Sends user credential data to a device running a Smartair mobile app. If the copy parameter is true, a copy of an existing user card will be sent to the mobile phone. The specified e-mail address must not be in use by a different user. If the specified e-mail address is being used by a different user, an error will be returned (ERROR_ENCODING_CARD_ALREADY_ISSUED) . If the site is using an Openow integration with the server-to-server user registration mode, the value of the userEmailAddress may contain any unique string instead of an e-mail address.

3.7.3.1 mobileAppWrite Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
userEmailAddress	String	YES
userId	Integer	YES
appType	mobileAppType	YES
copy	Boolean	NO

Example Request



```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:mobileAppWrite>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <userEmailAddress>tesasmartair2017@gmail.com</userEmailAddress>
      <userId>546</userId>
      <appType>MOBILE_APP_TYPE_BLE</apptype>
    </soap:mobileAppWrite>
  </soapenv:Body>
</soapenv:Envelope>
```

3.7.3.2 mobileAppWrite Response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:mobileAppWriteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <return>
        <type>RESULT_OK</type>
      </return>
    </ns2:mobileAppWriteResponse>
  </S:Body>
</S:Envelope>
```

3.7.4 mobileAppRevoke

Sends a request to cancel and remove existing user credentials from all devices.

3.7.4.1 mobileAppRevoke Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
userId	Integer	YES

Example Request. Door identified by name

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:mobileAppRevoke>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <userId>546</userId>
    </soap:mobileAppRevoke>
  </soapenv:Body>
</soapenv:Envelope>
```

3.7.4.2 mobileAppRevoke Response

Example Response



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 125 of 342

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:mobileAppRevokeResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <return>
        <type>RESULT_OK</type>
      </return>
    </ns2:mobileAppRevokeResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 126 of 342
---	--

3.8 EncoderWebService

This service contains methods to read and write physical user credentials such as keys and cards.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	EncoderServicePortBinding
Location	https://host:8181/ServerPlatform/EncoderWebService
Descriptor	https://host:8181/ServerPlatform/EncoderWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.8.1 Data type information for EncoderWebService

This service uses an `encodingRequest` type to provide request parameters such as target encoder (`encodeName`, `encoderId` or `agentId`), technology (proximity or key) and user to encode (`userId` or `userName`).

encodingRequest		
Field	SOAP Type	Description
agentId	String	EncoderAgent Id
encoderId	String	Encoder Id
encoderName	String	Encoder Name
copy	Integer	Encode copy flag
technology	EncoderType enumeration	Encoder technology
	ENCODER_TYPE_PROX	
	ENCODER_TYPE_KEY	
userId	String	User Id
userName	Integer	User Name
cardId	String	CardId for EncoderZero mode
cardType	Integer	CardType for EncoderZero mode. Accepted values: 1 (Ultralight), 2 (Mifare Classic 4-byte cardId), 3 (Mifare Classic 7-byte cardId)

3.8.2 encoderGetByNameOrIP

This method returns information about encoders registered in the system. This method accepts `encoderName`, `encoderIPAddress`, `encoderDNSAddress` and `encoderPort` parameters to filter out responses. If no parameters are given, all system encoders are returned.

3.8.2.1 encoderGetByNameOrIP Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
encoderName	String	NO
encoderIPAddress	String	NO
encoderDNSAddress	String	NO
encoderPort	Integer	NO



Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:encoderGetByNameOrIP>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
    </soap:encoderGetByNameOrIP>
  </soapenv:Body>
</soapenv:Envelope>
```

3.8.2.2 encoderGetByNameOrIP Response

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/"
  <S:Body>
    <ns2:encoderGetByNameOrIPResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <findEncoderByNameOrIP>
        <type>RESULT_OK</type>
        <encoderData>
          <encoderId>1</encoderId>
          <encoderName>Editor on Desktop</encoderName>
          <ipAddress>10.246.83.12</ipAddress>
          <port>27000</port>
          <protocol>1</protocol>
          <version>01.00</version>
        </encoderData>
        <encoderData>
          <agentId>a2a3bb63449f2e6accad51cb44dd66</agentId>
          <encoderId>10</encoderId>
          <encoderName>Encoder Agent a2a3</encoderName>
          <ipAddress>127.0.0.1</ipAddress>
          <version>01.00</version>
        </encoderData>
        <encoderData>
          <agentId>100b03c303c8a1d01876b12cff0d9b</agentId>
          <encoderId>11</encoderId>
          <encoderName>Encoder Agent 100b</encoderName>
          <ipAddress>127.0.0.1</ipAddress>
          <version>01.01</version>
        </encoderData>
      </findEncoderByNameOrIP>
    </ns2:encoderGetByNameOrIPResponse>
  </S:Body>
</S:Envelope>
```



3.8.3 read

This method reads a physical credential from the specified encoder. The target encoder must be identified (using either its `encoderName`, `encoderId` or `agentId`) as well as its technology type (`ENCODER_TYPE_PROX` or `ENCODER_TYPE_KEY`).

This method supports the EncoderZero mode to interpret raw data contents of a credential read from another encoder. To enable EncoderZero mode, `encoderId` value must be set to 0. Data must be provided in the `data` parameter. EncoderZero mode can be used with either `ENCODER_TYPE_MAG` or `ENCODER_TYPE_PROX` technologies. When using `ENCODER_TYPE_PROX`, `cardId` parameter must also be provided.

3.8.3.1 read Request

Parameter	Type	Mandatory
<code>operatorName</code>	String	YES
<code>operatorPassword</code>	String	YES
<code>request</code>	encodingRequest	YES

Example Request. Encoder specified with agentId.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:read>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <request>
        <agentId>14ff55f40575aa93703b5bf390b3cd</agentId>
        <technology>ENCODER_TYPE_PROX</technology>
      </request>
    </soap:read>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Encoder Zero Mode

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:read>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <request>
        <encoderId>0</encoderId>
        <cardId>94D8C163</cardId>
        <data>3C03582DC29A4278686690C0718B0DA87CDFDF2D2435573971B42D76B35652FC00844C27
185A82C73766528BA699D63A</data>
        <technology>ENCODER_TYPE_PROX</technology>
      </request>
    </soap:read>
  </soapenv:Body>
</soapenv:Envelope>
```




3.8.3.2 read Response

Example Response. Card read successfully

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:readResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <userData>
          <ada>false</ada>
          <dateActivation>2020-10-06T16:40:00</dateActivation>
          <dateExpiration>2020-10-21T16:30:00</dateExpiration>
          <dateIssue>2020-10-06T16:46:00</dateIssue>
          <grants/>
          <info>Mifare 4K</info>
          <keypad/>
          <numCopies>0</numCopies>
          <UOCAccess>false</UOCAccess>
          <UOCAudit>true</UOCAudit>
          <UOCOverflow>false</UOCOverflow>
          <userCardId>1A949D19</userCardId>
          <userName>TESA test</username>
          <userType>USER_STANDARD</userType>
        </userData>
      </operationResult>
    </ns2:readResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Error. Deleted card

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:readResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>915</errorCode>
        <errorDetail>3DC31A949D193</errorDetail>
        <errorType>ERROR_READING_DELETED_CARD</errorType>
        <type>RESULT_ERROR</type>
        <userData>
          <userCardId>1A949D19</userCardId>
        </userData>
      </operationResult>
    </ns2:readResponse>
  </S:Body>
</S:Envelope>
```



Example Response. Error. No card on reader

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:readResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>908</errorCode>
        <errorDetail>³E8³</errorDetail>
        <errorType>ERROR_ENCODING_READ_TIMEOUT</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:readResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Error. Encoder not communicating

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:readResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>909</errorCode>
        <errorDetail>³EA³</errorDetail>
        <errorType>ERROR_ENCODING_NO_COMMUNICATION</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:readResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Error. Encoder Service not running

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:readResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>905</errorCode>
        <errorDetail>Connection refused: connect</errorDetail>
        <errorType>ERROR_SERVER_CANNOT_CONNECT</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:readResponse>
  </S:Body>
</S:Envelope>
```



3.8.4 encode

Encodes a physical credential on the specified encoder. The target encoder must be identified (using either its encoderName, encoderId or agentId), technology type must be specified (ENCODER_TYPE_PROX or ENCODER_TYPE_KEY) and the user to encode must be declared using either its userName or userId.

This method supports the EncoderZero mode to return raw data contents of a credential instead of performing an encoding operation in a device. To enable the EncoderZero mode, encoderId value must be set to 0. Data is returned in the detail response field. EncoderZero mode can be used with either ENCODER_TYPE_MAG or ENCODER_TYPE_PROX technologies. When using ENCODER_TYPE_PROX, cardId parameter must also be provided.

3.8.4.1 encode Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
request	encodingRequest	YES

Example Request. Encoder specified with agentId.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:encode>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <request>
        <agentId>14ff55f40575aa93703b5bf390b3cd</agentId>
        <copy>false</copy>
        <userName>TESA test</userName>
      </request>
    </soap:encode>
  </soapenv:Body>
</soapenv:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 132 of 342

Example Request. EncoderZero mode

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:encode>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <request>
        <encoderId>0</encoderId>
        <cardId>94D8C163</cardId>
        <cardType>1</cardType>
        <userName>Usuario PROX</userName>
        <copy>false</copy>
        <technology>ENCODER_TYPE_PROX</technology>
      </request>
    </soap:encode>
  </soapenv:Body>
</soapenv:Envelope>
```



3.8.4.2 encode Response

Example Response. Encoder specified with agentId.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:encodeResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <userData>
          <ada>false</ada>
          <appCheckin>false</appCheckin>
          <bleCheckin>false</bleCheckin>
          <codLev>5</codLev>
          <data1/>
          <data2/>
          <data3/>
          <data4/>
          <dateActivation>2020-10-07T12:00:00</dateActivation>
          <dateExpiration>2020-10-21T16:30:00</dateExpiration>
          <dateIssue>2020-10-07T12:07:18</dateIssue>
          <dateUpdate>2000-01-01T00:00:00</dateUpdate>
          <deleted>false</deleted>
          <enkReles>1</enkReles>
          <externalId/>
          <keyPad>FFFFFF</keyPad>
          <numCopies>0</numCopies>
          <openBlockedDoors>false</openBlockedDoors>
          <pinCheckin>false</pinCheckin>
          <track1/>
          <track2/>
          <UOCAccess>true</UOCAccess>
          <UOCAudit>true</UOCAudit>
          <UOCDays>168</UOCDays>
          <UOCOverflow>false</UOCOverflow>
          <UOCRevalidate>false</UOCRevalidate>
          <updateRequired>false</updateRequired>
          <userAPB>false</userAPB>
          <userCardId>1A949D19</userCardId>
          <userCarrier>CAR_PROX</userCarrier>
          <userEmailAddress>tesaassaabloy@gmail.com</userEmailAddress>
          <userEmailAddress2/>
          <userEmailAddress3/>
          <userEmailAddress4/>
          <userEncoded>true</userEncoded>
          <userGroup/>
          <userId>112</userId>
          <userName>TESA test</userName>
          <userPhoneNumber/>
          <userType>USER_STANDARD</userType>
        </userData>
      </operationResult>
    </ns2:encodeResponse>
  </S:Body>
</S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 134 of 342

Example Response. EncoderZero mode.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:encodeResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
<detail>3C03582DC29A4278686690C0718B0DA87CDFDF2D2435573971B42D76B35652FC00844C
27185A82C73766528BA699D63A</detail>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:encodeResponse>
  </S:Body>
</S:Envelope>
```

3.8.5 delete

Deletes a physical credential on the specified encoder. The target encoder must be identified (using either its encoderName, encoderId or agentId) as well as its technology type (ENCODER_TYPE_PROX or ENCODER_TYPE_KEY).

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
request	encodingRequest	YES

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:delete>
      <operatorName>tesa</operatorName>
      <operatorPassword>aaaabbbb</operatorPassword>
      <request>
        <agentId>14ff55f40575aa93703b5bf390b3cd</agentId>
        <technology>ENCODER_TYPE_PROX</technology>
      </request>
    </soap:delete>
  </soapenv:Body>
</soapenv:Envelope>
```

3.8.5.1 delete Response

Example Response



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:deleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:deleteResponse>
  </S:Body>
</S:Envelope>
```

3.9 GuestsWebService

This service contains methods related to the management of hotel guests and allows operations such as obtaining room data, checking in and checking out.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	GuestsServicePortBinding
Location	https://host:8181/ServerPlatform/GuestsWebService
Descriptor	https://host:8181/ServerPlatform/GuestsWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.9.1 Data type information for GuestsWebService

The main datatype used by this service is the `GuestInfo` type, which represents a guest check-in or preassignment request. `DoorInfo` is also used to return information about rooms. Please see XSD reference for detailed description of data types.

- `GuestInfo`: Contains complete information of a guest check-in or preassignment request.

GuestInfo type		
Field	SOAP Type	Description
roomId	Integer	Door id
roomMultipleId1	Integer	Door id
roomMultipleId2	Integer	Door id
roomMultipleId3	Integer	Door id
dateActivation	Date type	Activation date
dateExpiration	Date type	Expiration date
grants	String list	Grant name list
keypad	String	Keypad PIN value



ada	Boolean	User with disability
track1	String	Track 1 data
track2	String	Track 2 data
appCheckin	Boolean	TesaHotel app check-in
localCardCheckin	Boolean	Local card check-in
openowcheckin	Boolean	Openow app check-in
pinCheckin	Boolean	PIN check-in
agentId	String	Agent Id for local encoding
encoderId	String	Encoder Id for local encoding
encoderName	String	Encoder Name for local encoding
userEmailAddress	String	E-mail address 1
userEmailAddress2	String	E-mail address 2
userEmailAddress3	String	E-mail address 3
userEmailAddress4	String	E-mail address 4
sendPreCheckinInformationMail	Boolean	Send precheck-in information email
preCheckinInformationMailLang	String	Precheck-in information email language
cancelOccupied	Boolean	Cancel occupied rooms
cardId	String	CardId for EncoderZero mode
cardType	Integer	CardType for EncoderZero mode. Accepted values: 1 (Ultralight), 2 (Mifare Classic 4-byte cardId), 3 (Mifare Classic 7-byte cardId)

The table below shows a list of common error type responses for guest operations. Please see Appendix A for detailed reference and XSD schemas of the object types.

errorType	Description
ERROR_BAD_PARAMETERS	Required data missing/incorrect
RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING	No valid encoding target specified
ERROR_ENCODING_DEVICE_MISSING	No encoder specified for local encoding
RESULT_ERROR_CHECKIN_ROOM_OCCUPIED	Room already occupied
RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED	Room already preassigned
RESULT_ERROR_CHECKIN_PARENT_OCCUPIED	Parent room occupied
RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED	Parent room preassigned
RESULT_ERROR_CHECKIN_CHILD_OCCUPIED	Children room occupied
RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED	Children room preassigned
RESULT_ERROR_CHECKIN_INVALID_ROOM	Unsupported operation for the room
RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM	Unsupported operation for the room
RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM	Unsupported operation for the room
RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED	Room is not occupied
RESULT_ERROR_CHECKIN_TOO_MANY_COPIES	Maximum copies exceeded
RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING	E-mail address missing
ERROR_DATA_ERROR	Data validation error (e.g: invalid dates)

ERROR_DATA_ERROR validation error includes an additional detail field to specify known validation error causes as shown in the table below.

ERROR_DATA_ERROR detail	Error cause description
VALIDATION_ERROR_EXPIRATION_DATE_IN_THE_PAST	Invalid dates
VALIDATION_ERROR_EXPIRATION_DATE_BEFORE_ACTIVATION	Invalid dates
VALIDATION_ERROR	Invalid parameter value



3.9.2 checkin

This method performs a check-in operation for the selected rooms and dates. The operation requires at least one `roomId`, `dateActivation`, `dateExpiration`, and one or several encoding targets (`localCardCheckin`, `pinCheckin`, `appCheckin` or `openowCheckin`). When using `localCardCheckin` the target encoder must be identified using either its `encoderName`, `encoderId` or `agentId`.

This method supports the `EncoderZero` mode to return raw data contents of a credential instead of performing an encoding operation in a device. To enable the `EncoderZero` mode, `encoderId` value must be set to 0. Data is returned in the `detail` response field. `EncoderZero` mode can be used with either `ENCODER_TYPE_MAG` or `ENCODER_TYPE_PROX` technologies. When using `ENCODER_TYPE_PROX`, `cardId` parameter must also be provided.

3.9.2.1 checkIn Request

Parameter	SOAP type	Mandatory
<code>operatorName</code>	String	Yes
<code>operatorPassword</code>	String	Yes
<code>guestInfo</code>	GuestInfo	Yes

Example Request. Check-in operation on local encoder

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkin>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2021-02-15T12:12:12</dateActivation>
        <dateExpiration>2021-03-15T12:12:12</dateExpiration>
        <localCardCheckin>true</localCardCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
      </guestData>
    </soap:checkin>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Check-in operation in EncoderZero mode.



```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkin>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2021-02-15T12:12:12</dateActivation>
        <dateExpiration>2021-03-15T12:12:12</dateExpiration>
        <localCardCheckin>true</localCardCheckin>
        <encoderId>0</encoderId>
        <cardId>94D8C163</cardId>
        <technology>ENCODER_TYPE_PROX</technology>
        <cardType>1</cardType>
      </guestData>
    </soap:checkin>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Check-in operation with grants on local encoder and openow. cancelOccupied can be used to automatically cancel an existing check-in.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkin>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2021-02-15T12:12:12</dateActivation>
        <dateExpiration>2021-03-15T12:12:12</dateExpiration>
        <grants>REST0</grants>
        <grants>CLUB</grants>
        <localCardCheckin>true</localCardCheckin>
        <openowCheckin>true</openowCheckin>
        <cancelOccupied>true</cancelOccupied>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
        <userEmailAddress>guest@tesa.es</userEmailAddress>
      </guestData>
    </soap:checkin>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.2.2 checkIn Responses

A check-in operation is usually composed of several enclosed suboperations (e.g: local encoding + openow encoding). Information about each operation is returned in the subOperations field. The detail field returns the Card UID value in case of a successful local encoding operation.



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 139 of 342

Example Response. Successful check-in (local encoder)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>1A949D19</detail>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful check-in. EncoderZero mode.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>3C03582DC29A4278B4D533318AD373B8C0CCDA1A069C11B847AD8256890595D430DFA0
          67E6B1A0E29154A0F4F4DC57EA</detail>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinResponse>
  </S:Body>
</S:Envelope>
```



Example Response. Successful check-in (local+openow+mobileApp)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations xsi:type="ns2:operationResultMultiple"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
          <detail>1A949D19</detail>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>guest@tesa.es</detail>
          <operationId>NOTIFICATION_TYPE_MOBILEAPP_COPY</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>guest@tesa.es</detail>
          <operationId>NOTIFICATION_TYPE_BLE_COPY</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Unsuccessful check-in. Occupied room. Result includes occupied room name and dates

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>300</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_ROOM_OCCUPIED</errorType>
        <type>RESULT_ERROR</type>
        <dateActivation>2021-04-28T10:30:00+02:00</dateActivation>
        <dateExpiration>2021-04-29T12:00:00+02:00</dateExpiration>
        <doorName>d_1</doorName>
      </operationResult>
    </ns2:checkinResponse>
  </S:Body>
</S:Envelope>
```

**Example Response. Unsuccessful check-in. Data error with invalid date. ErrorDetail contains error cause information**

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>800</errorCode>
      <errorDetail>VALIDATION_ERROR_EXPIRATION_DATE_IN_THE_PAST</errorDetail>
      <errorType>ERROR_DATA_ERROR</errorType>
      <type>RESULT_ERROR</type>
    </operationResult>
  </ns2:checkinResponse>
</S:Body>
</S:Envelope>
```

3.9.3 checkinCopy

This method performs a guest copy operation for the selected rooms. The operation requires a valid `roomId`, `dateActivation`, `dateExpiration`, and one or several encoding targets (`localCardCheckin`, `pinCheckin`, `appCheckin` or `openowCheckin`). When using `localCardCheckin` the target encoder must be identified using either its `encoderName`, `encoderId` or `agentId`.

This method supports the `EncoderZero` mode to return raw data contents of a credential instead of performing an encoding operation in a device. Please refer to 3.9.2 for more information and example requests/responses with `EncoderZero` mode.

3.9.3.1 checkinCopy Request

Example Request. Copy operation on local encoder

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkinCopy>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2020-02-15T12:12:12</dateActivation>
        <dateExpiration>2021-03-15T12:12:12</dateExpiration>
        <localCardCheckin>true</localCardCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
      </guestData>
    </soap:checkinCopy>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Copy operation on local encoder and openow

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkinCopy>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2021-05-16T12:12:12</dateActivation>
        <dateExpiration>2021-05-26T12:12:12</dateExpiration>
        <localCardCheckin>true</localCardCheckin>
        <openowCheckin>true</openowCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
        <userEmailAddress>guest@tesa.es</userEmailAddress>
      </guestData>
    </soap:checkinCopy>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.3.2 checkinCopy Responses

A copy operation can be composed of several enclosed suboperations (e.g: local copy + openow copy). Information about each operation is returned in the subOperations field. The detail field contains the copy number value. In case of a successful local encoding operation, the detail field contains the copy number and the Card UID separated by a comma.

Example Response. Successful copy on local encoder. Detail field returns copy number

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinCopyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>2,1A949D19</detail>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinCopyResponse>
  </S:Body>
</S:Envelope>
```



Example Response. Successful copy on local encoder + openow. Detail field returns copy number

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinCopyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>5,1A949D19</detail>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>guest@tesa.es</detail>
          <operationId>NOTIFICATION_TYPE_BLE_COPY</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinCopyResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Unsuccessful copy. Room not occupied

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinCopyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>310</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:checkinCopyResponse>
  </S:Body>
</S:Envelope>
```



3.9.1 checkinModifyDate

This method modifies the expiration date of an existing check-in. The operation requires a valid `roomId` and `dateExpiration`.

3.9.1.1 checkinModifyDate Request

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkinModifyDate>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <roomId>81</roomId>
      <dateExpiration>2021-05-19T12:12:00</dateExpiration>
    </soap:checkinModifyDate>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.1.2 checkinModifyDate Response

Example Response. Unsuccessful modification. Room not occupied

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinModifyDateResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <errorCode>310</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:checkinModifyDateResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful modification (check-in with local card)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinModifyDateResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <operationId>MODIFY_STAY_CHECKIN</operationId>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:checkinModifyDateResponse>
  </S:Body>
</S:Envelope>
```




Example Response. Successful modification (check-in with local card + openow)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinModifyDateResponse
      xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <operationId>MODIFY_STAY_CHECKIN</operationId>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>guest@tesa.es</detail>
          <operationId>NOTIFICATION_TYPE_BLE_ADD</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinModifyDateResponse>
  </S:Body>
</S:Envelope>
```

3.9.2 checkinModifyGrants

This method modifies the grants of an existing check-in. The operation requires a valid `roomId` and list of valid grant names.

3.9.2.1 checkinModifyGrants Request

Example Request.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkinModify>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <roomId>81</roomId>
      <grants>GYM</grants>
      <grants>POOL</grants>
    </soap:checkinModify>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.2.2 checkinModifyGrants Response

Example Response. Unsuccessful modification. Room not occupied

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinModifyGrantsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <errorCode>310</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:checkinModifyGrantsResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful modification (check-in with local card)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinModifyGrantsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <operationId>MODIFY_STAY_CHECKIN</operationId>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:checkinModifyGrantsResponse >
  </S:Body>
</S:Envelope>
```

Example Response. Successful modification (check-in with local card + openow)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkinModifyGrantsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <operationId>MODIFY_STAY_CHECKIN</operationId>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>guest@tesa.es</detail>
          <operationId>NOTIFICATION_TYPE_BLE_ADD</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:checkinModifyGrantsResponse>
  </S:Body>
</S:Envelope>
```



3.9.3 checkout

This method performs a checkout operation for the selected room. The method requires a `roomId`.

3.9.3.1 checkout Request

Example Request.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:checkout>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <roomId>81</roomId>
    </soap:checkout>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.3.2 checkout Response

Example Response. Unsuccessful checkout. Room not occupied

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkoutResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations xsi:type="ns2:operationResultCheckin"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
          <errorCode>310</errorCode>
          <errorType>RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED</errorType>
          <type>RESULT_ERROR</type>
        </subOperations>
      </operationResult>
    </ns2:checkoutResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful checkout

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:checkoutResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:checkoutResponse>
  </S:Body>
</S:Envelope>
```



3.9.4 precheckin

This method performs a precheckin operation for the selected rooms and dates. The operation requires at least one `roomId`, `dateActivation`, `dateExpiration`, and one or several encoding targets (`localCardCheckin`, `pinCheckin`, `appCheckin` or `openowCheckin`). Multiple precheckins can be created for the same room using different dates. Each precheckin will be identified with its unique `preAssignmentId` value.

This method supports the `EncoderZero` mode to return raw data contents of a credential instead of performing an encoding operation in a device. Please refer to 3.9.2 for more information and example requests/responses with `EncoderZero` mode.

3.9.4.1 precheckin Request

Example Request. Precheckin operation on local encoder

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckin>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2021-04-23T12:12:00</dateActivation>
        <dateExpiration>2021-05-15T12:12:00</dateExpiration>
        <grants>GYM</grants>
        <localCardCheckin>true</localCardCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
      </guestData>
    </soap:precheckin>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Precheckin operation on local encoder + openow. Confirmation e-mail to be sent in english



```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckin>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <roomId>81</roomId>
        <dateActivation>2021-04-23T12:12:00</dateActivation>
        <dateExpiration>2021-05-15T12:12:00</dateExpiration>
        <grants>GYM</grants>
        <localCardCheckin>true</localCardCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
        <openowCheckin>true</openowCheckin>
      <sendPreCheckinInformationMail>true</sendPreCheckinInformationMail>
      <preCheckinInformationMailLang>en</preCheckinInformationMailLang>
      <userEmailAddress>guest@tesa.es</userEmailAddress>
    </guestData>
  </soap:precheckin>
</soapenv:Body>
</soapenv:Envelope>
```

3.9.4.2 precheckin Responses

A precheck-in operation is usually composed of several enclosed suboperations (e.g: local encoding + openow encoding). Information about each operation is returned in the subOperations field. The detail field returns the Card UID value in case of a successful local encoding operation.

Example Response. Successful operation (local encoder)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>1A949D19</detail>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:precheckinResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful operation (local+openow) with email confirmation sent to the user.



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>1A949D19</detail>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>guest@tesa.es</detail>
          <operationId>PRECHECKIN_INFO_EMAIL</operationId>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:precheckinResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Unsuccessful operation. Room already preassigned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>EC</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED</errorType>
        <type>RESULT_ERROR</type>
        <dateActivation>2021-05-23T12:10:00</dateActivation>
        <dateExpiration>2021-06-07T12:10:00</dateExpiration>
        <doorName>d_1</doorName>
      </operationResult>
    </ns2:precheckinResponse>
  </S:Body>
</S:Envelope>
```

3.9.1 precheckinCopy

This method performs a guest copy operation for the selected preassigned rooms. The operation requires a valid `preAssignmentId` and one or several encoding targets (`localCardCheckin`, `pinCheckin`, `appCheckin` or `openowCheckin`).

This method supports the `EncoderZero` mode to return raw data contents of a credential instead of performing an encoding operation in a device. Please refer to 3.9.2 for more information and example requests/responses with `EncoderZero` mode.

3.9.1.1 precheckinCopy Request

Example Request. Copy operation on local encoder



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 151 of 342

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckinCopy>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <preAssignmentId>298</preAssignmentId>
        <localCardCheckin>true</localCardCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
      </guestData>
    </soap:precheckinCopy>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. Copy operation on local encoder + openow

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckinCopy>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <guestData>
        <preAssignmentId>298</preAssignmentId>
        <localCardCheckin>true</localCardCheckin>
        <agentId>90f307ff09b14c848084cf19995aaa</agentId>
        <openowCheckin>true</openowCheckin>
        <userEmailAddress>guest@tesa.es</userEmailAddress>
      </guestData>
    </soap:precheckinCopy>
  </soapenv:Body>
</soapenv:Envelope>
```



3.9.1.2 precheckinCopy Responses

A precheck-in copy operation can be composed of several enclosed suboperations (e.g: local copy + openow copy). Information about each operation is returned in the subOperations field. The detail field contains the copy number value. In case of a successful local encoding operation, the detail field contains the copy number and the Card UID values separated by a comma.

Example Response. Successful copy on local encoder.

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinCopyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <operationId>ENCODING_TYPE_LOCAL</operationId>
          <detail>2,1A949D19</detail>
          <type>RESULT_OK</type>
        </subOperations>
      </operationResult>
    </ns2:precheckinCopyResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Unsuccessful copy. Room not preassigned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinCopyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>307</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_INVALID_ROOM</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:precheckinCopyResponse>
  </S:Body>
</S:Envelope>
```




3.9.2 precheckinModifyDate

This method modifies the expiration date of an existing preassignment. The operation requires a valid `preAssignmentId` and `dateExpiration`

3.9.2.1 precheckinModifyDate Request

Example Request.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckinModifyDate>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <preAssignmentId>298</preAssignmentId>
      <dateExpiration>2021-05-19T12:12:00</dateExpiration>
    </soap:precheckinModifyDate>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.2.2 precheckinModifyDate Response

Example Response. Unsuccessful modification. Room not preassigned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinModifyDateResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <errorCode>307</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_INVALID_ROOM</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:precheckinModifyDateResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful modification (precheckin with local card)

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinModifyDateResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <operationId>MODIFY_STAY_PRECHECKIN</operationId>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:precheckinModifyDateResponse>
  </S:Body>
</S:Envelope>
```



3.9.1 precheckinModifyGrants

This method modifies the grants of an existing preassignment. The operation requires a valid `preAssignmentId` and list of grants names

3.9.1.1 precheckinModifyGrants Request

Example Request.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckinModifyGrants>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <preAssignmentId>298</preAssignmentId>
      <grants>GYM</grants>
    </soap:precheckinModifyGrants>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.1.2 precheckinModifyGrants Response

Example Response. Unsuccessful modification. Room not preassigned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinModifyGrantsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <errorCode>307</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_INVALID_ROOM</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:precheckinModifyGrantsResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful modification

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinModifyGrantsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <operationId>MODIFY_GRANTS_PRECHECKIN</operationId>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:precheckinModifyGrantsResponse>
  </S:Body>
</S:Envelope>
```



3.9.2 precheckinCancel

This method cancels an existing preassignment for the selected room. The method requires a preAssignmentId.

3.9.2.1 precheckinCancel Request

Example Request.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:precheckinCancel>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
      <preAssignmentId>298</preAssignmentId>
    </soap:precheckinCancel>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.2.2 precheckinCancel Response

Example Response. Unsuccessful cancellation. Room not preassigned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinCancelResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <errorCode>307</errorCode>
        <errorType>RESULT_ERROR_CHECKIN_INVALID_ROOM</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:precheckinCancelResponse>
  </S:Body>
</S:Envelope>
```

Example Response. Successful cancellation

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:precheckinCancelResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <type>RESULT_OK</type>
      </operationResult>
    </ns2:precheckinCancelResponse>
  </S:Body>
</S:Envelope>
```



3.9.3 findAllRooms

This method returns information about all the rooms in a list of `DoorInfo` elements. `roomOccupied` and `roomPreassigned` values show the state of each room.

When a room is occupied, `dateActivation`, `dateExpiration` and `grantsOccupied` fields contain information about the check-in. When a room is preassigned, the `preAssignations` field contains a list of the preassignments for the room.

3.9.3.1 findAllRooms Request

Example Request.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:findAllRooms>
      <operatorName>inhova</operatorName>
      <operatorPassword>aaaaaaaa</operatorPassword>
    </soap:findAllRooms>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.3.2 findAllRooms Response

Example Response. Site with 3 rooms (1 occupied, 1 preassigned, 1 free).



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 157 of 342

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:findAllOccupiedRoomsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <doorData>
          <actManual>false</actManual>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <assignedCommonPins>Generic Pin 1</assignedCommonPins>
          <assignedCommonPins>Generic Pin 2</assignedCommonPins>
          <assignedCommonPins>Generic Pin 3</assignedCommonPins>
          <assignedCommonPins>Generic Pin 4</assignedCommonPins>
          <assignedCommonPins>Generic Pin 28</assignedCommonPins>
          <BLEvers>05.23</BLEvers>
          <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <dateActivation>2021-04-30T11:00:00+02:00</dateActivation>
          <dateExpiration>2021-05-01T12:00:00+02:00</dateExpiration>
          <deleted>false</deleted>
          <device>R4SDF_W</device>
          <disableLog>false</disableLog>
          <doorId>81</doorId>
          <doorName>d_1</doorName>
          <doorStateInfo>
            <batteryPercentage>90</batteryPercentage>
            <batteryStatus>OK</batteryStatus>
            <cabinetState/>
            <emergency>false</emergency>
            <mode>UNBLOCKED</mode>
            <physicalState>DOOR_CLOSED</physicalState>
            <privacy>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorType>TYPE_ESCUTCHEON_UOL</doorType>
          <doorVersion>05.62</doorVersion>
          <externalId/>
          <grants>Permi1</grants>
          <grants>Permi2</grants>
          <grants>BAR</grants>
          <grantsOccupied>Permi1</grantsOccupied>
          <grantsOccupied>Permi2</grantsOccupied>
          <grantsOccupied>BAR</grantsOccupied>
          <grantsOccupied>CLUB</grantsOccupied>
          <grantsOccupied>RESTO</grantsOccupied>
          <groupName/>
          <highTraffic>false</highTraffic>
          <keypad/>
          <lockdownState>0</lockdownState>
          <macAddress>255.0.85.184</macAddress>
          <numCopiesOccupied>0</numCopiesOccupied>
          <parentId>0</parentId>
          <privacyOverPassage>false</privacyOverPassage>
          <pushButton>false</pushButton>
        </doorData>
      </operationResult>
    </ns2:findAllOccupiedRoomsResponse>
  </S:Body>
</S:Envelope>
```

```

<registerHandle>false</registerHandle>
<relaySetupMode>0</relaySetupMode>
<requiredGrantIndex>0</requiredGrantIndex>
<rfVersion>05.20</rfVersion>
<roomOccupied>true</roomOccupied>
<roomPreassigned>false</roomPreassigned>
<roomType>TYPE_DOOR_ROOM</roomType>
<upatingModeId>0</upatingModeId>
<updateRequired>true</updateRequired>
<userId>109</userId>
<tDlo>30</tDlo>
<tEscReturn>0</tEscReturn>
<tOpen>240</tOpen>
</doorData>
<doorData>
  <actManual>false</actManual>
  <antiPassbackArea>APB_AREA_1</antiPassbackArea>
  <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
  <BLEvers>05.23</BLEvers>
  <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
  <calendarId>1</calendarId>
  <dateActu>2020-03-05T15:48:07.710+01:00</dateActu>
  <deleted>false</deleted>
  <device>R4SDF_W</device>
  <disableLog>false</disableLog>
  <doorId>82</doorId>
  <doorName>d_3</doorName>
  <doorStateInfo>
    <batteryPercentage>90</batteryPercentage>
    <batteryStatus>OK</batteryStatus>
    <emergency>false</emergency>
  </doorStateInfo>
  <doorType>TYPE_ESCUTCHEON_PROX</doorType>
  <doorVersion>05.62</doorVersion>
  <externalId/>
  <groupName>Guest</groupName>
  <highTraffic>false</highTraffic>
  <keypad/>
  <lockdownState>0</lockdownState>
  <numCopiesPreassigned>0</numCopiesPreassigned>
  <parentId>0</parentId>
  <privacyOverPassage>false</privacyOverPassage>
  <pushButton>false</pushButton>
  <preAssignations>
    <datePreActivation>2023-04-14T12:00:00</datePreActivation>
    <datePreExpiration>2023-04-15T12:00:00</datePreExpiration>
    <numCopiesPreassigned>0</numCopiesPreassigned>
    <grantsPreassigned>BAR</grantsPreassigned>
    <grantsPreassigned>CLUB</grantsPreassigned>
    <preAssignmentId>300</preAssignmentId>
    <roomPreassigned>true</roomPreassigned>
  </preAssignations>
  <registerHandle>false</registerHandle>
  <relaySetupMode>0</relaySetupMode>
  <requiredGrantIndex>0</requiredGrantIndex>

```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 159 of 342

```
<roomOccupied>false</roomOccupied>
<roomPreassigned>true</roomPreassigned>
<roomType>TYPE_DOOR_ROOM</roomType>
<upatingModeId>0</upatingModeId>
<updateRequired>true</updateRequired>
<userId>110</userId>
<tDlo>30</tDlo>
<tEscReturn>0</tEscReturn>
<tOpen>4</tOpen>
</doorData>
<doorData>
  <actManual>true</actManual>
  <antiPassbackArea>APB_AREA_1</antiPassbackArea>
  <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
  <BLEvers/>
  <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
  <calendarId>1</calendarId>
  <deleted>false</deleted>
  <device/>
  <disableLog>false</disableLog>
  <doorId>111</doorId>
  <doorName>d_2</doorName>
  <doorStateInfo>
    <cabinetState/>
  </doorStateInfo>
  <doorType>TYPE_ESCUTCHEON_UOL</doorType>
  <doorVersion>xx.xx</doorVersion>
  <externalId/>
  <groupName/>
  <highTraffic>false</highTraffic>
  <keypad/>
  <parentId>0</parentId>
  <privacyOverPassage>false</privacyOverPassage>
  <pushButton>false</pushButton>
  <registerHandle>false</registerHandle>
  <relaySetupMode>0</relaySetupMode>
  <requiredGrantIndex>0</requiredGrantIndex>
  <roomOccupied>false</roomOccupied>
  <roomPreassigned>false</roomPreassigned>
  <roomType>TYPE_DOOR_ROOM</roomType>
  <upatingModeId>0</upatingModeId>
  <updateRequired>true</updateRequired>
  <userId>183</userId>
  <tDlo>30</tDlo>
  <tEscReturn>0</tEscReturn>
  <tOpen>2</tOpen>
</doorData>
<recordCount>3</recordCount>
</operationResult>
</ns2:findAllOccupiedRoomsResponse>
</S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 160 of 342
---	---

3.9.4 findAllOccupiedRooms

This method returns a list of information about all the rooms that are occupied or preassigned, using a list of DoorInfo elements. roomOccupied and roomPreassigned values show the state of each room.

When a room is occupied, dateActivation, dateExpiration and grantsOccupied fields contain information about the check-in. Similarly, when a room is preassigned, datePreActivation, datePreExpiration and grantsPreassigned contain information about the preassignment.

3.9.4.1 findAllOccupiedRooms Request

Example Request. <pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/" <soapenv:Header/> <soapenv:Body> <soap:findAllOccupiedRooms> <operatorName>inhova</operatorName> <operatorPassword>aaaaaaaa</operatorPassword> </soap:findAllOccupiedRooms> </soapenv:Body> </soapenv:Envelope></pre>

3.9.4.2 findAllOccupiedRooms Response

Example Response. Site with 2 occupied rooms (1 occupied with multiple preassignments, 1 preassigned)



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 161 of 342

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:findAllOccupiedRoomsResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <doorData>
          <actManual>>false</actManual>
          <antiPassbackArea>APB_AREA_1</antiPassbackArea>
          <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
          <assignedCommonPins>Generic Pin 1</assignedCommonPins>
          <assignedCommonPins>Generic Pin 2</assignedCommonPins>
          <assignedCommonPins>Generic Pin 3</assignedCommonPins>
          <assignedCommonPins>Generic Pin 4</assignedCommonPins>
          <assignedCommonPins>Generic Pin 28</assignedCommonPins>
          <BLEvers>05.23</BLEvers>
          <cabinetOpenAfterHours>>false</cabinetOpenAfterHours>
          <calendarId>1</calendarId>
          <dateActivation>2021-04-30T11:00:00+02:00</dateActivation>
          <dateExpiration>2021-05-01T12:00:00+02:00</dateExpiration>
          <deleted>>false</deleted>
          <device>R4SDF_W</device>
          <disableLog>>false</disableLog>
          <doorId>81</doorId>
          <doorName>d_1</doorName>
          <doorStateInfo>
            <batteryPercentage>90</batteryPercentage>
            <batteryStatus>OK</batteryStatus>
            <cabinetState/>
            <emergency>>false</emergency>
            <mode>UNBLOCKED</mode>
            <physicalState>DOOR_CLOSED</physicalState>
            <privacy>>false</privacy>
            <state>CARD</state>
          </doorStateInfo>
          <doorType>TYPE_ESCUTCHEON_UOL</doorType>
          <doorVersion>05.62</doorVersion>
          <externalId/>
          <grants>Permi1</grants>
          <grants>Permi2</grants>
          <grants>BAR</grants>
          <grantsOccupied>Permi1</grantsOccupied>
          <grantsOccupied>Permi2</grantsOccupied>
          <grantsOccupied>BAR</grantsOccupied>
          <grantsOccupied>CLUB</grantsOccupied>
          <grantsOccupied>RESTO</grantsOccupied>
          <groupName/>
          <highTraffic>>false</highTraffic>
          <keypad/>
          <lockdownState>0</lockdownState>
          <macAddress>255.0.85.184</macAddress>
          <numCopiesOccupied>0</numCopiesOccupied>
          <parentId>0</parentId>
          <privacyOverPassage>>false</privacyOverPassage>
          <pushButton>>false</pushButton>
```

```

<registerHandle>false</registerHandle>
<relaySetupMode>0</relaySetupMode>
<requiredGrantIndex>0</requiredGrantIndex>
<rfVersion>05.20</rfVersion>
<roomOccupied>true</roomOccupied>
<roomPreassigned>false</roomPreassigned>
<roomType>TYPE_DOOR_ROOM</roomType>
<upatingModeId>0</upatingModeId>
<updateRequired>true</updateRequired>
<userId>109</userId>
<tDlo>30</tDlo>
<tEscReturn>0</tEscReturn>
<tOpen>240</tOpen>
</doorData>
<doorData>
  <actManual>false</actManual>
  <antiPassbackArea>APB_AREA_1</antiPassbackArea>
  <antiPassbackEntry>TYPE_APB_NONE</antiPassbackEntry>
  <BLEvers>05.23</BLEvers>
  <cabinetOpenAfterHours>false</cabinetOpenAfterHours>
  <calendarId>1</calendarId>
  <dateActu>2020-03-05T15:48:07.710+01:00</dateActu>
  <deleted>false</deleted>
  <device>R4SDF_W</device>
  <disableLog>false</disableLog>
  <doorId>82</doorId>
  <doorName>d_3</doorName>
  <doorStateInfo>
    <batteryPercentage>90</batteryPercentage>
    <batteryStatus>OK</batteryStatus>
    <emergency>false</emergency>
  </doorStateInfo>
  <doorType>TYPE_ESCUTCHEON_PROX</doorType>
  <doorVersion>05.62</doorVersion>
  <externalId/>
  <groupName>Guest</groupName>
  <highTraffic>false</highTraffic>
  <keypad/>
  <lockdownState>0</lockdownState>
  <numCopiesPreassigned>0</numCopiesPreassigned>
  <parentId>0</parentId>
  <preAssignations>
    <datePreActivation>2023-04-14T12:00:00</datePreActivation>
    <datePreExpiration>2023-04-15T12:00:00</datePreExpiration>
    <grantsPreassigned>BAR</grantsPreassigned>
    <grantsPreassigned>CLUB</grantsPreassigned>
    <numCopiesPreassigned>0</numCopiesPreassigned>
    <preAssignmentId>300</preAssignmentId>
    <roomPreassigned>true</roomPreassigned>
  </preAssignations>
  <preAssignations>
    <datePreActivation>2023-04-17T12:00:00</datePreActivation>
    <datePreExpiration>2023-04-18T12:00:00</datePreExpiration>
    <numCopiesPreassigned>0</numCopiesPreassigned>
    <preAssignmentId>301</preAssignmentId>
  </preAssignations>

```

```

        <roomPreassigned>true</roomPreassigned>
    </preAssignations>
    <privacyOverPassage>false</privacyOverPassage>
    <pushButton>false</pushButton>
    <registerHandle>false</registerHandle>
    <relaySetupMode>0</relaySetupMode>
    <requiredGrantIndex>0</requiredGrantIndex>
    <roomOccupied>false</roomOccupied>
    <roomPreassigned>true</roomPreassigned>
    <roomType>TYPE_DOOR_ROOM</roomType>
    <upatingModeId>0</upatingModeId>
    <updateRequired>true</updateRequired>
    <userId>110</userId>
    <tDlo>30</tDlo>
    <tEscReturn>0</tEscReturn>
    <tOpen>4</tOpen>
</doorData>
    <recordCount>2</recordCount>
</operationResult>
</ns2:findAllOccupiedRoomsResponse>
</S:Body>
</S:Envelope>

```

3.10 PCToLockWebService

This service contains methods to download and upload PCToLock files. Binary data representation is supported in two ways: using base64 encoded strings inside the message body or using SOAP attachments with MTOM (Message Transmission Optimization Mechanism).

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	PCToLockServicePortBinding
Location	https://host:8181/ServerPlatform/PCToLockWebService
Descriptor	https://host:8181/ServerPlatform/PCToLockWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.10.1 Data type information for PCToLockWebService

This service uses an `pcToLockFileRequest` type to provide request parameters such as file expiration date, file encryption key, password to open doors, door selection and set of operations allowed for the operator.

pcToLockFileRequest			
Field	SOAP Type	Description	Mandatory
fileExpirationDate	DateTime	PCToLock file expiration date	NO
fileEncryptionKey	String	PCToLock file encryption password	YES
passwordToOpenDoors	String	PP password	NO

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 164 of 342
---	---

sortOrderField	String	PCToLock file internal doors sorting order field. Allowed values: name, group.	NO
doorSelection	DoorSelectionParams	Door selection to be included in the PCToLock file: - doorIdList: Specifies a concrete set of doors. - doorsNotUpdated: Selects all doors that are not updated. If none of the options are specified, all the doors are included in the file.	NO
	doorIdList		
	doorsNotUpdated		
operatorIsAllowedTo	OperatorAllowedParams	Operator options to be enabled in the PCToLock application. If no values are specified, the default values are set to false.	NO
	doorInitialize		
	doorOpen		
	doorUpdate		
	firmwareUpdate		
	openingsRead		
	safeOpen		

The table below shows a list of common error type responses for PCToLock file operations. Please see Appendix A for detailed reference and XSD schemas of the object types.

errorType	Description
ERROR_PCTOLOCK_FILE_INVALID	Uploaded file is not valid
ERROR_PCTOLOCK_FILE_WRONG_SITE	Uploaded file belongs to another site
ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST	Door processing error. Door not in database
ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH	Door processing error. Accessed door type does not match database type

Error responses may include additional information in the `detail` field. For example, if a valid file is uploaded with an incorrect password, the returned error type is `ERROR_PCTOLOCK_FILE_INVALID` and the `detail` field contains the “Wrong password” string to specify the root cause of the error.

3.10.1 pcToLockUploadFile

This method uploads a PcToLock file to be processed by the server. The method returns information about the result of the file processing process.

3.10.1.1 pcToLockUploadFile Request

Parameter	Type	Mandatory
operatorName	String	YES
operatorPassword	String	YES
fileEncryptionKey	String	YES
file	Base64 binary String or Attachment/MTOM	YES



Example Request. Inline file upload. Binary data represented as base64 encoded string

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:pcToLockUploadFile>
      <operatorName>operator1</operatorName>
      <operatorPassword>paszWord%$333</operatorPassword>
      <fileEncryptionKey>Admin1234-Z</fileEncryptionKey>
      <file>UESDBBQAAQBjACTorFQAAAAASU8AAKn+BgAQAAAsATG9ja0xvYW...</file>
    </soap:pcToLockUploadFile>
  </soapenv:Body>
</soapenv:Envelope>
```

Example Request. MTOM enabled. File uploaded as an attachment.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:pcToLockUploadFile>
      <operatorName>operator1</operatorName>
      <operatorPassword>paszWord%$333</operatorPassword>
      <fileEncryptionKey>Admin1234-Z</fileEncryptionKey>
      <file>cid:fileid</file>
    </soap:pcToLockUploadFile>
  </soapenv:Body>
</soapenv:Envelope>
```

3.10.1.2 pcToLockUploadFile Responses

A pcToLockUpload operation is composed of several enclosed suboperations. Information about each subOperation is returned in the subOperations field.

For each successfully processed door, an PCTOLOCK_DOOR_ACCESSED suboperation is returned. The door name is stated in the detail field. An additional PCTOLOCK_DOOR_OPENINGS_INSERTED subOperation returns the number of openings inserted in the database for the door stated in the preceding PCTOLOCK_DOOR_ACCESSED suboperation.

Example Response. Successful file processing. 2 doors accessed



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:pcToLockUploadFileResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <type>RESULT_OK</type>
        <subOperations>
          <detail>door 1</detail>
          <operationId>PCTOLOCK_DOOR_ACCESSED</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>25</detail>
          <operationId>PCTOLOCK_DOOR_OPENINGS_INSERTED</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>door 2</detail>
          <operationId>PCTOLOCK_DOOR_ACCESSED</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <subOperations>
          <detail>0</detail>
          <operationId>PCTOLOCK_DOOR_OPENINGS_INSERTED</operationId>
          <type>RESULT_OK</type>
        </subOperations>
        <accessedDoors>2</accessedDoors>
      </operationResult>
    </ns2:pcToLockUploadFileResponse>
  </S:Body>
</S:Envelope>
```

Example Response. File could not be processed (wrong file password).

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:pcToLockUploadFileResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <errorCode>802</errorCode>
        <errorDetail>Wrong Password</errorDetail>
        <errorType>ERROR_PCTOLOCK_FILE_INVALID</errorType>
        <type>RESULT_ERROR</type>
      </operationResult>
    </ns2:pcToLockUploadFileResponse>
  </S:Body>
</S:Envelope>
```

3.10.2 pcToLockDownloadFile

This method returns a PCToLock file for the specified doors and options. The fileEncryptionKey password parameter is mandatory.

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 167 of 342
---	--

3.10.2.1 pcToLockDownloadFile Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
params	pcToLockFileRequest	Yes

Example Request. PCToLock file for all doors enabling door update and openings read options
<pre> <soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:pcToLockDownloadFile> <operatorName>operator1</operatorName> <operatorPassword>paszWord%\$333</operatorPassword> <params> <fileEncryptionKey>MyP%azzw0011rd</fileEncryptionKey> <operatorIsAllowedTo> <doorUpdate>true</doorUpdate> <openingsRead>true</openingsRead> </operatorIsAllowedTo> </params> </soap:pcToLockDownloadFile> </soapenv:Body> </soapenv:Envelope> </pre>

f

Example Request. PCToLock file for specific doors lds and multiple enabled options
--



```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:pcToLockDownloadFile>
      <operatorName>operator1</operatorName>
      <operatorPassword>paszWord%$333</operatorPassword>
      <params>
        <fileExpirationDate>2023-01-01T01:01:00</fileExpirationDate>
        <fileEncryptionKey>MyP%azzw0011rd</fileEncryptionKey>
        <passwordToOpenDoors>1234</passwordToOpenDoors>
        <sortOrderField>name</sortOrderField>
        <doorSelection>
          <doorIdList>1</doorIdList>
          <doorIdList>5</doorIdList>
        </doorSelection>
        <operatorIsAllowedTo>
          <doorInitialize>true</doorInitialize>
          <doorOpen>false</doorOpen>
          <doorUpdate>true</doorUpdate>
          <firmwareUpdate>true</firmwareUpdate>
          <openingsRead>true</openingsRead>
          <safeOpen>true</safeOpen>
        </operatorIsAllowedTo>
      </params>
    </soap:pcToLockDownloadFile>
  </soapenv:Body>
</soapenv:Envelope>
```

3.10.2.2 pcToLockDownloadFile Response

Example Response. Inline response as base64 encoded string and provided in the response body

```
S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/"
  <S:Body>
    <ns2:pcToLockDownloadFileResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/"
      <operationResult>
        <pcToLockFile>
          UEsDBDMAAQhjACdMrVQAAAAARloAAJr9BgAQAA/FKyXqiEEmclOU943c1MxOTRJup0oL05Dm/LugK3
          cUWYMW08oRYbhyM2VRQ ...
        </pcToLockFile>
      </operationResult>
    </ns2:pcToLockDownloadFileResponse>
  </S:Body>
</S:Envelope>
```

Example Response. MTOM enabled. File content is provided as an attachment



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:pcToLockDownloadFileResponse
      xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operationResult>
        <pcToLockFile>
          <xop:Include href="cid:6e5e57f9-6764-4ec3-92ee-
a5f122e39bfa@example.jaxws.sun.com"
xmlns:xop="http://www.w3.org/2004/08/xop/include"/>
        </pcToLockFile>
      </operationResult>
    </ns2:pcToLockDownloadFileResponse>
  </S:Body>
</S:Envelope>
```

3.11 OperatorsWebService

This service contains methods to manage system operators. System operators are defined by an operatorName, operatorPassword, access level and authorized user/door groups. Each operator must be linked to a user.

Property	Value
Target Namespace	http://soap.ws.ts1000.tesa.es/
Port	OperatorsWebServicePortBinding
Location	https://host:8181/ServerPlatform/OperatorsWebService
Descriptor	https://host:8181/ServerPlatform/OperatorsWebService?wsdl
Style	Document
Transport protocol	SOAP over HTTP

3.11.1 Data type information for OperatorsWebService

The main datatype used by this service is the `OperatorInfo` type, which represents an operator. Please see XSD reference for detailed description of data types.

OperatorInfo			
Field	SOAP Type	Description	Mandatory
allDoorGroups	Boolean	Operator has access to all door groups	NO
allUserGroups	Boolean	Operator has access to all user groups	NO
defaultEncoder	EncoderInfo	Default encoder	NO
expanded	Boolean	Show expanded groups in user interface	NO
expirationLimit	Boolean	Operator expiration	NO
expirationLimitDays	Integer	Operator expiration days	NO
level	Integer	Operator access level	YES
operatorName	String	Operator name	YES
operatorPassword	String	Operator password	YES
selectdDoorGroups	String (multiple occurrences)	Authorized door groups for this operator	NO
selectedUserGroups	String (multiple occurrences)	Authorized user groups for this operator	NO
userId	Integer	Linked user	YES

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 170 of 342
---	---

The table below shows a list of common error type responses for OperatorService operations. Please see Appendix A for detailed reference and XSD schemas of the object types.

errorType	Description
USERNAME_IS_EMPTY	Operator name must have a value
USERNAME_ALREADY_EXISTS	Operator name or linked user is already taken by another operator
USER_NOT_FOUND	Linked user does not exist
GROUP_NOT_ALLOWED	Authenticated operator does not have permission for a specified group

Error responses may include additional information in the `detail` field.

3.11.1 operatorAdd

Creates a new operator. An operator must be linked to a `userId`. The linked user cannot be modified after creation.

3.11.1.1 operatorAddRequest

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
operatorInfo	OperatorInfo	Yes

Example Request. Add an operator with level 5 access, access to all groups and a default encoder <pre> <soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/"> <soapenv:Header/> <soapenv:Body> <soap:operatorAdd> <operatorName>tesaop</operatorName> <operatorPassword>tesaop1234z</operatorPassword> <operatorInfo> <allUserGroups>true</allUserGroups> <allDoorGroups>true</allDoorGroups> <level>5</level> <userId>20</userId> <operatorName>oper12</operatorName> <defaultEncoder> <encoderId>41</encoderId> </defaultEncoder> </operatorInfo> </soap:operatorAdd> </soapenv:Body> </soapenv:Envelope> </pre>

3.11.1.2 operatorAdd Response

Example Response. Operator created successfully
--



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:operatorAddResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operatorInfo>
        <type>RESULT_OK</type>
        <operatorData>
          <allDoorGroups>true</allDoorGroups>
          <allUserGroups>true</allUserGroups>
          <defaultEncoder>
            <encoderId>41</encoderId>
          </defaultEncoder>
          <level>5</level>
          <operatorName>oper12</operatorName>
          <userId>20</userId>
        </operatorData>
      </operatorInfo>
    </ns2:operatorAddResponse>
  </S:Body>
</S:Envelope>
```

3.11.1 operatorGetById

Gets operator information by its linked userId.

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
userId	Integer	Yes

Example Request. Get operator linked to userId 20

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:operatorGetById>
      <operatorName>tesaop</operatorName>
      <operatorPassword>tesaop1234z</operatorPassword>
      <userId>20</userId>
    </soap:operatorGetById>
  </soapenv:Body>
</soapenv:Envelope>
```

3.11.1.1 operatorGetById Response

Example Response. Operator info returned



```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:operatorGetByIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operatorInfo>
        <type>RESULT_OK</type>
        <operatorData>
          <allDoorGroups>true</allDoorGroups>
          <allUserGroups>true</allUserGroups>
          <defaultEncoder>
            <agentId/>
            <connected>false</connected>
            <dnsAddress/>
            <encoderId>41</encoderId>
            <encoderName>Encoder IP MesaMikel</encoderName>
            <ipAddress>10.248.196.185</ipAddress>
            <port>7890</port>
            <protocol>1</protocol>
            <version>01.06</version>
          </defaultEncoder>
          <deleted>false</deleted>
          <expanded>false</expanded>
          <expirationLimit>false</expirationLimit>
          <expirationLimitDays>0</expirationLimitDays>
          <level>5</level>
          <operatorName>oper12</operatorName>
          <userId>20</userId>
        </operatorData>
      </operatorInfo>
    </ns2:operatorGetByIdResponse>
  </S:Body>
</S:Envelope>
```

3.11.2 operatorModify

Modifies operator information. The operator is identified by its linked userId.

3.11.2.1 operatorModify Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
operatorInfo	OperatorInfo	Yes

Example Request. Change default encoder for operator.



```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:operatorModify>
      <operatorName>tesaop</operatorName>
      <operatorPassword>tesaop1234z</operatorPassword>
      <operatorInfo>
        <operatorName>operator34</operatorName>
        <userId>306</userId>
        <defaultEncoder>
          <encoderId>40</encoderId>
        </defaultEncoder>
      </operatorInfo>
    </soap:operatorModify>
  </soapenv:Body>
</soapenv:Envelope>
```

3.11.2.2 operatorModify Response

Example Response. Operator data has been successfully modified

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:operatorModifyResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operatorInfo>
        <type>RESULT_OK</type>
        <operatorData>
          <defaultEncoder>
            <encoderId>40</encoderId>
          </defaultEncoder>
          <operatorName>operator34</operatorName>
          <userId>306</userId>
        </operatorData>
      </operatorInfo>
    </ns2:operatorModifyResponse>
  </S:Body>
</S:Envelope>
```

3.11.3 operatorGetAll

Returns a list of all system operators.

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes

Example Request. Get list of operators



```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:operatorsGetAll>
      <operatorName>tesaop</operatorName>
      <operatorPassword>tesaop1234z</operatorPassword>
    </soap:operatorsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

3.11.3.1 operatorGetAll Response

Example Response. Available operator information

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:operatorsGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <operatorData>
        <allDoorGroups>false</allDoorGroups>
        <allUserGroups>false</allUserGroups>
        <deleted>false</deleted>
        <expanded>false</expanded>
        <expirationLimit>false</expirationLimit>
        <expirationLimitDays>0</expirationLimitDays>
        <level>5</level>
        <operatorName>sysop1</operatorName>
        <selectedDoorGroups>MainBuilding</selectedDoorGroups>
        <selectedDoorGroups>WarehouseBuilding</selectedDoorGroups>
        <selectedUserGroups>Staff</selectedUserGroups>
        <userId>13</userId>
      </operatorData>
      <operatorData>
        <allDoorGroups>true</allDoorGroups>
        <allUserGroups>true</allUserGroups>
        <deleted>false</deleted>
        <expanded>false</expanded>
        <expirationLimit>false</expirationLimit>
        <expirationLimitDays>0</expirationLimitDays>
        <level>5</level>
        <operatorName>sysop2</operatorName>
        <userId>15</userId>
      </operatorData>
    </ns2:operatorsGetAllResponse>
  </S:Body>
</S:Envelope>
```

3.11.4 operatorDelete

Deletes an operator. The operator is identified by its linked userId.

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 175 of 342
---	--

3.11.4.1 operatorDelete Request

Parameter	SOAP type	Mandatory
operatorName	String	Yes
operatorPassword	String	Yes
userId	Integer	Yes

Example Request. Delete operator with linked userId 14
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/" <soapenv:Header/> <soapenv:Body> <soap:operatorDelete> <operatorName>tesaop</operatorName> <operatorPassword>tesaop1234z</operatorPassword> <userId>14</userId> </soap:operatorDelete> </soapenv:Body> </soapenv:Envelope></pre>

3.11.4.2 operatorDelete Response

Example Response. Operator successfully deleted
<pre><S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/" <S:Body> <ns2:operatorDeleteResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/" <operationResult> <type>RESULT_OK</type> </operationResult> </ns2:operatorDeleteResponse> </S:Body> </S:Envelope></pre>



Descriptors and Schemas

DoorsWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?><definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="DoorsWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/DoorsWebService?xsd=1"/>
</xsd:schema>
</types>
<message name="getVersion">
<part name="parameters" element="tns:getVersion"/>
</message>
<message name="getVersionResponse">
<part name="parameters" element="tns:getVersionResponse"/>
</message>
<message name="doorGetAllByLockdownArea">
<part name="parameters" element="tns:doorGetAllByLockdownArea"/>
</message>
<message name="doorGetAllByLockdownAreaResponse">
<part name="parameters" element="tns:doorGetAllByLockdownAreaResponse"/>
</message>
<message name="doorRetrieveOpenings">
<part name="parameters" element="tns:doorRetrieveOpenings"/>
</message>
<message name="doorRetrieveOpeningsResponse">
<part name="parameters" element="tns:doorRetrieveOpeningsResponse"/>
</message>
<message name="siteLockDown">
<part name="parameters" element="tns:siteLockDown"/>
</message>
<message name="siteLockDownResponse">
<part name="parameters" element="tns:siteLockDownResponse"/>
</message>
<message name="doorClose">
<part name="parameters" element="tns:doorClose"/>
</message>
<message name="doorCloseResponse">
<part name="parameters" element="tns:doorCloseResponse"/>
</message>
<message name="doorBlock">
<part name="parameters" element="tns:doorBlock"/>
</message>
```




```
<message name="doorBlockResponse">
<part name="parameters" element="tns:doorBlockResponse"/>
</message>
<message name="doorDiagnostic">
<part name="parameters" element="tns:doorDiagnostic"/>
</message>
<message name="doorDiagnosticResponse">
<part name="parameters" element="tns:doorDiagnosticResponse"/>
</message>
<message name="doorUnblock">
<part name="parameters" element="tns:doorUnblock"/>
</message>
<message name="doorUnblockResponse">
<part name="parameters" element="tns:doorUnblockResponse"/>
</message>
<message name="doorUpdate">
<part name="parameters" element="tns:doorUpdate"/>
</message>
<message name="doorUpdateResponse">
<part name="parameters" element="tns:doorUpdateResponse"/>
</message>
<message name="doorPassage">
<part name="parameters" element="tns:doorPassage"/>
</message>
<message name="doorPassageResponse">
<part name="parameters" element="tns:doorPassageResponse"/>
</message>
<message name="doorSetTime">
<part name="parameters" element="tns:doorSetTime"/>
</message>
<message name="doorSetTimeResponse">
<part name="parameters" element="tns:doorSetTimeResponse"/>
</message>
<message name="doorGetAll">
<part name="parameters" element="tns:doorGetAll"/>
</message>
<message name="doorGetAllResponse">
<part name="parameters" element="tns:doorGetAllResponse"/>
</message>
<message name="doorOpen">
<part name="parameters" element="tns:doorOpen"/>
</message>
<message name="doorOpenResponse">
<part name="parameters" element="tns:doorOpenResponse"/>
</message>
<message name="doorGetInfo">
<part name="parameters" element="tns:doorGetInfo"/>
</message>
<message name="doorGetInfoResponse">
<part name="parameters" element="tns:doorGetInfoResponse"/>
</message>
<portType name="WirelessDoorsService">
<operation name="getVersion">
```



```
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/getVersionReques
t" message="tns:getVersion"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/getVersionRespon
se" message="tns:getVersionResponse"/>
</operation>
<operation name="doorGetAllByLockdownArea">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorGetAllByLock
downAreaRequest" message="tns:doorGetAllByLockdownArea"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorGetAllByLock
downAreaResponse" message="tns:doorGetAllByLockdownAreaResponse"/>
</operation>
<operation name="doorRetrieveOpenings">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorRetrieveOpen
ingsRequest" message="tns:doorRetrieveOpenings"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorRetrieveOpen
ingsResponse" message="tns:doorRetrieveOpeningsResponse"/>
</operation>
<operation name="siteLockDown">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/siteLockDownRequ
est" message="tns:siteLockDown"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/siteLockDownResp
onse" message="tns:siteLockDownResponse"/>
</operation>
<operation name="doorClose">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorCloseRequest
" message="tns:doorClose"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorCloseRespons
e" message="tns:doorCloseResponse"/>
</operation>
<operation name="doorBlock">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorBlockRequest
" message="tns:doorBlock"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorBlockRespons
e" message="tns:doorBlockResponse"/>
</operation>
<operation name="doorDiagnostic">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorDiagnosticRe
quest" message="tns:doorDiagnostic"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorDiagnosticRe
sponse" message="tns:doorDiagnosticResponse"/>
</operation>
```



```
<operation name="doorUnblock">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorUnblockRequest" message="tns:doorUnblock"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorUnblockResponse" message="tns:doorUnblockResponse"/>
</operation>
<operation name="doorUpdate">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorUpdateRequest" message="tns:doorUpdate"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorUpdateResponse" message="tns:doorUpdateResponse"/>
</operation>
<operation name="doorPassage">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorPassageRequest" message="tns:doorPassage"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorPassageResponse" message="tns:doorPassageResponse"/>
</operation>
<operation name="doorSetTime">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorSetTimeRequest" message="tns:doorSetTime"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorSetTimeResponse" message="tns:doorSetTimeResponse"/>
</operation>
<operation name="doorGetAll">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorGetAllRequest" message="tns:doorGetAll"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorGetAllResponse" message="tns:doorGetAllResponse"/>
</operation>
<operation name="doorOpen">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorOpenRequest" message="tns:doorOpen"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorOpenResponse" message="tns:doorOpenResponse"/>
</operation>
<operation name="doorGetInfo">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorGetInfoRequest" message="tns:doorGetInfo"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessDoorsService/doorGetInfoResponse" message="tns:doorGetInfoResponse"/>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 180 of 342

```
</operation>
</portType>
<binding name="WirelessDoorsServicePortBinding" type="tns:WirelessDoorsService">
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
<operation name="getVersion">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorGetAllByLockdownArea">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorRetrieveOpenings">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="siteLockDown">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorClose">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorBlock">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 181 of 342

```
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorDiagnostic">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorUnblock">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorUpdate">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorPassage">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorSetTime">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorGetAll">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 182 of 342

```
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorOpen">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorGetInfo">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="DoorsWebService">
<port name="WirelessDoorsServicePort"
binding="tns:WirelessDoorsServicePortBinding">
<soap:address
location="https://localhost:8181/TesaSmartairPlatform/DoorsWebService"/>
</port>
</service>
</definitions>
```



DoorsWebService XSD

```
<?xml version='1.0' encoding='UTF-8'?>
<xs:schema xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/">

<xs:element name="cabinetStateInfo" type="tns:cabinetStateInfo"/>

<xs:element name="doorBlock" type="tns:doorBlock"/>

<xs:element name="doorBlockResponse" type="tns:doorBlockResponse"/>

<xs:element name="doorClose" type="tns:doorClose"/>

<xs:element name="doorCloseResponse" type="tns:doorCloseResponse"/>

<xs:element name="doorDiagnostic" type="tns:doorDiagnostic"/>

<xs:element name="doorDiagnosticResponse" type="tns:doorDiagnosticResponse"/>

<xs:element name="doorGetAll" type="tns:doorGetAll"/>

<xs:element name="doorGetAllByLockdownArea"
type="tns:doorGetAllByLockdownArea"/>

<xs:element name="doorGetAllByLockdownAreaResponse"
type="tns:doorGetAllByLockdownAreaResponse"/>

<xs:element name="doorGetAllResponse" type="tns:doorGetAllResponse"/>

<xs:element name="doorGetInfo" type="tns:doorGetInfo"/>

<xs:element name="doorGetInfoResponse" type="tns:doorGetInfoResponse"/>

<xs:element name="doorOpen" type="tns:doorOpen"/>

<xs:element name="doorOpenResponse" type="tns:doorOpenResponse"/>

<xs:element name="doorPassage" type="tns:doorPassage"/>

<xs:element name="doorPassageResponse" type="tns:doorPassageResponse"/>

<xs:element name="doorRetrieveOpenings" type="tns:doorRetrieveOpenings"/>

<xs:element name="doorRetrieveOpeningsResponse"
type="tns:doorRetrieveOpeningsResponse"/>

<xs:element name="doorSetTime" type="tns:doorSetTime"/>

<xs:element name="doorSetTimeResponse" type="tns:doorSetTimeResponse"/>

<xs:element name="doorStateInfo" type="tns:doorStateInfo"/>

<xs:element name="doorUnblock" type="tns:doorUnblock"/>
```



```
<xs:element name="doorUnblockResponse" type="tns:doorUnblockResponse"/>
<xs:element name="doorUpdate" type="tns:doorUpdate"/>
<xs:element name="doorUpdateResponse" type="tns:doorUpdateResponse"/>
<xs:element name="getVersion" type="tns:getVersion"/>
<xs:element name="getVersionResponse" type="tns:getVersionResponse"/>
<xs:element name="lockdownRequest" type="tns:lockdownRequest"/>
<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="rfModuleInfo" type="tns:rfModuleInfo"/>
<xs:element name="siteLockDown" type="tns:siteLockDown"/>
<xs:element name="siteLockDownResponse" type="tns:siteLockDownResponse"/>
<xs:element name="systemInfo" type="tns:systemInfo"/>
<xs:element name="wirelessDoor" type="tns:wirelessDoor"/>
<xs:element name="wirelessDoorListLockDownAreas"
type="tns:wirelessDoorListLockDownAreas"/>
<xs:element name="wirelessResult" type="tns:wirelessResult"/>
<xs:element name="wirelessResultDoorList" type="tns:wirelessResultDoorList"/>
<xs:element name="wirelessResultDoorListLockdownAreas"
type="tns:wirelessResultDoorListLockdownAreas"/>
<xs:element name="wirelessResultRFModuleInfo"
type="tns:wirelessResultRFModuleInfo"/>
<xs:complexType name="doorBlock">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="doorBlockResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="wirelessResult">
<xs:complexContent>
```




```
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="doorInfo" type="tns:wirelessDoor" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="operationResult">
<xs:sequence>
<xs:element name="detail" type="xs:string" minOccurs="0"/>
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="operationId" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="wirelessDoor">
<xs:sequence>
<xs:element name="batteryLevel" type="xs:int" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo" minOccurs="0"/>
<xs:element name="doorType" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorVersion" type="xs:string" minOccurs="0"/>
<xs:element name="groupName" type="xs:string" minOccurs="0"/>
<xs:element name="hubIPAddress" type="xs:string" minOccurs="0"/>
<xs:element name="hubName" type="xs:string" minOccurs="0"/>
<xs:element name="hubServiceWSDL" type="xs:string" minOccurs="0"/>
<xs:element name="hubVersion" type="xs:string" minOccurs="0"/>
<xs:element name="lockdownAreaId" type="xs:int" minOccurs="0"/>
<xs:element name="lockdownState" type="xs:int" minOccurs="0"/>
<xs:element name="notSupportedDoor" type="xs:boolean" minOccurs="0"/>
<xs:element name="rfMacAddress" type="xs:string" minOccurs="0"/>
<xs:element name="rfSignal" type="xs:int" minOccurs="0"/>
<xs:element name="rfState" type="tns:rfStatusType" minOccurs="0"/>
<xs:element name="rfVersion" type="xs:string" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorStateInfo">
<xs:sequence>
<xs:element name="batteryPercentage" type="xs:int" minOccurs="0"/>
<xs:element name="batteryStatus" type="tns:batteryStatusType" minOccurs="0"/>
<xs:element name="cabinetState" type="tns:cabinetStateInfo" minOccurs="0"/>
<xs:element name="emergency" type="xs:boolean" minOccurs="0"/>
<xs:element name="mode" type="tns:blockModeType" minOccurs="0"/>
<xs:element name="physicalState" type="tns:physicalStateType" minOccurs="0"/>
<xs:element name="privacy" type="xs:boolean" minOccurs="0"/>
<xs:element name="state" type="tns:stateType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```



```
</xs:sequence>
</xs:complexType>

<xs:complexType name="cabinetStateInfo">
<xs:sequence>
<xs:element name="state" type="tns:cabinetStatusType" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorClose">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorCloseResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="siteLockDown">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="lockdownInfo" type="tns:lockdownRequest" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="lockdownRequest">
<xs:sequence>
<xs:element name="areaId" type="xs:int" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="mode" type="tns:lockdownMode" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="siteLockDownResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorUnblock">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```



```
<xs:complexType name="doorUnblockResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetAllByLockdownArea">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetAllByLockdownAreaResponse">
<xs:sequence>
<xs:element name="operationResultAssignedRFModules"
type="tns:wirelessResultDoorListLockdownAreas" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="wirelessResultDoorListLockdownAreas">
<xs:complexContent>
<xs:extension base="tns:wirelessResult">
<xs:sequence>
<xs:element name="areas" type="tns:wirelessDoorListLockDownAreas"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="wirelessDoorListLockDownAreas">
<xs:sequence>
<xs:element name="areaHasNotSupportedDoors" type="xs:boolean" minOccurs="0"/>
<xs:element name="areaHasPendingDoors" type="xs:boolean" minOccurs="0"/>
<xs:element name="areaId" type="xs:int" minOccurs="0"/>
<xs:element name="areaInExecution" type="xs:boolean" minOccurs="0"/>
<xs:element name="areaName" type="xs:string" minOccurs="0"/>
<xs:element name="wirelessDoors" type="tns:wirelessResultDoorList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="wirelessResultDoorList">
<xs:complexContent>
<xs:extension base="tns:wirelessResult">
<xs:sequence>
<xs:element name="recordCount" type="xs:int" minOccurs="0"/>
<xs:element name="wirelessDoor" type="tns:wirelessDoor" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
```



```
<xs:complexType name="doorUpdate">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorUpdateResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorPassage">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorPassageResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="getVersion">
<xs:sequence/>
</xs:complexType>

<xs:complexType name="getVersionResponse">
<xs:sequence>
<xs:element name="systemInfo" type="tns:systemInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="systemInfo">
<xs:sequence>
<xs:element name="dataVersion" type="xs:string" minOccurs="0"/>
<xs:element name="platformVersion" type="xs:string" minOccurs="0"/>
<xs:element name="portAgentCommunication" type="xs:int" minOccurs="0"/>
<xs:element name="portAgentRegistration" type="xs:int" minOccurs="0"/>
<xs:element name="portEncodingService" type="xs:int" minOccurs="0"/>
<xs:element name="portPMS" type="xs:int" minOccurs="0"/>
<xs:element name="siteId" type="xs:string" minOccurs="0"/>
<xs:element name="siteName" type="xs:string" minOccurs="0"/>
<xs:element name="siteNameShort" type="xs:string" minOccurs="0"/>
<xs:element name="systemTime" type="xs:dateTime" minOccurs="0"/>
<xs:element name="systemType" type="xs:string" minOccurs="0"/>
</xs:sequence>
```



```
</xs:complexType>

<xs:complexType name="doorOpen">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="doorId" type="xs:int" minOccurs="0"/>
    <xs:element name="doorName" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="doorOpenResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="doorRetrieveOpenings">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="doorId" type="xs:int" minOccurs="0"/>
    <xs:element name="doorName" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="doorRetrieveOpeningsResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetAll">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetAllResponse">
  <xs:sequence>
    <xs:element name="operationResultAssignedRFModules"
      type="tns:wirelessResultDoorList" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="doorDiagnostic">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="doorId" type="xs:int" minOccurs="0"/>
    <xs:element name="doorName" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```



```
<xs:complexType name="doorDiagnosticResponse">
<xs:sequence>
<xs:element name="operationResultRFDiagnostic"
type="tns:wirelessResultRFModuleInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="wirelessResultRFModuleInfo">
<xs:complexContent>
<xs:extension base="tns:wirelessResult">
<xs:sequence>
<xs:element name="rfModuleInfo" type="tns:rfModuleInfo" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="rfModuleInfo">
<xs:sequence>
<xs:element name="descrDevice" type="xs:string" minOccurs="0"/>
<xs:element name="doorDeviceType" type="xs:string" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo" minOccurs="0"/>
<xs:element name="doorVersion" type="xs:string" minOccurs="0"/>
<xs:element name="hubName" type="xs:string" minOccurs="0"/>
<xs:element name="lockResponse" type="xs:boolean" minOccurs="0"/>
<xs:element name="lqi" type="xs:int" minOccurs="0"/>
<xs:element name="macAddress" type="xs:string" minOccurs="0"/>
<xs:element name="signal" type="xs:int" minOccurs="0"/>
<xs:element name="status" type="tns:rfStatusType" minOccurs="0"/>
<xs:element name="statusBytes" type="xs:string" minOccurs="0"/>
<xs:element name="version" type="xs:string" minOccurs="0"/>
<xs:element name="tSleep" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorSetTime">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorSetTimeResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetInfo">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
```



```
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```

```
<xs:complexType name="doorGetInfoResponse">
<xs:sequence>
<xs:element name="operationResultAssignedRFModules"
type="tns:wirelessResultDoorList" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```

```
<xs:simpleType name="batteryStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="OK"/>
<xs:enumeration value="LOW_BATTERIES"/>
<xs:enumeration value="VERY_LOW_BATTERIES"/>
</xs:restriction>
</xs:simpleType>
```

```
<xs:simpleType name="cabinetStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="FREE"/>
<xs:enumeration value="IN_USE"/>
</xs:restriction>
</xs:simpleType>
```

```
<xs:simpleType name="blockModeType">
<xs:restriction base="xs:string">
<xs:enumeration value="UNBLOCKED"/>
<xs:enumeration value="BLOCKED"/>
</xs:restriction>
</xs:simpleType>
```

```
<xs:simpleType name="physicalStateType">
<xs:restriction base="xs:string">
<xs:enumeration value="DOOR_CLOSED"/>
<xs:enumeration value="INTRUSION"/>
<xs:enumeration value="DOOR_LEFT_OPEN"/>
<xs:enumeration value="DOOR_CLOSED_NOT_SECURED"/>
</xs:restriction>
</xs:simpleType>
```

```
<xs:simpleType name="stateType">
<xs:restriction base="xs:string">
<xs:enumeration value="CARD"/>
<xs:enumeration value="PASSAGE"/>
<xs:enumeration value="FIRST_USER"/>
<xs:enumeration value="KEYPAD"/>
<xs:enumeration value="CARD_PIN"/>
<xs:enumeration value="DUAL_USER"/>
<xs:enumeration value="PIN_CARD"/>
</xs:restriction>
</xs:simpleType>
```



```
<xs:simpleType name="doorType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_ZERO"/>
<xs:enumeration value="TYPE_CYLINDER"/>
<xs:enumeration value="TYPE_LOCK"/>
<xs:enumeration value="TYPE_READER"/>
<xs:enumeration value="TYPE_SAFE_MAG"/>
<xs:enumeration value="TYPE_CYLINDER_MEC"/>
<xs:enumeration value="TYPE_READER_ONLINE"/>
<xs:enumeration value="TYPE_ESCUTCHEON_PROX"/>
<xs:enumeration value="TYPE_READER_PROX_OFF"/>
<xs:enumeration value="TYPE_READER_PROX_ON"/>
<xs:enumeration value="TYPE_LOCK_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX"/>
<xs:enumeration value="TYPE_READER_DUAL"/>
<xs:enumeration value="TYPE_SAFE_KEYBOARD"/>
<xs:enumeration value="TYPE_SAFE_PROX"/>
<xs:enumeration value="TYPE_READER_UPDATER"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL"/>
<xs:enumeration value="TYPE_ESCUTCHEON_UOL"/>
<xs:enumeration value="TYPE_CABINET"/>
<xs:enumeration value="TYPE_READER_UOL"/>
<xs:enumeration value="TYPE_READER_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG"/>
<xs:enumeration value="TYPE_VISUALIZER"/>
<xs:enumeration value="TYPE_SPY_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG_UOL"/>
<xs:enumeration value="TYPE_READER_MAG_UOL"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER_UOL"/>
<xs:enumeration value="TYPE_ENERGYSAVER_PROX"/>
<xs:enumeration value="TYPE_ENERGYSAVER_MAG"/>
<xs:enumeration value="TYPE_ENERGYSAVER_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL_UOL"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="rfStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="ALWAYS_AWAKE"/>
<xs:enumeration value="SLEEP_AWAKE"/>
<xs:enumeration value="ALWAYS_SLEEP"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="errorType">
<xs:restriction base="xs:string">
<xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
<xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
<xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
</xs:restriction>
</xs:simpleType>
```




```
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
<xs:enumeration value="ERROR_FORMAT_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_INVALID"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_WRONG_SITE"/>
<xs:enumeration value="ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST"/>
<xs:enumeration value="ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
```



```
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_FOUND"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
<xs:enumeration value="ERROR_READING_CARD"/>
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPRIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
```



```
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="lockdownMode">
<xs:restriction base="xs:string">
<xs:enumeration value="LOCKDOWN_OFF"/>
<xs:enumeration value="LOCKDOWN_OPEN"/>
<xs:enumeration value="LOCKDOWN_CLOSE"/>
<xs:enumeration value="LOCKDOWN_BLOCK"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



UsersWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?>
<definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-utility-1.0.xsd" xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="UsersWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/UsersWebService?xsd=
1"/>
</xsd:schema>
</types>
<message name="userAuthenticate">
<part name="parameters" element="tns:userAuthenticate"/>
</message>
<message name="userAuthenticateResponse">
<part name="parameters" element="tns:userAuthenticateResponse"/>
</message>
<message name="userGetByCardId">
<part name="parameters" element="tns:userGetByCardId"/>
</message>
<message name="userGetByCardIdResponse">
<part name="parameters" element="tns:userGetByCardIdResponse"/>
</message>
<message name="usersGetAll">
<part name="parameters" element="tns:usersGetAll"/>
</message>
<message name="usersGetAllResponse">
<part name="parameters" element="tns:usersGetAllResponse"/>
</message>
<message name="userGetById">
<part name="parameters" element="tns:userGetById"/>
</message>
<message name="userGetByIdResponse">
<part name="parameters" element="tns:userGetByIdResponse"/>
</message>
<message name="userGetByName">
<part name="parameters" element="tns:userGetByName"/>
</message>
<message name="userGetByNameResponse">
<part name="parameters" element="tns:userGetByNameResponse"/>
</message>
<message name="userAdd">
<part name="parameters" element="tns:userAdd"/>
</message>
<message name="userAddResponse">
<part name="parameters" element="tns:userAddResponse"/>
</message>
```



```
</message>
<message name="userModify">
  <part name="parameters" element="tns:userModify"/>
</message>
<message name="userModifyResponse">
  <part name="parameters" element="tns:userModifyResponse"/>
</message>
<message name="userDelete">
  <part name="parameters" element="tns:userDelete"/>
</message>
<message name="userDeleteResponse">
  <part name="parameters" element="tns:userDeleteResponse"/>
</message>
<portType name="UsersService">
  <operation name="userAuthenticate">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userAuthenticateRequest"
      message="tns:userAuthenticate"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userAuthenticateResponse"
      message="tns:userAuthenticateResponse"/>
    </operation>
  <operation name="userGetByCardId">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userGetByCardIdRequest"
      message="tns:userGetByCardId"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userGetByCardIdResponse"
      message="tns:userGetByCardIdResponse"/>
    </operation>
  <operation name="usersGetAll">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/usersGetAllRequest"
      message="tns:usersGetAll"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/usersGetAllResponse"
      message="tns:usersGetAllResponse"/>
    </operation>
  <operation name="userGetById">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userGetByIdRequest"
      message="tns:userGetById"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userGetByIdResponse"
      message="tns:userGetByIdResponse"/>
    </operation>
  <operation name="userGetByName">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userGetByNameRequest"
      message="tns:userGetByName"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userGetByNameResponse"
      message="tns:userGetByNameResponse"/>
    </operation>
  <operation name="userAdd">
```



```
<input wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userAddRequest"
message="tns:userAdd"/>
<output wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userAddResponse"
message="tns:userAddResponse"/>
</operation>
<operation name="userModify">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userModifyRequest"
message="tns:userModify"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userModifyResponse"
message="tns:userModifyResponse"/>
</operation>
<operation name="userDelete">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userDeleteRequest"
message="tns:userDelete"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/UsersService/userDeleteResponse"
message="tns:userDeleteResponse"/>
</operation>
</portType>
<binding name="UsersServicePortBinding" type="tns:UsersService">
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
<operation name="userAuthenticate">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="userGetByCardId">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="usersGetAll">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="userGetById">
<soap:operation soapAction=""/>
<input>
```



```
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="userGetByName">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="userAdd">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="userModify">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="userDelete">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="UsersWebService">
<port name="UsersServicePort" binding="tns:UsersServicePortBinding">
<soap:address
location="https://localhost:8181/TesaSmartairPlatform/UsersWebService"/>
</port>
</service>
</definitions>
```

UsersWebService XSD



```
<?xml version='1.0' encoding='UTF-8'?>
<xs:schema xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/">
<xs:element name="cabinetStateInfo" type="tns:cabinetStateInfo"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo"/>
<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="operationResultUserInfoList"
type="tns:operationResultUserInfoList"/>
<xs:element name="userAdd" type="tns:userAdd"/>
<xs:element name="userAddResponse" type="tns:userAddResponse"/>
<xs:element name="userAuthenticate" type="tns:userAuthenticate"/>
<xs:element name="userAuthenticateResponse"
type="tns:userAuthenticateResponse"/>
<xs:element name="userCancelCard" type="tns:userCancelCard"/>
<xs:element name="userCancelCardResponse" type="tns:userCancelCardResponse"/>
<xs:element name="userDelete" type="tns:userDelete"/>
<xs:element name="userDeleteResponse" type="tns:userDeleteResponse"/>
<xs:element name="userGetByCardId" type="tns:userGetByCardId"/>
<xs:element name="userGetByCardIdResponse" type="tns:userGetByCardIdResponse"/>
<xs:element name="userGetByExternalId" type="tns:userGetByExternalId"/>
<xs:element name="userGetByExternalIdResponse"
type="tns:userGetByExternalIdResponse"/>
<xs:element name="userGetById" type="tns:userGetById"/>
<xs:element name="userGetByIdResponse" type="tns:userGetByIdResponse"/>
<xs:element name="userGetByName" type="tns:userGetByName"/>
<xs:element name="userGetByNameResponse" type="tns:userGetByNameResponse"/>
<xs:element name="userInfo" type="tns:userInfo"/>
<xs:element name="userModify" type="tns:userModify"/>
<xs:element name="userModifyResponse" type="tns:userModifyResponse"/>
<xs:element name="usersGetAll" type="tns:usersGetAll"/>
<xs:element name="usersGetAllResponse" type="tns:usersGetAllResponse"/>
<xs:element name="wirelessDoor" type="tns:wirelessDoor"/>
<xs:element name="wirelessResult" type="tns:wirelessResult"/>
<xs:element name="wirelessResultAuthorizedOperations"
type="tns:wirelessResultAuthorizedOperations"/>
<xs:complexType name="userGetByExternalId">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:userType" minOccurs="0"/>
<xs:element name="externalId" type="xs:string" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userGetByExternalIdResponse">
<xs:sequence>
<xs:element name="userInfo" type="tns:operationResultUserInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultUserInfoList">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
```




```
<xs:element name="cardDiagnostic" type="xs:int" minOccurs="0"/>
<xs:element name="recordCount" type="xs:int" minOccurs="0"/>
<xs:element name="userData" type="tns:userInfo" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResult">
<xs:sequence>
<xs:element name="detail" type="xs:string" minOccurs="0"/>
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="operationId" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userInfo">
<xs:sequence>
<xs:element name="actFormat" type="xs:boolean" minOccurs="0"/>
<xs:element name="actUser" type="xs:boolean" minOccurs="0"/>
<xs:element name="ada" type="xs:boolean" minOccurs="0"/>
<xs:element name="appCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="bleCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="cabinetName" type="xs:string" minOccurs="0"/>
<xs:element name="codLev" type="xs:string" minOccurs="0"/>
<xs:element name="data1" type="xs:string" minOccurs="0"/>
<xs:element name="data2" type="xs:string" minOccurs="0"/>
<xs:element name="data3" type="xs:string" minOccurs="0"/>
<xs:element name="data4" type="xs:string" minOccurs="0"/>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateIssue" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateUpdate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
<xs:element name="enkReles" type="xs:int" minOccurs="0"/>
<xs:element name="externalId" type="xs:string" minOccurs="0"/>
<xs:element name="grants" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="hasMultiples" type="xs:boolean" minOccurs="0"/>
<xs:element name="info" type="xs:string" minOccurs="0"/>
<xs:element name="keyClock" type="xs:dateTime" minOccurs="0"/>
<xs:element name="keyPad" type="xs:string" minOccurs="0"/>
<xs:element name="mobileKeyState" type="xs:string" minOccurs="0"/>
<xs:element name="nonSentLockingPlanEntries" type="xs:int" minOccurs="0"/>
<xs:element name="numCopies" type="xs:int" minOccurs="0"/>
<xs:element name="openBlockedDoors" type="xs:boolean" minOccurs="0"/>
<xs:element name="pinCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomCheckedOut" type="xs:boolean" minOccurs="0"/>
<xs:element name="track1" type="xs:string" minOccurs="0"/>
<xs:element name="track2" type="xs:string" minOccurs="0"/>
<xs:element name="UOAccess" type="xs:boolean" minOccurs="0"/>
```

```

<xs:element name="UOCAudit" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCDays" type="xs:int" minOccurs="0"/>
<xs:element name="UOCOOverflow" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCRevalidate" type="xs:boolean" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
<xs:element name="userAPB" type="xs:boolean" minOccurs="0"/>
<xs:element name="userCardId" type="xs:string" minOccurs="0"/>
<xs:element name="userCarrier" type="tns:carrierType" minOccurs="0"/>
<xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress2" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress3" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress4" type="xs:string" minOccurs="0"/>
<xs:element name="userEncoded" type="xs:boolean" minOccurs="0"/>
<xs:element name="userGroup" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
<xs:element name="userPhoneNumber" type="xs:string" minOccurs="0"/>
<xs:element name="userType" type="tns:userType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userModify">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userData" type="tns:userInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userModifyResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userGetByCardId">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:userType" minOccurs="0"/>
<xs:element name="cardId" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userGetByCardIdResponse">
<xs:sequence>
<xs:element name="userInfo" type="tns:operationResultUserInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userGetByName">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:userType" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>

```



```
</xs:complexType>
<xs:complexType name="userGetByNameResponse">
<xs:sequence>
<xs:element name="userInfo" type="tns:operationResultUserInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userAdd">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="userData" type="tns:userInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userAddResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="usersGetAll">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:userType" minOccurs="0"/>
<xs:element name="numPage" type="xs:int" minOccurs="0"/>
<xs:element name="pageSize" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="usersGetAllResponse">
<xs:sequence>
<xs:element name="userInfo" type="tns:operationResultUserInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userDelete">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userDeleteResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userGetById">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:userType" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userGetByIdResponse">
```



```
<xs:sequence>
<xs:element name="userInfo" type="tns:operationResultUserInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userCancelCard">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userCancelCardResponse">
<xs:sequence>
<xs:element name="return" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userAuthenticate">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userAuthenticateResponse">
<xs:sequence>
<xs:element name="userAuthorizedOperations"
type="tns:wirelessResultAuthorizedOperations" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="wirelessResultAuthorizedOperations">
<xs:complexContent>
<xs:extension base="tns:wirelessResult">
<xs:sequence>
<xs:element name="authorizedOperationList" minOccurs="0">
<xs:complexType>
<xs:sequence>
<xs:element name="authorizedOperation" type="xs:int" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="wirelessResult">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="doorInfo" type="tns:wirelessDoor" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="wirelessDoor">
```

```

<xs:sequence>
<xs:element name="batteryLevel" type="xs:int" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo" minOccurs="0"/>
<xs:element name="doorType" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorVersion" type="xs:string" minOccurs="0"/>
<xs:element name="groupName" type="xs:string" minOccurs="0"/>
<xs:element name="hubIPAddress" type="xs:string" minOccurs="0"/>
<xs:element name="hubName" type="xs:string" minOccurs="0"/>
<xs:element name="hubServiceWSDL" type="xs:string" minOccurs="0"/>
<xs:element name="hubVersion" type="xs:string" minOccurs="0"/>
<xs:element name="lockdownAreaId" type="xs:int" minOccurs="0"/>
<xs:element name="lockdownState" type="xs:int" minOccurs="0"/>
<xs:element name="notSupportedDoor" type="xs:boolean" minOccurs="0"/>
<xs:element name="rfMacAddress" type="xs:string" minOccurs="0"/>
<xs:element name="rfSignal" type="xs:int" minOccurs="0"/>
<xs:element name="rfState" type="tns:rfStatusType" minOccurs="0"/>
<xs:element name="rfVersion" type="xs:string" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="doorStateInfo">
<xs:sequence>
<xs:element name="batteryPercentage" type="xs:int" minOccurs="0"/>
<xs:element name="batteryStatus" type="tns:batteryStatusType" minOccurs="0"/>
<xs:element name="cabinetState" type="tns:cabinetStateInfo" minOccurs="0"/>
<xs:element name="emergency" type="xs:boolean" minOccurs="0"/>
<xs:element name="mode" type="tns:blockModeType" minOccurs="0"/>
<xs:element name="physicalState" type="tns:physicalStateType" minOccurs="0"/>
<xs:element name="privacy" type="xs:boolean" minOccurs="0"/>
<xs:element name="state" type="tns:stateType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="cabinetStateInfo">
<xs:sequence>
<xs:element name="state" type="tns:cabinetStatusType" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:simpleType name="userType">
<xs:restriction base="xs:string">
<xs:enumeration value="USER_SPECIAL"/>
<xs:enumeration value="USER_STANDARD"/>
<xs:enumeration value="USER_GUEST"/>
<xs:enumeration value="USER_SAFE_MASTER"/>
<xs:enumeration value="USER_OPERATOR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="carrierType">
<xs:restriction base="xs:string">
<xs:enumeration value="CAR_LLAVE"/>
<xs:enumeration value="CAR_TARJETA"/>
<xs:enumeration value="CAR_LLAVE_MEC"/>
<xs:enumeration value="CAR_PROX"/>

```



```
<xs:enumeration value="CAR_MAG_PROX"/>
<xs:enumeration value="CAR_KEY_PROX"/>
<xs:enumeration value="CAR_KEY_MAG"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="errorType">
<xs:restriction base="xs:string">
<xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
<xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
<xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
<xs:enumeration value="ERROR_FORMAT_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
```



```
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_INVALID"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_WRONG_SITE"/>
<xs:enumeration value="ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST"/>
<xs:enumeration value="ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_FOUND"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
<xs:enumeration value="ERROR_READING_CARD"/>
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPRIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
```



```
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="batteryStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="OK"/>
<xs:enumeration value="LOW_BATTERIES"/>
<xs:enumeration value="VERY_LOW_BATTERIES"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="cabinetStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="FREE"/>
<xs:enumeration value="IN_USE"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="blockModeType">
<xs:restriction base="xs:string">
<xs:enumeration value="UNBLOCKED"/>
<xs:enumeration value="BLOCKED"/>
</xs:restriction>
```




```
</xs:simpleType>
<xs:simpleType name="physicalStateType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="DOOR_CLOSED"/>
    <xs:enumeration value="INTRUSION"/>
    <xs:enumeration value="DOOR_LEFT_OPEN"/>
    <xs:enumeration value="DOOR_CLOSED_NOT_SECURED"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="stateType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="CARD"/>
    <xs:enumeration value="PASSAGE"/>
    <xs:enumeration value="FIRST_USER"/>
    <xs:enumeration value="KEYPAD"/>
    <xs:enumeration value="CARD_PIN"/>
    <xs:enumeration value="DUAL_USER"/>
    <xs:enumeration value="PIN_CARD"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="doorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="TYPE_ZERO"/>
    <xs:enumeration value="TYPE_CYLINDER"/>
    <xs:enumeration value="TYPE_LOCK"/>
    <xs:enumeration value="TYPE_READER"/>
    <xs:enumeration value="TYPE_SAFE_MAG"/>
    <xs:enumeration value="TYPE_CYLINDER_MEC"/>
    <xs:enumeration value="TYPE_READER_ONLINE"/>
    <xs:enumeration value="TYPE_ESCUTCHEON_PROX"/>
    <xs:enumeration value="TYPE_READER_PROX_OFF"/>
    <xs:enumeration value="TYPE_READER_PROX_ON"/>
    <xs:enumeration value="TYPE_LOCK_DUAL"/>
    <xs:enumeration value="TYPE_ELEVATOR"/>
    <xs:enumeration value="TYPE_ELEVATOR_PROX"/>
    <xs:enumeration value="TYPE_READER_DUAL"/>
    <xs:enumeration value="TYPE_SAFE_KEYBOARD"/>
    <xs:enumeration value="TYPE_SAFE_PROX"/>
    <xs:enumeration value="TYPE_READER_UPDATER"/>
    <xs:enumeration value="TYPE_ELEVATOR_DUAL"/>
    <xs:enumeration value="TYPE_ESCUTCHEON_UOL"/>
    <xs:enumeration value="TYPE_CABINET"/>
    <xs:enumeration value="TYPE_READER_UOL"/>
    <xs:enumeration value="TYPE_READER_DUAL_UOL"/>
    <xs:enumeration value="TYPE_SPY_MAG"/>
    <xs:enumeration value="TYPE_VISUALIZER"/>
    <xs:enumeration value="TYPE_SPY_DUAL_UOL"/>
    <xs:enumeration value="TYPE_SPY_MAG_UOL"/>
    <xs:enumeration value="TYPE_READER_MAG_UOL"/>
    <xs:enumeration value="TYPE_KNOB_CYLINDER"/>
    <xs:enumeration value="TYPE_KNOB_CYLINDER_UOL"/>
    <xs:enumeration value="TYPE_ENERGYSaver_PROX"/>
    <xs:enumeration value="TYPE_ENERGYSaver_MAG"/>
    <xs:enumeration value="TYPE_ENERGYSaver_DUAL"/>
    <xs:enumeration value="TYPE_ELEVATOR_UOL"/>
  </xs:restriction>
</xs:simpleType>
```



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 210 of 342

```
<xs:enumeration value="TYPE_ELEVATOR_PROX_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL_UOL"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="rfStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="ALWAYS_AWAKE"/>
<xs:enumeration value="SLEEP_AWAKE"/>
<xs:enumeration value="ALWAYS_SLEEP"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



DoorsDataWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?>
<definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-utility-1.0.xsd" xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="DoorsDataWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/DoorsDataWebService?
xsd=1"/>
</xsd:schema>
</types>
<message name="doorGetByName">
<part name="parameters" element="tns:doorGetByName"/>
</message>
<message name="doorGetByNameResponse">
<part name="parameters" element="tns:doorGetByNameResponse"/>
</message>
<message name="doorsGetAll">
<part name="parameters" element="tns:doorsGetAll"/>
</message>
<message name="doorsGetAllResponse">
<part name="parameters" element="tns:doorsGetAllResponse"/>
</message>
<message name="doorGetById">
<part name="parameters" element="tns:doorGetById"/>
</message>
<message name="doorGetByIdResponse">
<part name="parameters" element="tns:doorGetByIdResponse"/>
</message>
<message name="doorAdd">
<part name="parameters" element="tns:doorAdd"/>
</message>
<message name="doorAddResponse">
<part name="parameters" element="tns:doorAddResponse"/>
</message>
<message name="doorModify">
<part name="parameters" element="tns:doorModify"/>
</message>
<message name="doorModifyResponse">
<part name="parameters" element="tns:doorModifyResponse"/>
</message>
<message name="doorDelete">
<part name="parameters" element="tns:doorDelete"/>
</message>
<message name="doorDeleteResponse">
<part name="parameters" element="tns:doorDeleteResponse"/>
</message>
```



```
</message>
<portType name="DoorsService">
  <operation name="doorGetByName">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorGetByNameRequest"
      message="tns:doorGetByName"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorGetByNameResponse"
      message="tns:doorGetByNameResponse"/>
    </operation>
  <operation name="doorsGetAll">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorsGetAllRequest"
      message="tns:doorsGetAll"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorsGetAllResponse"
      message="tns:doorsGetAllResponse"/>
    </operation>
  <operation name="doorGetById">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorGetByIdRequest"
      message="tns:doorGetById"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorGetByIdResponse"
      message="tns:doorGetByIdResponse"/>
    </operation>
  <operation name="doorAdd">
    <input wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorAddRequest"
      message="tns:doorAdd"/>
    <output wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorAddResponse"
      message="tns:doorAddResponse"/>
    </operation>
  <operation name="doorModify">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorModifyRequest"
      message="tns:doorModify"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorModifyResponse"
      message="tns:doorModifyResponse"/>
    </operation>
  <operation name="doorDelete">
    <input
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorDeleteRequest"
      message="tns:doorDelete"/>
    <output
      wsam:Action="http://soap.ws.ts1000.tesa.es/DoorsService/doorDeleteResponse"
      message="tns:doorDeleteResponse"/>
    </operation>
</portType>
<binding name="DoorsServicePortBinding" type="tns:DoorsService">
  <soap:binding transport="http://schemas.xmlsoap.org/soap/http"
    style="document"/>
  <operation name="doorGetByName">
    <soap:operation soapAction=""/>
  </operation>
</binding>
```



```
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorsGetAll">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorGetById">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorAdd">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorModify">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="doorDelete">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="DoorsDataWebService">
<port name="DoorsServicePort" binding="tns:DoorsServicePortBinding">
```



ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 214 of 342

```
<soap:address  
location="https://localhost:8181/TesaSmartairPlatform/DoorsDataWebService"/>  
</port>  
</service>  
</definitions>
```



DoorsDataWebService XSD

```
<?xml version='1.0' encoding='UTF-8'?>
<xs:schema xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/">
<xs:element name="cabinetStateInfo" type="tns:cabinetStateInfo"/>
<xs:element name="doorAdd" type="tns:doorAdd"/>
<xs:element name="doorAddResponse" type="tns:doorAddResponse"/>
<xs:element name="doorDelete" type="tns:doorDelete"/>
<xs:element name="doorDeleteResponse" type="tns:doorDeleteResponse"/>
<xs:element name="doorGetById" type="tns:doorGetById"/>
<xs:element name="doorGetByIdResponse" type="tns:doorGetByIdResponse"/>
<xs:element name="doorGetByName" type="tns:doorGetByName"/>
<xs:element name="doorGetByNameResponse" type="tns:doorGetByNameResponse"/>
<xs:element name="doorInfo" type="tns:doorInfo"/>
<xs:element name="doorModify" type="tns:doorModify"/>
<xs:element name="doorModifyResponse" type="tns:doorModifyResponse"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo"/>
<xs:element name="doorsGetAll" type="tns:doorsGetAll"/>
<xs:element name="doorsGetAllResponse" type="tns:doorsGetAllResponse"/>
<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="operationResultDoorInfoList"
type="tns:operationResultDoorInfoList"/>
<xs:element name="userInfo" type="tns:userInfo"/>
<xs:complexType name="doorGetByName">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="doorGetByNameResponse">
<xs:sequence>
<xs:element name="doorInfo" type="tns:operationResultDoorInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultDoorInfoList">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="doorData" type="tns:doorInfo" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="recordCount" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResult">
<xs:sequence>
<xs:element name="detail" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```



```
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="operationId" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="doorInfo">
<xs:sequence>
<xs:element name="actManual" type="xs:boolean" minOccurs="0"/>
<xs:element name="activePins" type="xs:string" minOccurs="0"/>
<xs:element name="antiPassbackArea" type="tns:apbAreaType" minOccurs="0"/>
<xs:element name="antiPassbackEntry" type="tns:apbEntryType" minOccurs="0"/>
<xs:element name="assignedCommonPins" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="BLEvers" type="xs:string" minOccurs="0"/>
<xs:element name="cabinetOpenAfterHours" type="xs:boolean" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
<xs:element name="changeId" type="xs:int" minOccurs="0"/>
<xs:element name="children" type="tns:doorInfo" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="data1" type="xs:string" minOccurs="0"/>
<xs:element name="data2" type="xs:string" minOccurs="0"/>
<xs:element name="data3" type="xs:string" minOccurs="0"/>
<xs:element name="data4" type="xs:string" minOccurs="0"/>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateActu" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="datePreActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="datePreExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
<xs:element name="device" type="xs:string" minOccurs="0"/>
<xs:element name="disableLog" type="xs:boolean" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo" minOccurs="0"/>
<xs:element name="doorType" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorVersion" type="xs:string" minOccurs="0"/>
<xs:element name="externalId" type="xs:string" minOccurs="0"/>
<xs:element name="grantBits" type="xs:string" minOccurs="0"/>
<xs:element name="grantBitsOccupied" type="xs:string" minOccurs="0"/>
<xs:element name="grantBitsPreassigned" type="xs:string" minOccurs="0"/>
<xs:element name="grants" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="grantsOccupied" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="grantsPreassigned" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="groupName" type="xs:string" minOccurs="0"/>
<xs:element name="highTraffic" type="xs:boolean" minOccurs="0"/>
<xs:element name="keyPad" type="xs:string" minOccurs="0"/>
<xs:element name="lockdownAreaId" type="xs:int" minOccurs="0"/>
<xs:element name="lockdownState" type="xs:int" minOccurs="0"/>
```



```
<xs:element name="macAddress" type="xs:string" minOccurs="0"/>
<xs:element name="numCopiesOccupied" type="xs:int" minOccurs="0"/>
<xs:element name="numCopiesPreassigned" type="xs:int" minOccurs="0"/>
<xs:element name="parentId" type="xs:int" minOccurs="0"/>
<xs:element name="parkingMode" type="xs:boolean" minOccurs="0"/>
<xs:element name="pcId" type="xs:int" minOccurs="0"/>
<xs:element name="privacyOverPassage" type="xs:boolean" minOccurs="0"/>
<xs:element name="pushButton" type="xs:boolean" minOccurs="0"/>
<xs:element name="registerHandle" type="xs:boolean" minOccurs="0"/>
<xs:element name="relaySetupMode" type="xs:int" minOccurs="0"/>
<xs:element name="requiredGrantIndex" type="xs:int" minOccurs="0"/>
<xs:element name="requiredGrantName" type="xs:string" minOccurs="0"/>
<xs:element name="rfVersion" type="xs:string" minOccurs="0"/>
<xs:element name="roomOccupied" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomPreassigned" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomType" type="tns:roomType" minOccurs="0"/>
<xs:element name="upatingModeId" type="xs:int" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userInfo" type="tns:userInfo" minOccurs="0"/>
<xs:element name="tDlo" type="xs:int" minOccurs="0"/>
<xs:element name="tEscReturn" type="xs:int" minOccurs="0"/>
<xs:element name="tOpen" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorStateInfo">
<xs:sequence>
<xs:element name="batteryPercentage" type="xs:int" minOccurs="0"/>
<xs:element name="batteryStatus" type="tns:batteryStatusType" minOccurs="0"/>
<xs:element name="cabinetState" type="tns:cabinetStateInfo" minOccurs="0"/>
<xs:element name="emergency" type="xs:boolean" minOccurs="0"/>
<xs:element name="mode" type="tns:blockModeType" minOccurs="0"/>
<xs:element name="physicalState" type="tns:physicalStateType" minOccurs="0"/>
<xs:element name="privacy" type="xs:boolean" minOccurs="0"/>
<xs:element name="state" type="tns:stateType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="cabinetStateInfo">
<xs:sequence>
<xs:element name="state" type="tns:cabinetStatusType" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="userInfo">
<xs:sequence>
<xs:element name="actFormat" type="xs:boolean" minOccurs="0"/>
<xs:element name="actUser" type="xs:boolean" minOccurs="0"/>
<xs:element name="ada" type="xs:boolean" minOccurs="0"/>
<xs:element name="appCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="bleCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="cabinetName" type="xs:string" minOccurs="0"/>
<xs:element name="codLev" type="xs:string" minOccurs="0"/>
```



```
<xs:element name="data1" type="xs:string" minOccurs="0"/>
<xs:element name="data2" type="xs:string" minOccurs="0"/>
<xs:element name="data3" type="xs:string" minOccurs="0"/>
<xs:element name="data4" type="xs:string" minOccurs="0"/>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateIssue" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateUpdate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
<xs:element name="enkReles" type="xs:int" minOccurs="0"/>
<xs:element name="externalId" type="xs:string" minOccurs="0"/>
<xs:element name="grants" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="hasMultiples" type="xs:boolean" minOccurs="0"/>
<xs:element name="info" type="xs:string" minOccurs="0"/>
<xs:element name="keyClock" type="xs:dateTime" minOccurs="0"/>
<xs:element name="keyPad" type="xs:string" minOccurs="0"/>
<xs:element name="mobileKeyState" type="xs:string" minOccurs="0"/>
<xs:element name="nonSentLockingPlanEntries" type="xs:int" minOccurs="0"/>
<xs:element name="numCopies" type="xs:int" minOccurs="0"/>
<xs:element name="openBlockedDoors" type="xs:boolean" minOccurs="0"/>
<xs:element name="pinCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomCheckedOut" type="xs:boolean" minOccurs="0"/>
<xs:element name="track1" type="xs:string" minOccurs="0"/>
<xs:element name="track2" type="xs:string" minOccurs="0"/>
<xs:element name="UOCAccess" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCAudit" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCDays" type="xs:int" minOccurs="0"/>
<xs:element name="UOCOverflow" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCRevalidate" type="xs:boolean" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
<xs:element name="userAPB" type="xs:boolean" minOccurs="0"/>
<xs:element name="userCardId" type="xs:string" minOccurs="0"/>
<xs:element name="userCarrier" type="tns:carrierType" minOccurs="0"/>
<xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress2" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress3" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress4" type="xs:string" minOccurs="0"/>
<xs:element name="userEncoded" type="xs:boolean" minOccurs="0"/>
<xs:element name="userGroup" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
<xs:element name="userPhoneNumber" type="xs:string" minOccurs="0"/>
<xs:element name="userType" type="tns:userType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorModify">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorData" type="tns:doorInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```



```
<xs:complexType name="doorModifyResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetById">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorGetByIdResponse">
<xs:sequence>
<xs:element name="doorInfo" type="tns:operationResultDoorInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorAdd">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorData" type="tns:doorInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorAddResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorsGetAll">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:doorType" minOccurs="0"/>
<xs:element name="numPage" type="xs:int" minOccurs="0"/>
<xs:element name="pageSize" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorsGetAllResponse">
<xs:sequence>
<xs:element name="doorInfo" type="tns:operationResultDoorInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorDelete">
```



```
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorDeleteResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:simpleType name="doorType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_ZERO"/>
<xs:enumeration value="TYPE_CYLINDER"/>
<xs:enumeration value="TYPE_LOCK"/>
<xs:enumeration value="TYPE_READER"/>
<xs:enumeration value="TYPE_SAFE_MAG"/>
<xs:enumeration value="TYPE_CYLINDER_MEC"/>
<xs:enumeration value="TYPE_READER_ONLINE"/>
<xs:enumeration value="TYPE_ESCUTCHEON_PROX"/>
<xs:enumeration value="TYPE_READER_PROX_OFF"/>
<xs:enumeration value="TYPE_READER_PROX_ON"/>
<xs:enumeration value="TYPE_LOCK_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX"/>
<xs:enumeration value="TYPE_READER_DUAL"/>
<xs:enumeration value="TYPE_SAFE_KEYBOARD"/>
<xs:enumeration value="TYPE_SAFE_PROX"/>
<xs:enumeration value="TYPE_READER_UPDATER"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL"/>
<xs:enumeration value="TYPE_ESCUTCHEON_UOL"/>
<xs:enumeration value="TYPE_CABINET"/>
<xs:enumeration value="TYPE_READER_UOL"/>
<xs:enumeration value="TYPE_READER_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG"/>
<xs:enumeration value="TYPE_VISUALIZER"/>
<xs:enumeration value="TYPE_SPY_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG_UOL"/>
<xs:enumeration value="TYPE_READER_MAG_UOL"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER_UOL"/>
<xs:enumeration value="TYPE_ENERGYSaver_PROX"/>
<xs:enumeration value="TYPE_ENERGYSaver_MAG"/>
<xs:enumeration value="TYPE_ENERGYSaver_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL_UOL"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="apbAreaType">
<xs:restriction base="xs:string">
```



```
<xs:enumeration value="APB_AREA_1"/>
<xs:enumeration value="APB_AREA_2"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="apbEntryType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_APB_NONE"/>
<xs:enumeration value="TYPE_APB_ENTRY"/>
<xs:enumeration value="TYPE_APB_EXIT"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="batteryStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="OK"/>
<xs:enumeration value="LOW_BATTERIES"/>
<xs:enumeration value="VERY_LOW_BATTERIES"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="cabinetStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="FREE"/>
<xs:enumeration value="IN_USE"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="blockModeType">
<xs:restriction base="xs:string">
<xs:enumeration value="UNBLOCKED"/>
<xs:enumeration value="BLOCKED"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="physicalStateType">
<xs:restriction base="xs:string">
<xs:enumeration value="DOOR_CLOSED"/>
<xs:enumeration value="INTRUSION"/>
<xs:enumeration value="DOOR_LEFT_OPEN"/>
<xs:enumeration value="DOOR_CLOSED_NOT_SECURED"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="stateType">
<xs:restriction base="xs:string">
<xs:enumeration value="CARD"/>
<xs:enumeration value="PASSAGE"/>
<xs:enumeration value="FIRST_USER"/>
<xs:enumeration value="KEYPAD"/>
<xs:enumeration value="CARD_PIN"/>
<xs:enumeration value="DUAL_USER"/>
<xs:enumeration value="PIN_CARD"/>
</xs:restriction>
</xs:simpleType>
```



```
<xs:simpleType name="roomType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_DOOR_STANDARD"/>
<xs:enumeration value="TYPE_DOOR_ROOM"/>
<xs:enumeration value="TYPE_DOOR_SUITE"/>
<xs:enumeration value="TYPE_DOOR_CORRIDOR"/>
<xs:enumeration value="TYPE_DOOR_HIGH_TRAFFIC"/>
<xs:enumeration value="TYPE_DOOR_SAFE"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="carrierType">
<xs:restriction base="xs:string">
<xs:enumeration value="CAR_LLAVE"/>
<xs:enumeration value="CAR_TARJETA"/>
<xs:enumeration value="CAR_LLAVE_MEC"/>
<xs:enumeration value="CAR_PROX"/>
<xs:enumeration value="CAR_MAG_PROX"/>
<xs:enumeration value="CAR_KEY_PROX"/>
<xs:enumeration value="CAR_KEY_MAG"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="userType">
<xs:restriction base="xs:string">
<xs:enumeration value="USER_SPECIAL"/>
<xs:enumeration value="USER_STANDARD"/>
<xs:enumeration value="USER_GUEST"/>
<xs:enumeration value="USER_SAFE_MASTER"/>
<xs:enumeration value="USER_OPERATOR"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="errorType">
<xs:restriction base="xs:string">
<xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
<xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
<xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
<xs:enumeration value="ERROR_FORMAT_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
```



```
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_INVALID"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_WRONG_SITE"/>
<xs:enumeration value="ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST"/>
<xs:enumeration value="ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_FOUND"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
```




```
<xs:enumeration value="ERROR_READING_CARD"/>
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
```




Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 225 of 342

```
<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



EventsWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?>
<definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-utility-1.0.xsd" xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="EventsWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/EventsWebService?xsd
=1"/>
</xsd:schema>
</types>
<message name="activeAlarmsGetAll">
<part name="parameters" element="tns:activeAlarmsGetAll"/>
</message>
<message name="activeAlarmsGetAllResponse">
<part name="parameters" element="tns:activeAlarmsGetAllResponse"/>
</message>
<message name="activeAlarmsDeleteAll">
<part name="parameters" element="tns:activeAlarmsDeleteAll"/>
</message>
<message name="activeAlarmsDeleteAllResponse">
<part name="parameters" element="tns:activeAlarmsDeleteAllResponse"/>
</message>
<message name="openingsGetAll">
<part name="parameters" element="tns:openingsGetAll"/>
</message>
<message name="openingsGetAllResponse">
<part name="parameters" element="tns:openingsGetAllResponse"/>
</message>
<portType name="EventsService">
<operation name="activeAlarmsGetAll">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/EventsService/activeAlarmsGetAllReque
st" message="tns:activeAlarmsGetAll"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/EventsService/activeAlarmsGetAllRespo
nse" message="tns:activeAlarmsGetAllResponse"/>
</operation>
<operation name="activeAlarmsDeleteAll">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/EventsService/activeAlarmsDeleteAllRe
quest" message="tns:activeAlarmsDeleteAll"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/EventsService/activeAlarmsDeleteAllRe
sponse" message="tns:activeAlarmsDeleteAllResponse"/>
</operation>
```



```
<operation name="openingsGetAll">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/EventsService/openingsGetAllRequest"
message="tns:openingsGetAll"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/EventsService/openingsGetAllResponse"
message="tns:openingsGetAllResponse"/>
</operation>
</portType>
<binding name="EventsServicePortBinding" type="tns:EventsService">
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
<operation name="activeAlarmsGetAll">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="activeAlarmsDeleteAll">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="openingsGetAll">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="EventsWebService">
<port name="EventsServicePort" binding="tns:EventsServicePortBinding">
<soap:address
location="https://localhost:8181/TesaSmartairPlatform/EventsWebService"/>
</port>
</service>
</definitions>
```

EventsWebService XSD

```
<?xml version='1.0' encoding='UTF-8'?>
<xs:schema xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/">
```



```
<xs:element name="activeAlarmInfo" type="tns:activeAlarmInfo"/>
<xs:element name="activeAlarmsDeleteAll" type="tns:activeAlarmsDeleteAll"/>
<xs:element name="activeAlarmsDeleteAllResponse"
type="tns:activeAlarmsDeleteAllResponse"/>
<xs:element name="activeAlarmsGetAll" type="tns:activeAlarmsGetAll"/>
<xs:element name="activeAlarmsGetAllResponse"
type="tns:activeAlarmsGetAllResponse"/>
<xs:element name="cabinetStateInfo" type="tns:cabinetStateInfo"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo"/>
<xs:element name="openingInfo" type="tns:openingInfo"/>
<xs:element name="openingsGetAll" type="tns:openingsGetAll"/>
<xs:element name="openingsGetAllResponse" type="tns:openingsGetAllResponse"/>
<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="wirelessDoor" type="tns:wirelessDoor"/>
<xs:element name="wirelessResult" type="tns:wirelessResult"/>
<xs:complexType name="openingsGetAll">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="sortField" type="tns:eventSortField" minOccurs="0"/>
<xs:element name="sortOrder" type="tns:sortOrder" minOccurs="0"/>
<xs:element name="fromDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="toDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="doorID" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="userID" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="operationType" type="tns:eventType" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="fromOpeningId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="openingsGetAllResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResultOpeningList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="wirelessResultOpeningList">
<xs:complexContent>
<xs:extension base="tns:wirelessResult">
<xs:sequence>
<xs:element name="maxOpeningId" type="xs:int" minOccurs="0"/>
<xs:element name="openingInfo" type="tns:openingInfo" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="recordCount" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="wirelessResult">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="doorInfo" type="tns:wirelessDoor" minOccurs="0"/>
</xs:sequence>
```

```

</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResult">
<xs:sequence>
<xs:element name="detail" type="xs:string" minOccurs="0"/>
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="operationId" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="openingInfo">
<xs:sequence>
<xs:element name="aproxDate" type="xs:boolean" minOccurs="0"/>
<xs:element name="copyNumber" type="xs:int" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="eventCode" type="xs:int" minOccurs="0"/>
<xs:element name="eventType" type="tns:eventType" minOccurs="0"/>
<xs:element name="exit" type="xs:boolean" minOccurs="0"/>
<xs:element name="hubId" type="xs:int" minOccurs="0"/>
<xs:element name="hubName" type="xs:string" minOccurs="0"/>
<xs:element name="id" type="xs:int" minOccurs="0"/>
<xs:element name="openingDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="wirelessDoor">
<xs:sequence>
<xs:element name="batteryLevel" type="xs:int" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo" minOccurs="0"/>
<xs:element name="doorType" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorVersion" type="xs:string" minOccurs="0"/>
<xs:element name="groupName" type="xs:string" minOccurs="0"/>
<xs:element name="hubIPAddress" type="xs:string" minOccurs="0"/>
<xs:element name="hubName" type="xs:string" minOccurs="0"/>
<xs:element name="hubServiceWSDL" type="xs:string" minOccurs="0"/>
<xs:element name="hubVersion" type="xs:string" minOccurs="0"/>
<xs:element name="lockdownAreaId" type="xs:int" minOccurs="0"/>
<xs:element name="lockdownState" type="xs:int" minOccurs="0"/>
<xs:element name="notSupportedDoor" type="xs:boolean" minOccurs="0"/>
<xs:element name="rfMacAddress" type="xs:string" minOccurs="0"/>
<xs:element name="rfSignal" type="xs:int" minOccurs="0"/>
<xs:element name="rfState" type="tns:rfStatusType" minOccurs="0"/>
<xs:element name="rfVersion" type="xs:string" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

```



```
<xs:complexType name="doorStateInfo">
<xs:sequence>
<xs:element name="batteryPercentage" type="xs:int" minOccurs="0"/>
<xs:element name="batteryStatus" type="tns:batteryStatusType" minOccurs="0"/>
<xs:element name="cabinetState" type="tns:cabinetStateInfo" minOccurs="0"/>
<xs:element name="emergency" type="xs:boolean" minOccurs="0"/>
<xs:element name="mode" type="tns:blockModeType" minOccurs="0"/>
<xs:element name="physicalState" type="tns:physicalStateType" minOccurs="0"/>
<xs:element name="privacy" type="xs:boolean" minOccurs="0"/>
<xs:element name="state" type="tns:stateType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="cabinetStateInfo">
<xs:sequence>
<xs:element name="state" type="tns:cabinetStatusType" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="activeAlarmsGetAll">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="activeAlarmsGetAllResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResultActiveAlarmsList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="wirelessResultActiveAlarmsList">
<xs:complexContent>
<xs:extension base="tns:wirelessResult">
<xs:sequence>
<xs:element name="activeAlarmInfo" type="tns:activeAlarmInfo" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="maxActiveAlarmId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="activeAlarmInfo">
<xs:sequence>
<xs:element name="aproxDate" type="xs:boolean" minOccurs="0"/>
<xs:element name="copyNumber" type="xs:int" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="eventType" type="tns:eventType" minOccurs="0"/>
<xs:element name="exit" type="xs:boolean" minOccurs="0"/>
<xs:element name="hubName" type="xs:string" minOccurs="0"/>
<xs:element name="id" type="xs:int" minOccurs="0"/>
<xs:element name="openingDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```



```
</xs:sequence>
</xs:complexType>
<xs:complexType name="activeAlarmsDeleteAll">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="activeAlarmsDeleteAllResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:wirelessResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:simpleType name="eventSortField">
<xs:restriction base="xs:string">
<xs:enumeration value="USER_NAME"/>
<xs:enumeration value="DOOR_NAME"/>
<xs:enumeration value="PC_NAME"/>
<xs:enumeration value="EVENT_TYPE_ID"/>
<xs:enumeration value="EVENT_ID"/>
<xs:enumeration value="DATE"/>
<xs:enumeration value="TIME"/>
<xs:enumeration value="DATATEXT"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="sortOrder">
<xs:restriction base="xs:string">
<xs:enumeration value="ASCENDING"/>
<xs:enumeration value="DESCENDING"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="eventType">
<xs:restriction base="xs:string">
<xs:enumeration value="OPENING_ACCESS_GRANTED"/>
<xs:enumeration value="OPENING_ACCESS_GRANTED_CARDPIN"/>
<xs:enumeration value="OPENING_ACCESS_GRANTED_COMMONKEYPAD"/>
<xs:enumeration value="OPENING_ACCESS_GRANTED_NEWCARD"/>
<xs:enumeration value="ENCODING_NEW_CARD"/>
<xs:enumeration value="ENCODING_KEY_AUTH"/>
<xs:enumeration value="SAFE_OPEN_AFTER_INCOMPLETE_CLOSE"/>
<xs:enumeration value="OPENING_DOOR_OPEN_BY_PC_PP"/>
<xs:enumeration value="OPENING_ACCESS_GRANTED_DUALUSER"/>
<xs:enumeration value="GUEST_ENTERED_NEW_PIN"/>
<xs:enumeration value="SAFE_CLOSE"/>
<xs:enumeration value="EMERGENCY_OPEN"/>
<xs:enumeration value="EMERGENCY_CLOSE"/>
<xs:enumeration value="EMERGENCY_END"/>
<xs:enumeration value="DUAL_USER_FIRST_ACCEPTED"/>
<xs:enumeration value="CABINET_LOCKED"/>
<xs:enumeration value="CABINET_LOCKED_NEWCARD"/>
<xs:enumeration value="DENIAL_CABINET_USER_ALREADY_LOCKED_ANOTHER"/>
<xs:enumeration value="DENIAL_CABINET_IN_USE"/>
<xs:enumeration value="DENIAL_THUMBTURN_DEACTIVATED"/>
<xs:enumeration value="DENIAL_ANTIPASSBACK"/>
<xs:enumeration value="DENIAL_USER_WITHDRAWN"/>
</xs:restriction>
</xs:simpleType>
```



```
<xs:enumeration value="DOOR_CLOSED_BY_PC_PP"/>
<xs:enumeration value="DENIAL_COULD_NOT_ADD_USER"/>
<xs:enumeration value="DENIAL_KEY_DAMAGED"/>
<xs:enumeration value="DENIAL_CARD_WITHDRAWN"/>
<xs:enumeration value="OPENINGS_OVERFLOW"/>
<xs:enumeration value="DENIAL_KEY_FORMAT_ERROR"/>
<xs:enumeration value="DENIAL_KEY_NOT_ACTIVE"/>
<xs:enumeration value="DENIAL_KEY_EXPIRED"/>
<xs:enumeration value="DENIAL_PIN_INVALID"/>
<xs:enumeration value="DENIAL_ANOTHER_USER_REQUIRED"/>
<xs:enumeration value="DENIAL_USER_NOT_ENABLED"/>
<xs:enumeration value="DENIAL_GRANT_MISSING"/>
<xs:enumeration value="DENIAL_KEY_CANCELLED"/>
<xs:enumeration value="DENIAL_KEYPAD_BLOCKED"/>
<xs:enumeration value="DENIAL_OUT_OF_TIME"/>
<xs:enumeration value="DENIAL_NO_PRIVACY_OVERRIDE"/>
<xs:enumeration value="DENIAL_CANNOT_OPEN_BLOCKED"/>
<xs:enumeration value="DENIAL_KEY_NOT_AUTHORIZED"/>
<xs:enumeration value="DENIAL_DOOR_EMERGENCY_CLOSE"/>
<xs:enumeration value="DENIAL_CLOCK_STOPPED"/>
<xs:enumeration value="DENIAL_VERY_LOW_BATTERIES"/>
<xs:enumeration value="MODE_DUAL_USER"/>
<xs:enumeration value="MODE_CARD_PIN"/>
<xs:enumeration value="MODE_STANDARD"/>
<xs:enumeration value="MODE_COMMON_KEYPAD"/>
<xs:enumeration value="MODE_FIRST_USER"/>
<xs:enumeration value="MODE_OPEN"/>
<xs:enumeration value="MODE_OPEN_END"/>
<xs:enumeration value="MODE_BLOCKED"/>
<xs:enumeration value="MODE_BLOCKED_END"/>
<xs:enumeration value="MODE_CANCELLED"/>
<xs:enumeration value="RF_MODULE_AWAKEN"/>
<xs:enumeration value="START_ESC_RETURN"/>
<xs:enumeration value="END_ESC_RETURN"/>
<xs:enumeration value="RF_MODULE_ALWAYS_AWAKE"/>
<xs:enumeration value="INTERNAL_HANDLE"/>
<xs:enumeration value="DOOR_OPENED_BY_PUSHBUTTON"/>
<xs:enumeration value="REALTIME_CLOCK_UNSETTLED"/>
<xs:enumeration value="LOW_BATTERIES"/>
<xs:enumeration value="CARD_WITHDRAWN"/>
<xs:enumeration value="RF_COULD_NOT_UPLINK_AUDIT"/>
<xs:enumeration value="WARNING_INTRUSSION"/>
<xs:enumeration value="WARNING_DOOR_LEFT_OPEN"/>
<xs:enumeration value="DST_CHANGE"/>
<xs:enumeration value="DOOR_DATA_UPDATED_BY_PC_PP"/>
<xs:enumeration value="DOOR_OPENINGS_READ"/>
<xs:enumeration value="TEST"/>
<xs:enumeration value="MECHANIC_KEY_OVERRIDE"/>
<xs:enumeration value="DOOR_INITIALIZED"/>
<xs:enumeration value="POWER_ON_RESET"/>
<xs:enumeration value="WATCHDOG_RESET"/>
<xs:enumeration value="UNKNOWN_RESET"/>
<xs:enumeration value="DISCONNECTED"/>
<xs:enumeration value="RTC_UPDATED_BY_PC_PP"/>
<xs:enumeration value="FIRMWARE_UPDATED"/>
```




```
<xs:enumeration value="USER_ADD"/>
<xs:enumeration value="USER_MODIFY"/>
<xs:enumeration value="USER_DELETE"/>
<xs:enumeration value="OPENING_LOCK_PRIVACY_ON"/>
<xs:enumeration value="OPENING_LOCK_PRIVACY_OFF"/>
<xs:enumeration value="OPENING_WARNING_DURESS_ENTRY"/>
<xs:enumeration value="HUB_EVENT_TAMPER_START"/>
<xs:enumeration value="DENIAL_ESC_RETURN_ENABLED"/>
<xs:enumeration value="EMERGENCY_BLOCK"/>
<xs:enumeration value="DENIAL_DOOR_STATE_EMERGENCY_OPEN"/>
<xs:enumeration value="DENIAL_DOOR_STATE_EMERGENCY_BLOCKED"/>
<xs:enumeration value="OPENINGS_OVERFLOW_RECORDS_LOST"/>
<xs:enumeration value="MEMORY_ERROR_CANNOT_OPEN_RECORD"/>
<xs:enumeration value="USER_CARD_UPDATED"/>
<xs:enumeration value="USER_PLAN_UPDATED"/>
<xs:enumeration value="CABINET_PARTIALLY_OPENED"/>
<xs:enumeration value="CABINET_OPENED_AFTER_INCOMPLETE_OPENCLOSE"/>
<xs:enumeration value="DOOR_NOT_OPEN_DURING_OPENING_TIME"/>
<xs:enumeration value="MODE_PIN_CARD"/>
<xs:enumeration value="OPENING_ACCESS_GRANTED_PIN_CARD"/>
<xs:enumeration value="HUB_EVENT_TAMPER_END"/>
<xs:enumeration value="LOCK_ERROR_RF_STUCK"/>
<xs:enumeration value="LOCK_ERROR_INCOMPLETE_MEMORY_UPDATE"/>
<xs:enumeration value="LOCK_ERROR_MECHANICAL_WRONG_KNOB_POSITION"/>
<xs:enumeration value="LOCK_ERROR_SECURE_AREA_COMMUNICATION"/>
<xs:enumeration value="WARNING_INCORRECT_ANTIPASSBACK_DATA"/>
<xs:enumeration value="DOOR_CLOSED_BUT_NOT_SECURED"/>
<xs:enumeration value="RF_MODULE_LINKED"/>
<xs:enumeration value="HUB_EXIT_1_ON"/>
<xs:enumeration value="HUB_EXIT_1_OFF"/>
<xs:enumeration value="HUB_EXIT_2_ON"/>
<xs:enumeration value="HUB_EXIT_2_OFF"/>
<xs:enumeration value="HUB_CONNECTION_ERROR_EVENT"/>
<xs:enumeration value="HUB_CONNECTION_OK_EVENT"/>
<xs:enumeration value="WARNING_INTRUDER_WANDERING"/>
<xs:enumeration value="WARNING_INTRUDER_STANDING"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="batteryStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="OK"/>
<xs:enumeration value="LOW_BATTERIES"/>
<xs:enumeration value="VERY_LOW_BATTERIES"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="cabinetStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="FREE"/>
<xs:enumeration value="IN_USE"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="blockModeType">
<xs:restriction base="xs:string">
<xs:enumeration value="UNBLOCKED"/>
<xs:enumeration value="BLOCKED"/>
```



```
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="physicalStateType">
<xs:restriction base="xs:string">
<xs:enumeration value="DOOR_CLOSED"/>
<xs:enumeration value="INTRUSION"/>
<xs:enumeration value="DOOR_LEFT_OPEN"/>
<xs:enumeration value="DOOR_CLOSED_NOT_SECURED"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="stateType">
<xs:restriction base="xs:string">
<xs:enumeration value="CARD"/>
<xs:enumeration value="PASSAGE"/>
<xs:enumeration value="FIRST_USER"/>
<xs:enumeration value="KEYPAD"/>
<xs:enumeration value="CARD_PIN"/>
<xs:enumeration value="DUAL_USER"/>
<xs:enumeration value="PIN_CARD"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="doorType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_ZERO"/>
<xs:enumeration value="TYPE_CYLINDER"/>
<xs:enumeration value="TYPE_LOCK"/>
<xs:enumeration value="TYPE_READER"/>
<xs:enumeration value="TYPE_SAFE_MAG"/>
<xs:enumeration value="TYPE_CYLINDER_MEC"/>
<xs:enumeration value="TYPE_READER_ONLINE"/>
<xs:enumeration value="TYPE_ESCUTCHEON_PROX"/>
<xs:enumeration value="TYPE_READER_PROX_OFF"/>
<xs:enumeration value="TYPE_READER_PROX_ON"/>
<xs:enumeration value="TYPE_LOCK_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX"/>
<xs:enumeration value="TYPE_READER_DUAL"/>
<xs:enumeration value="TYPE_SAFE_KEYBOARD"/>
<xs:enumeration value="TYPE_SAFE_PROX"/>
<xs:enumeration value="TYPE_READER_UPDATER"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL"/>
<xs:enumeration value="TYPE_ESCUTCHEON_UOL"/>
<xs:enumeration value="TYPE_CABINET"/>
<xs:enumeration value="TYPE_READER_UOL"/>
<xs:enumeration value="TYPE_READER_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG"/>
<xs:enumeration value="TYPE_VISUALIZER"/>
<xs:enumeration value="TYPE_SPY_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG_UOL"/>
<xs:enumeration value="TYPE_READER_MAG_UOL"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER_UOL"/>
<xs:enumeration value="TYPE_ENERGYSaver_PROX"/>
<xs:enumeration value="TYPE_ENERGYSaver_MAG"/>
<xs:enumeration value="TYPE_ENERGYSaver_DUAL"/>
```



```
<xs:enumeration value="TYPE_ELEVATOR_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL_UOL"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="rfStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="ALWAYS_AWAKE"/>
<xs:enumeration value="SLEEP_AWAKE"/>
<xs:enumeration value="ALWAYS_SLEEP"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="errorType">
<xs:restriction base="xs:string">
<xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
<xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
<xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
<xs:enumeration value="ERROR_FORMAT_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
```



```
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_INVALID"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_WRONG_SITE"/>
<xs:enumeration value="ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST"/>
<xs:enumeration value="ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_FOUND"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
<xs:enumeration value="ERROR_READING_CARD"/>
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
```

```
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



LockingPlanWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?>
<definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-utility-1.0.xsd" xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="LockingPlanWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/LockingPlanWebServic
e?xsd=1"/>
</xsd:schema>
</types>
<message name="calendarDeleteHolidays">
<part name="parameters" element="tns:calendarDeleteHolidays"/>
</message>
<message name="calendarDeleteHolidaysResponse">
<part name="parameters" element="tns:calendarDeleteHolidaysResponse"/>
</message>
<message name="timetableGet">
<part name="parameters" element="tns:timetableGet"/>
</message>
<message name="timetableGetResponse">
<part name="parameters" element="tns:timetableGetResponse"/>
</message>
<message name="changeGet">
<part name="parameters" element="tns:changeGet"/>
</message>
<message name="changeGetResponse">
<part name="parameters" element="tns:changeGetResponse"/>
</message>
<message name="changeAdd">
<part name="parameters" element="tns:changeAdd"/>
</message>
<message name="changeAddResponse">
<part name="parameters" element="tns:changeAddResponse"/>
</message>
<message name="changeModify">
<part name="parameters" element="tns:changeModify"/>
</message>
<message name="changeModifyResponse">
<part name="parameters" element="tns:changeModifyResponse"/>
</message>
<message name="changeDelete">
<part name="parameters" element="tns:changeDelete"/>
</message>
<message name="changeDeleteResponse">
<part name="parameters" element="tns:changeDeleteResponse"/>
</message>
```



```
</message>
<message name="calendarGet">
<part name="parameters" element="tns:calendarGet"/>
</message>
<message name="calendarGetResponse">
<part name="parameters" element="tns:calendarGetResponse"/>
</message>
<message name="calendarAdd">
<part name="parameters" element="tns:calendarAdd"/>
</message>
<message name="calendarAddResponse">
<part name="parameters" element="tns:calendarAddResponse"/>
</message>
<message name="lockingPlanGet">
<part name="parameters" element="tns:lockingPlanGet"/>
</message>
<message name="lockingPlanGetResponse">
<part name="parameters" element="tns:lockingPlanGetResponse"/>
</message>
<message name="lockingPlanModify">
<part name="parameters" element="tns:lockingPlanModify"/>
</message>
<message name="lockingPlanModifyResponse">
<part name="parameters" element="tns:lockingPlanModifyResponse"/>
</message>
<message name="timetableModify">
<part name="parameters" element="tns:timetableModify"/>
</message>
<message name="timetableModifyResponse">
<part name="parameters" element="tns:timetableModifyResponse"/>
</message>
<message name="timetableDelete">
<part name="parameters" element="tns:timetableDelete"/>
</message>
<message name="timetableDeleteResponse">
<part name="parameters" element="tns:timetableDeleteResponse"/>
</message>
<message name="calendarChangeName">
<part name="parameters" element="tns:calendarChangeName"/>
</message>
<message name="calendarChangeNameResponse">
<part name="parameters" element="tns:calendarChangeNameResponse"/>
</message>
<message name="calendarDelete">
<part name="parameters" element="tns:calendarDelete"/>
</message>
<message name="calendarDeleteResponse">
<part name="parameters" element="tns:calendarDeleteResponse"/>
</message>
<message name="calendarAddHolidays">
<part name="parameters" element="tns:calendarAddHolidays"/>
</message>
<message name="calendarAddHolidaysResponse">
<part name="parameters" element="tns:calendarAddHolidaysResponse"/>
</message>
```




```
<message name="updatingModeGet">
<part name="parameters" element="tns:updatingModeGet"/>
</message>
<message name="updatingModeGetResponse">
<part name="parameters" element="tns:updatingModeGetResponse"/>
</message>
<message name="updatingModeAdd">
<part name="parameters" element="tns:updatingModeAdd"/>
</message>
<message name="updatingModeAddResponse">
<part name="parameters" element="tns:updatingModeAddResponse"/>
</message>
<message name="updatingModeModify">
<part name="parameters" element="tns:updatingModeModify"/>
</message>
<message name="updatingModeModifyResponse">
<part name="parameters" element="tns:updatingModeModifyResponse"/>
</message>
<message name="updatingModeDelete">
<part name="parameters" element="tns:updatingModeDelete"/>
</message>
<message name="updatingModeDeleteResponse">
<part name="parameters" element="tns:updatingModeDeleteResponse"/>
</message>
<portType name="LockingPlanService">
<operation name="calendarDeleteHolidays">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarDeleteHolidaysRequest" message="tns:calendarDeleteHolidays"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarDeleteHolidaysResponse" message="tns:calendarDeleteHolidaysResponse"/>
</operation>
<operation name="timetableGet">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/timetableGetRequest" message="tns:timetableGet"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/timetableGetResponse" message="tns:timetableGetResponse"/>
</operation>
<operation name="changeGet">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeGetRequest" message="tns:changeGet"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeGetResponse" message="tns:changeGetResponse"/>
</operation>
<operation name="changeAdd">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeAddRequest" message="tns:changeAdd"/>
```




```
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeAddResponse"
message="tns:changeAddResponse"/>
</operation>
<operation name="changeModify">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeModifyRequest"
message="tns:changeModify"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeModifyResponse"
message="tns:changeModifyResponse"/>
</operation>
<operation name="changeDelete">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeDeleteRequest"
message="tns:changeDelete"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/changeDeleteResponse"
message="tns:changeDeleteResponse"/>
</operation>
<operation name="calendarGet">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarGetRequest"
message="tns:calendarGet"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarGetResponse"
message="tns:calendarGetResponse"/>
</operation>
<operation name="calendarAdd">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarAddRequest"
message="tns:calendarAdd"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarAddResponse"
message="tns:calendarAddResponse"/>
</operation>
<operation name="lockingPlanGet">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/lockingPlanGetRequest"
message="tns:lockingPlanGet"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/lockingPlanGetResponse"
message="tns:lockingPlanGetResponse"/>
</operation>
<operation name="lockingPlanModify">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/lockingPlanModifyRequest"
message="tns:lockingPlanModify"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/lockingPlanModifyResponse"
message="tns:lockingPlanModifyResponse"/>
</operation>
<operation name="timetableModify">
```



```
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/timetableModifyReq
uest" message="tns:timetableModify"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/timetableModifyRes
ponse" message="tns:timetableModifyResponse"/>
</operation>
<operation name="timetableDelete">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/timetableDeleteReq
uest" message="tns:timetableDelete"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/timetableDeleteRes
ponse" message="tns:timetableDeleteResponse"/>
</operation>
<operation name="calendarChangeName">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarChangeName
Request" message="tns:calendarChangeName"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarChangeName
Response" message="tns:calendarChangeNameResponse"/>
</operation>
<operation name="calendarDelete">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarDeleteReq
uest" message="tns:calendarDelete"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarDeleteResp
onse" message="tns:calendarDeleteResponse"/>
</operation>
<operation name="calendarAddHolidays">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarAddHoliday
sRequest" message="tns:calendarAddHolidays"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/calendarAddHoliday
sResponse" message="tns:calendarAddHolidaysResponse"/>
</operation>
<operation name="updatingModeGet">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeGetReq
uest" message="tns:updatingModeGet"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeGetRes
ponse" message="tns:updatingModeGetResponse"/>
</operation>
<operation name="updatingModeAdd">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeAddReq
uest" message="tns:updatingModeAdd"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeAddRes
ponse" message="tns:updatingModeAddResponse"/>
</operation>
```



```
<operation name="updatingModeModify">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeModify
Request" message="tns:updatingModeModify"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeModify
Response" message="tns:updatingModeModifyResponse"/>
</operation>
<operation name="updatingModeDelete">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeDelete
Request" message="tns:updatingModeDelete"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/LockingPlanService/updatingModeDelete
Response" message="tns:updatingModeDeleteResponse"/>
</operation>
</portType>
<binding name="LockingPlanServicePortBinding" type="tns:LockingPlanService">
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
<operation name="calendarDeleteHolidays">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="timetableGet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="changeGet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="changeAdd">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
```



```
</operation>
<operation name="changeModify">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="changeDelete">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="calendarGet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="calendarAdd">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="lockingPlanGet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="lockingPlanModify">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 245 of 342

```
<operation name="timetableModify">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="timetableDelete">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="calendarChangeName">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="calendarDelete">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="calendarAddHolidays">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="updatingModeGet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="updatingModeAdd">
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 246 of 342

```
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="updatingModeModify">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="updatingModeDelete">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="LockingPlanWebService">
<port name="LockingPlanServicePort" binding="tns:LockingPlanServicePortBinding">
<soap:address
location="https://localhost:8181/TesaSmartairPlatform/LockingPlanWebService"/>
</port>
</service>
</definitions>
```



LockingPlanWebService XSD

```
<?xml version='1.0' encoding='UTF-8'?>
<xs:schema xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/">
<xs:element name="calendarAdd" type="tns:calendarAdd"/>
<xs:element name="calendarAddHolidays" type="tns:calendarAddHolidays"/>
<xs:element name="calendarAddHolidaysResponse"
type="tns:calendarAddHolidaysResponse"/>
<xs:element name="calendarAddResponse" type="tns:calendarAddResponse"/>
<xs:element name="calendarChangeName" type="tns:calendarChangeName"/>
<xs:element name="calendarChangeNameResponse"
type="tns:calendarChangeNameResponse"/>
<xs:element name="calendarDelete" type="tns:calendarDelete"/>
<xs:element name="calendarDeleteHolidays" type="tns:calendarDeleteHolidays"/>
<xs:element name="calendarDeleteHolidaysResponse"
type="tns:calendarDeleteHolidaysResponse"/>
<xs:element name="calendarDeleteResponse" type="tns:calendarDeleteResponse"/>
<xs:element name="calendarGet" type="tns:calendarGet"/>
<xs:element name="calendarGetResponse" type="tns:calendarGetResponse"/>
<xs:element name="calendarInfo" type="tns:calendarInfo"/>
<xs:element name="changeAdd" type="tns:changeAdd"/>
<xs:element name="changeAddResponse" type="tns:changeAddResponse"/>
<xs:element name="changeDelete" type="tns:changeDelete"/>
<xs:element name="changeDeleteResponse" type="tns:changeDeleteResponse"/>
<xs:element name="changeGet" type="tns:changeGet"/>
<xs:element name="changeGetResponse" type="tns:changeGetResponse"/>
<xs:element name="changeInfo" type="tns:changeInfo"/>
<xs:element name="changeModify" type="tns:changeModify"/>
<xs:element name="changeModifyResponse" type="tns:changeModifyResponse"/>
<xs:element name="lockingPlanGet" type="tns:lockingPlanGet"/>
<xs:element name="lockingPlanGetResponse" type="tns:lockingPlanGetResponse"/>
<xs:element name="lockingPlanInfo" type="tns:lockingPlanInfo"/>
<xs:element name="lockingPlanModify" type="tns:lockingPlanModify"/>
<xs:element name="lockingPlanModifyResponse"
type="tns:lockingPlanModifyResponse"/>
<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="operationResultCalendarInfo"
type="tns:operationResultCalendarInfo"/>
<xs:element name="operationResultCalendarInfoList"
type="tns:operationResultCalendarInfoList"/>
<xs:element name="operationResultChangeInfo"
type="tns:operationResultChangeInfo"/>
<xs:element name="operationResultChangeInfoList"
type="tns:operationResultChangeInfoList"/>
<xs:element name="operationResultTimetableInfoList"
type="tns:operationResultTimetableInfoList"/>
<xs:element name="operationResultUpdatingModeInfo"
type="tns:operationResultUpdatingModeInfo"/>
<xs:element name="operationResultUpdatingModeInfoList"
type="tns:operationResultUpdatingModeInfoList"/>
<xs:element name="timeModeWeekDays" type="tns:timeModeWeekDays"/>
<xs:element name="timeRangeWeekDays" type="tns:timeRangeWeekDays"/>
```



```
<xs:element name="timetableDelete" type="tns:timetableDelete"/>
<xs:element name="timetableDeleteResponse" type="tns:timetableDeleteResponse"/>
<xs:element name="timetableGet" type="tns:timetableGet"/>
<xs:element name="timetableGetResponse" type="tns:timetableGetResponse"/>
<xs:element name="timetableInfo" type="tns:timetableInfo"/>
<xs:element name="timetableModify" type="tns:timetableModify"/>
<xs:element name="timetableModifyResponse" type="tns:timetableModifyResponse"/>
<xs:element name="updatingInfo" type="tns:updatingInfo"/>
<xs:element name="updatingModeAdd" type="tns:updatingModeAdd"/>
<xs:element name="updatingModeAddResponse" type="tns:updatingModeAddResponse"/>
<xs:element name="updatingModeDelete" type="tns:updatingModeDelete"/>
<xs:element name="updatingModeDeleteResponse"
type="tns:updatingModeDeleteResponse"/>
<xs:element name="updatingModeGet" type="tns:updatingModeGet"/>
<xs:element name="updatingModeGetResponse" type="tns:updatingModeGetResponse"/>
<xs:element name="updatingModeModify" type="tns:updatingModeModify"/>
<xs:element name="updatingModeModifyResponse"
type="tns:updatingModeModifyResponse"/>
<xs:element name="weekDays" type="tns:weekDays"/>
<xs:complexType name="calendarAddHolidays">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
<xs:element name="daysYYYY-MM-DD" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarAddHolidaysResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResult">
<xs:sequence>
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="changeGet">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="filterChangeId" type="xs:int" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="changeGetResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultChangeInfoList"
minOccurs="0"/>
</xs:sequence>
```




```
</xs:complexType>
<xs:complexType name="operationResultChangeInfoList">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="changeInfo" type="tns:changeInfo" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="changeInfo">
<xs:sequence>
<xs:element name="id" type="xs:int" minOccurs="0"/>
<xs:element name="name" type="xs:string" minOccurs="0"/>
<xs:element name="timeModeDaysOption" type="tns:timeModeWeekDays"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timeModeWeekDays">
<xs:sequence>
<xs:element name="days" type="tns:weekDays" minOccurs="0"/>
<xs:element name="mode" type="xs:int" minOccurs="0"/>
<xs:element name="time" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="weekDays">
<xs:sequence>
<xs:element name="friday" type="xs:boolean"/>
<xs:element name="holiday" type="xs:boolean"/>
<xs:element name="monday" type="xs:boolean"/>
<xs:element name="saturday" type="xs:boolean"/>
<xs:element name="sunday" type="xs:boolean"/>
<xs:element name="thursday" type="xs:boolean"/>
<xs:element name="tuesday" type="xs:boolean"/>
<xs:element name="wednesday" type="xs:boolean"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarGet">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarGetResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCalendarInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultCalendarInfoList">
<xs:complexContent>
<xs:extension base="tns:operationResult">
```



```
<xs:sequence>
<xs:element name="calendarInfo" type="tns:calendarInfo" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="calendarInfo">
<xs:sequence>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
<xs:element name="calendarName" type="xs:string" minOccurs="0"/>
<xs:element name="holidaysDateList" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarDelete">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarDeleteResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="updatingModeModify">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="updatingModeId" type="xs:int" minOccurs="0"/>
<xs:element name="updatingModeData" type="tns:updatingInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="updatingInfo">
<xs:sequence>
<xs:element name="id" type="xs:int" minOccurs="0"/>
<xs:element name="name" type="xs:string" minOccurs="0"/>
<xs:element name="timeModeDaysOption" type="tns:timeModeWeekDays"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="updatingModeModifyResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timetableModify">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="timetableData" type="tns:timetableInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timetableInfo">
```

```
<xs:sequence>
<xs:element name="color" type="tns:timetableColor" minOccurs="0"/>
<xs:element name="id" type="xs:int" minOccurs="0"/>
<xs:element name="name" type="xs:string" minOccurs="0"/>
<xs:element name="timesAndDaysOption" type="tns:timeRangeWeekDays"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timeRangeWeekDays">
<xs:sequence>
<xs:element name="days" type="tns:weekDays" minOccurs="0"/>
<xs:element name="timeEnd" type="xs:string" minOccurs="0"/>
<xs:element name="timeStart" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timetableModifyResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarChangeName">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
<xs:element name="newName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarChangeNameResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="updatingModeDelete">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="updatingModeId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="updatingModeDeleteResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarDeleteHolidays">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
<xs:element name="daysYYYY-MM-DD" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="calendarDeleteHolidaysResponse">
<xs:sequence>
```



```
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timetableDelete">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="timetableId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="timetableDeleteResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="changeModify">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="changeId" type="xs:int" minOccurs="0"/>
<xs:element name="changeData" type="tns:changeInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="changeModifyResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="lockingPlanModify">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
<xs:element name="canOpen" type="xs:boolean" minOccurs="0"/>
<xs:element name="codTimetable" type="xs:int" minOccurs="0"/>
<xs:element name="privacyOverride" type="xs:boolean" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="lockingPlanModifyResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="changeDelete">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="changeId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="changeDeleteResponse">
<xs:sequence>
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
```



```
</xs:complexType>
<xs:complexType name="lockingPlanGet">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="userId" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="doorId" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="lockingPlanGetResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:operationResultLockingPlan"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultLockingPlan">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element name="lockingPlanInfo" type="tns:lockingPlanInfo" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="lockingPlanInfo">
  <xs:sequence>
    <xs:element name="canOpen" type="xs:boolean" minOccurs="0"/>
    <xs:element name="doorId" type="xs:int" minOccurs="0"/>
    <xs:element name="doorName" type="xs:string" minOccurs="0"/>
    <xs:element name="privacyOverride" type="xs:boolean" minOccurs="0"/>
    <xs:element name="timezoneCode" type="xs:int" minOccurs="0"/>
    <xs:element name="updated" type="xs:boolean" minOccurs="0"/>
    <xs:element name="userId" type="xs:int" minOccurs="0"/>
    <xs:element name="userName" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="changeAdd">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="changeData" type="tns:changeInfo" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="changeAddResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:operationResultChangeInfo"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultChangeInfo">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element ref="tns:changeInfo" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```



```
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="updatingModeAdd">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="updatingModeData" type="tns:updatingInfo" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="updatingModeAddResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:operationResultUpdatingModeInfo"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultUpdatingModeInfo">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element ref="tns:updatingInfo" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="calendarAdd">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="nameCalendar" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="calendarAddResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:operationResultCalendarInfo"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultCalendarInfo">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element ref="tns:calendarInfo" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="timetableGet">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="timetableId" type="xs:int" minOccurs="0"
maxOccurs="unbounded"/>
  </xs:sequence>
```



```
</xs:complexType>
<xs:complexType name="timetableGetResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:operationResultTimetableInfoList"
      minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultTimetableInfoList">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element name="timetableInfo" type="tns:timetableInfo" nillable="true"
          minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="updatingModeGet">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="updatingId" type="xs:int" minOccurs="0"
      maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="updatingModeGetResponse">
  <xs:sequence>
    <xs:element name="operationResult"
      type="tns:operationResultUpdatingModeInfoList" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultUpdatingModeInfoList">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element name="updInfo" type="tns:updatingInfo" nillable="true" minOccurs="0"
          maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="errorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
    <xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
    <xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
    <xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
    <xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
    <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
    <xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
    <xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
    <xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
    <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
    <xs:enumeration value="ERROR_FORMAT_ERROR"/>
    <xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
  </xs:restriction>
</xs:simpleType>
```



```

<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_SCRIPT_EXECUTION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="timetableColor">
<xs:restriction base="xs:string">
<xs:enumeration value="MAROON"/>
<xs:enumeration value="GREEN"/>
<xs:enumeration value="OLIVE"/>
<xs:enumeration value="NAVY"/>
<xs:enumeration value="PURPLE"/>

```




ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 257 of 342

```
<xs:enumeration value="TEAL"/>
<xs:enumeration value="GRAY"/>
<xs:enumeration value="SILVER"/>
<xs:enumeration value="RED"/>
<xs:enumeration value="LIME"/>
<xs:enumeration value="YELLOW"/>
<xs:enumeration value="BLUE"/>
<xs:enumeration value="FUCHSIA"/>
<xs:enumeration value="AQUA"/>
<xs:enumeration value="WHITE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



SystemConfigWebService WSDL

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-utility-1.0.xsd" xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="SystemConfigWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/SystemConfigWebServi
ce?xsd=1"/>
</xsd:schema>
</types>
<message name="commonPinsGet">
<part name="parameters" element="tns:commonPinsGet"/>
</message>
<message name="commonPinsGetResponse">
<part name="parameters" element="tns:commonPinsGetResponse"/>
</message>
<message name="commonPinsSet">
<part name="parameters" element="tns:commonPinsSet"/>
</message>
<message name="commonPinsSetResponse">
<part name="parameters" element="tns:commonPinsSetResponse"/>
</message>
<portType name="SystemConfigService">
<operation name="commonPinsGet">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/SystemConfigService/commonPinsGetRequ
est" message="tns:commonPinsGet"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/SystemConfigService/commonPinsGetResp
onse" message="tns:commonPinsGetResponse"/>
</operation>
<operation name="commonPinsSet">
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 259 of 342

```
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/SystemConfigService/commonPinsSetRequ
est" message="tns:commonPinsSet"/>

<output
wsam:Action="http://soap.ws.ts1000.tesa.es/SystemConfigService/commonPinsSetResp
onse" message="tns:commonPinsSetResponse"/>

</operation>
</portType>

<binding name="SystemConfigServicePortBinding" type="tns:SystemConfigService">
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
<operation name="commonPinsGet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="commonPinsSet">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>

<service name="SystemConfigWebService">
<port name="SystemConfigServicePort"
binding="tns:SystemConfigServicePortBinding">
<soap:address
location="https://localhost:8181/TesaSmartairPlatform/SystemConfigWebService"/>
</port>
</service>
</definitions>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 260 of 342

SystemConfigWebService XSD

```
<?xml version="1.0" encoding="UTF-8"?>

<xs:schema xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/">

  <xs:element name="commonPinsGet" type="tns:commonPinsGet"/>
  <xs:element name="commonPinsGetResponse" type="tns:commonPinsGetResponse"/>
  <xs:element name="commonPinsInfo" type="tns:commonPinsInfo"/>
  <xs:element name="commonPinsSet" type="tns:commonPinsSet"/>
  <xs:element name="commonPinsSetResponse" type="tns:commonPinsSetResponse"/>
  <xs:element name="operationResult" type="tns:operationResult"/>
  <xs:element name="operationResultCommonPinsInfo"
type="tns:operationResultCommonPinsInfo"/>
  <xs:complexType name="commonPinsGet">
    <xs:sequence>
      <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
      <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="commonPinsGetResponse">
    <xs:sequence>
      <xs:element name="operationResult" type="tns:operationResultCommonPinsInfo"
minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="operationResultCommonPinsInfo">
    <xs:complexContent>
      <xs:extension base="tns:operationResult">
        <xs:sequence>
          <xs:element ref="tns:commonPinsInfo" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="operationResult">
```



```
<xs:sequence>
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="commonPinsInfo">
<xs:sequence>
<xs:element name="pin1" type="xs:string" minOccurs="0"/>
<xs:element name="pin2" type="xs:string" minOccurs="0"/>
<xs:element name="pin3" type="xs:string" minOccurs="0"/>
<xs:element name="pin4" type="xs:string" minOccurs="0"/>
<xs:element name="pin5" type="xs:string" minOccurs="0"/>
<xs:element name="pin6" type="xs:string" minOccurs="0"/>
<xs:element name="pin7" type="xs:string" minOccurs="0"/>
<xs:element name="pinName1" type="xs:string" minOccurs="0"/>
<xs:element name="pinName2" type="xs:string" minOccurs="0"/>
<xs:element name="pinName3" type="xs:string" minOccurs="0"/>
<xs:element name="pinName4" type="xs:string" minOccurs="0"/>
<xs:element name="pinName5" type="xs:string" minOccurs="0"/>
<xs:element name="pinName6" type="xs:string" minOccurs="0"/>
<xs:element name="pinName7" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="commonPinsSet">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="commonPinsData" type="tns:commonPinsInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="commonPinsSetResponse">
<xs:sequence>
```



```
<xs:element ref="tns:operationResult" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:simpleType name="errorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
    <xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
    <xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
    <xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
    <xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
    <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
    <xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
    <xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
    <xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
    <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
    <xs:enumeration value="ERROR_FORMAT_ERROR"/>
    <xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
    <xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
    <xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
    <xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
    <xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
    <xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
    <xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
    <xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
    <xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
    <xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
    <xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
    <xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
    <xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
    <xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
    <xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
    <xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
    <xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
    <xs:enumeration value="ERROR_DOOR_LOWBATT"/>
    <xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
    <xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
  </xs:restriction>
</xs:simpleType>
```



```
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



WirelessMobileAppWebService WSDL

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions targetNamespace="http://soap.ws.ts1000.tesa.es/"
name="WirelessMobileAppWebService" xmlns:wsu="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
xmlns:wsp1="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/">
  <types>
    <xsd:schema>
      <xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/WirelessMobileAppWeb
Service?xsd=1"/>
    </xsd:schema>
  </types>
  <message name="mobileAppWrite">
    <part name="parameters" element="tns:mobileAppWrite"/>
  </message>
  <message name="mobileAppWriteResponse">
    <part name="parameters" element="tns:mobileAppWriteResponse"/>
  </message>
  <message name="mobileAppGetInfo">
    <part name="parameters" element="tns:mobileAppGetInfo"/>
  </message>
  <message name="mobileAppGetInfoResponse">
    <part name="parameters" element="tns:mobileAppGetInfoResponse"/>
  </message>
  <message name="mobileAppRevoke">
    <part name="parameters" element="tns:mobileAppRevoke"/>
  </message>
  <message name="mobileAppRevokeResponse">
    <part name="parameters" element="tns:mobileAppRevokeResponse"/>
  </message>
  <portType name="WirelessMobileAppService">
    <operation name="mobileAppWrite">
```




```
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessMobileAppService/mobileAppWriteRequest" message="tns:mobileAppWrite"/>

<output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessMobileAppService/mobileAppWriteResponse" message="tns:mobileAppWriteResponse"/>
</operation>
<operation name="mobileAppGetInfo">

  <input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessMobileAppService/mobileAppGetInfoRequest" message="tns:mobileAppGetInfo"/>

  <output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessMobileAppService/mobileAppGetInfoResponse" message="tns:mobileAppGetInfoResponse"/>
  </operation>
  <operation name="mobileAppRevoke">

    <input
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessMobileAppService/mobileAppRevokeRequest" message="tns:mobileAppRevoke"/>

    <output
wsam:Action="http://soap.ws.ts1000.tesa.es/WirelessMobileAppService/mobileAppRevokeResponse" message="tns:mobileAppRevokeResponse"/>
    </operation>
  </portType>
  <binding name="WirelessMobileAppServicePortBinding"
type="tns:WirelessMobileAppService">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
    <operation name="mobileAppWrite">
      <soap:operation soapAction=""/>
      <input>
        <soap:body use="literal"/>
      </input>
      <output>
        <soap:body use="literal"/>
      </output>
    </operation>
    <operation name="mobileAppGetInfo">
      <soap:operation soapAction=""/>
      <input>
        <soap:body use="literal"/>
      </input>
    </operation>
  </binding>
</wsdl:binding>
</wsdl:portType>
</wsdl:service>
</wsdl:definitions>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 266 of 342

```
</input>
<output>
  <soap:body use="literal"/>
</output>
</operation>
<operation name="mobileAppRevoke">
  <soap:operation soapAction=""/>
  <input>
    <soap:body use="literal"/>
  </input>
  <output>
    <soap:body use="literal"/>
  </output>
</operation>
</binding>
<service name="WirelessMobileAppWebService">
  <port name="WirelessMobileAppServicePort"
binding="tns:WirelessMobileAppServicePortBinding">
    <soap:address
location="https://localhost:8181/TesaSmartairPlatform/WirelessMobileAppWebServic
e"/>
  </port>
</service>
</definitions>
```



WirelessMobileAppWebService XSD

```
<xs:schema version="1.0" targetNamespace="http://soap.ws.ts1000.tesa.es/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema">

  <xs:element name="mobileAppGetInfo" type="tns:mobileAppGetInfo"/>
  <xs:element name="mobileAppGetInfoResponse"
type="tns:mobileAppGetInfoResponse"/>
  <xs:element name="mobileAppRevoke" type="tns:mobileAppRevoke"/>
  <xs:element name="mobileAppRevokeResponse"
type="tns:mobileAppRevokeResponse"/>
  <xs:element name="mobileAppWrite" type="tns:mobileAppWrite"/>
  <xs:element name="mobileAppWriteResponse" type="tns:mobileAppWriteResponse"/>
  <xs:element name="operationResult" type="tns:operationResult"/>
  <xs:element name="operationResultRemoteUserInfo"
type="tns:operationResultRemoteUserInfo"/>
  <xs:element name="user" type="tns:user"/>
  <xs:complexType name="mobileAppGetInfo">
    <xs:sequence>
      <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
      <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
      <xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="mobileAppGetInfoResponse">
    <xs:sequence>
      <xs:element name="operationResultDeviceInfo"
type="tns:operationResultRemoteUserInfo" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="operationResultRemoteUserInfo">
    <xs:complexContent>
      <xs:extension base="tns:operationResult">
        <xs:sequence>
          <xs:element name="userInfo" type="tns:user" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:schema>
```



```
<xs:complexType name="operationResult">
  <xs:sequence>
    <xs:element name="errorCode" type="xs:string" minOccurs="0"/>
    <xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
    <xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
    <xs:element name="type" type="tns:resultType" minOccurs="0"/>
    <xs:element name="warningCode" type="xs:string" minOccurs="0"/>
    <xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="user">
  <xs:sequence>
    <xs:element name="active" type="xs:boolean" minOccurs="0"/>
    <xs:element name="confirmationCode" type="xs:string" minOccurs="0"/>
    <xs:element name="creationDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="email" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="mobileAppRevoke">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
    <xs:element name="userId" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="mobileAppRevokeResponse">
  <xs:sequence>
    <xs:element name="return" type="tns:operationResult" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="mobileAppWrite">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
```

```

        <xs:element name="userId" type="xs:string" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>
<xs:complexType name="mobileAppWriteResponse">
    <xs:sequence>
        <xs:element name="return" type="tns:operationResult" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>
<xs:simpleType name="errorType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
        <xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
        <xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
        <xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
        <xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
        <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
        <xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
        <xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
        <xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
        <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
        <xs:enumeration value="ERROR_FORMAT_ERROR"/>
        <xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
        <xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
        <xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
        <xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
        <xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
        <xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
        <xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
        <xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
        <xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
        <xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
        <xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
        <xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
        <xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
        <xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
        <xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
    </xs:restriction>
</xs:simpleType>

```



```
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="RESULT_OK"/>
    <xs:enumeration value="RESULT_ERROR"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
    <xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
    <xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
```



```
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```

EncoderWebService WSDL

```
<definitions targetNamespace="http://soap.ws.ts1000.tesa.es/"
name="EncoderWebService" xmlns:wsu="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/">
  <types>
    <xsd:schema>
      <xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/EncoderWebService?xs
d=1"/>
    </xsd:schema>
  </types>
  <message name="encode">
    <part name="parameters" element="tns:encode"/>
  </message>
  <message name="encodeResponse">
    <part name="parameters" element="tns:encodeResponse"/>
  </message>
  <message name="read">
    <part name="parameters" element="tns:read"/>
  </message>
  <message name="readResponse">
```



```
<part name="parameters" element="tns:readResponse"/>
</message>
<message name="delete">
  <part name="parameters" element="tns:delete"/>
</message>
<message name="deleteResponse">
  <part name="parameters" element="tns:deleteResponse"/>
</message>
<message name="encoderGetByNameOrIP">
  <part name="parameters" element="tns:encoderGetByNameOrIP"/>
</message>
<message name="encoderGetByNameOrIPResponse">
  <part name="parameters" element="tns:encoderGetByNameOrIPResponse"/>
</message>
<message name="checkCurrentEncodingState">
  <part name="parameters" element="tns:checkCurrentEncodingState"/>
</message>
<message name="checkCurrentEncodingStateResponse">
  <part name="parameters" element="tns:checkCurrentEncodingStateResponse"/>
</message>
<portType name="EncoderService">
  <operation name="encode">
    <input
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/encodeRequest"
message="tns:encode"/>
    <output
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/encodeResponse"
message="tns:encodeResponse"/>
  </operation>
  <operation name="read">
    <input
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/readRequest"
message="tns:read"/>
    <output
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/readResponse"
message="tns:readResponse"/>
  </operation>
  <operation name="delete">
```




```
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/deleteRequest"
message="tns:delete"/>

<output
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/deleteResponse"
message="tns:deleteResponse"/>

</operation>

<operation name="encoderGetByNameOrIP">

  <input
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/encoderGetByNameOrIPRe
quest" message="tns:encoderGetByNameOrIP"/>

  <output
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/encoderGetByNameOrIPRe
sponse" message="tns:encoderGetByNameOrIPResponse"/>

  </operation>

  <operation name="checkCurrentEncodingState">

    <input
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/checkCurrentEncodingSt
ateRequest" message="tns:checkCurrentEncodingState"/>

    <output
wsam:Action="http://soap.ws.ts1000.tesa.es/EncoderService/checkCurrentEncodingSt
ateResponse" message="tns:checkCurrentEncodingStateResponse"/>

    </operation>

  </portType>

  <binding name="EncoderServicePortBinding" type="tns:EncoderService">

    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>

    <operation name="encode">

      <soap:operation soapAction=""/>

      <input>

        <soap:body use="literal"/>

      </input>

      <output>

        <soap:body use="literal"/>

      </output>

    </operation>

    <operation name="read">

      <soap:operation soapAction=""/>

      <input>

        <soap:body use="literal"/>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 274 of 342

```
</input>
<output>
  <soap:body use="literal"/>
</output>
</operation>
<operation name="delete">
  <soap:operation soapAction=""/>
  <input>
    <soap:body use="literal"/>
  </input>
  <output>
    <soap:body use="literal"/>
  </output>
</operation>
<operation name="encoderGetByNameOrIP">
  <soap:operation soapAction=""/>
  <input>
    <soap:body use="literal"/>
  </input>
  <output>
    <soap:body use="literal"/>
  </output>
</operation>
<operation name="checkCurrentEncodingState">
  <soap:operation soapAction=""/>
  <input>
    <soap:body use="literal"/>
  </input>
  <output>
    <soap:body use="literal"/>
  </output>
</operation>
</binding>
<service name="EncoderWebService">
  <port name="EncoderServicePort" binding="tns:EncoderServicePortBinding">
```



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 275 of 342

```
<soap:address  
location="https://localhost:8181/TesaSmartairPlatform/EncoderWebService"/>  
</port>  
</service>  
</definitions>
```



EncoderWebService XSD

```
<xs:schema version="1.0" targetNamespace="http://soap.ws.ts1000.tesa.es/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema">

  <xs:element name="checkCurrentEncodingState"
type="tns:checkCurrentEncodingState"/>

  <xs:element name="checkCurrentEncodingStateResponse"
type="tns:checkCurrentEncodingStateResponse"/>

  <xs:element name="delete" type="tns:delete"/>

  <xs:element name="deleteResponse" type="tns:deleteResponse"/>

  <xs:element name="encode" type="tns:encode"/>

  <xs:element name="encodeResponse" type="tns:encodeResponse"/>

  <xs:element name="encoderGetByNameOrIP" type="tns:encoderGetByNameOrIP"/>

  <xs:element name="encoderGetByNameOrIPResponse"
type="tns:encoderGetByNameOrIPResponse"/>

  <xs:element name="encoderInfo" type="tns:encoderInfo"/>

  <xs:element name="encodingResponse" type="tns:encodingResponse"/>

  <xs:element name="operationResult" type="tns:operationResult"/>

  <xs:element name="operationResultMultiple"
type="tns:operationResultMultiple"/>

  <xs:element name="read" type="tns:read"/>

  <xs:element name="readResponse" type="tns:readResponse"/>

  <xs:element name="userInfo" type="tns:userInfo"/>

  <xs:complexType name="delete">
    <xs:sequence>
      <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
      <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
      <xs:element name="request" type="tns:encodingRequest" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="encodingRequest">
    <xs:sequence>
      <xs:element name="agentId" type="xs:string" minOccurs="0"/>
      <xs:element name="copy" type="xs:boolean" minOccurs="0"/>
      <xs:element name="encoderId" type="xs:int" minOccurs="0"/>
      <xs:element name="encoderName" type="xs:string" minOccurs="0"/>
      <xs:element name="technology" type="xs:string" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:schema>
```



```
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="deleteResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:encodingResponse"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="encodingResponse">
  <xs:complexContent>
    <xs:extension base="tns:operationResultMultiple">
      <xs:sequence>
        <xs:element name="cardDiagnostic" type="xs:int" minOccurs="0"/>
        <xs:element name="encoderAgentState" type="tns:encoderStateType"
minOccurs="0"/>
        <xs:element name="userData" type="tns:userInfo" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResultMultiple">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element name="hasErrors" type="xs:boolean" minOccurs="0"/>
        <xs:element name="subOperations" type="tns:operationResult"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResult">
  <xs:sequence>
    <xs:element name="detail" type="xs:string" minOccurs="0"/>
    <xs:element name="errorCode" type="xs:string" minOccurs="0"/>
```



```
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="userInfo">
  <xs:sequence>
    <xs:element name="actFormat" type="xs:boolean" minOccurs="0"/>
    <xs:element name="actUser" type="xs:boolean" minOccurs="0"/>
    <xs:element name="ada" type="xs:boolean" minOccurs="0"/>
    <xs:element name="appCheckin" type="xs:boolean" minOccurs="0"/>
    <xs:element name="bleCheckin" type="xs:boolean" minOccurs="0"/>
    <xs:element name="codLev" type="xs:string" minOccurs="0"/>
    <xs:element name="data1" type="xs:string" minOccurs="0"/>
    <xs:element name="data2" type="xs:string" minOccurs="0"/>
    <xs:element name="data3" type="xs:string" minOccurs="0"/>
    <xs:element name="data4" type="xs:string" minOccurs="0"/>
    <xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="dateIssue" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="dateUpdate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
    <xs:element name="enkReles" type="xs:int" minOccurs="0"/>
    <xs:element name="externalId" type="xs:string" minOccurs="0"/>
    <xs:element name="grants" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="hasMultiples" type="xs:boolean" minOccurs="0"/>
    <xs:element name="info" type="xs:string" minOccurs="0"/>
    <xs:element name="keyClock" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="keyPad" type="xs:string" minOccurs="0"/>
    <xs:element name="mobileKeyState" type="xs:string" minOccurs="0"/>
    <xs:element name="nonSentLockingPlanEntries" type="xs:int"
minOccurs="0"/>
    <xs:element name="numCopies" type="xs:int" minOccurs="0"/>
    <xs:element name="openBlockedDoors" type="xs:boolean" minOccurs="0"/>
```

```

<xs:element name="pinCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomCheckedOut" type="xs:boolean" minOccurs="0"/>
<xs:element name="track1" type="xs:string" minOccurs="0"/>
<xs:element name="track2" type="xs:string" minOccurs="0"/>
<xs:element name="UOCAccess" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCAudit" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCDays" type="xs:int" minOccurs="0"/>
<xs:element name="UOCOverflow" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCRevalidate" type="xs:boolean" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
<xs:element name="userAPB" type="xs:boolean" minOccurs="0"/>
<xs:element name="userCardId" type="xs:string" minOccurs="0"/>
<xs:element name="userCarrier" type="tns:carrierType" minOccurs="0"/>
<xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress2" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress3" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress4" type="xs:string" minOccurs="0"/>
<xs:element name="userEncoded" type="xs:boolean" minOccurs="0"/>
<xs:element name="userGroup" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
<xs:element name="userPhoneNumber" type="xs:string" minOccurs="0"/>
<xs:element name="userType" type="tns:userType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="encoderGetByNameOrIP">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="encoderName" type="xs:string" minOccurs="0"/>
    <xs:element name="encoderIpAddress" type="xs:string" minOccurs="0"/>
    <xs:element name="encoderPort" type="xs:int" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="encoderGetByNameOrIPResponse">
  <xs:sequence>

```



```
<xs:element name="findEncoderByNameOrIP"
type="tns:operationResultEncoderInfoList" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultEncoderInfoList">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="encoderData" type="tns:encoderInfo"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="encoderInfo">
<xs:sequence>
<xs:element name="agentId" type="xs:string" minOccurs="0"/>
<xs:element name="encoderId" type="xs:int" minOccurs="0"/>
<xs:element name="encoderName" type="xs:string" minOccurs="0"/>
<xs:element name="ipAddress" type="xs:string" minOccurs="0"/>
<xs:element name="port" type="xs:int" minOccurs="0"/>
<xs:element name="protocol" type="xs:int" minOccurs="0"/>
<xs:element name="version" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="encode">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="request" type="tns:encodingRequest" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="encodeResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:encodingResponse"
minOccurs="0"/>
</xs:sequence>
```




```
</xs:complexType>
<xs:complexType name="read">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="request" type="tns:encodingRequest" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="readResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:encodingResponse"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="checkCurrentEncodingState">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="arg2" type="tns:encodingRequest" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="checkCurrentEncodingStateResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:encodingResponse"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="encoderStateType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="ENCODER_STATE_READY"/>
    <xs:enumeration value="ENCODER_STATE_WAITING_CARD"/>
    <xs:enumeration value="ENCODER_STATE_READING_CARD"/>
    <xs:enumeration value="ENCODER_STATE_WRITING_CARD"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="carrierType">
  <xs:restriction base="xs:string">
```

```

        <xs:enumeration value="CAR_LLAVE"/>
        <xs:enumeration value="CAR_TARJETA"/>
        <xs:enumeration value="CAR_LLAVE_MEC"/>
        <xs:enumeration value="CAR_PROX"/>
        <xs:enumeration value="CAR_MAG_PROX"/>
        <xs:enumeration value="CAR_KEY_PROX"/>
        <xs:enumeration value="CAR_KEY_MAG"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="userType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="USER_SPECIAL"/>
        <xs:enumeration value="USER_STANDARD"/>
        <xs:enumeration value="USER_GUEST"/>
        <xs:enumeration value="USER_SAFE_MASTER"/>
        <xs:enumeration value="USER_OPERATOR"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="errorType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
        <xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
        <xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
        <xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
        <xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
        <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
        <xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
        <xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
        <xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
        <xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
        <xs:enumeration value="ERROR_FORMAT_ERROR"/>
        <xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
        <xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
        <xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
        <xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
        <xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
    </xs:restriction>
</xs:simpleType>

```

```
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
```

```

    <xs:enumeration value="ERROR_DATA_ERROR"/>
    <xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
    <xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
    <xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
    <xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
    <xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
    <xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
    <xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
    <xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
    <xs:enumeration value="ERROR_ENCODING_BUSY"/>
    <xs:enumeration value="ERROR_ENCODING_OTHER"/>
    <xs:enumeration value="ERROR_READING_UNKNOWN"/>
    <xs:enumeration value="ERROR_READING_USER_DELETED"/>
    <xs:enumeration value="ERROR_READING_SECURE_CARD"/>
    <xs:enumeration value="ERROR_READING_DELETED_CARD"/>
    <xs:enumeration value="ERROR_READING_CARD"/>
    <xs:enumeration value="ERROR_READING_EMPTY"/>
    <xs:enumeration value="ERROR_READING_FORMAT"/>
    <xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
    <xs:enumeration value="ERROR_READING_OTHER_SITE"/>
    <xs:enumeration value="ERROR_READING_NON_PROPIETARY"/>
    <xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
    <xs:enumeration value="ERROR_READING_LOST_COMM"/>
    <xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
    <xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
    <xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
    <xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
    <xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
    <xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
    <xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
    <xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
  <xs:restriction base="xs:string">

```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 285 of 342

```
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
    <xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
    <xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
    <xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
    <xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
    <xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
    <xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
    <xs:enumeration value="WARNING_RF_BOOT_MODE"/>
    <xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>
```



GuestsWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?><definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="GuestsWebService">
<types>
<xsd:schema>
<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/GuestsWebService?xsd=1"/>
</xsd:schema>
</types>
<message name="findAllOccupiedRooms">
<part name="parameters" element="tns:findAllOccupiedRooms"/>
</message>
<message name="findAllOccupiedRoomsResponse">
<part name="parameters" element="tns:findAllOccupiedRoomsResponse"/>
</message>
<message name="precheckinModifyGrants">
<part name="parameters" element="tns:precheckinModifyGrants"/>
</message>
<message name="precheckinModifyGrantsResponse">
<part name="parameters" element="tns:precheckinModifyGrantsResponse"/>
</message>
<message name="Exception">
<part name="fault" element="tns:Exception"/>
</message>
<message name="precheckinModifyDate">
<part name="parameters" element="tns:precheckinModifyDate"/>
</message>
<message name="precheckinModifyDateResponse">
<part name="parameters" element="tns:precheckinModifyDateResponse"/>
</message>
<message name="checkinModifyGrants">
<part name="parameters" element="tns:checkinModifyGrants"/>
</message>
<message name="checkinModifyGrantsResponse">
<part name="parameters" element="tns:checkinModifyGrantsResponse"/>
</message>
<message name="checkinModifyDate">
<part name="parameters" element="tns:checkinModifyDate"/>
</message>
<message name="checkinModifyDateResponse">
<part name="parameters" element="tns:checkinModifyDateResponse"/>
</message>
<message name="precheckinCancel">
<part name="parameters" element="tns:precheckinCancel"/>
</message>
```



```
</message>
<message name="precheckinCancelResponse">
<part name="parameters" element="tns:precheckinCancelResponse"/>
</message>
<message name="checkinCopy">
<part name="parameters" element="tns:checkinCopy"/>
</message>
<message name="checkinCopyResponse">
<part name="parameters" element="tns:checkinCopyResponse"/>
</message>
<message name="precheckinCopy">
<part name="parameters" element="tns:precheckinCopy"/>
</message>
<message name="precheckinCopyResponse">
<part name="parameters" element="tns:precheckinCopyResponse"/>
</message>
<message name="checkin">
<part name="parameters" element="tns:checkin"/>
</message>
<message name="checkinResponse">
<part name="parameters" element="tns:checkinResponse"/>
</message>
<message name="checkout">
<part name="parameters" element="tns:checkout"/>
</message>
<message name="checkoutResponse">
<part name="parameters" element="tns:checkoutResponse"/>
</message>
<message name="precheckin">
<part name="parameters" element="tns:precheckin"/>
</message>
<message name="precheckinResponse">
<part name="parameters" element="tns:precheckinResponse"/>
</message>
<message name="findAllRooms">
<part name="parameters" element="tns:findAllRooms"/>
</message>
<message name="findAllRoomsResponse">
<part name="parameters" element="tns:findAllRoomsResponse"/>
</message>
<portType name="GuestsService">
<operation name="findAllOccupiedRooms">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/findAllOccupiedRoomsReq
uest" message="tns:findAllOccupiedRooms"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/findAllOccupiedRoomsRes
ponse" message="tns:findAllOccupiedRoomsResponse"/>
</operation>
<operation name="precheckinModifyGrants">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinModifyGrantsR
equest" message="tns:precheckinModifyGrants"/>
```



```
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinModifyGrantsR
esponse" message="tns:precheckinModifyGrantsResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinModifyGrants/
Fault/Exception"/>
</operation>
<operation name="precheckinModifyDate">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinModifyDateReq
uest" message="tns:precheckinModifyDate"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinModifyDateRes
ponse" message="tns:precheckinModifyDateResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinModifyDate/Fa
ult/Exception"/>
</operation>
<operation name="checkinModifyGrants">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinModifyGrantsReq
uest" message="tns:checkinModifyGrants"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinModifyGrantsResp
onse" message="tns:checkinModifyGrantsResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinModifyGrants/Fau
lt/Exception"/>
</operation>
<operation name="checkinModifyDate">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinModifyDateReques
t" message="tns:checkinModifyDate"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinModifyDateRespon
se" message="tns:checkinModifyDateResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinModifyDate/Fault
/Exception"/>
</operation>
<operation name="precheckinCancel">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinCancelRequest
" message="tns:precheckinCancel"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinCancelRespons
e" message="tns:precheckinCancelResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinCancel/Fault/
Exception"/>
</operation>
<operation name="checkinCopy">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinCopyRequest"
message="tns:checkinCopy"/>
```




Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 289 of 342

```
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinCopyResponse"
message="tns:checkinCopyResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinCopy/Fault/Excep
tion"/>
</operation>
<operation name="precheckinCopy">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinCopyRequest"
message="tns:precheckinCopy"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinCopyResponse"
message="tns:precheckinCopyResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinCopy/Fault/Ex
ception"/>
</operation>
<operation name="checkin">
<input wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinRequest"
message="tns:checkin"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkinResponse"
message="tns:checkinResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkin/Fault/Exception
"/>
</operation>
<operation name="checkout">
<input wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkoutRequest"
message="tns:checkout"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkoutResponse"
message="tns:checkoutResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/checkout/Fault/Exceptio
n"/>
</operation>
<operation name="precheckin">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinRequest"
message="tns:precheckin"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckinResponse"
message="tns:precheckinResponse"/>
<fault message="tns:Exception" name="Exception"
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/precheckin/Fault/Except
ion"/>
</operation>
<operation name="findAllRooms">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/findAllRoomsRequest"
message="tns:findAllRooms"/>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 290 of 342

```
<output  
wsam:Action="http://soap.ws.ts1000.tesa.es/GuestsService/findAllRoomsResponse"  
message="tns:findAllRoomsResponse"/>  
</operation>  
</portType>  
<binding name="GuestsServicePortBinding" type="tns:GuestsService">  
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"  
style="document"/>  
<operation name="findAllOccupiedRooms">  
<soap:operation soapAction=""/>  
<input>  
<soap:body use="literal"/>  
</input>  
<output>  
<soap:body use="literal"/>  
</output>  
</operation>  
<operation name="precheckinModifyGrants">  
<soap:operation soapAction=""/>  
<input>  
<soap:body use="literal"/>  
</input>  
<output>  
<soap:body use="literal"/>  
</output>  
<fault name="Exception">  
<soap:fault name="Exception" use="literal"/>  
</fault>  
</operation>  
<operation name="precheckinModifyDate">  
<soap:operation soapAction=""/>  
<input>  
<soap:body use="literal"/>  
</input>  
<output>  
<soap:body use="literal"/>  
</output>  
<fault name="Exception">  
<soap:fault name="Exception" use="literal"/>  
</fault>  
</operation>  
<operation name="checkinModifyGrants">  
<soap:operation soapAction=""/>  
<input>  
<soap:body use="literal"/>  
</input>  
<output>  
<soap:body use="literal"/>  
</output>  
<fault name="Exception">  
<soap:fault name="Exception" use="literal"/>  
</fault>  
</operation>  
<operation name="checkinModifyDate">  
<soap:operation soapAction=""/>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 291 of 342

```
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="precheckinCancel">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="checkinCopy">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="precheckinCopy">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="checkin">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
```



```
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="checkout">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="precheckin">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
<fault name="Exception">
<soap:fault name="Exception" use="literal"/>
</fault>
</operation>
<operation name="findAllRooms">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="GuestsWebService">
<port name="GuestsServicePort" binding="tns:GuestsServicePortBinding">
<soap:address
location="https://localhost:8181/TesaSmartairPlatform/GuestsWebService"/>
</port>
</service>
</definitions>
```



GuestsWebService XSD

```
<?xml version='1.0' encoding='UTF-8'?><xs:schema
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/"

<xs:element name="Exception" type="tns:Exception"/>
<xs:element name="cabinetStateInfo" type="tns:cabinetStateInfo"/>
<xs:element name="checkin" type="tns:checkin"/>
<xs:element name="checkinCopy" type="tns:checkinCopy"/>
<xs:element name="checkinCopyResponse" type="tns:checkinCopyResponse"/>
<xs:element name="checkinModifyDate" type="tns:checkinModifyDate"/>
<xs:element name="checkinModifyDateResponse"
type="tns:checkinModifyDateResponse"/>
<xs:element name="checkinModifyGrants" type="tns:checkinModifyGrants"/>
<xs:element name="checkinModifyGrantsResponse"
type="tns:checkinModifyGrantsResponse"/>
<xs:element name="checkinResponse" type="tns:checkinResponse"/>

<xs:element name="checkout" type="tns:checkout"/>
<xs:element name="checkoutResponse" type="tns:checkoutResponse"/>
<xs:element name="doorInfo" type="tns:doorInfo"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo"/>
<xs:element name="findAllOccupiedRooms" type="tns:findAllOccupiedRooms"/>
<xs:element name="findAllOccupiedRoomsResponse"
type="tns:findAllOccupiedRoomsResponse"/>
<xs:element name="findAllRooms" type="tns:findAllRooms"/>
<xs:element name="findAllRoomsResponse" type="tns:findAllRoomsResponse"/>
<xs:element name="guestInfo" type="tns:guestInfo"/>
<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="operationResultCheckin" type="tns:operationResultCheckin"/>
<xs:element name="operationResultDoorInfoList"
type="tns:operationResultDoorInfoList"/>
<xs:element name="operationResultMultiple" type="tns:operationResultMultiple"/>
<xs:element name="precheckin" type="tns:precheckin"/>
<xs:element name="precheckinCancel" type="tns:precheckinCancel"/>
<xs:element name="precheckinCancelResponse"
type="tns:precheckinCancelResponse"/>
<xs:element name="precheckinCopy" type="tns:precheckinCopy"/>
<xs:element name="precheckinCopyResponse" type="tns:precheckinCopyResponse"/>
<xs:element name="precheckinModifyDate" type="tns:precheckinModifyDate"/>
<xs:element name="precheckinModifyDateResponse"
type="tns:precheckinModifyDateResponse"/>
<xs:element name="precheckinModifyGrants" type="tns:precheckinModifyGrants"/>
<xs:element name="precheckinModifyGrantsResponse"
type="tns:precheckinModifyGrantsResponse"/>
<xs:element name="precheckinResponse" type="tns:precheckinResponse"/>
<xs:element name="userInfo" type="tns:userInfo"/>
<xs:complexType name="precheckinCopy">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="guestData" type="tns:guestInfo" minOccurs="0"/>

```



```
</xs:sequence>
</xs:complexType>
<xs:complexType name="guestInfo">
<xs:sequence>
<xs:element name="ada" type="xs:boolean" minOccurs="0"/>
<xs:element name="agentId" type="xs:string" minOccurs="0"/>
<xs:element name="appCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="cancelOccupied" type="xs:boolean" minOccurs="0"/>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="encoderId" type="xs:int" minOccurs="0"/>
<xs:element name="encoderName" type="xs:string" minOccurs="0"/>
<xs:element name="energySaverRelays" type="xs:int" minOccurs="0"/>
<xs:element name="grants" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="keyPad" type="xs:int" minOccurs="0"/>
<xs:element name="localCardCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="openowCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="operation" type="tns:checkinOperation" minOccurs="0"/>
<xs:element name="pinCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="preCheckinInformationMailLang" type="xs:string"
minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
<xs:element name="roomMultipleId1" type="xs:int" minOccurs="0"/>
<xs:element name="roomMultipleId2" type="xs:int" minOccurs="0"/>
<xs:element name="roomMultipleId3" type="xs:int" minOccurs="0"/>
<xs:element name="sendPreCheckinInformationMail" type="xs:boolean"
minOccurs="0"/>
<xs:element name="track1" type="xs:string" minOccurs="0"/>
<xs:element name="track2" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress2" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress3" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress4" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinCopyResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="operationResultCheckin">
<xs:complexContent>
<xs:extension base="tns:operationResultMultiple">
<xs:sequence>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doors" type="tns:doorInfo" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
```



```
</xs:complexContent>
</xs:complexType>

<xs:complexType name="operationResultMultiple">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="hasErrors" type="xs:boolean" minOccurs="0"/>
<xs:element name="subOperations" type="tns:operationResult" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="operationResult">
<xs:sequence>
<xs:element name="detail" type="xs:string" minOccurs="0"/>
<xs:element name="errorCode" type="xs:string" minOccurs="0"/>
<xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
<xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
<xs:element name="operationId" type="xs:string" minOccurs="0"/>
<xs:element name="type" type="tns:resultType" minOccurs="0"/>
<xs:element name="warningCode" type="xs:string" minOccurs="0"/>
<xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorInfo">
<xs:sequence>
<xs:element name="actManual" type="xs:boolean" minOccurs="0"/>
<xs:element name="activePins" type="xs:string" minOccurs="0"/>
<xs:element name="antiPassbackArea" type="tns:apbAreaType" minOccurs="0"/>
<xs:element name="antiPassbackEntry" type="tns:apbEntryType" minOccurs="0"/>
<xs:element name="assignedCommonPins" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="BLEvers" type="xs:string" minOccurs="0"/>
<xs:element name="cabinetOpenAfterHours" type="xs:boolean" minOccurs="0"/>
<xs:element name="calendarId" type="xs:int" minOccurs="0"/>
<xs:element name="changeId" type="xs:int" minOccurs="0"/>
<xs:element name="children" type="tns:doorInfo" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="data1" type="xs:string" minOccurs="0"/>
<xs:element name="data2" type="xs:string" minOccurs="0"/>
<xs:element name="data3" type="xs:string" minOccurs="0"/>
<xs:element name="data4" type="xs:string" minOccurs="0"/>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateActu" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="datePreActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="datePreExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
<xs:element name="device" type="xs:string" minOccurs="0"/>
<xs:element name="disableLog" type="xs:boolean" minOccurs="0"/>
<xs:element name="doorId" type="xs:int" minOccurs="0"/>
```



```
<xs:element name="doorName" type="xs:string" minOccurs="0"/>
<xs:element name="doorStateInfo" type="tns:doorStateInfo" minOccurs="0"/>
<xs:element name="doorType" type="tns:doorType" minOccurs="0"/>
<xs:element name="doorVersion" type="xs:string" minOccurs="0"/>
<xs:element name="externalId" type="xs:string" minOccurs="0"/>
<xs:element name="grantBits" type="xs:string" minOccurs="0"/>
<xs:element name="grantBitsOccupied" type="xs:string" minOccurs="0"/>
<xs:element name="grantBitsPreassigned" type="xs:string" minOccurs="0"/>
<xs:element name="grants" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="grantsOccupied" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="grantsPreassigned" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="groupName" type="xs:string" minOccurs="0"/>
<xs:element name="highTraffic" type="xs:boolean" minOccurs="0"/>
<xs:element name="keyPad" type="xs:string" minOccurs="0"/>
<xs:element name="lockdownAreaId" type="xs:int" minOccurs="0"/>
<xs:element name="lockdownState" type="xs:int" minOccurs="0"/>
<xs:element name="macAddress" type="xs:string" minOccurs="0"/>
<xs:element name="numCopiesOccupied" type="xs:int" minOccurs="0"/>
<xs:element name="numCopiesPreassigned" type="xs:int" minOccurs="0"/>
<xs:element name="parentId" type="xs:int" minOccurs="0"/>
<xs:element name="pcId" type="xs:int" minOccurs="0"/>
<xs:element name="privacyOverPassage" type="xs:boolean" minOccurs="0"/>
<xs:element name="pushButton" type="xs:boolean" minOccurs="0"/>
<xs:element name="registerHandle" type="xs:boolean" minOccurs="0"/>
<xs:element name="relaySetupMode" type="xs:int" minOccurs="0"/>
<xs:element name="requiredGrantIndex" type="xs:int" minOccurs="0"/>
<xs:element name="requiredGrantName" type="xs:string" minOccurs="0"/>
<xs:element name="rfVersion" type="xs:string" minOccurs="0"/>
<xs:element name="roomOccupied" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomPreassigned" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomType" type="tns:roomType" minOccurs="0"/>
<xs:element name="upatingModeId" type="xs:int" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userInfo" type="tns:userInfo" minOccurs="0"/>
<xs:element name="tDlo" type="xs:int" minOccurs="0"/>
<xs:element name="tEscReturn" type="xs:int" minOccurs="0"/>
<xs:element name="tOpen" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="doorStateInfo">
<xs:sequence>
<xs:element name="batteryPercentage" type="xs:int" minOccurs="0"/>
<xs:element name="batteryStatus" type="tns:batteryStatusType" minOccurs="0"/>
<xs:element name="cabinetState" type="tns:cabinetStateInfo" minOccurs="0"/>
<xs:element name="emergency" type="xs:boolean" minOccurs="0"/>
<xs:element name="mode" type="tns:blockModeType" minOccurs="0"/>
<xs:element name="physicalState" type="tns:physicalStateType" minOccurs="0"/>
<xs:element name="privacy" type="xs:boolean" minOccurs="0"/>
<xs:element name="state" type="tns:stateType" minOccurs="0"/>
</xs:sequence>
```




```
</xs:complexType>

<xs:complexType name="cabinetStateInfo">
<xs:sequence>
<xs:element name="state" type="tns:cabinetStatusType" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="userInfo">
<xs:sequence>
<xs:element name="actFormat" type="xs:boolean" minOccurs="0"/>
<xs:element name="actUser" type="xs:boolean" minOccurs="0"/>
<xs:element name="ada" type="xs:boolean" minOccurs="0"/>
<xs:element name="appCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="bleCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="codLev" type="xs:string" minOccurs="0"/>
<xs:element name="data1" type="xs:string" minOccurs="0"/>
<xs:element name="data2" type="xs:string" minOccurs="0"/>
<xs:element name="data3" type="xs:string" minOccurs="0"/>
<xs:element name="data4" type="xs:string" minOccurs="0"/>
<xs:element name="dateActivation" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateIssue" type="xs:dateTime" minOccurs="0"/>
<xs:element name="dateUpdate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
<xs:element name="enkReles" type="xs:int" minOccurs="0"/>
<xs:element name="externalId" type="xs:string" minOccurs="0"/>
<xs:element name="grants" type="xs:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="hasMultiples" type="xs:boolean" minOccurs="0"/>
<xs:element name="info" type="xs:string" minOccurs="0"/>
<xs:element name="keyClock" type="xs:dateTime" minOccurs="0"/>
<xs:element name="keyPad" type="xs:string" minOccurs="0"/>
<xs:element name="mobileKeyState" type="xs:string" minOccurs="0"/>
<xs:element name="nonSentLockingPlanEntries" type="xs:int" minOccurs="0"/>
<xs:element name="numCopies" type="xs:int" minOccurs="0"/>
<xs:element name="openBlockedDoors" type="xs:boolean" minOccurs="0"/>
<xs:element name="pinCheckin" type="xs:boolean" minOccurs="0"/>
<xs:element name="roomCheckedOut" type="xs:boolean" minOccurs="0"/>
<xs:element name="track1" type="xs:string" minOccurs="0"/>
<xs:element name="track2" type="xs:string" minOccurs="0"/>
<xs:element name="UOCAccess" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCAudit" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCDays" type="xs:int" minOccurs="0"/>
<xs:element name="UOCOverflow" type="xs:boolean" minOccurs="0"/>
<xs:element name="UOCRevalidate" type="xs:boolean" minOccurs="0"/>
<xs:element name="updateRequired" type="xs:boolean" minOccurs="0"/>
<xs:element name="userAPB" type="xs:boolean" minOccurs="0"/>
<xs:element name="userCardId" type="xs:string" minOccurs="0"/>
<xs:element name="userCarrier" type="tns:carrierType" minOccurs="0"/>
<xs:element name="userEmailAddress" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress2" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress3" type="xs:string" minOccurs="0"/>
<xs:element name="userEmailAddress4" type="xs:string" minOccurs="0"/>
```



```
<xs:element name="userEncoded" type="xs:boolean" minOccurs="0"/>
<xs:element name="userGroup" type="xs:string" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
<xs:element name="userName" type="xs:string" minOccurs="0"/>
<xs:element name="userPhoneNumber" type="xs:string" minOccurs="0"/>
<xs:element name="userType" type="tns:userType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="Exception">
<xs:sequence>
<xs:element name="message" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="findAllOccupiedRooms">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="findAllOccupiedRoomsResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultDoorInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="operationResultDoorInfoList">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
<xs:element name="doorData" type="tns:doorInfo" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="recordCount" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="precheckinCancel">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinCancelResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
```



```
<xs:complexType name="checkinCopy">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="guestData" type="tns:guestInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkinCopyResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkin">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="guestData" type="tns:guestInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkinResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkinModifyGrants">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
<xs:element name="grants" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkinModifyGrantsResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="findAllRooms">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="findAllRoomsResponse">
```



```
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultDoorInfoList"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkout">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkoutResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinModifyGrants">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
<xs:element name="grants" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinModifyGrantsResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinModifyDate">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinModifyDateResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckin">
<xs:sequence>
```



```
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="guestData" type="tns:guestInfo" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="precheckinResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkinModifyDate">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="roomId" type="xs:int" minOccurs="0"/>
<xs:element name="dateExpiration" type="xs:dateTime" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="checkinModifyDateResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultCheckin"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>

<xs:simpleType name="checkinOperation">
<xs:restriction base="xs:string">
<xs:enumeration value="CHECKIN"/>
<xs:enumeration value="COPY"/>
<xs:enumeration value="PRECHECKIN"/>
<xs:enumeration value="PRECOPY"/>
<xs:enumeration value="PRECHECKINCANCEL"/>
<xs:enumeration value="CHECKOUT"/>
<xs:enumeration value="MODIFY_STAY_CHECKIN"/>
<xs:enumeration value="MODIFY_STAY_PRECHECKIN"/>
<xs:enumeration value="MODIFY_GRANTS_CHECKIN"/>
<xs:enumeration value="MODIFY_GRANTS_PRECHECKIN"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="apbAreaType">
<xs:restriction base="xs:string">
<xs:enumeration value="APB_AREA_1"/>
<xs:enumeration value="APB_AREA_2"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="apbEntryType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_APB_NONE"/>
<xs:enumeration value="TYPE_APB_ENTRY"/>
</xs:restriction>
</xs:simpleType>
```



```
<xs:enumeration value="TYPE_APB_EXIT"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="batteryStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="OK"/>
<xs:enumeration value="LOW_BATTERIES"/>
<xs:enumeration value="VERY_LOW_BATTERIES"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="cabinetStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="FREE"/>
<xs:enumeration value="IN_USE"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="blockModeType">
<xs:restriction base="xs:string">
<xs:enumeration value="UNBLOCKED"/>
<xs:enumeration value="BLOCKED"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="physicalStateType">
<xs:restriction base="xs:string">
<xs:enumeration value="DOOR_CLOSED"/>
<xs:enumeration value="INTRUSION"/>
<xs:enumeration value="DOOR_LEFT_OPEN"/>
<xs:enumeration value="DOOR_CLOSED_NOT_SECURED"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="stateType">
<xs:restriction base="xs:string">
<xs:enumeration value="CARD"/>
<xs:enumeration value="PASSAGE"/>
<xs:enumeration value="FIRST_USER"/>
<xs:enumeration value="KEYPAD"/>
<xs:enumeration value="CARD_PIN"/>
<xs:enumeration value="DUAL_USER"/>
<xs:enumeration value="PIN_CARD"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="doorType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_ZERO"/>
<xs:enumeration value="TYPE_CYLINDER"/>
<xs:enumeration value="TYPE_LOCK"/>
<xs:enumeration value="TYPE_READER"/>
<xs:enumeration value="TYPE_SAFE_MAG"/>
<xs:enumeration value="TYPE_CYLINDER_MEC"/>
```



```
<xs:enumeration value="TYPE_READER_ONLINE"/>
<xs:enumeration value="TYPE_ESCUTCHEON_PROX"/>
<xs:enumeration value="TYPE_READER_PROX_OFF"/>
<xs:enumeration value="TYPE_READER_PROX_ON"/>
<xs:enumeration value="TYPE_LOCK_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX"/>
<xs:enumeration value="TYPE_READER_DUAL"/>
<xs:enumeration value="TYPE_SAFE_KEYBOARD"/>
<xs:enumeration value="TYPE_SAFE_PROX"/>
<xs:enumeration value="TYPE_READER_UPDATER"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL"/>
<xs:enumeration value="TYPE_ESCUTCHEON_UOL"/>
<xs:enumeration value="TYPE_CABINET"/>
<xs:enumeration value="TYPE_READER_UOL"/>
<xs:enumeration value="TYPE_READER_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG"/>
<xs:enumeration value="TYPE_VISUALIZER"/>
<xs:enumeration value="TYPE_SPY_DUAL_UOL"/>
<xs:enumeration value="TYPE_SPY_MAG_UOL"/>
<xs:enumeration value="TYPE_READER_MAG_UOL"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER"/>
<xs:enumeration value="TYPE_KNOB_CYLINDER_UOL"/>
<xs:enumeration value="TYPE_ENERGYSAVER_PROX"/>
<xs:enumeration value="TYPE_ENERGYSAVER_MAG"/>
<xs:enumeration value="TYPE_ENERGYSAVER_DUAL"/>
<xs:enumeration value="TYPE_ELEVATOR_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_PROX_UOL"/>
<xs:enumeration value="TYPE_ELEVATOR_DUAL_UOL"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="roomType">
<xs:restriction base="xs:string">
<xs:enumeration value="TYPE_DOOR_STANDARD"/>
<xs:enumeration value="TYPE_DOOR_ROOM"/>
<xs:enumeration value="TYPE_DOOR_SUITE"/>
<xs:enumeration value="TYPE_DOOR_CORRIDOR"/>
<xs:enumeration value="TYPE_DOOR_HIGH_TRAFFIC"/>
<xs:enumeration value="TYPE_DOOR_SAFE"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="carrierType">
<xs:restriction base="xs:string">
<xs:enumeration value="CAR_LLAVE"/>
<xs:enumeration value="CAR_TARJETA"/>
<xs:enumeration value="CAR_LLAVE_MEC"/>
<xs:enumeration value="CAR_PROX"/>
<xs:enumeration value="CAR_MAG_PROX"/>
<xs:enumeration value="CAR_KEY_PROX"/>
<xs:enumeration value="CAR_KEY_MAG"/>
</xs:restriction>
</xs:simpleType>
```



```
<xs:simpleType name="userType">
<xs:restriction base="xs:string">
<xs:enumeration value="USER_SPECIAL"/>
<xs:enumeration value="USER_STANDARD"/>
<xs:enumeration value="USER_GUEST"/>
<xs:enumeration value="USER_SAFE_MASTER"/>
<xs:enumeration value="USER_OPERATOR"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="errorType">
<xs:restriction base="xs:string">
<xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
<xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
<xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
<xs:enumeration value="ERROR_FORMAT_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
```




```
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
<xs:enumeration value="ERROR_READING_CARD"/>
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPRIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
```



```
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```



PCToLockFileWebService WSDL

```
<?xml version='1.0' encoding='UTF-8'?><definitions xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
targetNamespace="http://soap.ws.ts1000.tesa.es/" name="PCToLockWebService">

<wsp:Policy wsu:Id="PCToLockServicePortBinding_MTOM_Policy-
PCToLockServicePortBinding_MTOM_Policy">

<ns1:OptimizedMimeSerialization
xmlns:ns1="http://schemas.xmlsoap.org/ws/2004/09/policy/optimizedmimeserializati
on" wsp:Optional="true"/>

</wsp:Policy>

<types>

<xsd:schema>

<xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/PCToLockWebService?xsd=1"/>

</xsd:schema>

</types>

<message name="pcToLockDownloadFile">

<part name="parameters" element="tns:pcToLockDownloadFile"/>

</message>

<message name="pcToLockDownloadFileResponse">

<part name="parameters" element="tns:pcToLockDownloadFileResponse"/>

</message>

<message name="pcToLockUploadFile">

<part name="parameters" element="tns:pcToLockUploadFile"/>

</message>

<message name="pcToLockUploadFileResponse">

<part name="parameters" element="tns:pcToLockUploadFileResponse"/>

</message>

<portType name="PCToLockService">

<operation name="pcToLockDownloadFile">

<input
wsam:Action="http://soap.ws.ts1000.tesa.es/PCToLockService/pcToLockDownloadFileR
equest" message="tns:pcToLockDownloadFile"/>
```



```
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/PCToLockService/pcToLockDownloadFileR
esponse" message="tns:pcToLockDownloadFileResponse"/>
</operation>
<operation name="pcToLockUploadFile">
<input
wsam:Action="http://soap.ws.ts1000.tesa.es/PCToLockService/pcToLockUploadFileReq
uest" message="tns:pcToLockUploadFile"/>
<output
wsam:Action="http://soap.ws.ts1000.tesa.es/PCToLockService/pcToLockUploadFileRes
ponse" message="tns:pcToLockUploadFileResponse"/>
</operation>
</portType>
<binding name="PCToLockServicePortBinding" type="tns:PCToLockService">
<wsp:PolicyReference URI="#PCToLockServicePortBinding_MTOM_Policy-
PCToLockServicePortBinding_MTOM_Policy"/>
<soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
<operation name="pcToLockDownloadFile">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
<operation name="pcToLockUploadFile">
<soap:operation soapAction=""/>
<input>
<soap:body use="literal"/>
</input>
<output>
<soap:body use="literal"/>
</output>
</operation>
</binding>
<service name="PCToLockWebService">
<port name="PCToLockServicePort" binding="tns:PCToLockServicePortBinding">
```



ASSA ABLOY, the global leader
in door opening solutions

Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 309 of 342

```
<soap:address  
location="https://localhost:8181/TesaSmartairPlatform/PCToLockWebService"/>  
</port>  
</service>  
</definitions>
```



PCToLockFileWebService XSD

```
<?xml version='1.0' encoding='UTF-8'?><xs:schema
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xmime="http://www.w3.org/2005/05/xmlmime"
xmlns:xs="http://www.w3.org/2001/XMLSchema" version="1.0"
targetNamespace="http://soap.ws.ts1000.tesa.es/"

<xs:import namespace="http://www.w3.org/2005/05/xmlmime"
schemaLocation="http://www.w3.org/2005/05/xmlmime"/>

<xs:element name="operationResult" type="tns:operationResult"/>
<xs:element name="operationResultMultiple" type="tns:operationResultMultiple"/>
<xs:element name="operationResultPCToLockFile"
type="tns:operationResultPCToLockFile"/>
<xs:element name="operationResultPCToLockFileUpload"
type="tns:operationResultPCToLockFileUpload"/>
<xs:element name="pcToLockDownloadFile" type="tns:pcToLockDownloadFile"/>
<xs:element name="pcToLockDownloadFileResponse"
type="tns:pcToLockDownloadFileResponse"/>
<xs:element name="pcToLockFileRequest2" type="tns:pcToLockFileRequest2"/>
<xs:element name="pcToLockUploadFile" type="tns:pcToLockUploadFile"/>
<xs:element name="pcToLockUploadFileResponse"
type="tns:pcToLockUploadFileResponse"/>
<xs:complexType name="pcToLockUploadFile">
<xs:sequence>
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="fileEncryptionKey" type="xs:string" minOccurs="0"/>
<xs:element name="file" type="xs:base64Binary" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="pcToLockUploadFileResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultPCToLockFileUpload"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultPCToLockFileUpload">
<xs:complexContent>
<xs:extension base="tns:operationResultMultiple">
<xs:sequence>
```



```
<xs:element name="accessedDoors" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResultMultiple">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element name="hasErrors" type="xs:boolean" minOccurs="0"/>
        <xs:element name="subOperations" type="tns:operationResult" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResult">
  <xs:sequence>
    <xs:element name="detail" type="xs:string" minOccurs="0"/>
    <xs:element name="errorCode" type="xs:string" minOccurs="0"/>
    <xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
    <xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
    <xs:element name="operationId" type="xs:string" minOccurs="0"/>
    <xs:element name="type" type="tns:resultType" minOccurs="0"/>
    <xs:element name="warningCode" type="xs:string" minOccurs="0"/>
    <xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="pcToLockDownloadFile">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="params" type="tns:pcToLockFileRequest2" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="pcToLockFileRequest2">
```



```
<xs:sequence>
<xs:element name="doorSelection" type="tns:doorSelectionParams" minOccurs="0"/>
<xs:element name="fileExpirationDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="fileEncryptionKey" type="xs:string" minOccurs="0"/>
<xs:element name="operatorIsAllowedTo" type="tns:operatorAllowedParams"
minOccurs="0"/>
<xs:element name="passwordToOpenDoors" type="xs:string" minOccurs="0"/>
<xs:element name="sortOrderField" type="xs:string" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="doorSelectionParams">
<xs:sequence>
<xs:element name="doorIdList" type="xs:int" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="doorsNotUpdated" type="xs:boolean" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operatorAllowedParams">
<xs:sequence>
<xs:element name="doorInitialization" type="xs:boolean" minOccurs="0"/>
<xs:element name="doorOpen" type="xs:boolean" minOccurs="0"/>
<xs:element name="doorUpdate" type="xs:boolean" minOccurs="0"/>
<xs:element name="firmwareUpdate" type="xs:boolean" minOccurs="0"/>
<xs:element name="openingsRead" type="xs:boolean" minOccurs="0"/>
<xs:element name="safeOpen" type="xs:boolean" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="pcToLockDownloadFileResponse">
<xs:sequence>
<xs:element name="operationResult" type="tns:operationResultPCToLockFile"
minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="operationResultPCToLockFile">
<xs:complexContent>
<xs:extension base="tns:operationResult">
<xs:sequence>
```




```
<xs:element name="pcToLockFile" xmlns:expectedContentTypes="application/octet-  
stream" type="xs:base64Binary" minOccurs="0"/>  
</xs:sequence>  
</xs:extension>  
</xs:complexContent>  
</xs:complexType>  
<xs:simpleType name="errorType">  
<xs:restriction base="xs:string">  
<xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>  
<xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>  
<xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>  
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>  
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>  
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>  
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>  
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>  
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>  
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>  
<xs:enumeration value="ERROR_FORMAT_ERROR"/>  
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>  
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>  
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>  
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>  
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>  
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>  
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>  
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>  
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>  
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>  
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>  
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>  
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>  
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>  
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>  
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>  
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
```



```
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_INVALID"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_WRONG_SITE"/>
<xs:enumeration value="ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST"/>
<xs:enumeration value="ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 315 of 342

```
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_FOUND"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
<xs:enumeration value="ERROR_READING_CARD"/>
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
```



```
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
<xs:restriction base="xs:string">
<xs:enumeration value="RESULT_OK"/>
<xs:enumeration value="RESULT_ERROR"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
<xs:restriction base="xs:string">
<xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
<xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
<xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
<xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
<xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
<xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
<xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
```



```
<xs:enumeration value="WARNING_RF_BOOT_MODE"/>
<xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```

OperatorsWebService WSDL

```
<definitions targetNamespace="http://soap.ws.ts1000.tesa.es/"
name="OperatorsWebService" xmlns:wsu="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
xmlns:wsp="http://www.w3.org/ns/ws-policy"
xmlns:wsp1_2="http://schemas.xmlsoap.org/ws/2004/09/policy"
xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/">

  <types>
    <xsd:schema>
      <xsd:import namespace="http://soap.ws.ts1000.tesa.es/"
schemaLocation="https://localhost:8181/TesaSmartairPlatform/OperatorsWebService?
xsd=1"/>
    </xsd:schema>
  </types>

  <message name="operatorDelete">
    <part name="parameters" element="tns:operatorDelete"/>
  </message>

  <message name="operatorDeleteResponse">
    <part name="parameters" element="tns:operatorDeleteResponse"/>
  </message>

  <message name="operatorGetById">
    <part name="parameters" element="tns:operatorGetById"/>
  </message>

  <message name="operatorGetByIdResponse">
    <part name="parameters" element="tns:operatorGetByIdResponse"/>
  </message>

  <message name="operatorModify">
    <part name="parameters" element="tns:operatorModify"/>
  </message>
```



```
<message name="operatorModifyResponse">
  <part name="parameters" element="tns:operatorModifyResponse"/>
</message>
<message name="operatorsGetAll">
  <part name="parameters" element="tns:operatorsGetAll"/>
</message>
<message name="operatorsGetAllResponse">
  <part name="parameters" element="tns:operatorsGetAllResponse"/>
</message>
<message name="operatorAdd">
  <part name="parameters" element="tns:operatorAdd"/>
</message>
<message name="operatorAddResponse">
  <part name="parameters" element="tns:operatorAddResponse"/>
</message>
<portType name="OperatorsService">
  <operation name="operatorDelete">
    <input
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorDeleteRequest" message="tns:operatorDelete"/>
    <output
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorDeleteResponse" message="tns:operatorDeleteResponse"/>
    </operation>
    <operation name="operatorGetById">
      <input
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorGetByIdRequest" message="tns:operatorGetById"/>
      <output
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorGetByIdResponse" message="tns:operatorGetByIdResponse"/>
      </operation>
      <operation name="operatorModify">
        <input
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorModifyRequest" message="tns:operatorModify"/>
        <output
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorModifyResponse" message="tns:operatorModifyResponse"/>
        </operation>
```



```
<operation name="operatorsGetAll">
  <input
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorsGetAllReque
st" message="tns:operatorsGetAll"/>
  <output
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorsGetAllRespo
nse" message="tns:operatorsGetAllResponse"/>
</operation>
<operation name="operatorAdd">
  <input
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorAddRequest"
message="tns:operatorAdd"/>
  <output
wsam:Action="http://soap.ws.ts1000.tesa.es/OperatorsService/operatorAddResponse"
message="tns:operatorAddResponse"/>
</operation>
</portType>
<binding name="OperatorsServicePortBinding" type="tns:OperatorsService">
  <soap:binding transport="http://schemas.xmlsoap.org/soap/http"
style="document"/>
  <operation name="operatorDelete">
    <soap:operation soapAction=""/>
    <input>
      <soap:body use="literal"/>
    </input>
    <output>
      <soap:body use="literal"/>
    </output>
  </operation>
  <operation name="operatorGetById">
    <soap:operation soapAction=""/>
    <input>
      <soap:body use="literal"/>
    </input>
    <output>
      <soap:body use="literal"/>
    </output>
  </operation>
  <operation name="operatorModify">
```



```
<soap:operation soapAction=""/>
<input>
  <soap:body use="literal"/>
</input>
<output>
  <soap:body use="literal"/>
</output>
</operation>
<operation name="operatorsGetAll">
  <soap:operation soapAction=""/>
  <input>
    <soap:body use="literal"/>
  </input>
  <output>
    <soap:body use="literal"/>
  </output>
</operation>
<operation name="operatorAdd">
  <soap:operation soapAction=""/>
  <input>
    <soap:body use="literal"/>
  </input>
  <output>
    <soap:body use="literal"/>
  </output>
</operation>
</binding>
<service name="OperatorsWebService">
  <port name="OperatorsServicePort"
binding="tns:OperatorsServicePortBinding">
    <soap:address
location="https://localhost:8181/TesaSmartairPlatform/OperatorsWebService"/>
  </port>
</service>
</definitions>
```

OperatorsWebService XSD



```
<xs:schema version="1.0" targetNamespace="http://soap.ws.ts1000.tesa.es/"
xmlns:tns="http://soap.ws.ts1000.tesa.es/"
xmlns:xs="http://www.w3.org/2001/XMLSchema">

  <xs:element name="encoderInfo" type="tns:encoderInfo"/>
  <xs:element name="operationResult" type="tns:operationResult"/>
  <xs:element name="operatorAdd" type="tns:operatorAdd"/>
  <xs:element name="operatorAddResponse" type="tns:operatorAddResponse"/>
  <xs:element name="operatorDelete" type="tns:operatorDelete"/>
  <xs:element name="operatorDeleteResponse" type="tns:operatorDeleteResponse"/>
  <xs:element name="operatorGetById" type="tns:operatorGetById"/>
  <xs:element name="operatorGetByIdResponse"
type="tns:operatorGetByIdResponse"/>
  <xs:element name="operatorInfoResultList" type="tns:operatorInfoResultList"/>
  <xs:element name="operatorModify" type="tns:operatorModify"/>
  <xs:element name="operatorModifyResponse" type="tns:operatorModifyResponse"/>
  <xs:element name="operatorsGetAll" type="tns:operatorsGetAll"/>
  <xs:element name="operatorsGetAllResponse"
type="tns:operatorsGetAllResponse"/>
  <xs:complexType name="operatorModify">
    <xs:sequence>
      <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
      <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
      <xs:element name="operatorInfo" type="tns:operatorInfo" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="operatorInfo">
    <xs:sequence>
      <xs:element name="allDoorGroups" type="xs:boolean" minOccurs="0"/>
      <xs:element name="allUserGroups" type="xs:boolean" minOccurs="0"/>
      <xs:element name="authorizedOperations" type="xs:int" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="defaultEncoder" type="tns:encoderInfo"
minOccurs="0"/>
      <xs:element name="deleted" type="xs:boolean" minOccurs="0"/>
      <xs:element name="expanded" type="xs:boolean" minOccurs="0"/>
      <xs:element name="expirationLimit" type="xs:boolean" minOccurs="0"/>
      <xs:element name="expirationLimitDays" type="xs:int" minOccurs="0"/>
      <xs:element name="level" type="xs:int" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:schema>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 322 of 342

```
<xs:element name="operatorName" type="xs:string" minOccurs="0"/>
<xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
<xs:element name="selectedDoorGroups" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="selectedUserGroups" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="topAccess" type="xs:boolean" minOccurs="0"/>
<xs:element name="userId" type="xs:int" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="encoderInfo">
  <xs:sequence>
    <xs:element name="agentId" type="xs:string" minOccurs="0"/>
    <xs:element name="connected" type="xs:boolean" minOccurs="0"/>
    <xs:element name="dnsAddress" type="xs:string" minOccurs="0"/>
    <xs:element name="encoderId" type="xs:int" minOccurs="0"/>
    <xs:element name="encoderName" type="xs:string" minOccurs="0"/>
    <xs:element name="ipAddress" type="xs:string" minOccurs="0"/>
    <xs:element name="port" type="xs:int" minOccurs="0"/>
    <xs:element name="protocol" type="xs:int" minOccurs="0"/>
    <xs:element name="version" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorModifyResponse">
  <xs:sequence>
    <xs:element name="operatorInfo" type="tns:operatorInfoResultList"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorInfoResultList">
  <xs:complexContent>
    <xs:extension base="tns:operationResult">
      <xs:sequence>
        <xs:element name="allDoorGroups" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="allUserGroups" type="xs:string" nillable="true"
minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```



```
<xs:element name="operatorData" type="tns:operatorInfo"
nillable="true" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="operationResult">
  <xs:sequence>
    <xs:element name="detail" type="xs:string" minOccurs="0"/>
    <xs:element name="errorCode" type="xs:string" minOccurs="0"/>
    <xs:element name="errorDetail" type="xs:string" minOccurs="0"/>
    <xs:element name="errorType" type="tns:errorType" minOccurs="0"/>
    <xs:element name="operationId" type="xs:string" minOccurs="0"/>
    <xs:element name="type" type="tns:resultType" minOccurs="0"/>
    <xs:element name="warningCode" type="xs:string" minOccurs="0"/>
    <xs:element name="warningType" type="tns:warningType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorDelete">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="userId" type="xs:int" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorDeleteResponse">
  <xs:sequence>
    <xs:element name="operationResult" type="tns:operationResult"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorGetById">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="userId" type="xs:int" minOccurs="0"/>
  </xs:sequence>
```



```
</xs:complexType>
<xs:complexType name="operatorGetByIdResponse">
  <xs:sequence>
    <xs:element name="operatorInfo" type="tns:operatorInfoResultList"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorsGetAll">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorsGetAllResponse">
  <xs:sequence>
    <xs:element name="operatorInfo" type="tns:operatorInfoResultList"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorAdd">
  <xs:sequence>
    <xs:element name="operatorName" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorPassword" type="xs:string" minOccurs="0"/>
    <xs:element name="operatorInfo" type="tns:operatorInfo" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="operatorAddResponse">
  <xs:sequence>
    <xs:element name="operatorInfo" type="tns:operatorInfoResultList"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="errorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="ERROR_SERVICE_AUTHENTICATION"/>
    <xs:enumeration value="ERROR_SERVICE_AUTHORIZATION"/>
    <xs:enumeration value="ERROR_OPERATION_TIMEOUT"/>
  </xs:restriction>
</xs:simpleType>
```

```
<xs:enumeration value="ERROR_OPERATION_DOOR_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_HUB_UNKNOWN"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_WIRELESS"/>
<xs:enumeration value="ERROR_OPERATION_MODULE_NOT_CONFIGURED"/>
<xs:enumeration value="ERROR_OPERATION_HUB_BUSY"/>
<xs:enumeration value="ERROR_OPERATION_UNKNOWN_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_DOOR_NOT_INITIALIZED"/>
<xs:enumeration value="ERROR_FORMAT_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_USER_UNKNOWN"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_FULL"/>
<xs:enumeration value="ERROR_HUB_MODULE_ALREADY_EXISTS"/>
<xs:enumeration value="ERROR_HUB_MODULE_LIST_EMPTY"/>
<xs:enumeration value="ERROR_HUB_MODULE_NOT_IN_LIST"/>
<xs:enumeration value="ERROR_COMMUNICATION_MODULE_LOCK"/>
<xs:enumeration value="ERROR_COMMUNICATION_NO_ANSWER"/>
<xs:enumeration value="ERROR_COMMUNICATION_LOCK_NOT_WAKING_UP"/>
<xs:enumeration value="ERROR_COMMUNICATION_HUB_MODULE"/>
<xs:enumeration value="ERROR_COMMUNICATION_BAD_SYNTAX"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_1"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_2"/>
<xs:enumeration value="ERROR_COMMUNICATION_WIRELESS_MEANS_BUSY"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_4"/>
<xs:enumeration value="ERROR_COMMUNICATION_RF_COLLISION"/>
<xs:enumeration value="ERROR_DOOR_WRONGINIT"/>
<xs:enumeration value="ERROR_DOOR_WRONGSYS"/>
<xs:enumeration value="ERROR_DOOR_WRONGDOOR"/>
<xs:enumeration value="ERROR_DOOR_LOWBATT"/>
<xs:enumeration value="ERROR_DOOR_WRONGDIALOG"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_PARENT_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_CHILD_PREASSIGNED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_PARENT_ROOM"/>
```

```

<xs:enumeration value="RESULT_ERROR_CHECKIN_INVALID_CHILD_ROOM"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ROOM_NOT_OCCUPIED"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_TOO_MANY_COPIES"/>
<xs:enumeration value="RESULT_ERROR_CHECKIN_ENCODING_TARGET_MISSING"/>
<xs:enumeration value="RESULT_ERROR_COPY_EMAIL_ADDRESSES_MISSING"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_LOCKING_PLAN"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_OUT_OF_TIME"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_MISSING_GRANT"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_USER_INACTIVE_OR_EXPIRED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_IN_SERVER_SITE_LICENSE"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_BLOCKED"/>
<xs:enumeration value="ERROR_NOT_AUTHORIZED_DOOR_PRIVACY_ON"/>
<xs:enumeration value="ERROR_BAD_PARAMETERS"/>
<xs:enumeration value="ERROR_DATA_ERROR"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_IN_USE"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_INVALID"/>
<xs:enumeration value="ERROR_PCTOLOCK_FILE_WRONG_SITE"/>
<xs:enumeration value="ERROR_PCTOLOCK_DOOR_DOES_NOT_EXIST"/>
<xs:enumeration value="ERROR_PCTOLOCK_INITIALIZATION_TYPE_MISMATCH"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_ELIGIBLE"/>
<xs:enumeration value="ERROR_ENCODING_NO_CARD_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_CARD_ALREADY_ISSUED"/>
<xs:enumeration value="ERROR_ENCODING_ROOM_MUST_BE_CHECKED_OUT"/>
<xs:enumeration
value="ERROR_ENCODING_REMOTE_SERVER_RESPONSE_OK_NFC_EXECUTION_FAILED"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_MISSING"/>
<xs:enumeration value="ERROR_ENCODING_DEVICE_NOT_FOUND"/>
<xs:enumeration value="ERROR_ENCODING_READ_TIMEOUT"/>
<xs:enumeration value="ERROR_ENCODING_NO_COMMUNICATION"/>
<xs:enumeration value="ERROR_ENCODING_BUSY"/>
<xs:enumeration value="ERROR_ENCODING_OTHER"/>
<xs:enumeration value="ERROR_READING_UNKNOWN"/>
<xs:enumeration value="ERROR_READING_USER_DELETED"/>
<xs:enumeration value="ERROR_READING_SECURE_CARD"/>
<xs:enumeration value="ERROR_READING_DELETED_CARD"/>
<xs:enumeration value="ERROR_READING_CARD"/>

```

```
<xs:enumeration value="ERROR_READING_EMPTY"/>
<xs:enumeration value="ERROR_READING_FORMAT"/>
<xs:enumeration value="ERROR_READING_UNKNOWN_MESSAGE"/>
<xs:enumeration value="ERROR_READING_OTHER_SITE"/>
<xs:enumeration value="ERROR_READING_NON_PROPIETARY"/>
<xs:enumeration value="ERROR_READING_WRONG_SIZE"/>
<xs:enumeration value="ERROR_READING_LOST_COMM"/>
<xs:enumeration value="ERROR_READING_SECTOR_AUTH"/>
<xs:enumeration value="ERROR_READING_COULD_NOT_AUTH"/>
<xs:enumeration value="ERROR_ENCODING_WRITE_ERROR"/>
<xs:enumeration value="ERROR_READING_OLD_CARD"/>
<xs:enumeration value="ERROR_READING_NOT_ACTIVE"/>
<xs:enumeration value="ERROR_READING_EXPIRED"/>
<xs:enumeration value="ERROR_READING_NOT_AUTHORIZED"/>
<xs:enumeration value="ERROR_ROOM_FREE"/>
<xs:enumeration value="ERROR_ROOM_OCCUPIED"/>
<xs:enumeration value="ERROR_ROOM_PREASSIGNED"/>
<xs:enumeration value="ERROR_READING_FRAUDULENT_KEY_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_CARD"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_SELECT_APPLICATION"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_CARD_VERSION"/>
<xs:enumeration value="ERROR_DESFIRE_CARD_ENCRYPTION_NOT_SUPPORTED"/>
<xs:enumeration value="ERROR_CARD_CANNOT_CHANGE_KEY"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_APP_LIST"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_APP"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_GET_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_CREATE_FILE"/>
<xs:enumeration value="ERROR_DESFIRE_CANNOT_DELETE_FILE"/>
<xs:enumeration value="ERROR_CANNOT_READ_DATA"/>
<xs:enumeration value="ERROR_CANNOT_WRITE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_DELETE_DATA"/>
<xs:enumeration value="ERROR_CANNOT_FORMAT_DATA"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_DELETING"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_OPERATION"/>
<xs:enumeration value="ERROR_ICLASS_CANCELLED_WRITING"/>
```



```
<xs:enumeration value="ERROR_ICLASS_INVALID_CONFIGURATION"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_CARD_TYPE"/>
<xs:enumeration value="ERROR_ICLASS_INVALID_FACILITY_CODE"/>
<xs:enumeration value="ERROR_SERVER_CANNOT_CONNECT"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_SITE_BLOCKED"/>
<xs:enumeration value="ERROR_SERVER_RESPONSE_OTHER"/>
<xs:enumeration value="ERROR_USER_NOT_ACTIVATED_FOR_APP_ID"/>
<xs:enumeration value="ERROR_SERVICE_SITE_INTERNAL_ERROR"/>
<xs:enumeration value="ERROR_OPERATION_LOCKDOWN_IN_PROGRESS"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="resultType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="RESULT_OK"/>
    <xs:enumeration value="RESULT_ERROR"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="warningType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="WARNING_RF_LOW_SIGNAL"/>
    <xs:enumeration value="WARNING_DOOR_WAS_ALREADY_OPEN"/>
    <xs:enumeration value="WARNING_HUB_RF_VERSION_ERROR_VALUE"/>
    <xs:enumeration value="WARNING_DOOR_MODULE_COMMUNICATION_ERROR"/>
    <xs:enumeration value="WARNING_HUB_MORE_DOORS_ACCESSIBLE"/>
    <xs:enumeration value="WARNING_HUB_BOOT_MODE"/>
    <xs:enumeration value="WARNING_HUB_INCOMPLETE_BOOT_MODE"/>
    <xs:enumeration value="WARNING_RF_BOOT_MODE"/>
    <xs:enumeration value="WARNING_RF_INCOMPLETE_BOOT_MODE"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>
```




4 Recommendations for synchronization

4.1 USERS synchronization

There are a number of ways to keep users list up to date with an external information management system (referred to as **IMS** in this document).

This is our recommendation for systems where synchronization is carried out with a considerable frequency.

First of all, all users should have a unique ID value (such as social security number, national identity card number, or so on) in the "User ID" field of the Users form of the SMARTair system.

NOTE: This unique value refers to **externalId** within our SOAP commands, not **userId**, which refers to an internal and unmodifiable value within SMARTair system.

These would be the steps to keep users of both systems (SMARTair and IMS) synchronized:

- 1- Obtain full list of users from the IMS
- 2- Go through the IMS's users list, and for each user in this list, send **usersGetByExternalId**. With the result of the SOAP command,
 - a. If the user exists in SMARTair, check for modifications, and if the user has changed within the IMS, send **userModify** with the new values
 - b. If the user does NOT exist in SMARTair, send **userAdd** to add it in the SMARTair system
- 3- Obtain full list of users from SMARTair, by sending **usersGetAll**
- 4- Go through the SMARTair users list, and for each user, if the user is NOT in the IMS's users list, remove it from SMARTair by sending **userDelete**

4.2 Example for users synchronization

Let's consider we have a list of 3 users in our SMARTair system, and when synchronization needs to be carried out, our IMS system has a list of 3 users, in which there is a user that is present in SMARTair without any changes, another user that is present but with some changes, and another that is not present in SMARTair.

In this case, following the recommended steps, we would start by obtaining the full list of users of the IMS.

This could be the list:

Example Response. All users returned



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 330 of 342

```
<userInfo>
  <userData>
    <userName>User 02</userName>
    <userType>USER_STANDARD</userType>
    <ada>false</ada>
    <data1/>
    <data2/>
    <data3/>
    <data4/>
    <dateActivation>2018-04-19T02:00:00+02:00</dateActivation>
    <dateExpiration>2018-12-30T23:40:00+01:00</dateExpiration>
    <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
    <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
    <deleted>false</deleted>
    <externalId>22222222</externalId>
    <keyPad>222222</keyPad>
    <numCopies>0</numCopies>
    <openBlockedDoors>true</openBlockedDoors>
    <track1/>
    <track2/>
    <UOCAccess>true</UOCAccess>
    <UOCAudit>true</UOCAudit>
    <UOCDays>168</UOCDays>
    <UOCOverflow>true</UOCOverflow>
    <UOCRevalidate>false</UOCRevalidate>
    <updateRequired>false</updateRequired>
    <userAPB>false</userAPB>
    <userCardId/>
    <userCarrier>CAR_PROX</userCarrier>
    <userEmailAddress/>
    <userEncoded>false</userEncoded>
    <userGroup>Dummy Users</userGroup>
    <userId>17</userId>
    <userPhoneNumber/>
  </userData>
  <userData>
    <userName>User 03</userName>
    <userType>USER_STANDARD</userType>
    <ada>false</ada>
    <data1/>
    <data2/>
    <data3/>
    <data4/>
    <dateActivation>2018-04-19T03:00:00+02:00</dateActivation>
    <dateExpiration>2018-12-30T23:30:00+01:00</dateExpiration>
    <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
    <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
    <deleted>false</deleted>
    <externalId>33333333</externalId>
    <keyPad>333333</keyPad>
    <numCopies>0</numCopies>
    <openBlockedDoors>true</openBlockedDoors>
    <track1/>
    <track2/>
    <UOCAccess>false</UOCAccess>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 331 of 342

```
<userEmailAddress/>
<userEncoded>false</userEncoded>
<userGroup>Dummy Users</userGroup>
<userId>17</userId>
<userPhoneNumber/>
</userData>
<userData>
  <dateActivation>2013-01-28T00:00:00+01:00</dateActivation>
  <dateIssue>2013-09-11T14:51:18.218+02:00</dateIssue>
  <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
  <updateRequired>true</updateRequired>
  <userCardId/>
  <userCarrier>CAR_TARJETA</userCarrier>
  <userEncoded>true</userEncoded>
  <userGroup/>
  <userId>65</userId>
  <userName>UserNamezz</userName>
  <userType>1</userType>
</userData>
</userInfo>
</ns2:usersGetAllResponse>
</S:Body>
</S:Envelope>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 332 of 342

```
<UOCAudit>false</UOCAudit>
<UOCDays>168</UOCDays>
<UOCOverflow>false</UOCOverflow>
<UOCRevalidate>false</UOCRevalidate>
<updateRequired>false</updateRequired>
<userAPB>false</userAPB>
<userCardId/>
<userCarrier>CAR_PROX</userCarrier>
<userEmailAddress/>
<userEncoded>false</userEncoded>
<userGroup>Dummy Users</userGroup>
<userId>18</userId>
<userPhoneNumber/>
</userData>
<userData>
  <userName>User 04</userName>
  <userType>USER_STANDARD</userType>
  <ada>false</ada>
  <data1/>
  <data2/>
  <data3/>
  <data4/>
  <dateActivation>2018-04-19T04:00:00+02:00</dateActivation>
  <dateExpiration>2018-12-30T23:20:00+01:00</dateExpiration>
  <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
  <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
  <deleted>false</deleted>
  <externalId>44444444</externalId>
  <keyPad>444444</keyPad>
  <numCopies>0</numCopies>
  <openBlockedDoors>true</openBlockedDoors>
  <track1/>
  <track2/>
  <UOCAccess>false</UOCAccess>
  <UOCAudit>true</UOCAudit>
  <UOCDays>168</UOCDays>
  <UOCOverflow>false</UOCOverflow>
  <UOCRevalidate>false</UOCRevalidate>
  <updateRequired>false</updateRequired>
  <userAPB>false</userAPB>
  <userCardId/>
  <userCarrier>CAR_PROX</userCarrier>
  <userEmailAddress/>
  <userEncoded>false</userEncoded>
  <userGroup>Dummy Users</userGroup>
  <userId>19</userId>
  <userPhoneNumber/>
</userData>
```



Next, we go through this list of 3 users ("User 02", "User 03", "User 04").

First, send **userGetByExternalId** for "User 02". The response would be:

Example Response. User with externalId 22222222 returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByExternalIdResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <ada>false</ada>
          <data1/>
          <data2/>
          <data3/>
          <data4/>
          <dateActivation>2018-04-19T02:00:00+02:00</dateActivation>
          <dateExpiration>2018-12-30T23:40:00+01:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
          <deleted>false</deleted>
          <externalId>22222222</externalId>
          <keyPad>222222</keyPad>
          <numCopies>0</numCopies>
          <openBlockedDoors>true</openBlockedDoors>
          <track1/>
          <track2/>
          <UOCAccess>true</UOCAccess>
          <UOCAudit>true</UOCAudit>
          <UOCDays>168</UOCDays>
          <UOCOverflow>true</UOCOverflow>
          <UOCRevalidate>false</UOCRevalidate>
          <updateRequired>false</updateRequired>
          <userAPB>false</userAPB>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEmailAddress/>
          <userEncoded>false</userEncoded>
          <userGroup>Dummy Users</userGroup>
          <userId>17</userId>
          <userName>User 02</userName>
          <userPhoneNumber/>
          <userType>USER_STANDARD</userType>
        </userData>
      </userInfo>
    </ns2:userGetByExternalIdResponse>
  </S:Body>
</S:Envelope>
```



“User 02” exists in SMARTAir, so we check for possible modifications. No changes have been applied within the IMS system, therefore we go to the next user.

Secondly, send **userGetByExternalId** for “User 03”. The response would be:

Example Response. User with externalId 33333333 returned

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:userGetByExternalIdResponse
xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <ada>false</ada>
          <data1/>
          <data2/>
          <data3/>
          <data4/>
          <dateActivation>2018-04-19T03:00:00+02:00</dateActivation>
          <dateExpiration>2018-12-30T23:30:00+01:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
          <deleted>false</deleted>
          <externalId>33333333</externalId>
          <keyPad>333333</keyPad>
          <numCopies>0</numCopies>
          <openBlockedDoors>true</openBlockedDoors>
          <track1/>
          <track2/>
          <UOCAccess>false</UOCAccess>
          <UOCAudit>true</UOCAudit>
          <UOCDays>168</UOCDays>
          <UOCOverflow>true</UOCOverflow>
          <UOCRevalidate>false</UOCRevalidate>
          <updateRequired>false</updateRequired>
          <userAPB>false</userAPB>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEmailAddress/>
          <userEncoded>false</userEncoded>
          <userGroup>Dummy Users</userGroup>
          <userId>18</userId>
          <userName>User 03</userName>
          <userPhoneNumber/>
          <userType>USER_STANDARD</userType>
        </userData>
      </userInfo>
    </ns2:userGetByExternalIdResponse>
  </S:Body>
</S:Envelope>
```

	ASSA ABLOY, the global leader in door opening solutions Document: SMARTAIR SOAP API rev22 Document Title: Smartair SOAP API Sheet 335 of 342
---	---

“User 03” exists in SMARTair, so we check for possible modifications. Some changes have been applied within the IMS (UOC parameters have been disabled), therefore we send **userModify** to apply those changes in the SMARTair system:

Example Request. Modify UOC data for user id 18
<pre><soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:soap="http://soap.ws.ts1000.tesa.es/" <soapenv:Header/> <soapenv:Body> <soap:userModify> <operatorName>Receptionist</operatorName> <operatorPassword>MyPassword</operatorPassword> <userId>18</userId> <userData> <UOCAccess>false</UOCAccess> <UOCAudit>false</UOCAudit> <UOCDays>168</UOCDays> <UOCOverflow>false</UOCOverflow> <UOCRevalidate>false</UOCRevalidate> </userData> </soap:userModify> </soapenv:Body> </soapenv:Envelope></pre>

Thirdly, send **userGetByExternalId** for “User 04”. The response would be:

Example Response
<pre><S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/"> <S:Body> <ns2: userGetByExternalIdResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/" <userInfo> <type>RESULT_OK</type> </userInfo> </ns2: userGetByExternalIdResponse> </S:Body> </S:Envelope></pre>



“User 04” does not exist in SMARTair (result is OK, but it has no user data), therefore we must add it by sending **userAdd**.

Example Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userAdd>
      <operatorName>Receptionist</operatorName>
      <operatorPassword>MyPassword</operatorPassword>
      <userData>
        <userName>User 04</userName>
        <userType>USER_STANDARD</userType>
        <ada>>false</ada>
        <dateActivation>2018-04-19T04:00:00+02:00</dateActivation>
        <dateExpiration>2018-12-30T23:20:00+01:00</dateExpiration>
        <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
        <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
        <deleted>>false</deleted>
        <externalId>44444444</externalId>
        <keyPad>4444444</keyPad>
        <numCopies>0</numCopies>
        <openBlockedDoors>true</openBlockedDoors>
        <UOCAccess>>false</UOCAccess>
        <UOCAudit>true</UOCAudit>
        <UOCDays>168</UOCDays>
        <UOCOverflow>>false</UOCOverflow>
        <UOCRevalidate>>false</UOCRevalidate>
        <updateRequired>>false</updateRequired>
        <userAPB>>false</userAPB>
        <userCarrier>CAR_PROX</userCarrier>
        <userEncoded>>false</userEncoded>
        <userGroup>Dummy Users</userGroup>
      </userData>
    </soap:userAdd>
  </soapenv:Body>
</soapenv:Envelope>
```




Once all users have been managed, get the full list from SMARTair, sending **usersGetAll**. The response from SMARTair would be:

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2: userGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <userInfo>
        <type>RESULT_OK</type>
        <userData>
          <userName>User 02</userName>
          <userType>USER_STANDARD</userType>
          <ada>>false</ada>
          <data1/>
          <data2/>
          <data3/>
          <data4/>
          <dateActivation>2018-04-19T02:00:00+02:00</dateActivation>
          <dateExpiration>2018-12-30T23:40:00+01:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
          <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
          <deleted>>false</deleted>
          <externalId>22222222</externalId>
          <keyPad>222222</keyPad>
          <numCopies>0</numCopies>
          <openBlockedDoors>true</openBlockedDoors>
          <track1/>
          <track2/>
          <UOCAccess>true</UOCAccess>
          <UOCAudit>true</UOCAudit>
          <UOCDays>168</UOCDays>
          <UOCOVerflow>true</UOCOVerflow>
          <UOCRevalidate>>false</UOCRevalidate>
          <updateRequired>>false</updateRequired>
          <userAPB>>false</userAPB>
          <userCardId/>
          <userCarrier>CAR_PROX</userCarrier>
          <userEmailAddress/>
          <userEncoded>>false</userEncoded>
          <userGroup>Dummy Users</userGroup>
          <userId>17</userId>
          <userPhoneNumber/>
        </userData>
        <userData>
          <userName>User 03</userName>
          <userType>USER_STANDARD</userType>
          <ada>>false</ada>
          <data1/>
          <data2/>
          <data3/>
          <data4/>
          <dateActivation>2018-04-19T03:00:00+02:00</dateActivation>
          <dateExpiration>2018-12-30T23:30:00+01:00</dateExpiration>
          <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 338 of 342

```
<dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
<deleted>false</deleted>
<externalId>33333333</externalId>
<keyPad>333333</keyPad>
<numCopies>0</numCopies>
<openBlockedDoors>true</openBlockedDoors>
<track1/>
<track2/>
<UOCAccess>false</UOCAccess>
<UOCAudit>false</UOCAudit>
<UOCDays>168</UOCDays>
<UOCOverflow>false</UOCOverflow>
<UOCRevalidate>false</UOCRevalidate>
<updateRequired>false</updateRequired>
<userAPB>false</userAPB>
<userCardId/>
<userCarrier>CAR_PROX</userCarrier>
<userEmailAddress/>
<userEncoded>false</userEncoded>
<userGroup>Dummy Users</userGroup>
<userId>18</userId>
<userPhoneNumber/>
</userData>
<userData>
  <userName>User 04</userName>
  <userType>USER_STANDARD</userType>
  <ada>false</ada>
  <data1/>
  <data2/>
  <data3/>
  <data4/>
  <dateActivation>2018-04-19T04:00:00+02:00</dateActivation>
  <dateExpiration>2018-12-30T23:20:00+01:00</dateExpiration>
  <dateIssue>2000-01-01T00:00:00+01:00</dateIssue>
  <dateUpdate>2000-01-01T00:00:00+01:00</dateUpdate>
  <deleted>false</deleted>
  <externalId>44444444</externalId>
  <keyPad>444444</keyPad>
  <numCopies>0</numCopies>
  <openBlockedDoors>true</openBlockedDoors>
  <track1/>
  <track2/>
  <UOCAccess>false</UOCAccess>
  <UOCAudit>true</UOCAudit>
  <UOCDays>168</UOCDays>
  <UOCOverflow>false</UOCOverflow>
  <UOCRevalidate>false</UOCRevalidate>
  <updateRequired>false</updateRequired>
  <userAPB>false</userAPB>
  <userCardId/>
  <userCarrier>CAR_PROX</userCarrier>
  <userEmailAddress/>
  <userEncoded>false</userEncoded>
  <userGroup>Dummy Users</userGroup>
  <userId>19</userId>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 339 of 342

```
<userPhoneNumber/>
</userData>
</userInfo>
</ns2: userGetAllResponse>
</S:Body>
</S:Envelope>
```

We must now go through the SMARTair list, checking whether the users are present in the IMS list.

“User 01” is not present in the IMS list, so we need to delete it from the SMARTair system, by sending **userDelete**:

Example Request. Delete user identified by id

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/">
  <soapenv:Header/>
  <soapenv:Body>
    <soap:userDelete>
      <operatorName>Receptionist</operatorName>
      <operatorPassword>MyPassword</operatorPassword>
      <userId>16</userId>
    </soap:userDelete>
  </soapenv:Body>
</soapenv:Envelope>
```

“User 02” is already in the IMS, continue.

“User 03” is already in the IMS, continue.

“User 04” is already in the IMS, continue.

At this point, both systems will have the same users list.



4.3 EVENTS querying and synchronization

System events are often queried using methods provided by the EventsWebService service. When queries are carried out with a considerable frequency and the number of event records is very high, the system may suffer from performance degradation.

This is our recommendation to reduce the amount of result records and avoid possible performance degradation issues.

- Always include the `fromOpeningId` parameter in every `openingsGetAll` call in order to reduce the number of results. This parameter can be used to retrieve only new event records that have been registered in the system from the last query instead of retrieving all the event records at once.

4.4 Example for events synchronization

Let's consider there are 250000 event records in our SMARTair system that are being retrieved by an IMS via the `openingsGetAll` SOAP method every 10 seconds.

Example Request

```
<<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:openingsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
    </soap:openingsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

The system will return all event records from the system. In this example, 250000 records are returned having IDs from 1 to 250000.

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:openingsGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <openingInfo>
        <aproxDate>>false</aproxDate>
        <copyNumber>0</copyNumber>
        <doorId>61</doorId>
        <doorName>Room212</doorName>
        <eventType>OPENING_ACCESS_GRANTED</eventType>
        <exit>>false</exit>
        <id>250001</id>
        <openingDate>2018-03-07T15:54:42+01:00</openingDate>
        <userId>2523</userId>
        <userName>_Room212</userName>
      </openingInfo>
      <openingInfo>
        <aproxDate>>false</aproxDate>
        <copyNumber>0</copyNumber>
        <doorId>61</doorId>
```



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 341 of 342

```
<doorName>Room212</doorName>
<eventType>LOW_BATTERIES</eventType>
<exit>false</exit>
<id>250000</id>
<openingDate>2018-03-07T15:54:40+01:00</openingDate>
<userId>2523</userId>
<userName>_Room212</userName>
</openingInfo>
<openingInfo>
  <aproxDate>false</aproxDate>
  <copyNumber>0</copyNumber>
  <doorId>61</doorId>
  <doorName>Room212</doorName>
  <eventType>OPENING_ACCESS_GRANTED</eventType>
  <exit>false</exit>
  <id>249999</id>
  <openingDate>2018-03-07T15:54:26+01:00</openingDate>
  <userId>2523</userId>
  <userName>_Room212</userName>
</openingInfo>

...

<openingInfo>
  <aproxDate>false</aproxDate>
  <copyNumber>0</copyNumber>
  <doorId>61</doorId>
  <doorName>Room212</doorName>
  <eventType>OPENING_ACCESS_GRANTED_NEWCARD</eventType>
  <exit>false</exit>
  <id>1</id>
  <openingDate>2018-03-07T15:54:18+01:00</openingDate>
  <userId>2523</userId>
  <userName>_Room212</userName>
</openingInfo>

</operationResult>
</ns2:openingsGetAllResponse>
</S:Body>
</S:Envelope>
```

Next time the IMS makes a call to `openingsGetAll` the request can include the `fromOpeningId` parameter in order to avoid retrieving events that have already been returned.

In this example the value of the parameter is 250001, which is the last event ID returned by the previous event method call.



Document:
Document Title:

SMARTAIR SOAP API rev22
Smartair SOAP API
Sheet 342 of 342

Example Request

```
<<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soap="http://soap.ws.ts1000.tesa.es/"
  <soapenv:Header/>
  <soapenv:Body>
    <soap:openingsGetAll>
      <operatorName>operator1</operatorName>
      <operatorPassword>myPassword</operatorPassword>
      <b>fromOpeningId>250001</fromOpeningId>
    </soap:openingsGetAll>
  </soapenv:Body>
</soapenv:Envelope>
```

The system will only return new events that have been registered in the system having IDs higher than 250001. In this example, two new events are returned.

Example Response

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
  <S:Body>
    <ns2:openingsGetAllResponse xmlns:ns2="http://soap.ws.ts1000.tesa.es/">
      <openingInfo>
        <aproxDate>>false</aproxDate>
        <copyNumber>0</copyNumber>
        <doorId>61</doorId>
        <doorName>Room212</doorName>
        <eventType>OPENING_ACCESS_GRANTED</eventType>
        <exit>>false</exit>
        <b>id>250003</id>
        <openingDate>2018-03-08T15:54:42+01:00</openingDate>
        <userId>2523</userId>
        <userName>_Room212</userName>
      </openingInfo>
      <openingInfo>
        <aproxDate>>false</aproxDate>
        <copyNumber>0</copyNumber>
        <doorId>61</doorId>
        <doorName>Room212</doorName>
        <eventType>OPENING_ACCESS_GRANTED</eventType>
        <exit>>false</exit>
        <b>id>250002</id>
        <openingDate>2018-03-08T15:54:18+01:00</openingDate>
        <userId>2523</userId>
        <userName>_Room212</userName>
      </openingInfo>
    </ns2:openingsGetAllResponse>
  </S:Body>
</S:Envelope>
```