



kyushu university interactive interfaces 2009

arne boon exchange student interaction design

## BOXPOD



turn the AR-marker into a drum loops machine

using a midi input device as controller


augmented reality as visualisation for sound creation

## BOXPOD



```
midi input device pod = selector
midi input device z-axis = enter
```

repeating selection modes: row > box > value

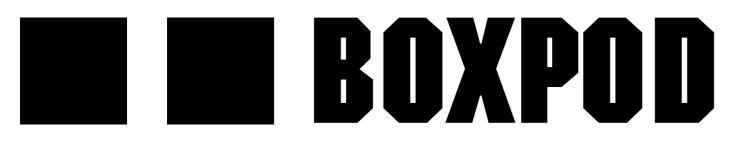



## remarks

simplicity

exploration

creation