

# **ReactJS.**

## The basics

# Agenda

- **Background**
- **JSX (JavaScript Extension Syntax)**
- **Developer tools**
  - **Storybook**
- **Component basics**

# ReactJS.

- **A Javascript Single Page App (SPA) framework for building dynamic Web User Interfaces.**



- **Client-side framework.**
  - **More a library than a framework.**

# Before ReactJS.

- **Traditional SPAs promoted the MVC (Model View Controller) pattern for app design.**
  - **Ex: AngularJS, EmberJS, BackboneJS etc.**
- **React is not MVC, just V.**
  - **It challenged established best practice (MVC).**
- **MVC frameworks use template technology at the V layer; React based on components**

	<b>Templates</b>	<b>React components</b>
Separation of concerns	Technology (JS, HTML)	Responsibility “Display UI”
Semantic	New concepts and micro-languages	HTML and Javascript
Expressiveness	Underpowered	Full power of Javascript

# ReactJS

- **Philosophy:** *Build components, not templates*
- **All about the UI (User Interface).**
  - Not about business logic or the data model.
- **Component: A unit comprised of HTML(ish), JS, and data.**
  - UI description (HTML) and UI behavior (JS) are tightly coupled and co-located.
    - Other SPA frameworks decoupled these aspects.
- **Benefits:**
  1. Composability.
  2. Reusability.
  3. Performance.

# Creating the UI description

- `React.createElement()` – **create a DOM element.**
- `ReactDOM.render()` – **attach an element to the DOM.**
- **Ref. 01-UIDescription.html**
- `createElement()` **arguments:**
  - **type (h1, div, span etc);**
  - **properties (style, event handler etc);**
  - **children.**
- `render()` **arguments:**
  - **element to be displayed;**
  - **DOM node on which to mount the element.**
- **Ref. 02-UIDescription.html**
- **We never use `createElement()` directly – far too cumbersome.**

# JSX.

- **JSX – JavaScript extension syntax**
- **Declarative syntax for coding UI descriptions.**
- **Retains the full power of Javascript.**
- **Allows tight coupling between UI logic and description.**
- **Must be transpiled (Babel) for browser execution compatibility.**
  - **Reference [03-JSX-error.html](#)**

# REPL (Read-Evaluate-Print-Loop) transpiler.

The screenshot shows the Babel REPL interface in a Chrome browser. The address bar shows the URL: <https://babeljs.io/repl/#?babili=false&browsers=&build=&builtIns=false&spec=false&loose=false&co...>

**SETTINGS**

- ☒ Evaluate
- ☒ Line Wrap
- ☐ Minify
- ☒ Prettify
- ☐ File Size
- ☐ Time Travel

**Source Type**

Module

**PRESETS**

- ☒ es2015
- ☐ es2015-loose
- ☐ es2016
- ☐ es2017
- ☐ stage-0
- ☐ stage-1
- ☐ stage-2
- ☐ stage-3
- ☒ react

v6.26.0

**Input Code (Left):**

```
1 let rootElement =
2   <div className='myCSSstyle' >
3     <h1>Languages</h1>
4     <ul>
5       <li>Ruby</li>
6       <li>Javascript</li>
7     </ul>
8   </div> ;
9
10 ReactDOM.render(rootElement,
11   document.getElementById('mount-point') );
```

**Output Code (Right):**

```
1 'use strict';
2
3 var rootElement = React.createElement(
4   'div',
5   { className: 'myCSSstyle' },
6   React.createElement(
7     'h1',
8     null,
9     'Languages'
10  ),
11  React.createElement(
12    'ul',
13    null,
14    React.createElement(
15      'li',
16      null,
17      'Ruby'
18    ),
19    React.createElement(
20      'li',
21      null,
22      'Javascript'
23    )
24  )
25 );
```

**Reference**  
**04-JSX.html**

React is not defined



# JSX.

- **HTML-like markup.**
  - **It's actually XML code.**
- **Must be transformed (transpiled) into ES5.**
  - **The Babel tool suite.**
- **Some minor HTML tag attributes differences, e.g. className (class), htmlFor (for).**
- **Allows declarative description of the UI inlined in JavaScript.**
- **Combines the ease-of-use of templates with the power of JS.**

# Transpiling JSX.

- **What?**
  - **The Babel platform**
- **How?**
  1. **Manually, via REPL or command line.**
    - **When experimenting only.**
  2. **By the web server (using special tooling, i.e.Webpack).**
    - **Suitable for app development mode.**
  3. **As part of the build process for an app.**
    - **When deploying app for production.**

# React Components.


- **We develop COMPONENTS.**
  - **A class that extend** `React.Component`
  - The `render()` **method**:
    - **Mandatory.**
    - **Returns the component** UI description.
- **We reference components as HTML tags - `<ComponentName>`**
  - **E.g.** `ReactDOM.render(<ComponentName/>, . . . . )`
- **Reference** `05-simpleComponent.html`

# React Development tools.

- **The create-react-app tool. Features:**
  - a) Scaffolding/Generator**
  - b) Development web server: auto-transpilation on file change + live reloading.**
  - c) Builder: build production standard version of app, i.e. minification, bundling.**
- **The Storybook tool:**
  - A development environment for UI components.**
  - Runs outside of your app - develop component in isolation.**
  - Leads to more reusable, testable components.**
  - Quicker development – ignore application-specific dependencies.**



- **Tool interface.**

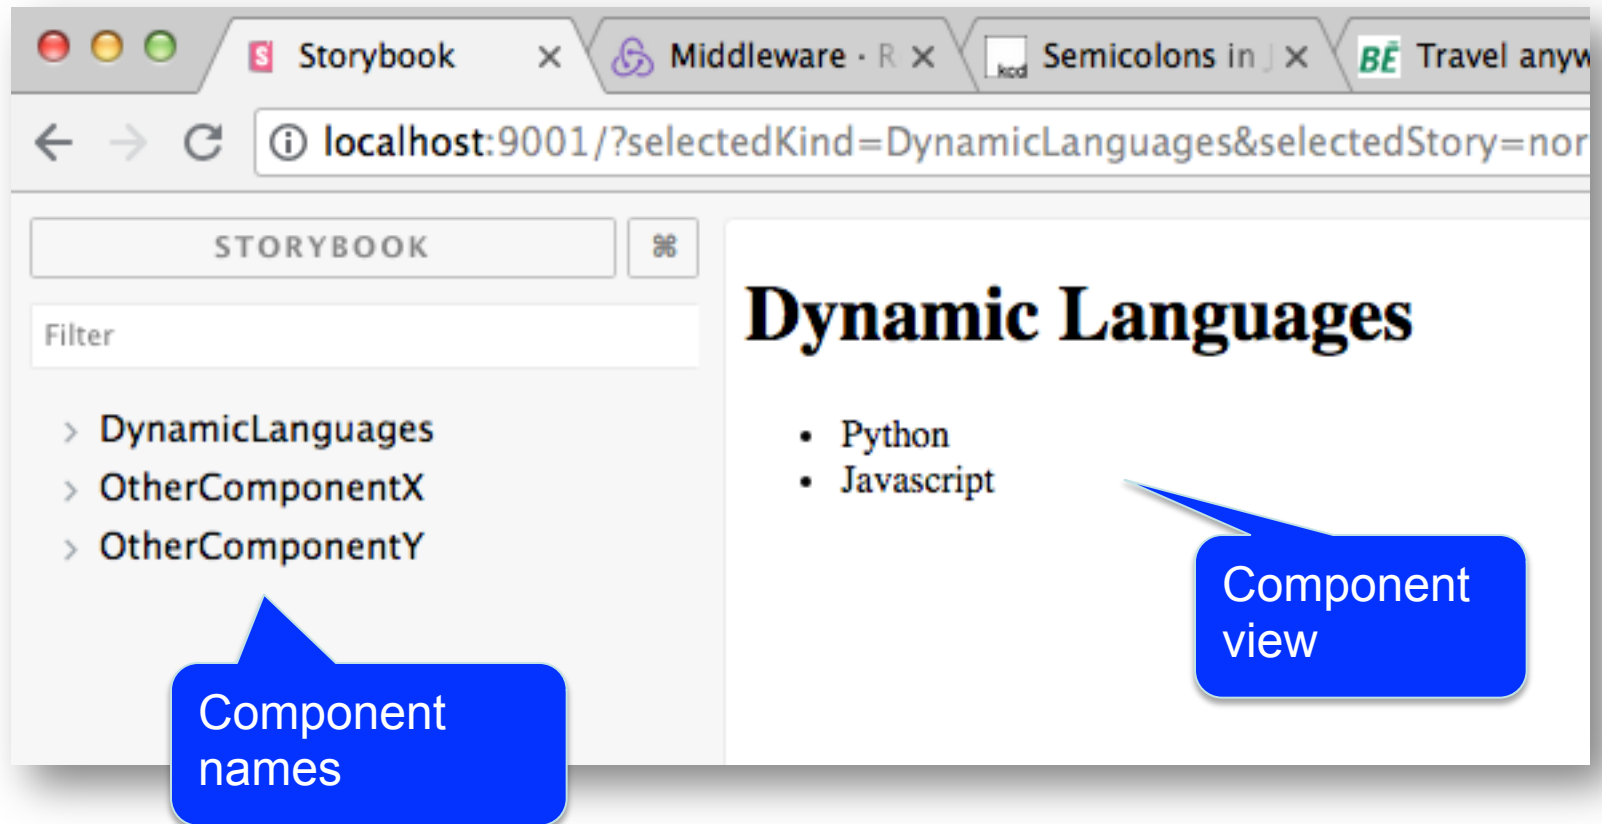




- **Component design considerations:**
  - **A component may have several STATES → The state influences how it should render,**
- **EX.: DynamicLanguages component:**
  - **Default – list of languages less than 5 → Renders full list**
  - **Boundary – empty list → Render ‘No language’ message**
  - **Exceptional – More than 5 languages → Render first 5 and a ‘See More...’ link to display next 5.**
- **Each state case termed a STORY**


# STORYBOOK

- A component may have many stories.
- The tool allows us document them.

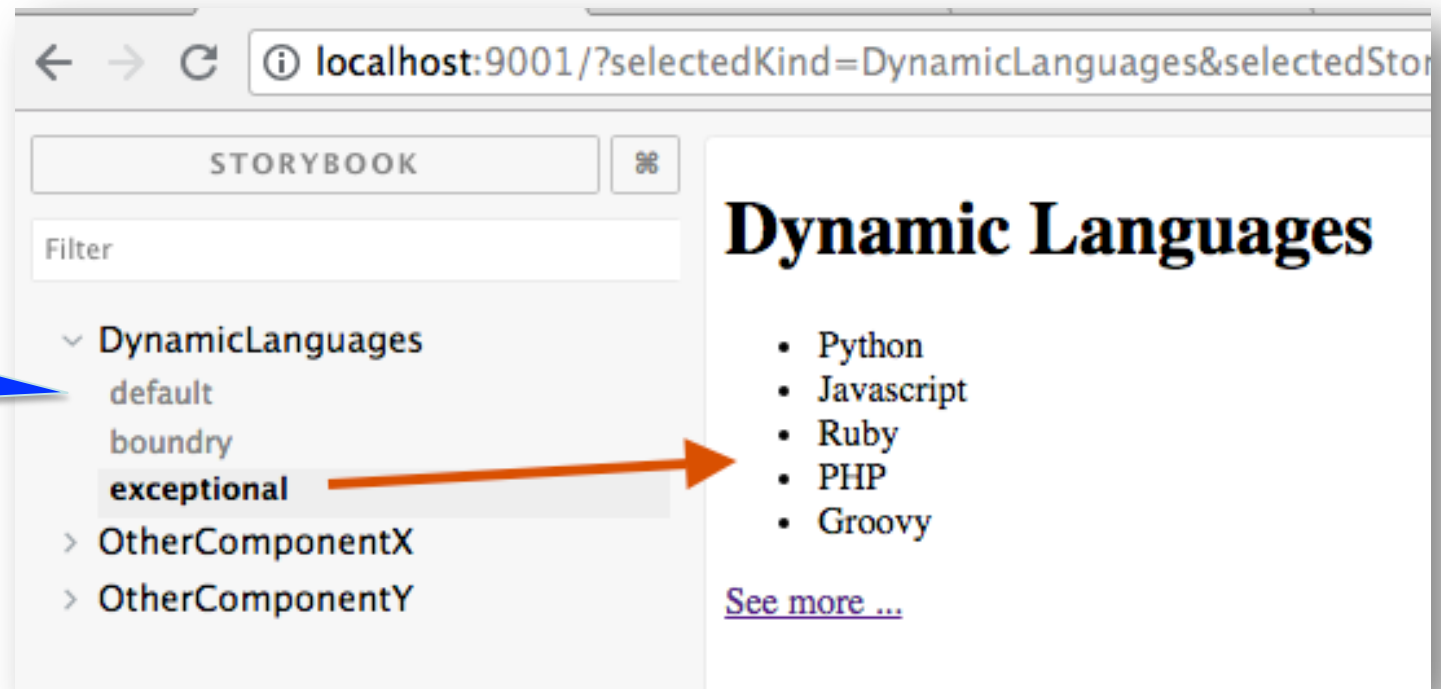



- For large component libraries, use component groups.
  - helps others understanding the catalogue.

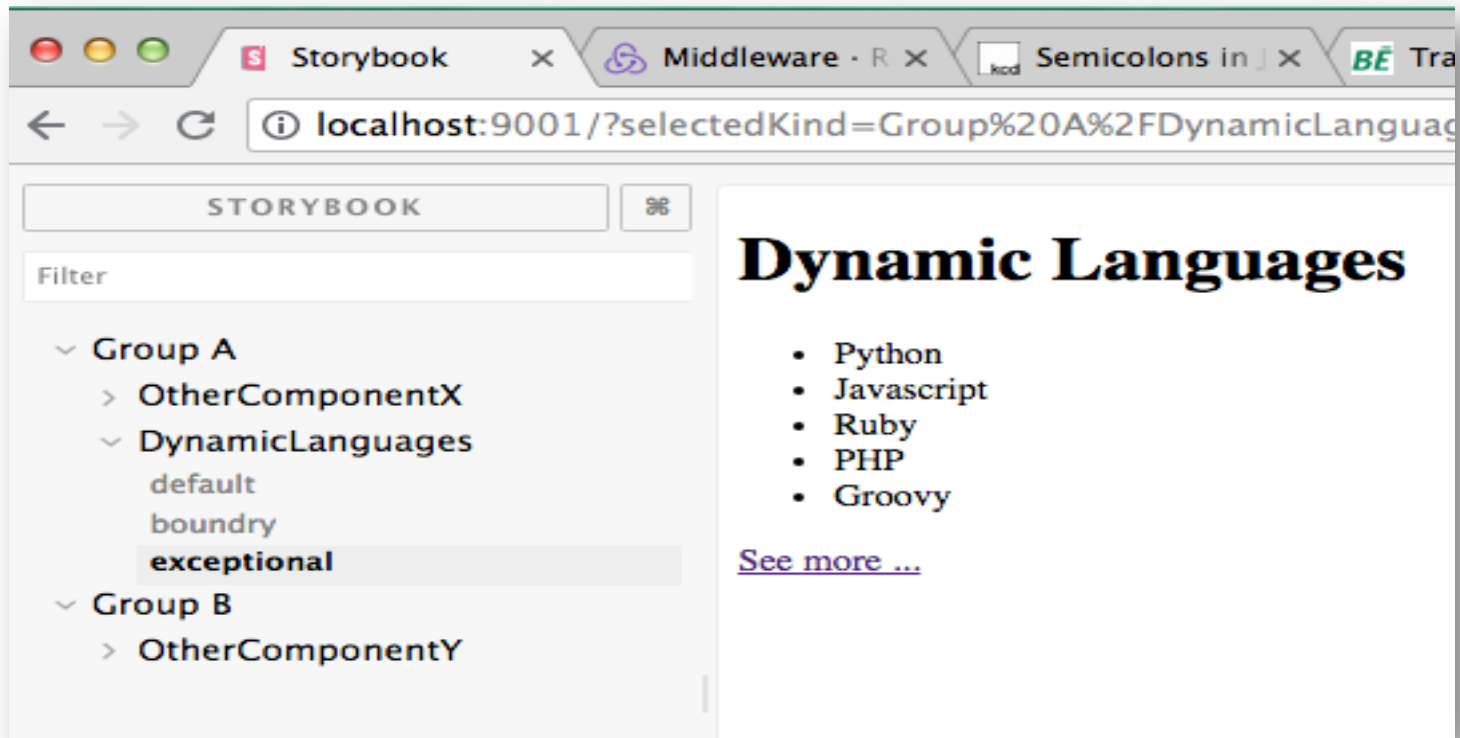



# Writing stories

- Tool provides a (fairly) declarative syntax for writing stories.
  - Like a domain specific language (DSL).

```
1 import React from 'react';
2 import { storiesOf } from '@storybook/react';
3 import DynamicLanguages from '../components/dynamicLanguages';
4
5 storiesOf('DynamicLanguages', module)
6   .add('default',
7     () => {
8       let languages = ['Python', 'Javascript', 'Ruby']
9       return <DynamicLanguages list={languages} />
10    }
11  )
12  .add('boundry',
13    () => . . . . .
14  )
15  .add('exceptional',
16    () => . . . . .
17  )
18
19 storiesOf('OtherComponentX', module)
20   .add('state 1',
21     () => . . . . .
22   )
23   . . . . .
```



Arrow  
function

A Story

... back to components . . .

# Samples

- Samples to demonstrate Component features.
  - Basis for this week's lab..

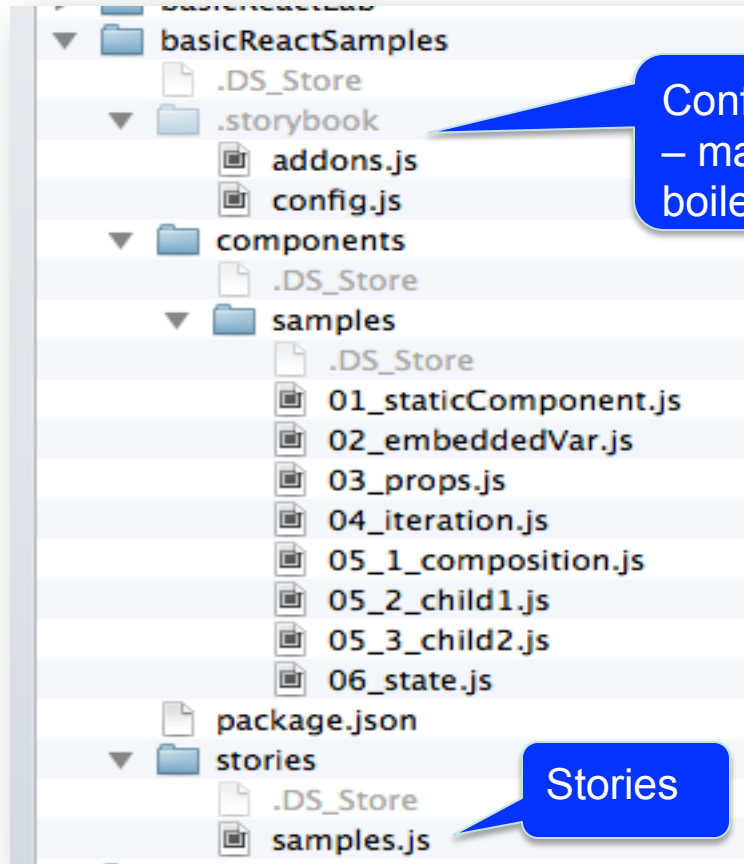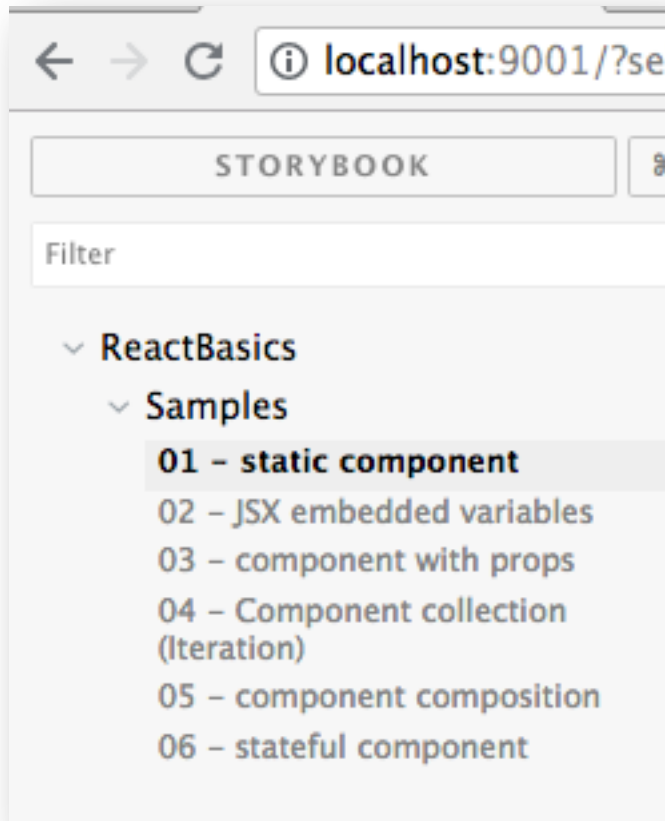

# JSX embedded variables.

- Dereference variable embedded in JSX code using { } braces.
  - Braces can contain any valid JS expression.
- Reference 02\_embeddedVariables.js

JS 02\_embeddedVar.js ×

```
1  import React , { Component } from 'react';
2  export default class DynamicLanguagesEmbeddedVars extends Component {
3      render() {
4          let languages = ['Go', 'Julia', 'Swift']
5          let header = 'Modern'
6          return (
7              <div className='myCSSstyle' >
8                  <h1>`${header} Languages`</h1>
9                  <ul>
10                     <li>{languages[0]}</li>
11                     <li>{languages[1]} </li>
12                     <li>{languages[2]} </li>
13                 </ul>
14             </div>
15         );
16     }
17 }
```

# Reusability.

- **Achieve reusability through parameterization.**
- **props – Component properties/attribute;**
  - **Passing props to a component:**  
`<CompName prop1Name={value} prop2Name={value} . . . . />`
  - **Access inside component via this.props object:**  
`let p1 = this.props.prop1Name`
  - **Immutable.**
- **Reference 03\_props.js and related story.**

## Aside – Some JS issues

- When an arrow function has only ONE statement, which is its return value, then you may omit:
  - Body curly braces; 'return' keyword; Semi-colon
- The **Array** map method – returns a new array based on applying the function argument to each element of the source array.

```
1  let frameworks = [  
2    {name: 'React', url : 'https://facebook.github.io/react/'},  
3    {name: 'Vue', url : 'https://vuejs.org/'},  
4    {name: 'Angular', url : 'https://angularjs.org/'}  
5  ] ;  
6  const names = frameworks.map((f,index) => `${index+1}. ${f.name}` )  
7  console.log(names)  
8  // [ '1. React', '2. Vue', '3. Angular' ]  
9
```

## Aside – Some JS issues

- We can assign a single **JSX** element to a variable.

```
9  
0  - const demo = <div>  
1      <h1>Something</h1>  
2      <h2>Something else</h2>  
3      </div> ;
```

# Component collection - Iteration

- **Obj.:** Generate a collection of component instances.
- **Reference** 04\_iteration.js

```
▼ <div>
  <h1>JS client-side Web</h1>
  ▼ <ul> = $0
    ▼ <li>
      <a href="https://facebook.github.io/react/">React</a>
    </li>
    ▼ <li>
      <a href="https://vuejs.org/">Vue</a>
    </li>
    ▼ <li>
      <a href="https://angularjs.org/">Angular</a>
    </li>
  </ul>
</div>
```

Real DOM  
produced by story  
(From Chrome  
Dev Tools)



# The render() return value.

- **Examples:**

- return <h1>Something</h1> ;
- return <MyComponent prop1={.....} prop2={.....} /> ;
- return (  
    <div>  
        <h1>{this.props.type}</h1>  
        <ul>  
            .....  
        </ul>  
    </div>  
);

- **Must enclose in ( ) when multiline.**

# The render() return value.

- **Must return only ONE element.**
- **Examples:**
  - return (  
    <h1>{this.props.type}</h1>  
    <ul>  
        .....  
    </ul>  
);
  - **Error** – ‘Adjacent JSX elements must be wrapped in an enclosing tag’
  - **Solution: Wrap in a div tag.**

# Component *Composition*.

*A React application is designed as a hierarchy of components.*

- **Components** have children – **nesting**.
- **See** *05\_1\_composition.js*.

From Chrome  
Dev Tools React  
extension



The screenshot shows the React DevTools component inspector. The 'React' tab is selected, and the component tree is displayed. The tree shows a hierarchy of components: Container(Layout), Container(ShortcutsHelp), Container(SearchBox), and SearchBox. The SearchBox component is expanded, showing its props: showSearchBox={false}. The Parent component is also expanded, showing its children: a div containing an h1, a Child1 component, and a Child2 component. The Child1 component is further expanded, showing its children: a div containing an h2. The entire tree is highlighted with an orange border.

```
<Container(Layout)>...</Container(Layout)>
  <Container(ShortcutsHelp)>...</Container(ShortcutsHelp)>
    <Container(SearchBox)>
      <SearchBox showSearchBox={false}>...</SearchBox>
    </Container(SearchBox)>
  </div>
  <Parent>
    <div>
      <h1>I'm parent component</h1>
      <Child1>
        <div>
          <h2>I'm a child1 component</h2>
        </div>
      </Child1>
      <Child2>...</Child2>
    </div>
  </Parent>
```

# Summary.

- **JSX.**
  - **UI** description **and** behaviour **tightly coupled**.
- **All about components.**
  - **A class that extends** `React.Component`
  - **The render method**
  - **Parameterization via props**
- **Storybook tool.**
  - **Develop components in isolation**
  - **Story** – how a component renders may depend on its state (data values)

