


Setting up Mongo



MongoDB

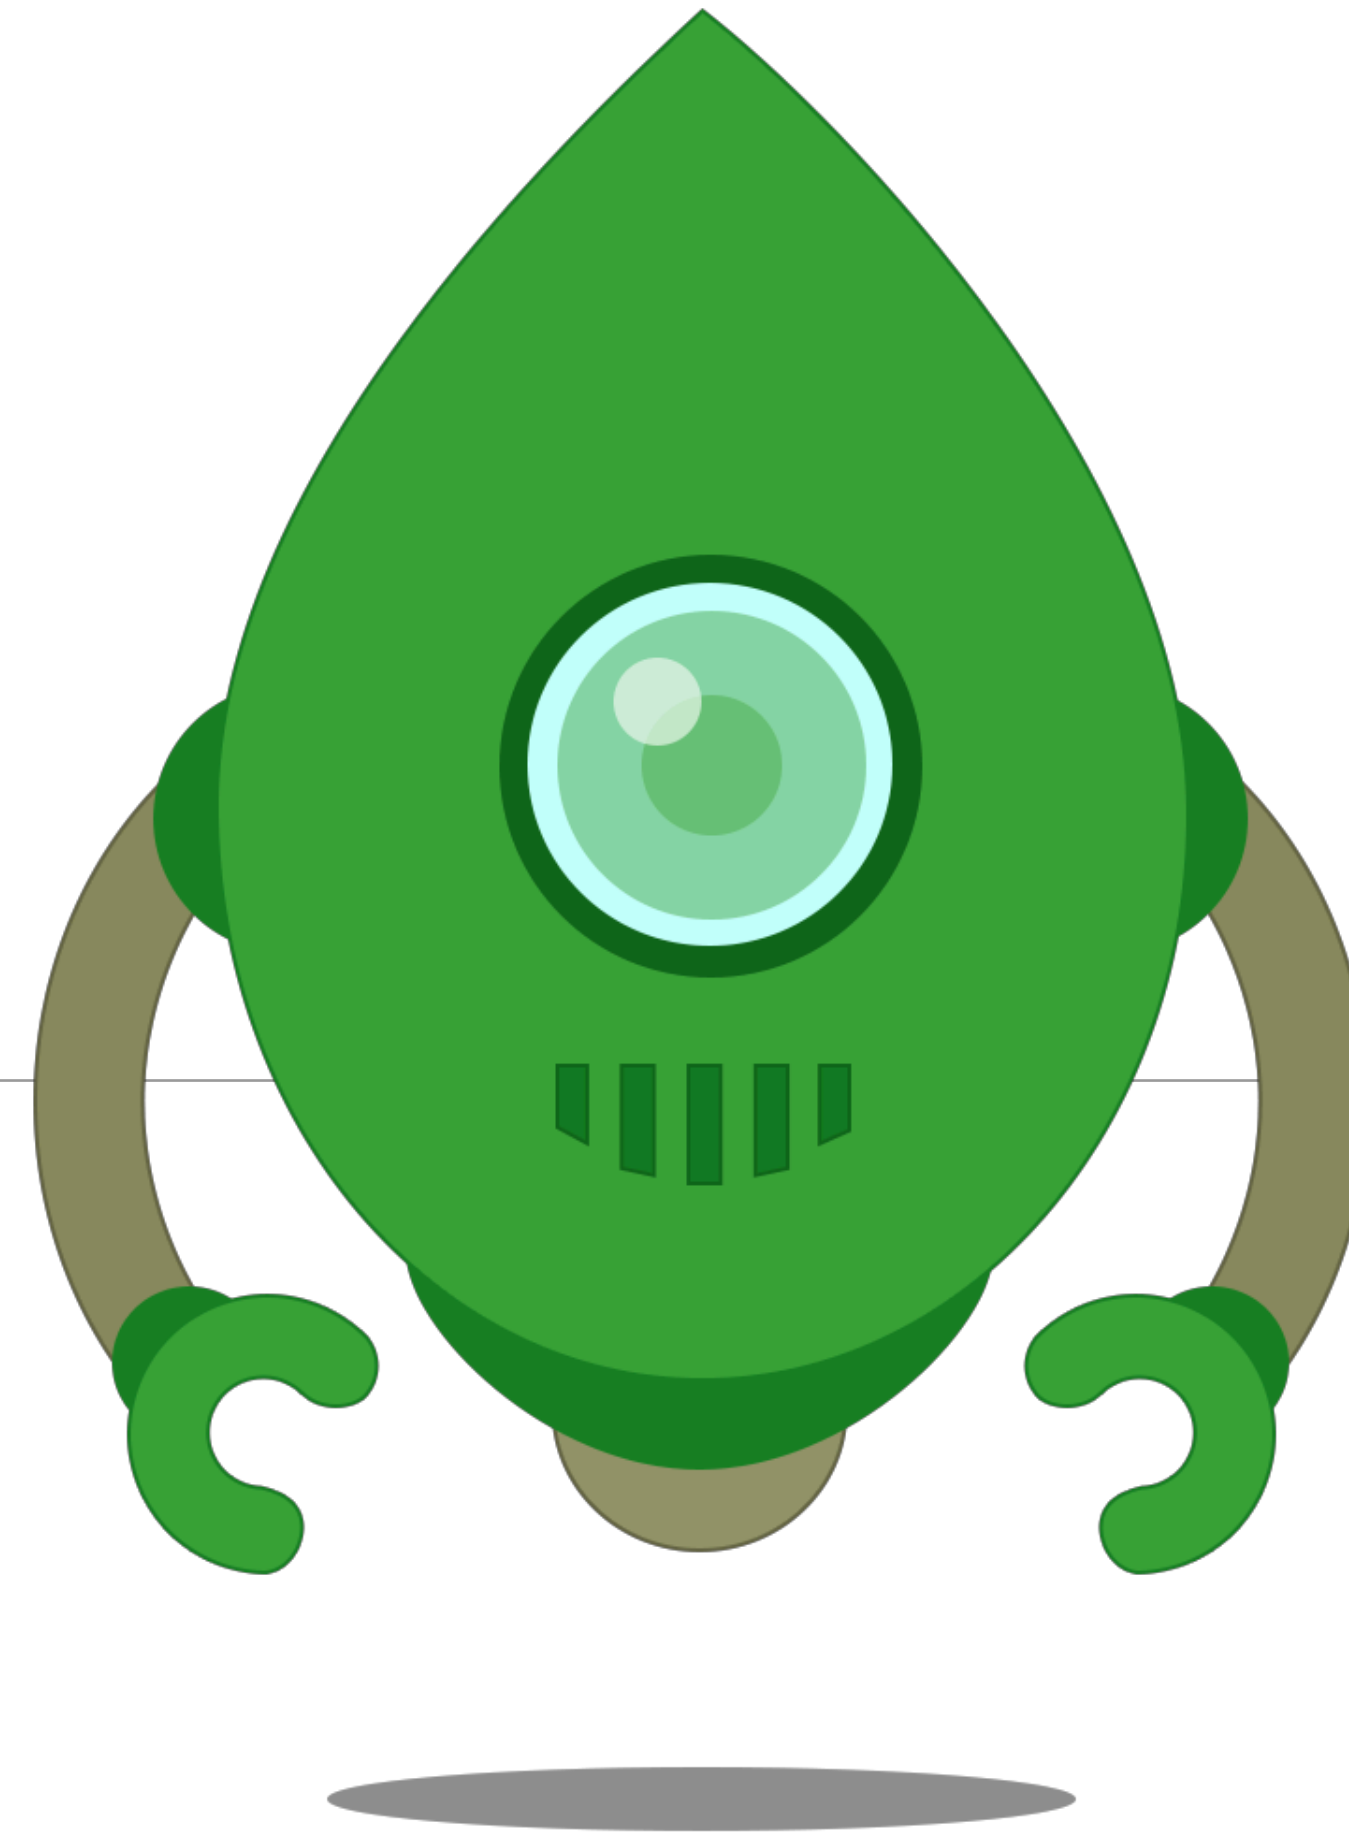

- MongoDB is an open-source document database that provides high performance, high availability, and automatic scaling.

- A record in MongoDB is a document, which is a data structure composed of field and value pairs.

- MongoDB documents are similar to JSON objects.

- The values of fields may include other documents, arrays, and arrays of documents.

```
{  
  name: "sue",  
  age: 26,  
  status: "A",  
  groups: [ "news", "sports" ]  
}
```

← field: value
← field: value
← field: value
← field: value

- Documents (i.e. objects) correspond to native data types in JavaScript
- Embedded documents and arrays reduce need for expensive joins.
- Dynamic schema supports fluent polymorphism.

mongoose

elegant **mongodb** object modeling for **node.js**

“Mongoose provides a straight-forward, schema-based solution to model your application data. It includes built-in type casting, validation, query building, business logic hooks and more, out of the box”

Why Mongoose?

- Node focussed Object Document Manager
Mongo & Node
- Can simplify MongoDB development,
particularly as a learning tool for first contact
with Mongo
- Re-introduces Schema to node, and simplifies
considerably evolution of moderately complex
applications.
- Can be viewed as an easier 'way into' mongo,
but understanding and familiarity with
MongoDB documentation still required.



Learning Mongo via Mongoose

- Shortcut to understanding the basics
- Closer to Object Relational Mapping libraries like JPA/Hibernate
- Will require deeper understanding of core Mongo API at a later stage, but Mongoose First is a useful approach for now.

mongoose

elegant **mongodb** object modeling for **node.js**

[read the docs](#)

[discover plugins](#)

 Star 17,894

Version 5.4.8

 Fork 2,553

Setup (1)

- Install MongoDB
- Launch Mongo

Cloud **Server** Tools

Select the server you would like to run:

MongoDB Community Server
FEATURE RICH. DEVELOPER READY.

MongoDB Enterprise Server
ADVANCED FEATURES. PERFORMANCE GRADE.

Version
4.0.5 (current release) ▼

OS
macOS 64-bit x64 ▼

Package
TGZ ▼

Download

https://fastdl.mongodb.org/osx/mongodb-osx-ssl-x86_64-4.0.5.tgz

- Release notes
- Changelog
- All version binaries
- Installation instructions
- Download source (tgz)
- Download source (zip)

Typically, to launch the mongodb database service on your platform, first create a directory somewhere to store the database itself:

```
mkdir db
```

Then enter the following command to launch the service:

```
mongod -dbpath db
```

mongod -dbpath db

```
Command Prompt - mongod -dbpath db

0 File(s)          0 bytes
10 Dir(s)         6,638,878,720 bytes free



C:\dev>mkdir db

C:\dev>mongod -dbpath db
2016-09-29T08:23:50.606+0100 I CONTROL [initandlisten] MongoDB starting : pid=5716 port=27017 dbpath=db 64-bit host=DESKTOP-H9JNMCS
2016-09-29T08:23:50.611+0100 I CONTROL [initandlisten] targetMinOS: Windows 7/Windows Server 2008 R2
2016-09-29T08:23:50.615+0100 I CONTROL [initandlisten] db version v3.2.9
2016-09-29T08:23:50.618+0100 I CONTROL [initandlisten] git version: 22ec9e93b40c85fc7cae7d56e7d6a02fd811088c
2016-09-29T08:23:50.622+0100 I CONTROL [initandlisten] OpenSSL version: OpenSSL 1.0.1p-fips 9 Jul 2015
2016-09-29T08:23:50.626+0100 I CONTROL [initandlisten] allocator: tcmalloc
2016-09-29T08:23:50.629+0100 I CONTROL [initandlisten] modules: none
2016-09-29T08:23:50.632+0100 I CONTROL [initandlisten] build environment:
2016-09-29T08:23:50.634+0100 I CONTROL [initandlisten]   distmod: 2008plus-ssl
2016-09-29T08:23:50.638+0100 I CONTROL [initandlisten]   distarch: x86_64
2016-09-29T08:23:50.640+0100 I CONTROL [initandlisten]   target_arch: x86_64
2016-09-29T08:23:50.642+0100 I CONTROL [initandlisten] options: { storage: { dbPath: "db" } }
2016-09-29T08:23:50.649+0100 I STORAGE [initandlisten] wiredtiger_open config: create,cache_size=4G,session_max=20000,eviction=(threads_max=4),config_base=false,statistics=(fast),log=(enabled=true,archive=true,path=journal,compressor=snappy),file_manager=(close_idle_time=100000),checkpoint=(wait=60,log_size=2GB),statistics_log=(wait=0),
2016-09-29T08:23:50.797+0100 I FTDC [initandlisten] Initializing full-time diagnostic data capture with directory 'db/diagnostic.data'
2016-09-29T08:23:50.802+0100 I NETWORK [HostnameCanonicalizationWorker] Starting hostname canonicalization worker
2016-09-29T08:23:50.832+0100 I NETWORK [initandlisten] waiting for connections on port 27017
2016-09-29T08:25:19.677+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:50054 #1 (1 connection now open)
2016-09-29T08:25:19.772+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:50055 #2 (2 connections now open)
2016-09-29T08:25:26.698+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:50058 #3 (3 connections now open)
2016-09-29T08:25:26.746+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:50059 #4 (4 connections now open)
```

- This will log event to the console and serves as a useful check on the status of the service


Setup (2)

- Install Robo 3T
- A visual tool for exploring and manipulation MongoDB Databases

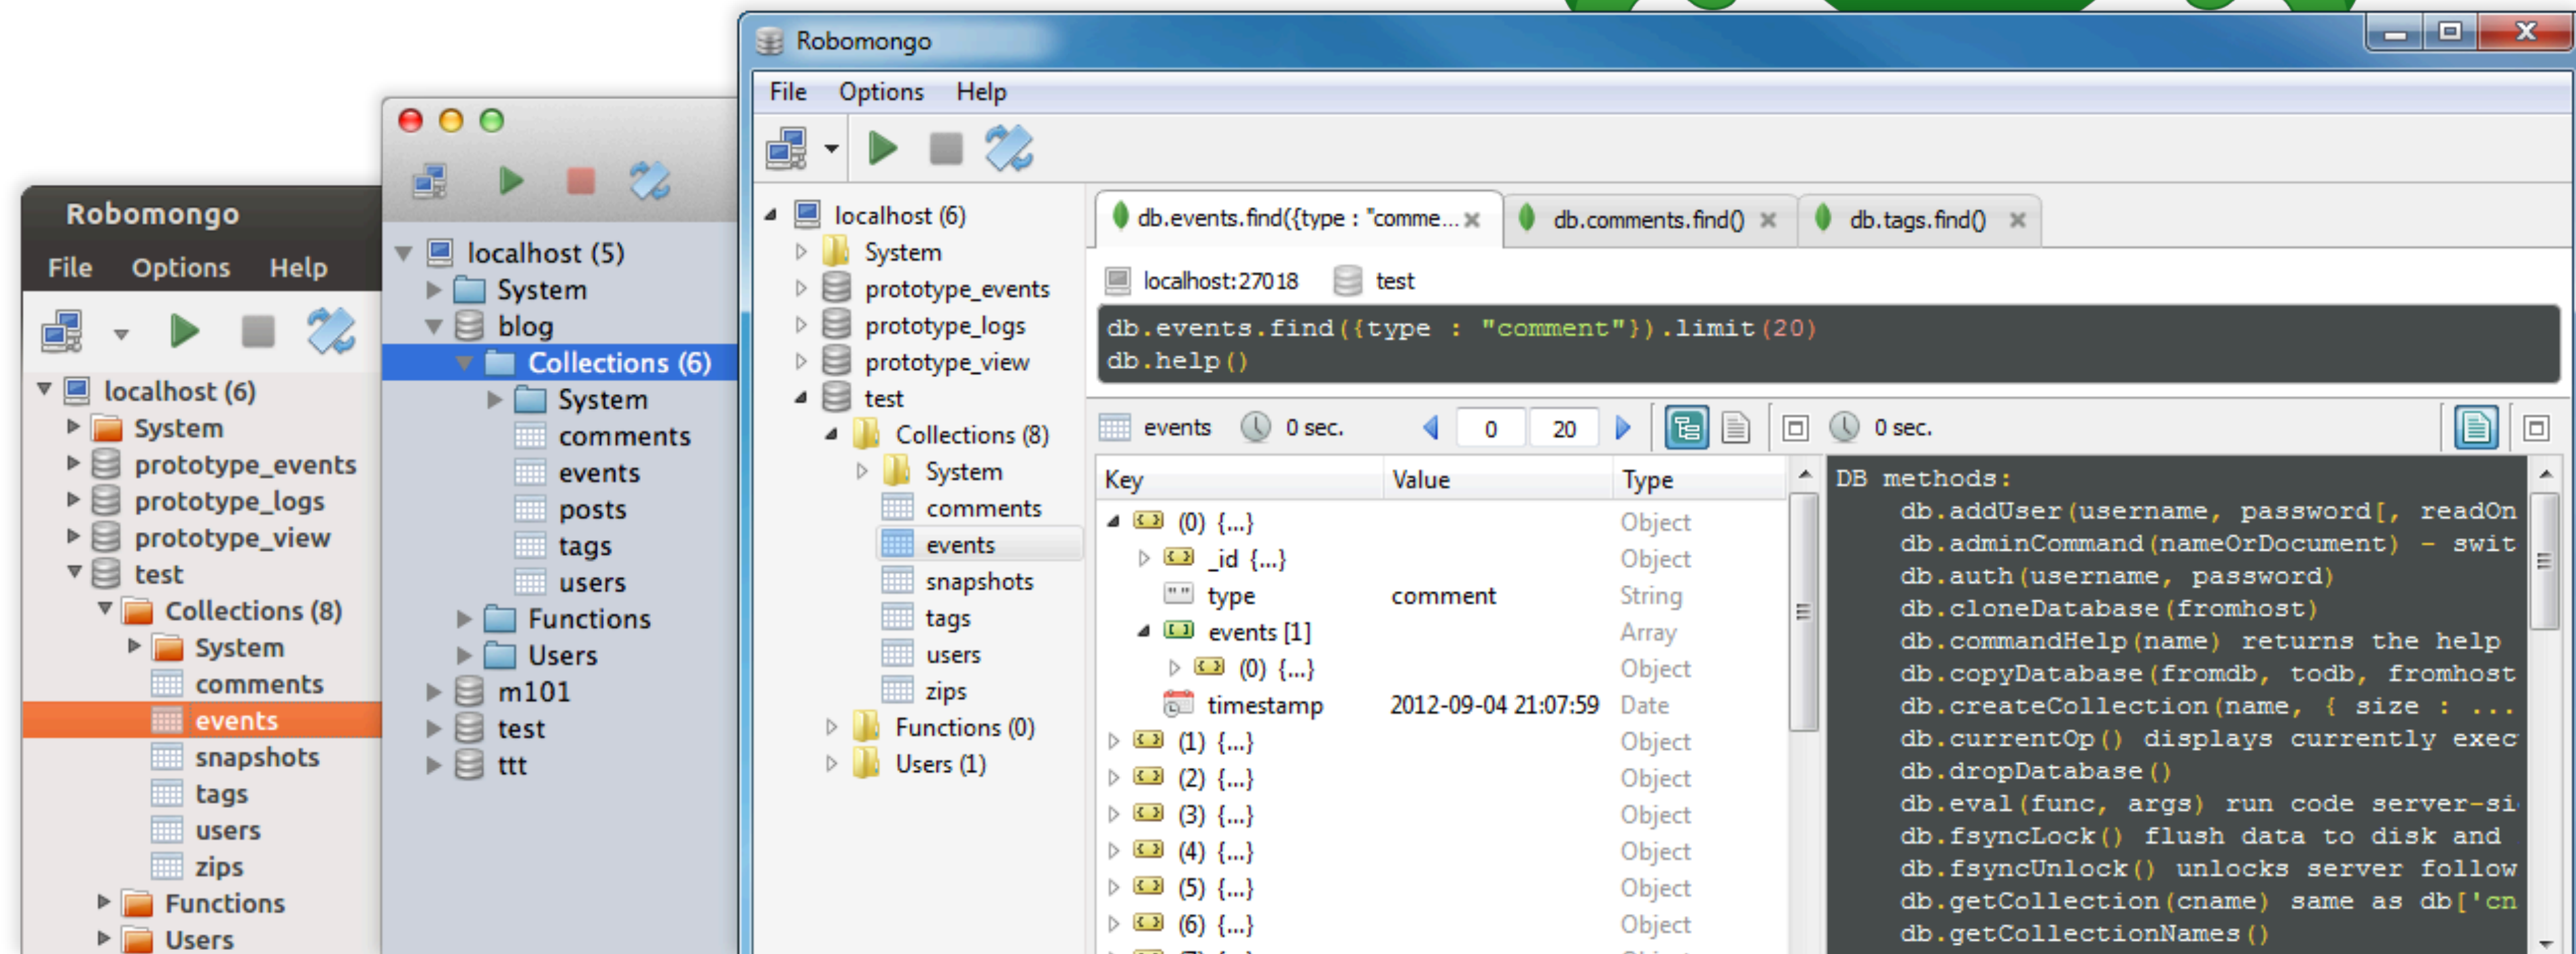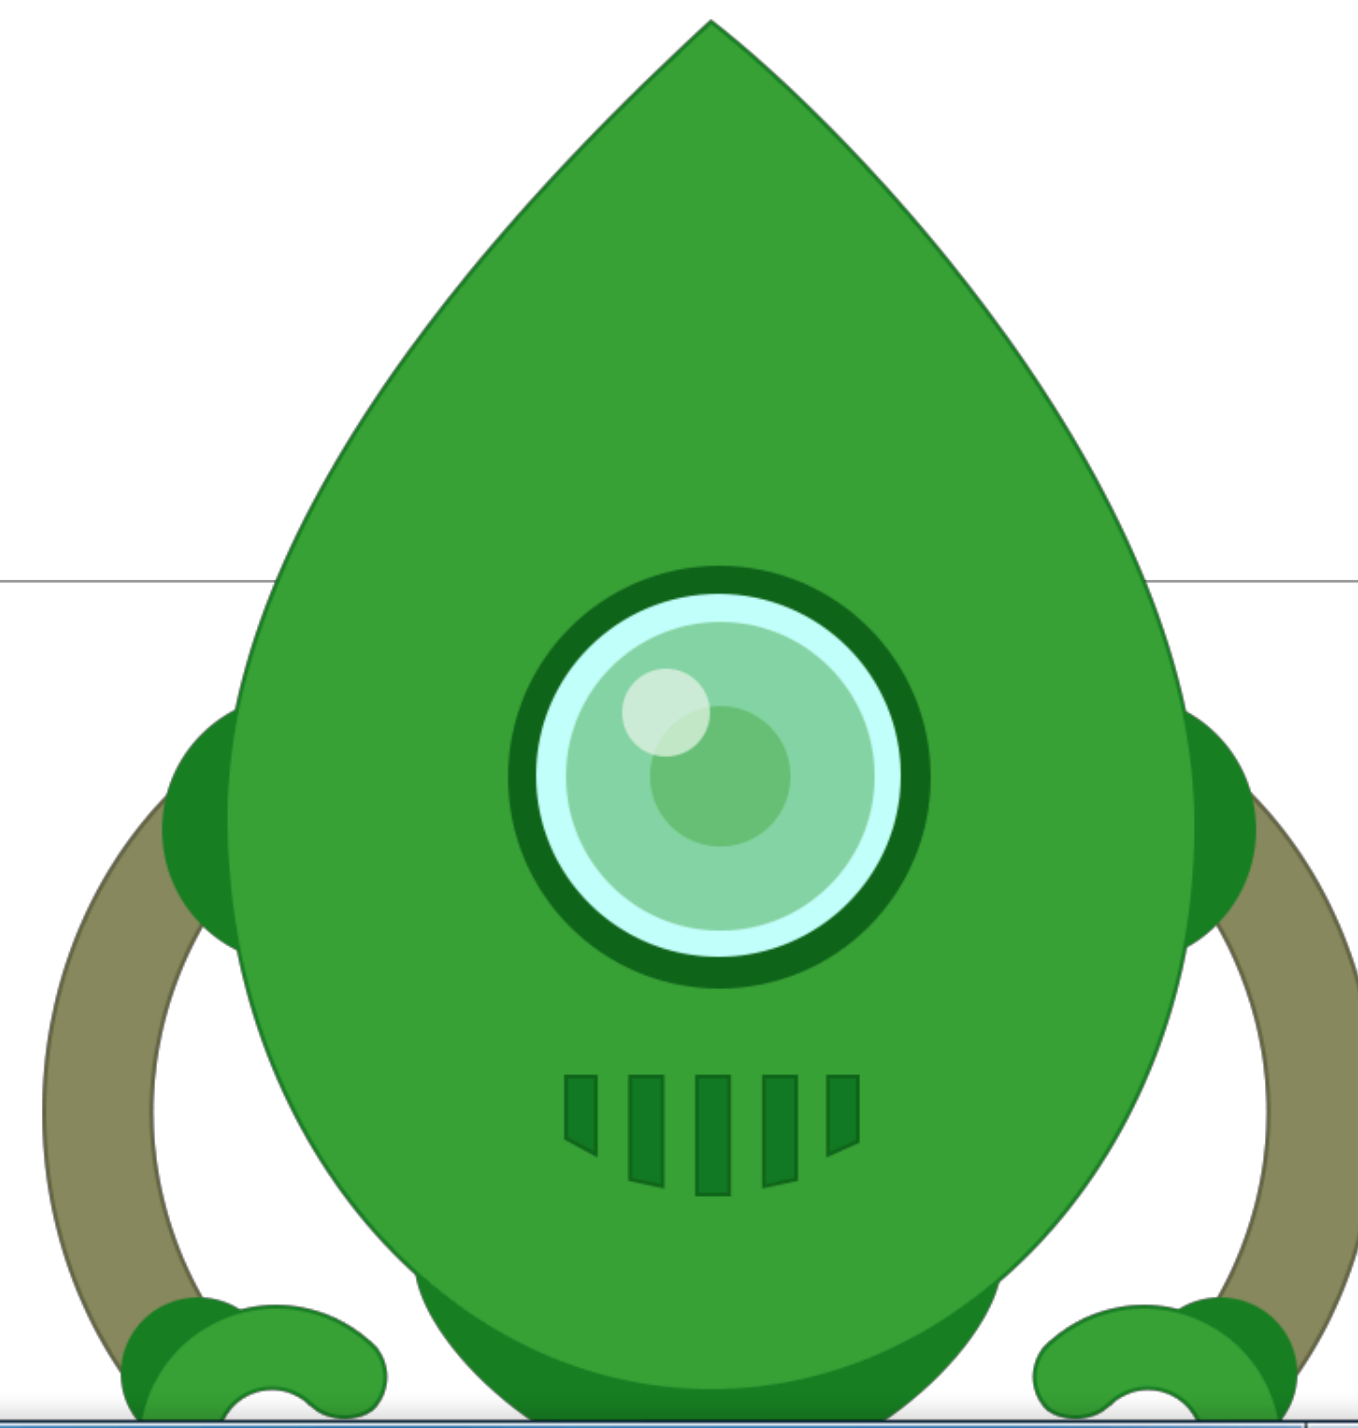

Setup (3)

- Launch Robo 3T and connect to the database you have already started
- Default may be localhost:27017

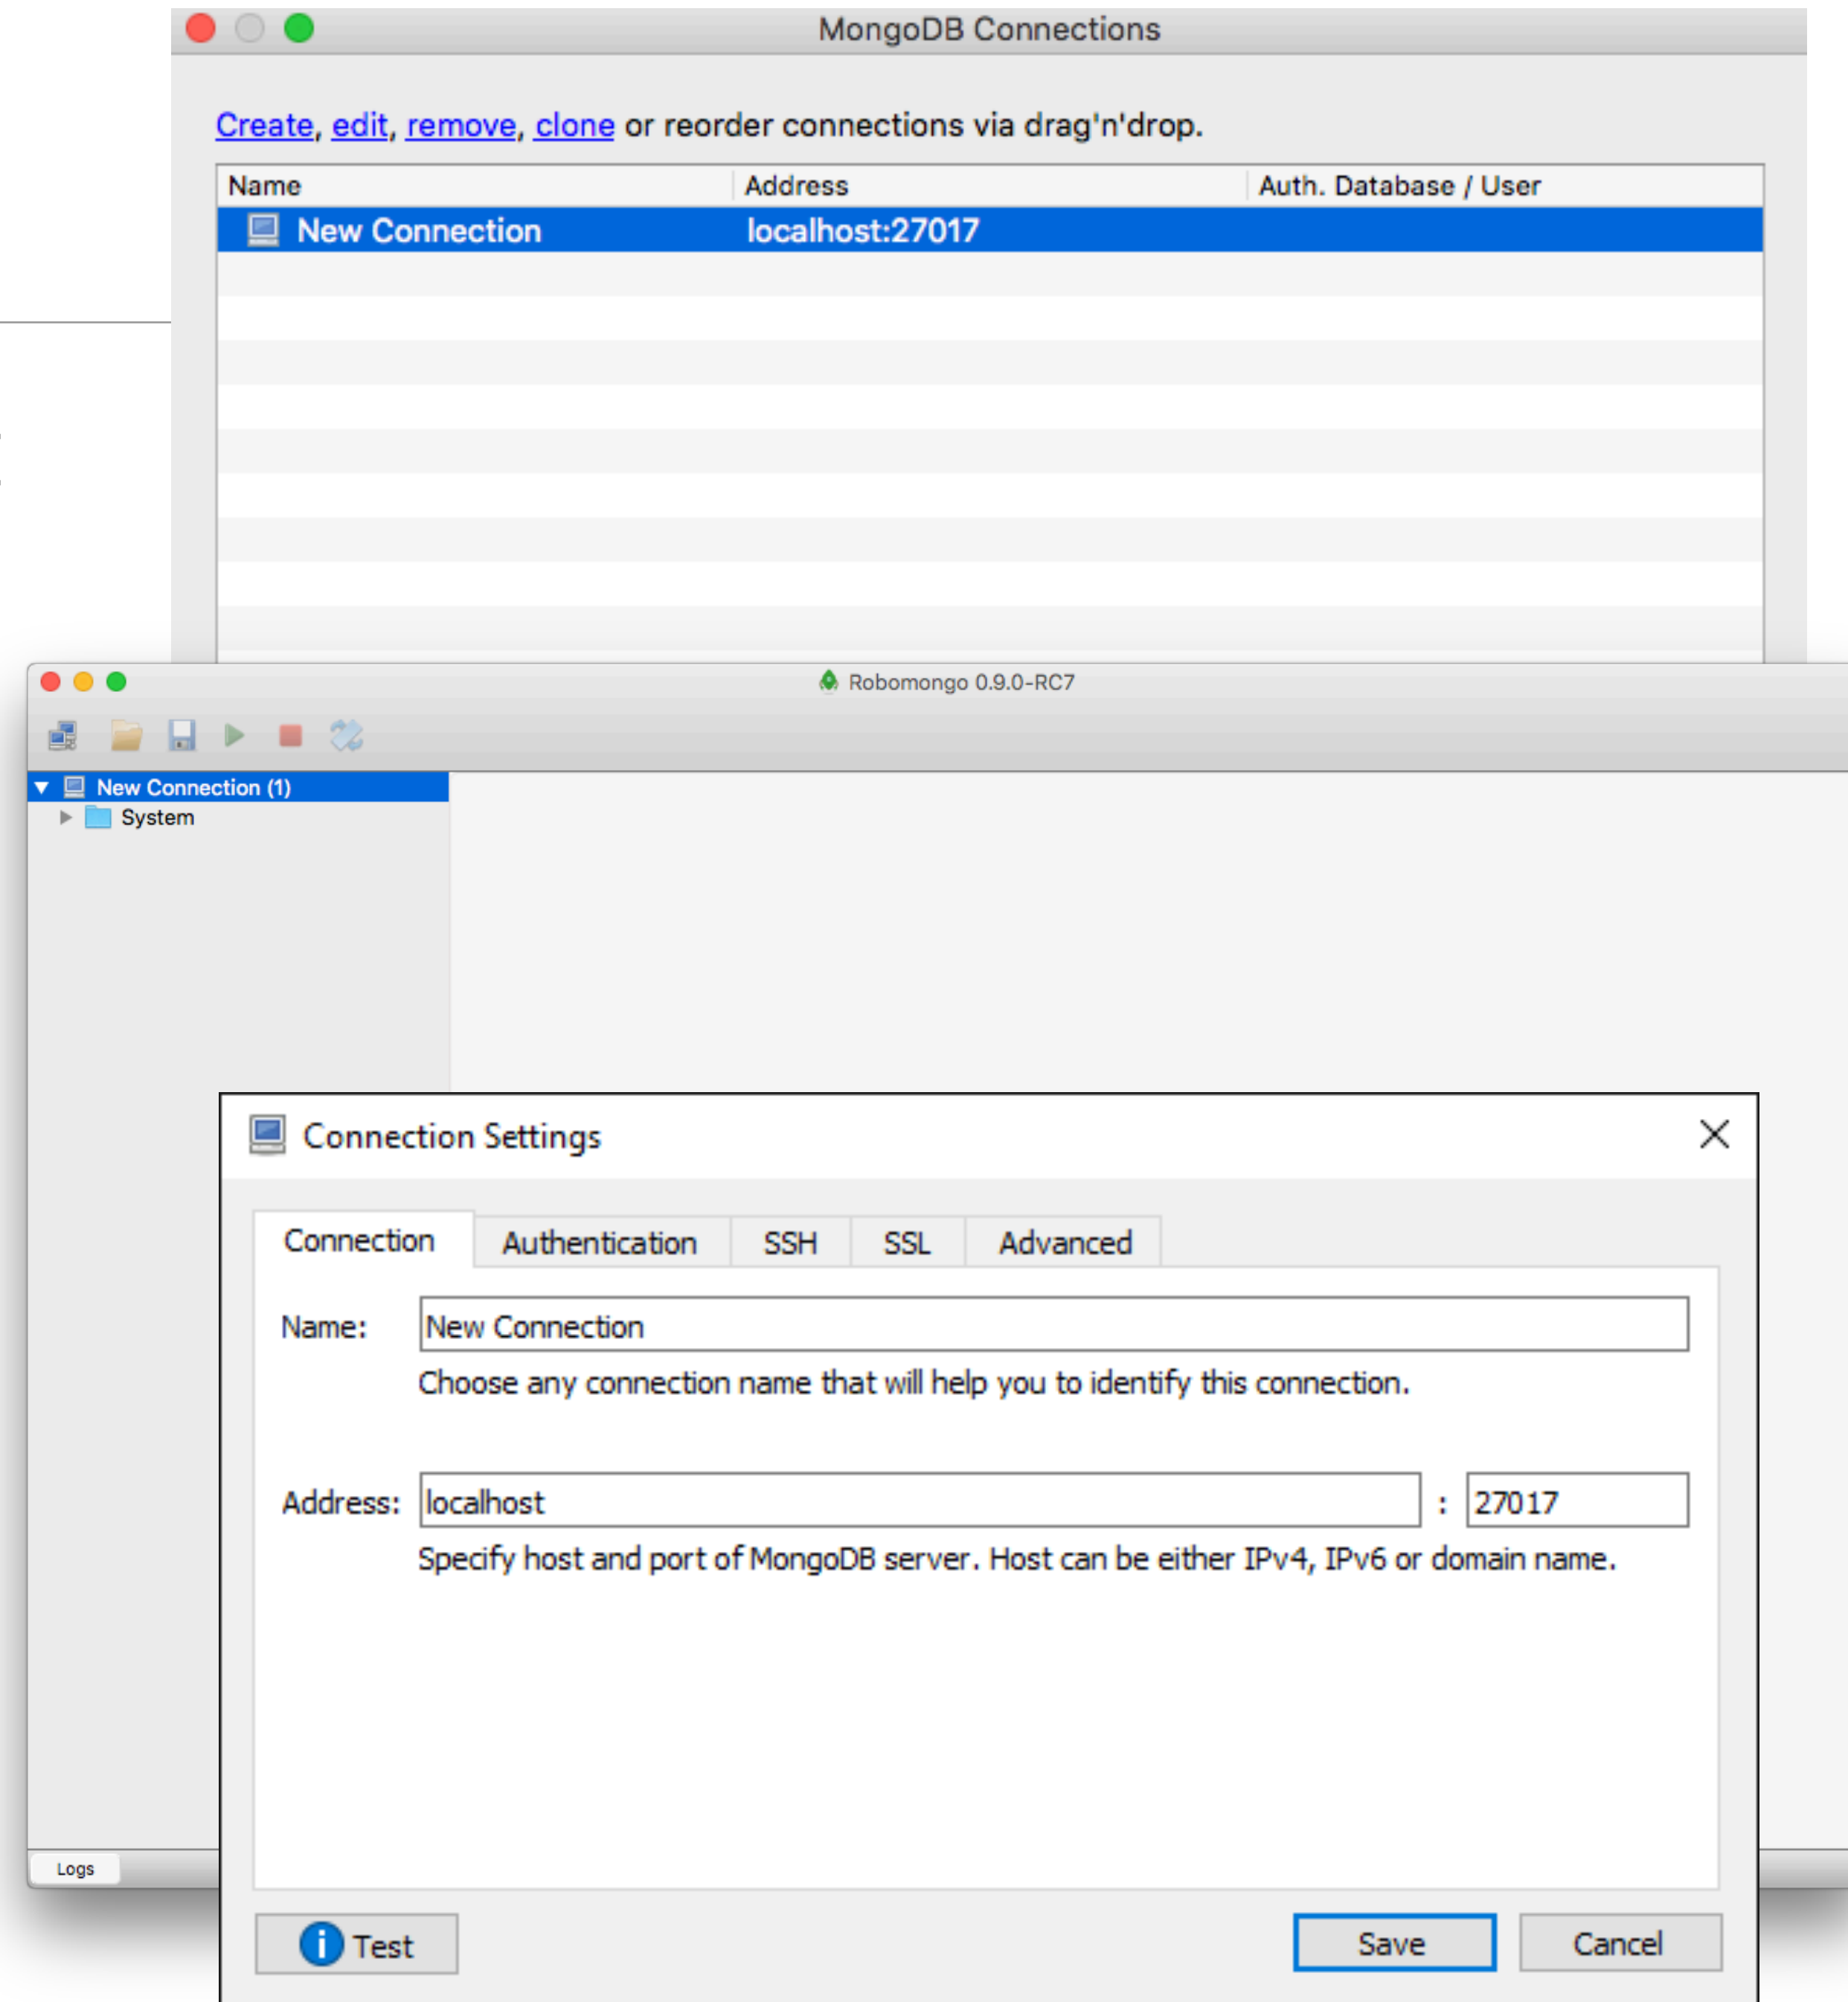

Node & Mongoose

```
npm install mongoose
```

- mongoose package is our primary gateway to mongodb
- Packages includes complete API for our purposes

package.json

```
{
  "name": "donation-web",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "author": "",
  "license": "ISC",
  "dependencies": {
    "dotenv": "^6.2.0",
    "handlebars": "^4.0.12",
    "hapi": "^18.0.0",
    "hapi-auth-cookie": "^9.1.0",
    "inert": "^5.1.2",
    "mongoose": "^5.4.7",
    "vision": "^5.4.4"
  },
  "devDependencies": {
    "prettier": "^1.16.0"
  },
  "prettier": {
    "singleQuote": true,
    "printWidth": 120
  }
}
```



Connecting to Mongo (via Mongoose)

db.js

import .env

import mongoose

connect to the database service

Log success/fail/disconnect

```
'use strict';

require('dotenv').config();

const Mongoose = require('mongoose');

Mongoose.connect(process.env.db);
const db = Mongoose.connection;

db.on('error', function(err) {
  console.log(`database connection error: ${err}`);
});

db.on('disconnected', function() {
  console.log('database disconnected');
});


db.once('open', function() {
  console.log(`database connected to ${this.name} on ${this.host}`);
})
```


- Trigger connection just by importing db.js from index

index.js


```
...  
require( './app/models/db' );  
...
```

- Note mongod log connection message

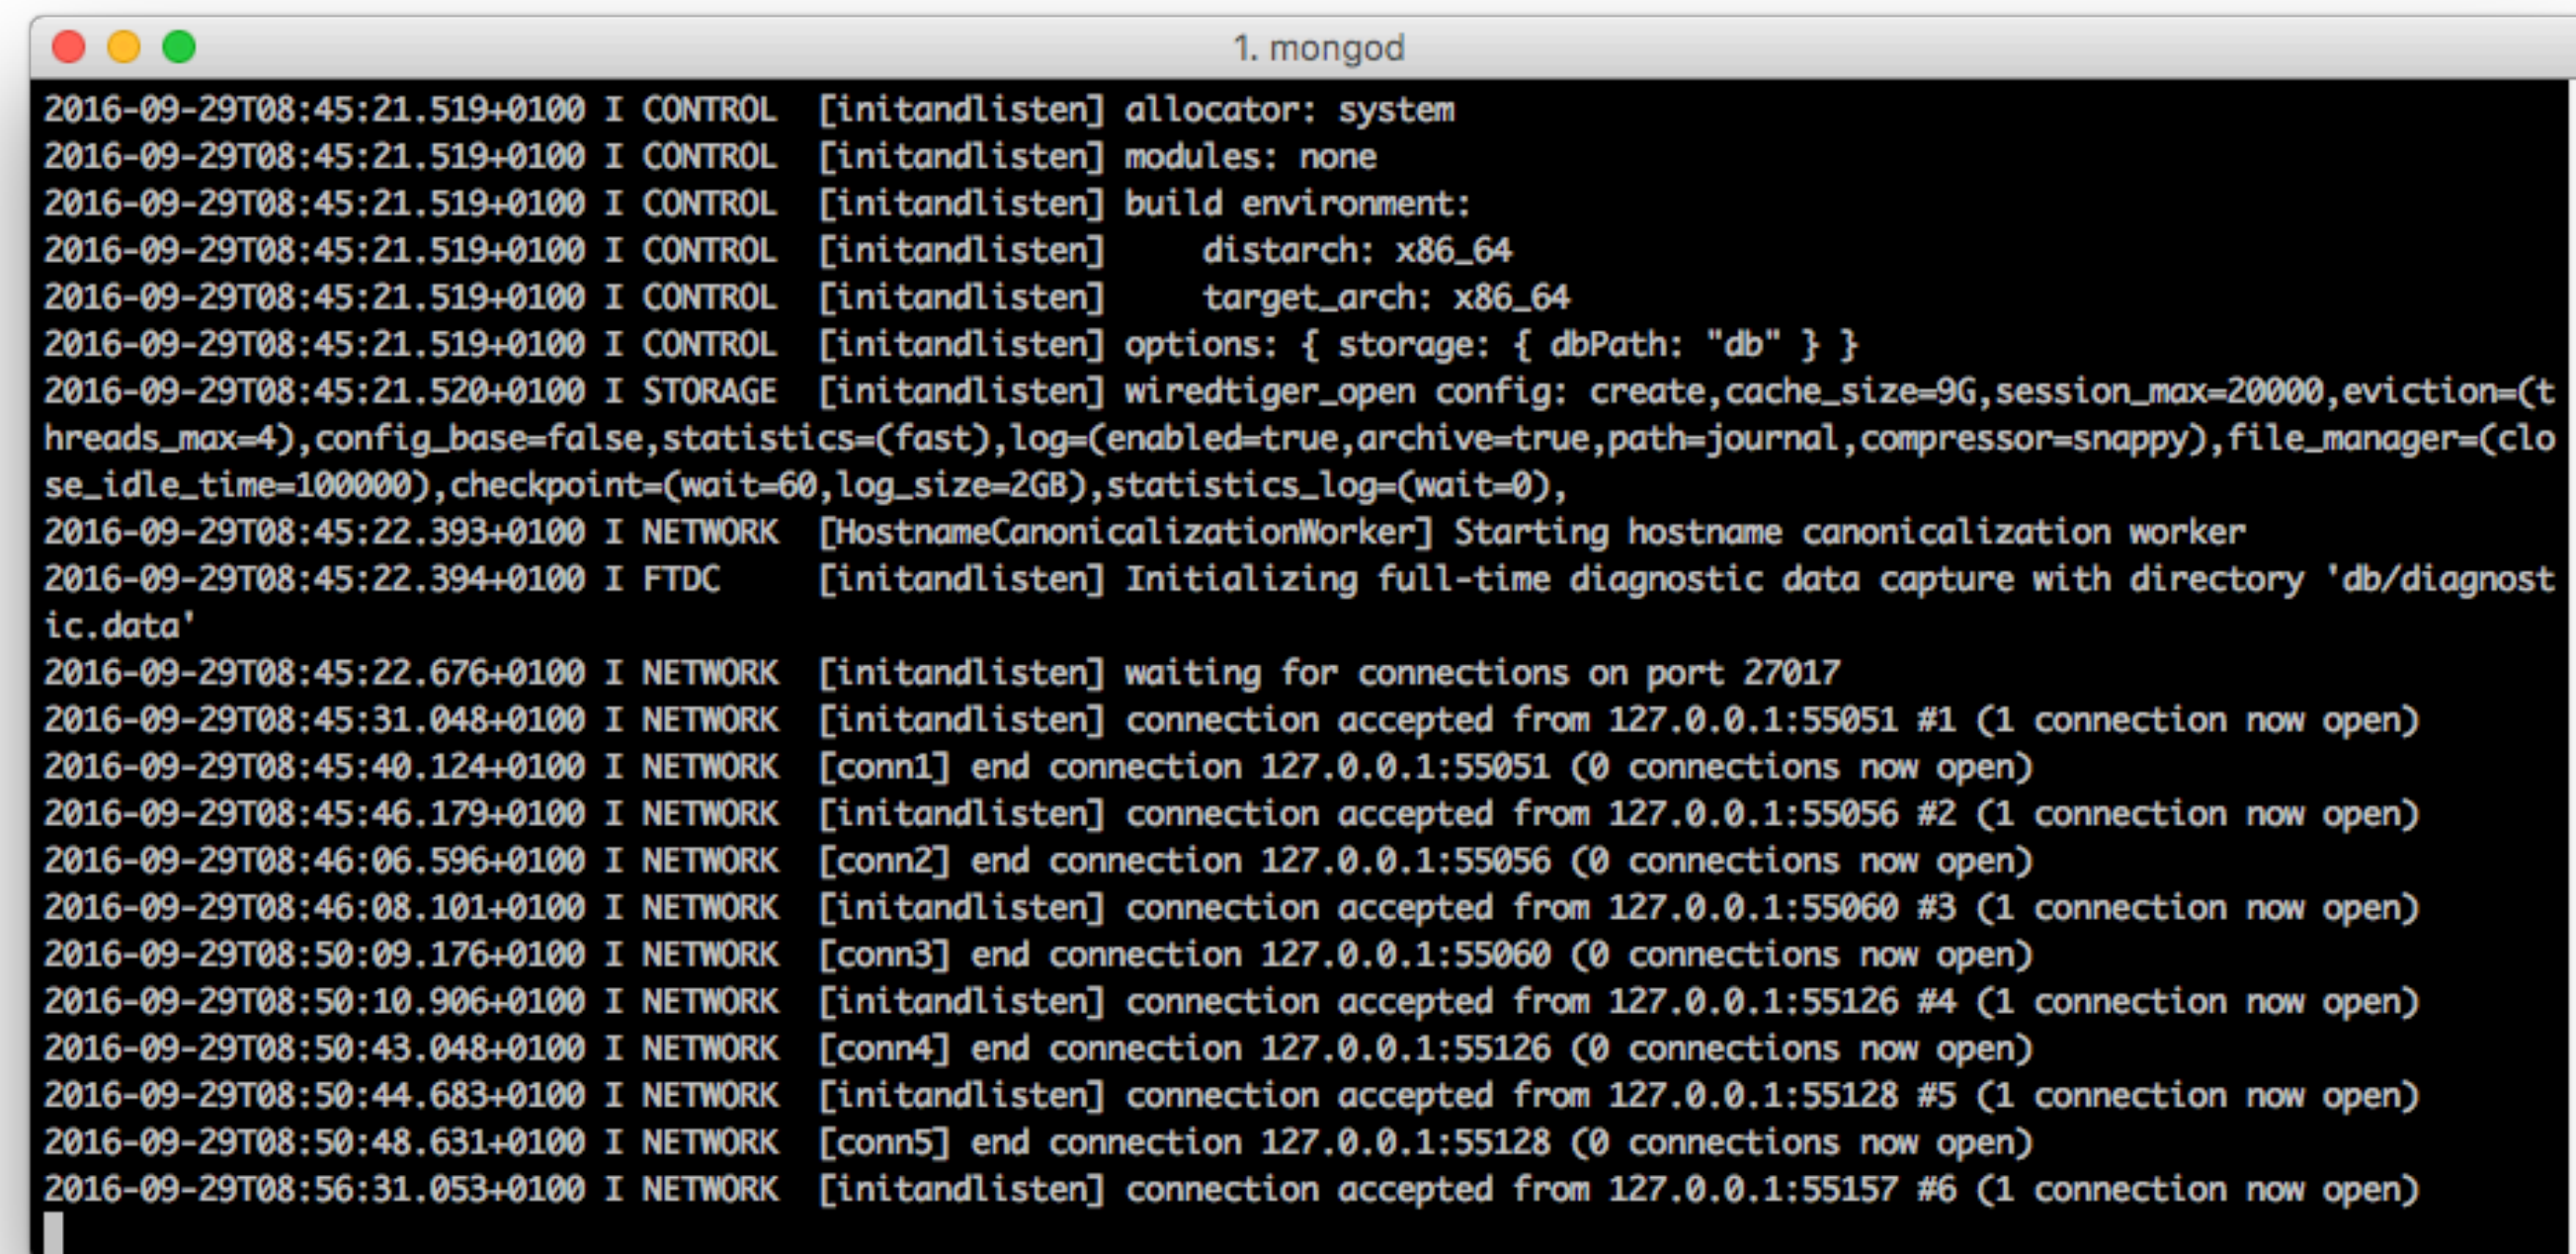

```
1. mongod  
2016-09-29T08:45:21.519+0100 I CONTROL [initandlisten] allocator: system  
2016-09-29T08:45:21.519+0100 I CONTROL [initandlisten] modules: none  
2016-09-29T08:45:21.519+0100 I CONTROL [initandlisten] build environment:  
2016-09-29T08:45:21.519+0100 I CONTROL [initandlisten] distarch: x86_64  
2016-09-29T08:45:21.519+0100 I CONTROL [initandlisten] target_arch: x86_64  
2016-09-29T08:45:21.519+0100 I CONTROL [initandlisten] options: { storage: { dbPath: "db" } }  
2016-09-29T08:45:21.520+0100 I STORAGE [initandlisten] wiredtiger_open config: create,cache_size=9G,session_max=20000,eviction=(t  
hreadsafe_max=4),config_base=false,statistics=(fast),log=(enabled=true,archive=true,path=journal,compressor=snappy),file_manager=(clo  
se_idle_time=100000),checkpoint=(wait=60,log_size=2GB),statistics_log=(wait=0),  
2016-09-29T08:45:22.393+0100 I NETWORK [HostnameCanonicalizationWorker] Starting hostname canonicalization worker  
2016-09-29T08:45:22.394+0100 I FTDC [initandlisten] Initializing full-time diagnostic data capture with directory 'db/diagnost  
ic.data'  
2016-09-29T08:45:22.676+0100 I NETWORK [initandlisten] waiting for connections on port 27017  
2016-09-29T08:45:31.048+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:55051 #1 (1 connection now open)  
2016-09-29T08:45:40.124+0100 I NETWORK [conn1] end connection 127.0.0.1:55051 (0 connections now open)  
2016-09-29T08:45:46.179+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:55056 #2 (1 connection now open)  
2016-09-29T08:46:06.596+0100 I NETWORK [conn2] end connection 127.0.0.1:55056 (0 connections now open)  
2016-09-29T08:46:08.101+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:55060 #3 (1 connection now open)  
2016-09-29T08:50:09.176+0100 I NETWORK [conn3] end connection 127.0.0.1:55060 (0 connections now open)  
2016-09-29T08:50:10.906+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:55126 #4 (1 connection now open)  
2016-09-29T08:50:43.048+0100 I NETWORK [conn4] end connection 127.0.0.1:55126 (0 connections now open)  
2016-09-29T08:50:44.683+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:55128 #5 (1 connection now open)  
2016-09-29T08:50:48.631+0100 I NETWORK [conn5] end connection 127.0.0.1:55128 (0 connections now open)  
2016-09-29T08:56:31.053+0100 I NETWORK [initandlisten] connection accepted from 127.0.0.1:55157 #6 (1 connection now open)
```

- ..and application log

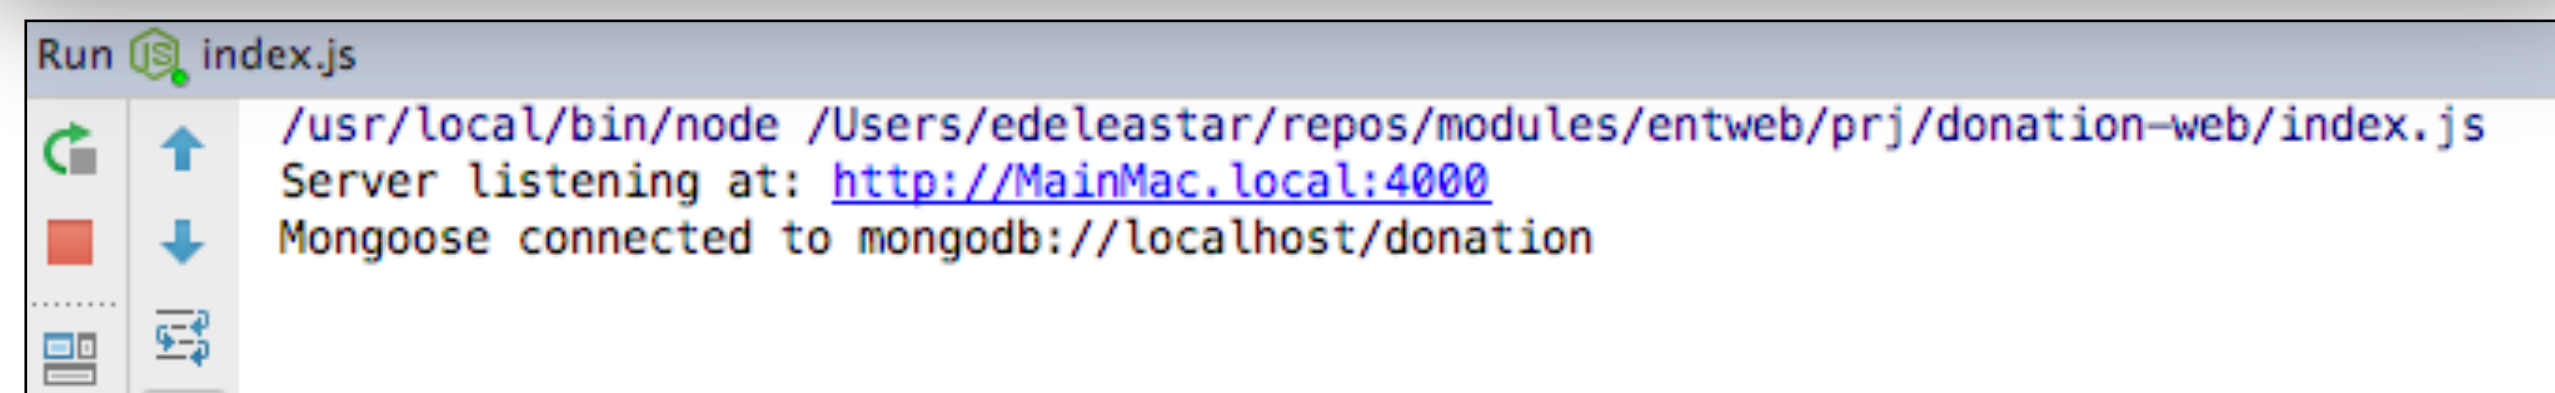

```
Run index.js  
/usr/local/bin/node /Users/edelestar/repos/modules/entweb/prj/donation-web/index.js  
Server listening at: http://MainMac.local:4000  
Mongoose connected to mongod://localhost/donation
```