

Models


SELECT * FROM SONG;

ID	ARTIST	DURATION	TITLE
1	Beethoven	0	Piano Sonata No. 3
2	Beethoven	0	Piano Sonata No. 7
3	Beethoven	0	Piano Sonata No. 10
4	Beethoven	0	Piano Concerto No. 27
5	Beethoven	0	Piano Concertos No. 17
6	Beethoven	0	Piano Concerto No. 10

(6 rows, 6 ms)

Edit


Model View Controller

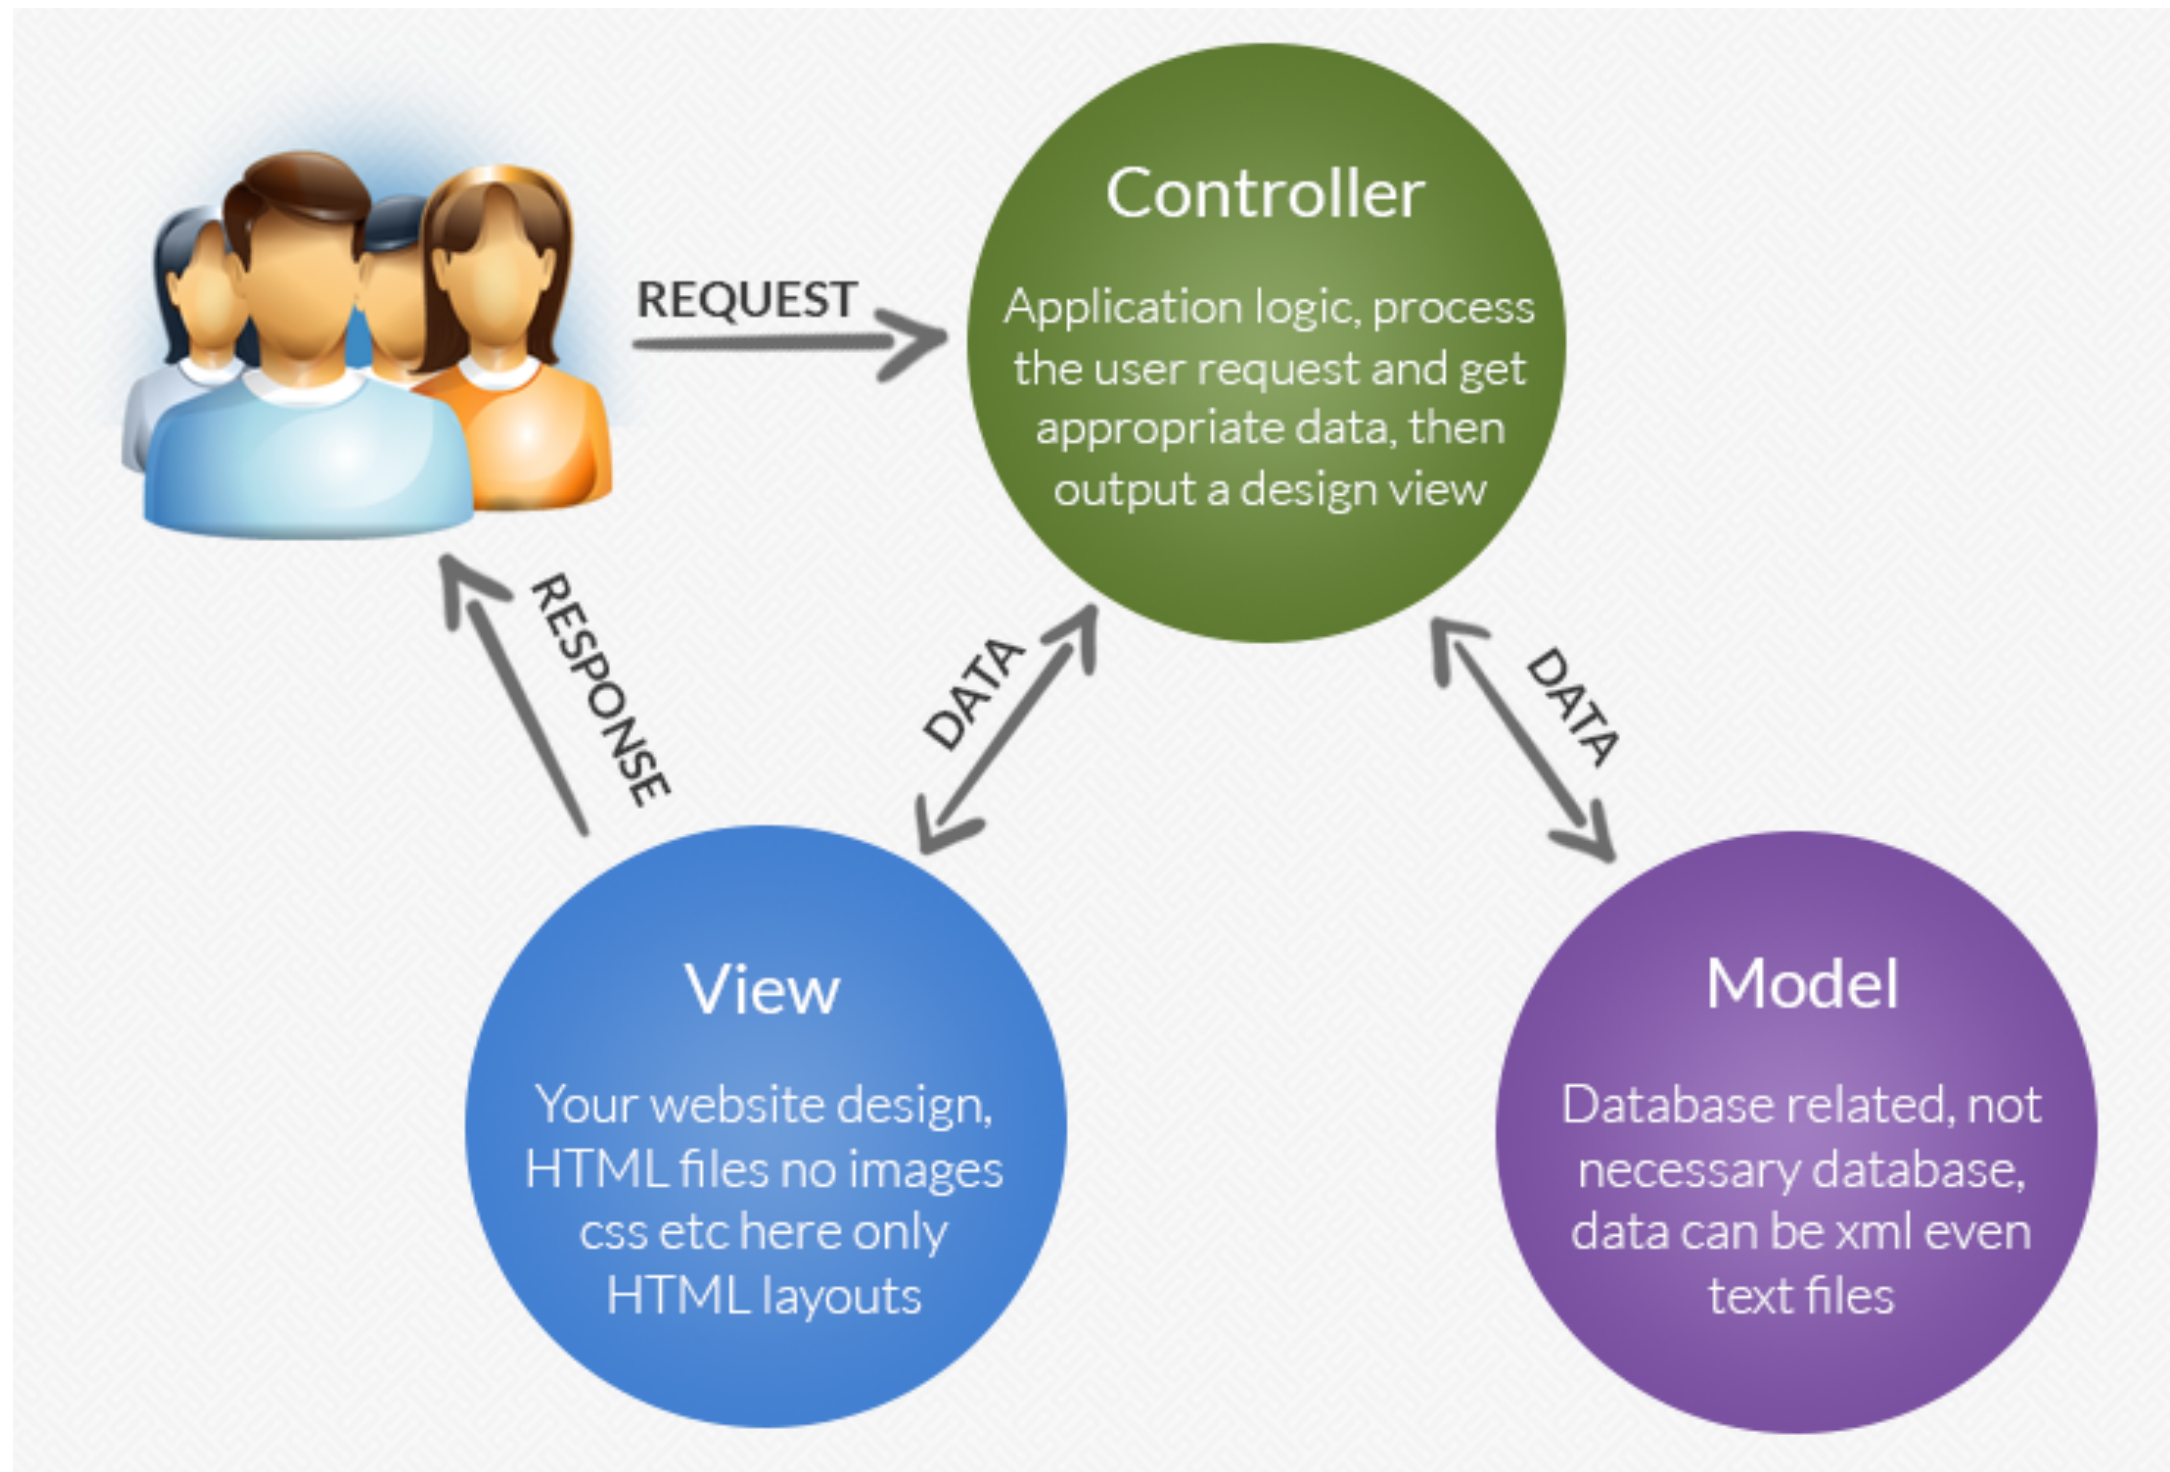

Database in Play

Configuration file
specifies a
database that will
be integrated into
the application

conf/application.conf




```
...  
# Database configuration  
# ~~~~~  
# Enable a database engine if needed.  
#  
# To quickly set up a development database, use either:  
#   - mem : for a transient in memory database (H2 in memory)  
#   - fs  : for a simple file written database (H2 file stored)  
db.default=mem  
...
```

In Memory test database
Full SQL support
Replaced with 'production'
database at a later stage

Inspecting the Database in Play

When app is running, browse to ➡ <http://localhost:9000/@db>

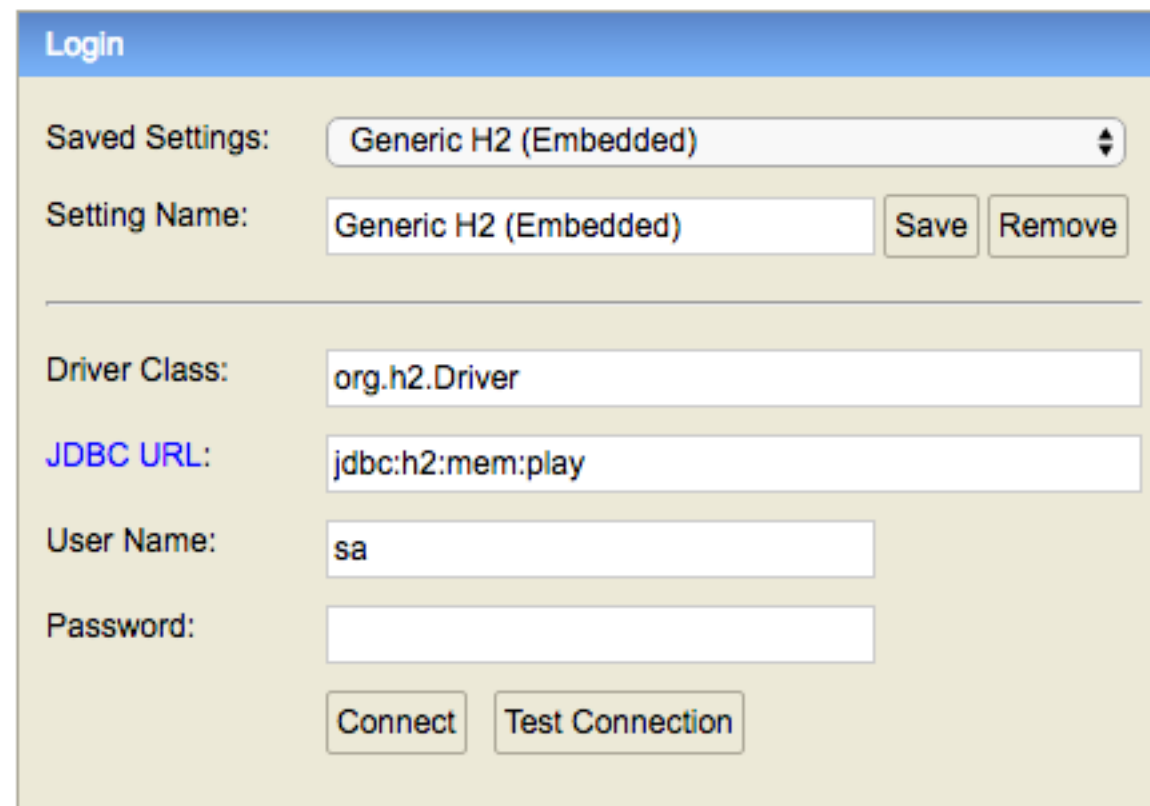

The screenshot shows a web form titled "Login" for connecting to a database. It includes a "Saved Settings" dropdown menu currently set to "Generic H2 (Embedded)". Below this, there is a "Setting Name" field with the same text and "Save" and "Remove" buttons. A horizontal line separates this from the main configuration fields: "Driver Class" (org.h2.Driver), "JDBC URL" (jdbc:h2:mem:play), "User Name" (sa), and "Password" (empty). At the bottom are "Connect" and "Test Connection" buttons.

Login	
Saved Settings:	Generic H2 (Embedded)
Setting Name:	Generic H2 (Embedded) [Save] [Remove]
<hr/>	
Driver Class:	org.h2.Driver
JDBC URL:	jdbc:h2:mem:play
User Name:	sa
Password:	
[Connect] [Test Connection]	

log in to database

Database console

Database
Tables



jdbc:h2:mem:play

playlist

id

duration

title

Indexes

playlist_song

playlist_id

songs_id

Indexes

song

id

artist

duration

title

Indexes

information_schema

Sequences

Users

H2 1.4.193 (2016-10-31)

Run Run Selected Auto complete Clear SQL statement:

Important Commands

?		Displays this Help Page
		Shows the Command History
	Ctrl+Enter	Executes the current SQL statement
	Shift+Enter	Executes the SQL statement defined by the text selection
	Ctrl+Space	Auto complete
		Disconnects from the database


Sample SQL Script

Delete the table if it exists	DROP TABLE IF EXISTS TEST;
Create a new table with ID and NAME columns	CREATE TABLE TEST(ID INT PRIMARY KEY, NAME VARCHAR(255));
Add a new row	INSERT INTO TEST VALUES(1, 'Hello');
Add another row	INSERT INTO TEST VALUES(2, 'World');
Query the table	SELECT * FROM TEST ORDER BY ID;
Change data in a row	UPDATE TEST SET NAME='Hi' WHERE ID=1;
Remove a row	DELETE FROM TEST WHERE ID=2;
Help	HELP ...

Adding Database Drivers

Additional database drivers can be registered by adding the Jar file location of the driver to the the envi CLASSPATH. Example (Windows): to add the database driver library C:/Programs/hsqldb/lib/hsqldb.jar, H2DRIVERS to C:/Programs/hsqldb/lib/hsqldb.jar.

SQL
Panel



Preloading the Database - YAML

<https://en.wikipedia.org/wiki/YAML>

 Not logged in [Talk](#) [Contributions](#) [Create account](#) [Log in](#)



WIKIPEDIA
The Free Encyclopedia

- [Main page](#)
- [Contents](#)
- [Featured content](#)
- [Current events](#)
- [Random article](#)
- [Donate to Wikipedia](#)
- [Wikipedia store](#)

Interaction

[Help](#)
[About Wikipedia](#)
[Community portal](#)
[Recent changes](#)
[Contact page](#)

Tools

[What links here](#)
[Related changes](#)
[Upload file](#)
[Special pages](#)
[Permanent link](#)
[Page information](#)
[Wikidata item](#)
[Cite this page](#)

Article

Talk

Read

[Edit](#)[View history](#)

[Search Wikipedia](#)




YAML

From Wikipedia, the free encyclopedia

YAML ([/ˈjæməl/](#), rhymes with *camel*) is a [human-readable data serialization language](#). It is commonly used for [configuration files](#), but could be used in many applications where data is being stored (e.g. debugging output) or transmitted (e.g. document headers). YAML targets many of the same communications applications as [XML](#), but has taken a more minimal approach which intentionally breaks compatibility with [SGML](#).^[1] YAML 1.2 is a [superset](#) of [JSON](#), another minimalist data serialization format where braces and brackets are used instead of indentation.^[2]

Custom data types are allowed, but YAML natively encodes [scalars](#) (such as [strings](#), [integers](#), and [floats](#)), [lists](#), and [associative arrays](#) (also known as hashes or dictionaries). These data types are based on the [Perl](#) programming language, though all commonly-used high-level programming languages share very similar concepts. YAML supports both [Python](#)-style indentation to indicate nesting, and a more compact format that uses `[]` for lists and `{}` for hashes.^[1] The colon-centered syntax used to express [key-value pairs](#) is inspired by [electronic mail](#) headers as defined in [RFC 0822](#), and the [document separator](#) `--` is borrowed from [MIME \(RFC 2045\)](#). [Escape sequences](#) are reused from [C](#), and whitespace wrapping for multi-line strings is inspired from [HTML](#). Lists and hashes can contain nested lists and hashes, forming a [tree structure](#); arbitrary [graphs](#) can be represented using YAML aliases (similar to XML in [SOAP](#)).^[1] YAML is intended to be read and written in streams, a feature inspired by [SAX](#).^[1]

Latest release	1.2 (Third Edition) (1 October 2009; 7 years ago)
Type of format	Data interchange
Open format?	Yes
Website	yaml.org 

Support for reading and writing YAML is available for several programming languages.^[3] Some source code editors such as Emacs^[4] and various **integrated development environments**^{[5][6][7]} have features that make editing YAML easier, such as folding up nested structures or automatically highlighting syntax errors.

YAML

Filename extension	<code>.yaml, .yml</code>
Internet media type	<i>not registered</i>
Initial release	11 May 2001; 15 years ago
Latest release	1.2 (Third Edition) (1 October 2009; 7 years ago)
Type of format	Data interchange
Open format?	Yes
Website	yaml.org 

YAML is a widely used notion for representing structured information


YAML Example

An invoice expressed via
YAML. Structure is shown
through indentation (one or
more spaces). Sequence
items are denoted by a
dash, and key value pairs
within a map are
separated by a colon.

```
invoice: 34843
date   : 2001-01-23
bill-to: &id001
  given  : Chris
  family : Dumars
  address:
    lines: |
      458 Walkman Dr.
      Suite #292
    city   : Royal Oak
    state  : MI
    postal : 48046
ship-to: *id001
product:
  - sku      : BL394D
    quantity : 4
    description : Basketball
    price     : 450.00
  - sku      : BL4438H
    quantity : 1
    description : Super Hoop
    price     : 2392.00
tax   : 251.42
total: 4443.52
comments: >
  Late afternoon is best.
  Backup contact is Nancy
  Billsmer @ 338-4338.
```

java

```
Song s1 = new Song("Piano Sonata No. 3", "Beethoven");  
Song s2 = new Song("Piano Sonata No. 7", "Beethoven");  
Song s3 = new Song("Piano Sonata No. 10", "Beethoven");  
Playlist p1 = new Playlist("Beethoven Sonatas");  
p1.songs.add (s1);  
p1.songs.add (s2);  
p1.songs.add (s3);
```

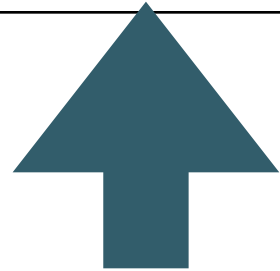


Embedded in a compiled
program.

When running, objects
occupy appropriate in
memory data structures.

Just a File format.

Used to represent structured
information in a flat file.

Must be processed by various
tools in order to be useful.




yaml

```
Song(s1):  
  title: Piano Sonata No. 3  
  artist: Beethoven  
  duration: 5  
Song(s2):  
  title: Piano Sonata No. 7  
  artist: Beethoven  
  duration: 6  
Song(s3):  
  title: Piano Sonata No. 10  
  artist: Beethoven  
  duration: 8  
  
Playlist(p1):  
  title: Bethoven Sonatas  
  duration: 19  
  songs:  
    - s1  
    - s2  
    - s3
```


yaml in Play


Bootstrap class
contains instruction
to load a model from
yaml file

data.yml contains the
model representation

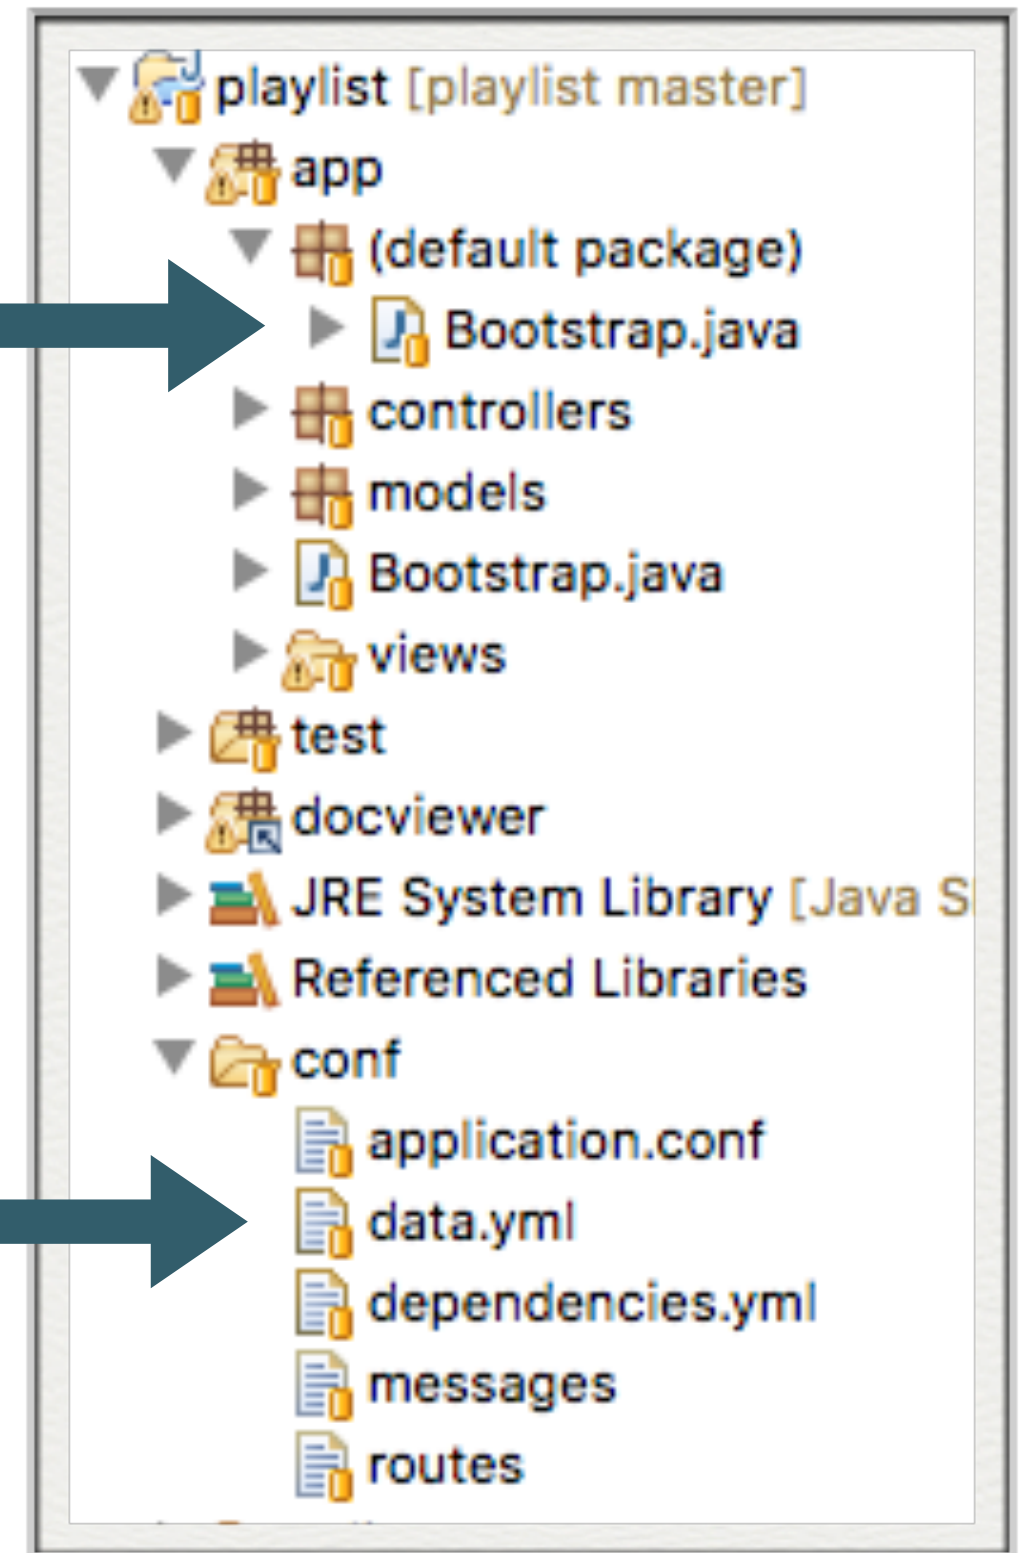

yaml in Play

Model data will be loaded into model objects

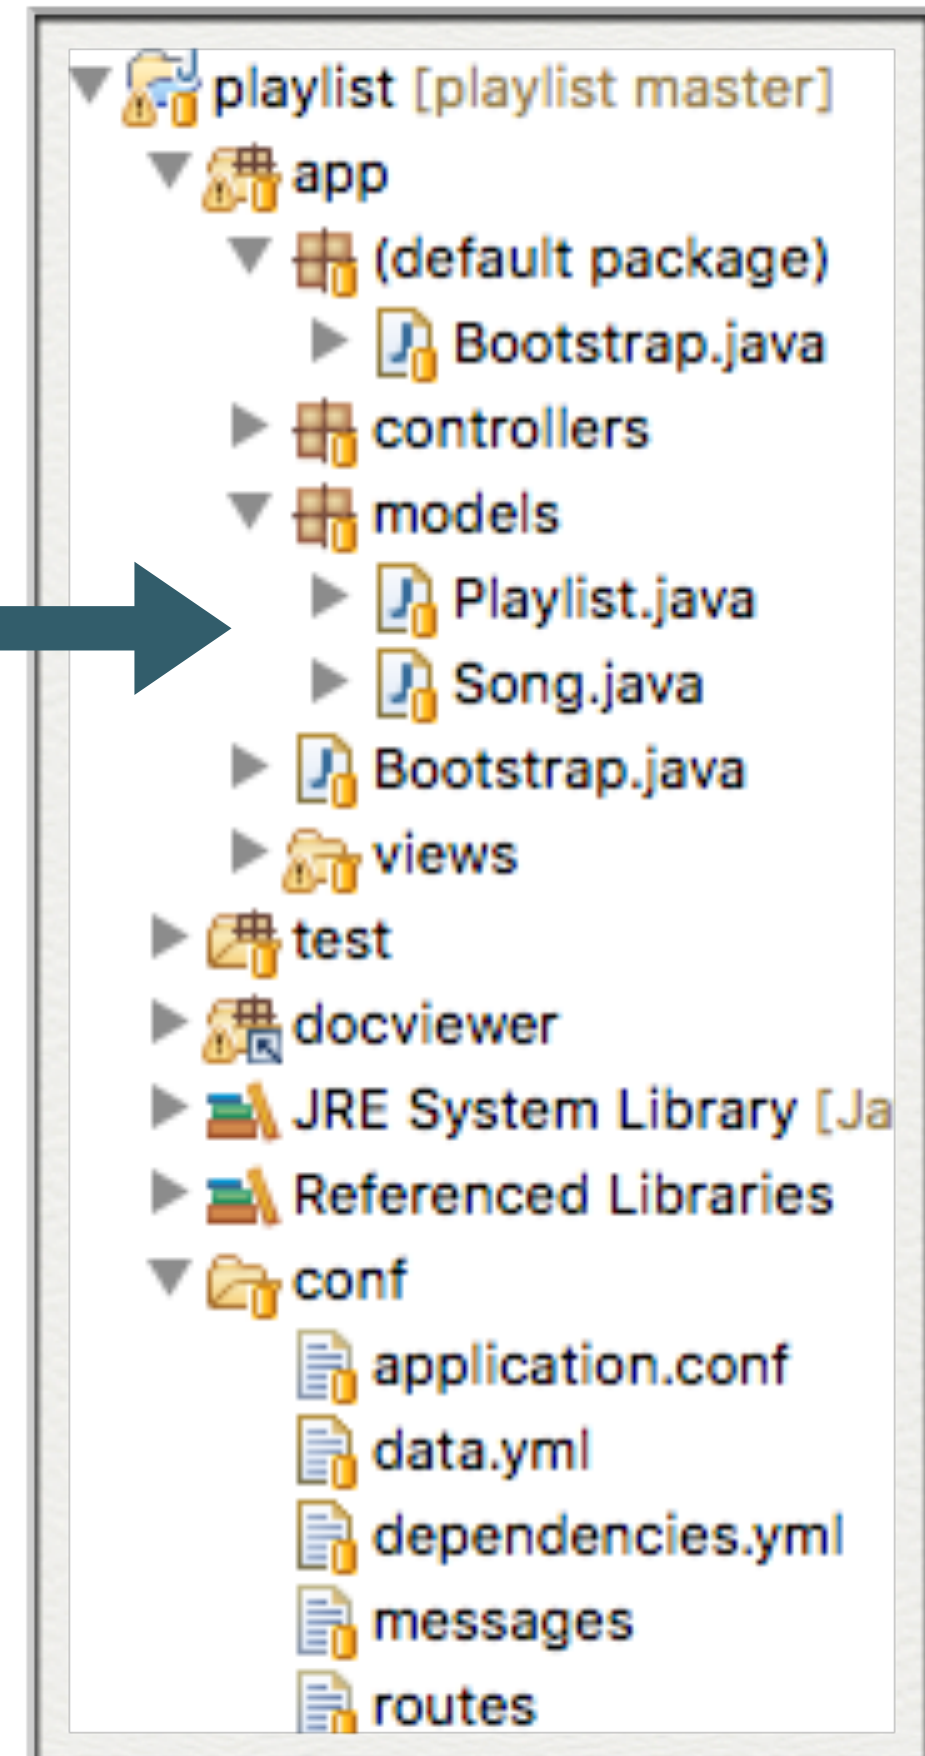

Revised Model Class: Song

Plain Old Java Object (POJO)

```
package models;

public class Song
{
    public String title;
    public String artist;

    public Song(String title, String artist)
    {
        this.title = title;
        this.artist = artist;
    }
}
```

Entity Model Object

```
package models;

import javax.persistence.Entity;
import play.db.jpa.Model;

@Entity
public class Song extends Model
{
    public String title;
    public String artist;
    public int duration;

    public Song(String title, String artist, int duration)
    {
        this.title = title;
        this.artist = artist;
        this.duration = duration;
    }
}
```

“extends” from Model
class (inheritance).

Marked as
“@Entity” (Annotation).

Revised Model Class: Playlist


Plain Old Java Object (POJO)

```
package models;

import java.util.ArrayList;
import java.util.List;

public class Playlist
{
    public String title;
    public List<Song> songs = new ArrayList<Song>();

    public Playlist(String title)
    {
        this.title = title;
    }
}
```

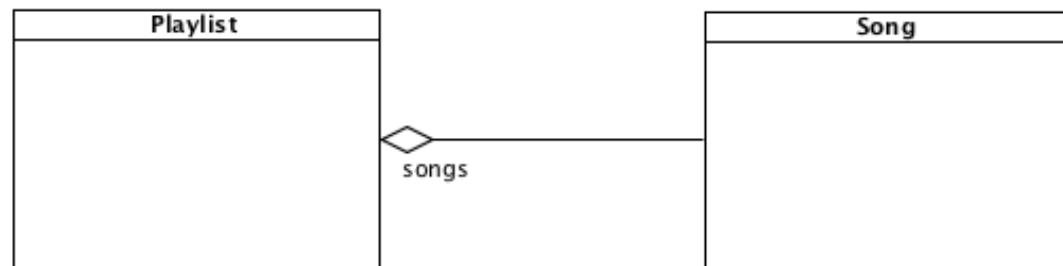

“extends” from Model
class (inheritance).
Marked as
“@Entity” (Annotation).

Entity Model Object

```
package models;

import java.util.ArrayList;
import java.util.List;

import javax.persistence.CascadeType;
import javax.persistence.Entity;
import javax.persistence.OneToMany;

import play.db.jpa.Model;

@Entity
public class Playlist extends Model
{
    public String title;

    @OneToMany(cascade = CascadeType.ALL)
    public List<Song> songs = new ArrayList<Song>();


    public Playlist(String title, int duration)
    {
        this.title = title;
        this.duration = duration;
    }
}
```

“@OneToMany” (Annotation)
describes Playlist->Song
relationship for database

```

Song(s1):
  title: Piano Sonata No. 3
  artist: Beethoven
  duration: 5
Song(s2):
  title: Piano Sonata No
  artist: Beethoven
  duration: 6
Song(s3):
  title: Piano Sonata No
  artist: Beethoven
  duration: 8
Playlist(p1):
  title: Bethoven Sonata
  duration: 19
  songs:
    - s1
    - s2
    - s3

```

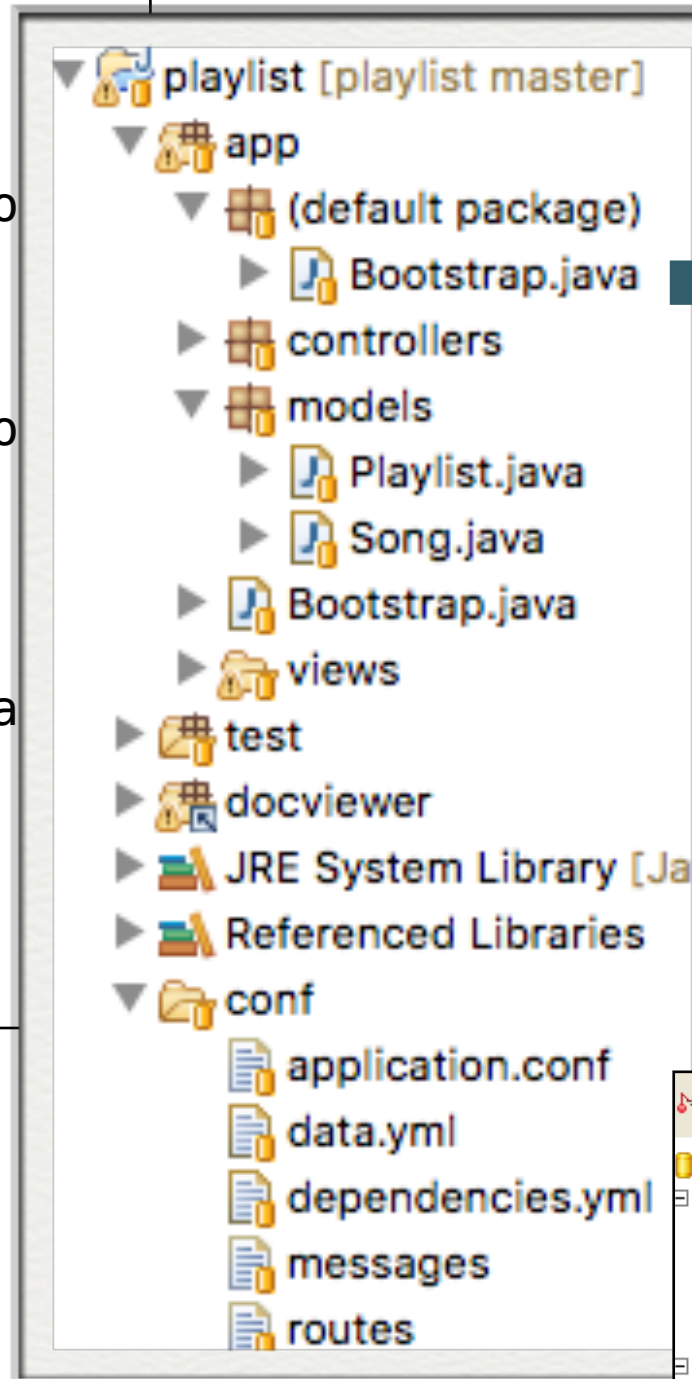

```

import java.util.List;

import play.*;
import play.jobs.*;
import play.test.*;

import models.*;

@OnApplicationStart
public class Bootstrap extends Job
{
    public void doJob()
    {
        Fixtures.loadModels("data.yml");
    }
}

```

localhost:9000/@db

When play app starts -
Bootstrap.doJob() called

Important Commands		
?		Displays this Help Page
⌘		Shows the Command History
▶	Ctrl+Enter	Executes the current SQL statement
▶	Shift+Enter	Executes the SQL statement defined by the text selection
	Ctrl+Space	Auto complete
✖		Disconnects from the database

Bootstrap class

```
2. Python
~ using java version "1.8.0_60"
objc[95621]: Class JavaLaunchHelper is implemented in both /Library/Java/JavaVirtualMachines/jdk1.8.0_60.jdk/Contents/Home/bin/java (0x101a074c0) and /Library/Java/JavaVirtualMachines/jdk1.8.0_60.jdk/Contents/Home/jre/lib/libinstrument.dylib (0x101b1a4e0). One of the two will be used. Which one is undefined.
Listening for transport dt_socket at address: 8000
12:54:29,755 INFO ~ Starting /Users/edelestar/repos/modules/web/ict-2017/prj/abprj/playlist
12:54:30,497 WARN ~ You're running Play! in DEV mode
12:54:30,595 INFO ~ Listening for HTTP on port 9000 (Waiting a first request to start) ...
~ Server is up and running
12:54:45,457 INFO ~ Connected to jdbc:h2:mem:play;MODE=MYSQL for default
12:54:46,226 INFO ~ HHH000262: Table not found: Playlist
12:54:46,228 INFO ~ HHH000262: Table not found: Playlist_Song
12:54:46,229 INFO ~ HHH000262: Table not found: Song
12:54:46,231 INFO ~ HHH000262: Table not found: Playlist
12:54:46,232 INFO ~ HHH000262: Table not found: Playlist_Song
12:54:46,234 INFO ~ HHH000262: Table not found: Song
12:54:46,235 INFO ~ HHH000262: Table not found: Playlist
12:54:46,237 INFO ~ HHH000262: Table not found: Playlist_Song
12:54:46,238 INFO ~ HHH000262: Table not found: Song
12:54:46,322 INFO ~ Application 'playlist' is now started !
12:54:47,503 INFO ~ Rendering Start
```

```
import java.util.List;

import play.*;
import play.jobs.*;
import play.test.*;

import models.*;

@OnApplicationStart
public class Bootstrap extends Job
{
    public void doJob()
    {
        Fixtures.loadModels("data.yml");
    }
}
```

Console shows attempted
access to database by
bootstrap / yml

Inspecting the Playlist Table

jdbc:h2:mem:play

- [-] playlist
 - [+] id
 - [+] duration
 - [+] title
 - [+] Indexes
- [-] playlist_song
 - [+] playlist_id
 - [+] songs_id
 - [+] Indexes
- [-] song
 - [+] id
 - [+] artist
 - [+] duration
 - [+] title
 - [+] Indexes
- [+] information_schema
- [+] Sequences
- [+] Users

H2 1.4.193 (2016-10-31)

Run Run Selected Auto complete Clear SQL statement:

SELECT * FROM PLAYLIST

SELECT * FROM PLAYLIST;

ID	DURATION	TITLE
1	0	Bethoven Sonatas
2	0	Bethoven Concertos

(2 rows, 3 ms)

Edit

localhost:9000/@db

Inspecting the Songs Table

The screenshot shows a database client interface with a sidebar on the left and a main workspace on the right. The sidebar displays a tree view of the database schema, including tables like 'playlist', 'playlist_song', and 'song', along with their columns and indexes. The main workspace is divided into two sections: the top section for SQL statements and the bottom section for query results.

At the top of the interface, there is a toolbar with various icons and settings, including 'Auto commit', 'Max rows: 1000', 'Auto complete', and 'Auto select'.

The SQL statement entered in the top section is:

```
SELECT * FROM PLAYLIST_SONG
```

The bottom section displays the results of the query as a table with 6 rows and 2 columns:

PLAYLIST_ID	SONGS_ID
1	1
1	2
1	3
2	4
2	5
2	6

Below the table, it indicates '(6 rows, 4 ms)'. An 'Edit' button is located at the bottom left of the results area.

localhost:9000/@db