

Using Methods

Methods that handle events

Produced Mairead Meagher
by: Dr. Siobhán Drohan



Waterford Institute of Technology
INSTITIÚID TEICNEOLAÍOCHTA PHORT LÁIRGE

Department of Computing and Mathematics
<http://www.wit.ie/>

Caveat

- The term **function** is used in Processing e.g. `line()`, `fill()`, etc.
- The term **method** is used in Java.
- As this course is primarily about learning the Java language, we are going to use the word **method** instead of function from here on in.

Topics list

- Method terminology:
 - Return type
 - Method names
 - Parameter list
- Using methods to handle mouse events.

Recap: Methods in Processing

- Processing comes with several pre-written methods that we can use.
- A method comprises a set of instructions that performs some task.
- When we invoke the method, it performs the task.
- Some methods we have used are: `rect`, `ellipse`, `stroke`, `line`, `fill`, etc.

Recap: Methods in Processing

- We have also **written** two methods to animate our drawings:
 - void setup()
this method is automatically called once when the program starts and should not be called again. It typically sets up your display window e.g. screen size, background colour.
 - void draw()
this method is automatically called straight after the setup() call. It continuously executes the code contained inside it.

Method terminology

Method signature



```
graph LR; MS[Method signature] --> S1[void setup()]; MB[Method body] --> S2["{ size(640, 360); background(120); }"]
```

void setup()

{


size(640, 360);

background(120);

}

Method body


Method signature

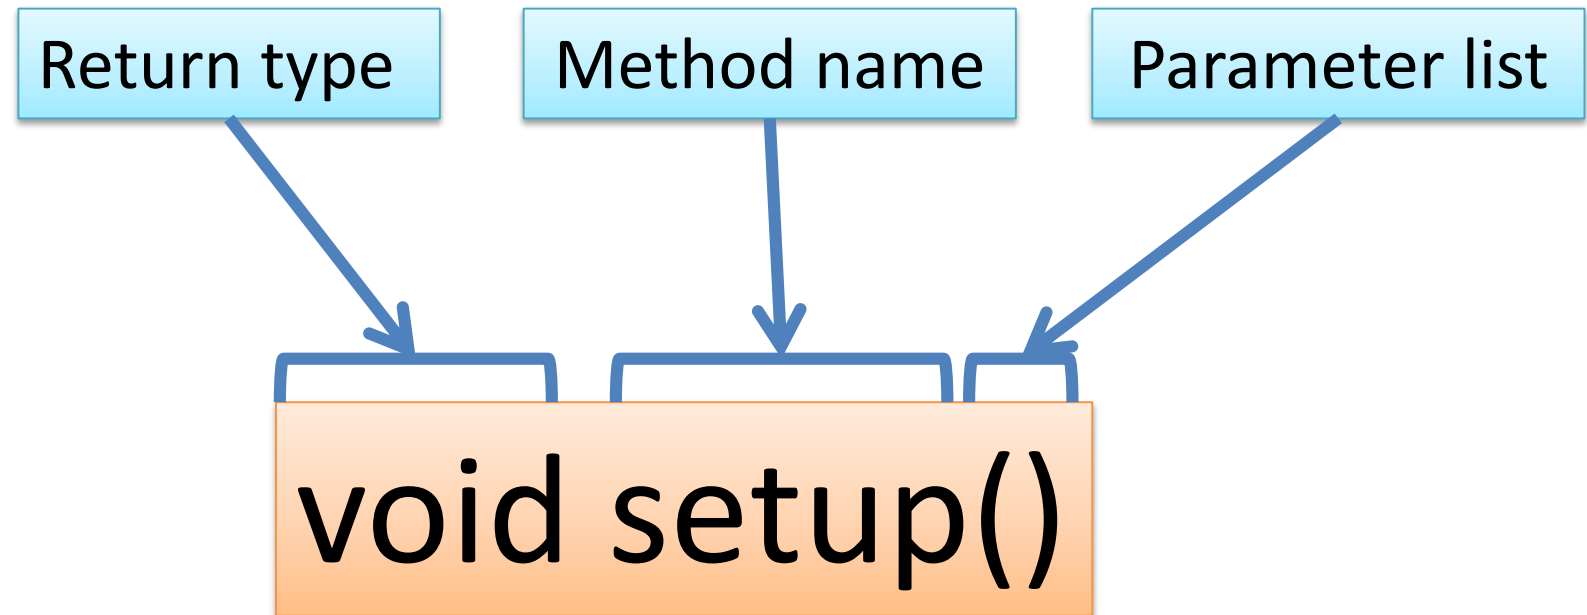

Topics list


- Method terminology:
 - Return type
 - Method names
 - Parameter list
- Using methods to handle mouse events.

Return Type: void

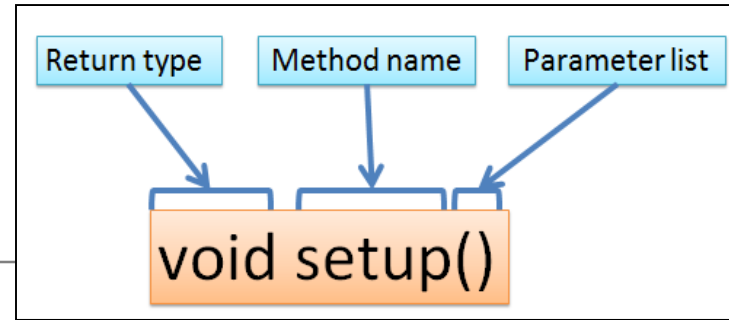


- Methods can return information.
- The **void** keyword just before the method name means that nothing is returned from the method.
- **void** is a return type and must be included in the method signature if your method returns no information.

Return Type: int

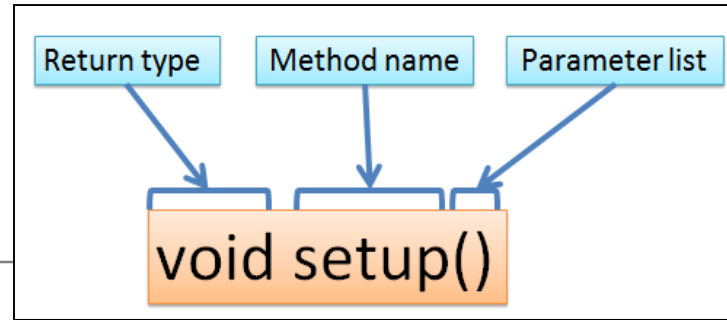

- When a data type (e.g. **int**) appears before the method name, this means that something is returned from the method.
- Within the body of the method, you use the **return** statement to return the value.

Return Type: int

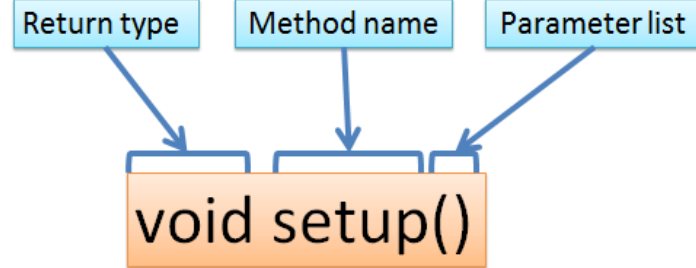

```
int val = 30;
```

```
void draw()
```

```
{
```

```
    int result = timestwo(val);
```

```
    println(result);
```

```
}
```

```
int timestwo(int number)
```

```
{
```


```
    number = number * 2;
```

```
    return number;
```

```
}
```

// The red **int** in the function declaration
// specifies the type of data to be returned.

Return Types

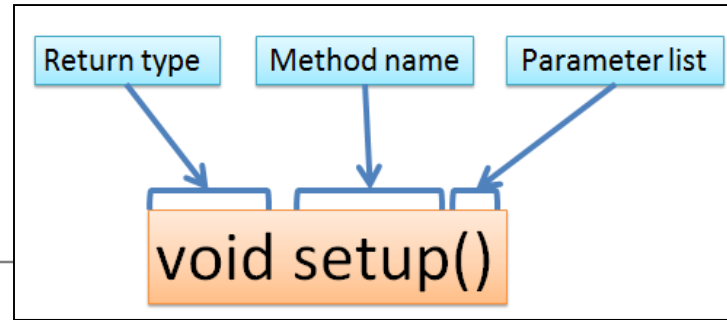


- Methods can return any type of data e.g.
 - boolean
 - byte
 - char
 - int
 - float
 - String
 - etc.
- You can only have one return type per method.

Topics list

- Method terminology:
 - Return type
 - Method names
 - Parameter list
- Using methods to handle mouse events.

Method name

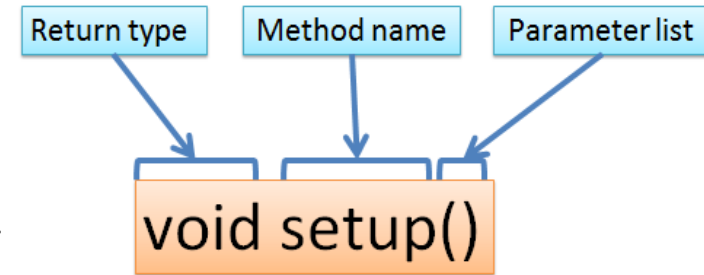


- Method names should:
 - Use verbs (i.e. actions) to describe what the method does e.g.
 - calculateTax
 - printResults
 - Be mixed case with the first letter lowercase and the first letter of each internal word capitalised.

Topics list

- Method terminology:
 - Return type
 - Method names
 - Parameter list
- Using methods to handle mouse events.

Parameter list

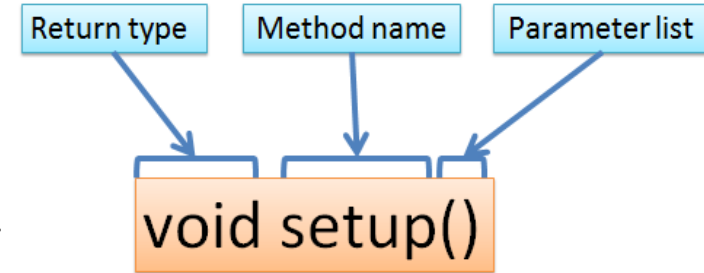

- Methods take in data via their parameters.
- Methods do not have to pass parameters e.g. `setup()` has no parameters.

Methods with NO parameters

```
void noStroke()  
void setup()  
void noCursor()
```

- Methods do not have to pass parameters.
- These methods have no parameters; note how no variable is passed in the parenthesis i.e. ().
- These methods don't need any additional information to do its tasks.

Methods with Parameters

```
void strokeWeight(float weight)
```

```
void size(int width, int height)
```

- If a method needs additional information to execute, we provide a parameter so that the information can be passed into it.
- The methods above have one parameter.
- A method can have any number of parameters.
- A parameter is a variable – it has a type (e.g. int) and a name (e.g. width).

Topics list

- Method terminology:
 - Return type
 - Method names
 - Parameter list
- Using methods to handle mouse events.

Mouse actions and their methods


Action	Description	Method
Clicked	Mouse button is pressed and then released	mouseClicked()
Pressed	Mouse button is pressed and held down	mousePressed()
Released	Mouse button was pressed, but now released	mouseReleased()
Moved	Mouse is moved without any buttons being pressed	mouseMoved()
Dragged	Mouse is moved with a button pressed	mouseDragged()

Mouse methods

- Mouse and keyboard events only work when a program has `draw()`.
- Without `draw()`, the code is only run once and then stops listening for events.


Processing Example 5.1 – setup()

```
void setup() {  
  size(400, 400);  
  background(0);  
  textAlign(CENTER);  
  textSize(24);  
  fill(255);  
  text("mouse has done nothing", width/2, height/2);  
}
```

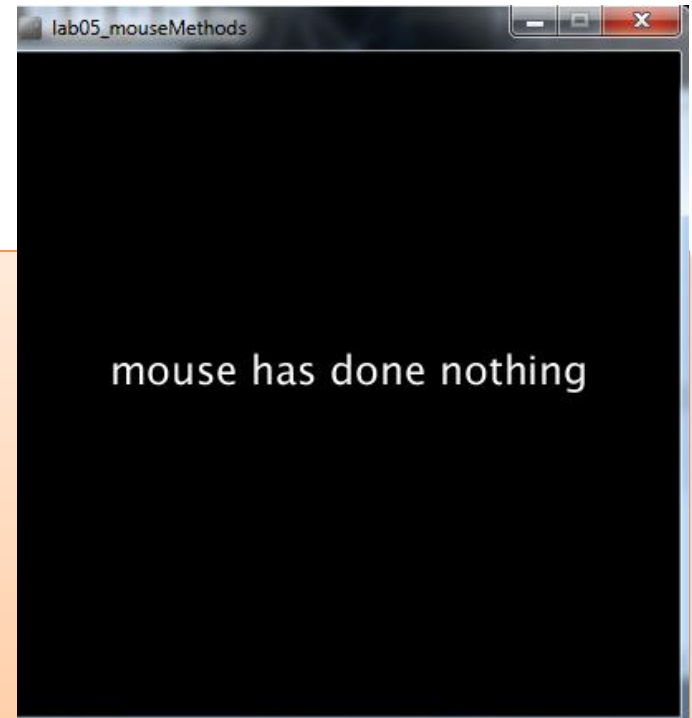

Processing Example 5.1 – draw()


```
void setup() {  
  size(400, 400);  
  background(0);  
  textAlign(CENTER);  
  textSize(24);  
  fill(255);  
  text("mouse has done nothing", width/2, height/2);  
}  
  
void draw(){  
}
```

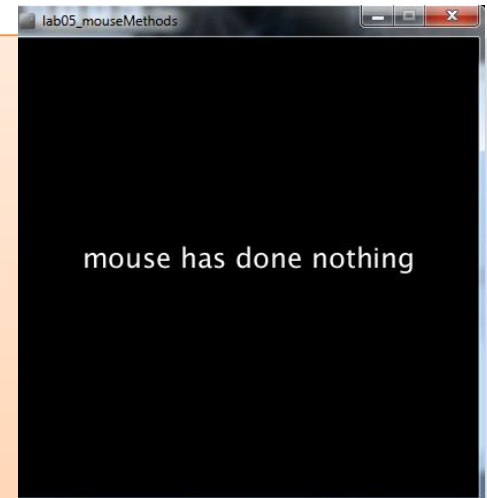

draw() is required because the mouse events only work when a program has it.

Processing Example 5.1 – mouseMoved()


```
void setup() {  
  size(400, 400);  
  background(0);  
  textAlign(CENTER);  
  textSize(24);  
  fill(255);  
  text("mouse has done nothing", width/2, height/2);  
}  
  
void draw(){  
}
```

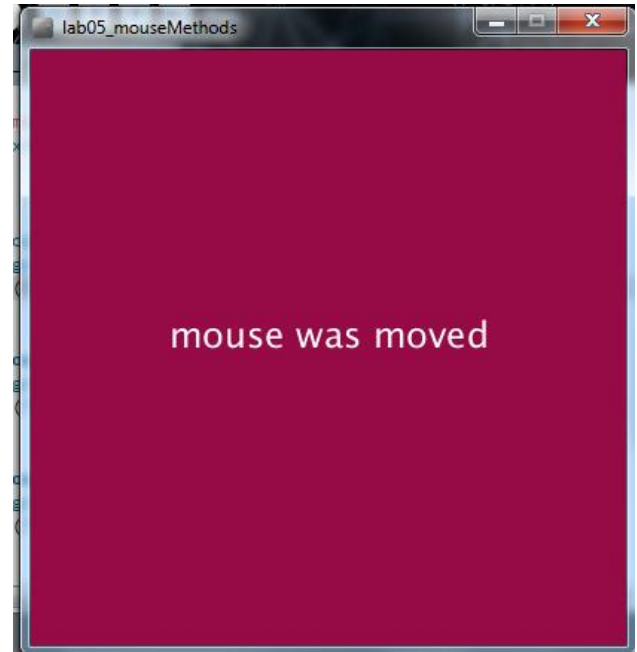

```
void mouseMoved() {  
  background(150, 10, 70);  
  text("mouse was moved", width/2, height/2);  
}
```


Processing Example 5.1 – mouseDragged()


```
void setup() {  
  size(400, 400);  
  background(0);  
  textAlign(CENTER);  
  textSize(24);  
  fill(255);  
  text("mouse has done nothing", width/2, height/2);  
}  
  
void draw(){  
}
```

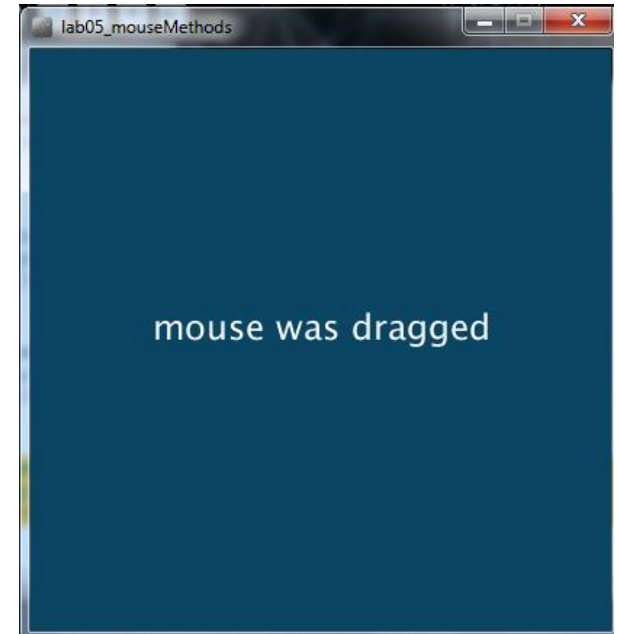

```
void mouseDragged() {  
  background(10, 70, 100);  
  text("mouse was dragged", width/2, height/2);  
}
```

Processing Example 5.1 – mouseReleased()


```
void setup() {  
  size(400, 400);  
  background(0);  
  textAlign(CENTER);  
  textSize(24);  
  fill(255);  
  text("mouse has done nothing", width/2, height/2);  
}  
  
void draw(){  
}
```

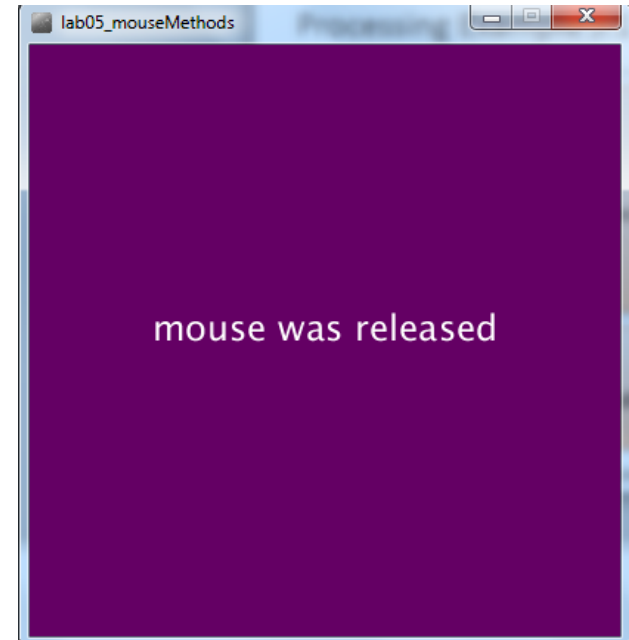

```
void mouseReleased() {  
  background(100, 0, 100);  
  text("mouse was released", width/2, height/2);  
}
```

Processing Example 5.1 – mousePressed ()

```
void mousePressed() {  
  background(100, 100, 0);  
  text("mouse was pressed", width/2, height/2);  
  if ( mouseButton == LEFT) {  
    text("and it was the left button", width/2, height/2 + 40);  
  }  
  if (mouseButton == RIGHT) {  
    text("and it was the right button", width/2, height/2 + 40);  
  }  
}
```

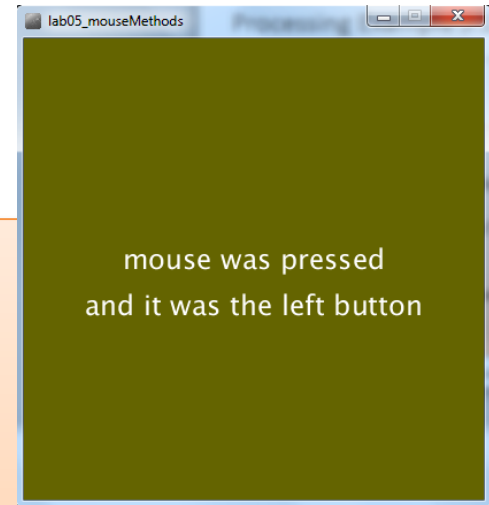


Some previous exercises

- We will now re-work the following examples that we covered previously:
 - Example 3.5
 - Example 3.6
 - Example 3.7
 - Example 3.8
- Each of these exercises tested the `mousePressed` variable. Now we want them to use the `mousePressed()` method instead.


Recap: Processing Example 3.5

- Functionality:

- If the mouse is pressed, draw a gray square with a white outline.





- Otherwise draw a gray circle with a white outline.



Recap: Processing Example 3.5

```
void setup() {  
  size(100,100);  
  stroke(255);  
  fill(128);  
}
```

```
void draw() {  
  background(0);  
  if (mousePressed){  
    rect(45,45,34,34);  
  }  
  else{  
    ellipse(45,45,34,34);  
  }  
}
```



Using mouse methods...

```
void setup()
{
  size(100,100);
  stroke(255);
  fill(150);
  background(0);
  ellipse(45,45,34,34);
}



void draw(){
}
```

```
void mousePressed(){
  background(0);
  rect(45,45,34,34);
}

void mouseReleased(){
  background(0);
  ellipse(45,45,34,34);
}
```

Recap: Processing Example 3.6



- Functionality:
 - If the mouse is pressed, set the fill to white and draw a square.
 - Otherwise set the fill to black and draw a square.



Recap: Processing Example 3.6

```
void setup() {  
  size(100,100);  
}
```

```
void draw() {  
  background(204);  
  if (mousePressed == true)  
  {  
    fill(255); // white  
  } else {  
    fill(0);   // black  
  }  
  rect(25, 25, 50, 50);  
}
```



Using mouse methods...

```
void setup()
{
  size(100,100);
  background(204);
  fill(0);
}




void draw(){
  rect(25, 25, 50, 50);
}
```

```
void mousePressed(){
  fill(255);
}

void mouseReleased(){
  fill(0);
}
```

Recap: Processing Example 3.7




- Functionality:
 - If the LEFT button on the mouse is pressed, set the fill to black and draw a square. As soon as the LEFT button is released, gray fill the square.
 - If the RIGHT button on the mouse is pressed, set the fill to white and draw a square. As soon as the RIGHT button is released, gray fill the square.
 - If no mouse button is pressed, set the fill to gray and draw a square.



Recap: Processing Example 3.7

```
void setup() {  
  size(100,100);  
}
```

```
void draw() {  
  if (mousePressed){  
    if (mouseButton == LEFT)  
      fill(0);      // black  
    else if (mouseButton == RIGHT)  
      fill(255);    // white  
  }  
  else {  
    fill(126);      // gray  
  }  
  rect(25, 25, 50, 50);  
}
```



Using mouse methods...

```
void setup()
{
  size(100,100);
  background(204);
  fill(126);
}



void draw(){
  rect(25, 25, 50, 50);
}
```

```
void mousePressed(){
  if (mouseButton == LEFT)
    fill(0);    // black
  else if (mouseButton == RIGHT)
    fill(255);  // white
}

void mouseReleased(){
  fill(126);
}
```

Recap: Processing Example 3.8



- Functionality:
 - Draw a circle on the mouse (x,y) coordinates.
 - Each time you move the mouse, draw a new circle.
 - All the circles remain in the sketch until you press a mouse button.
 - When you press a mouse button, the sketch is cleared and a single circle is drawn at the mouse (x,y) coordinates.

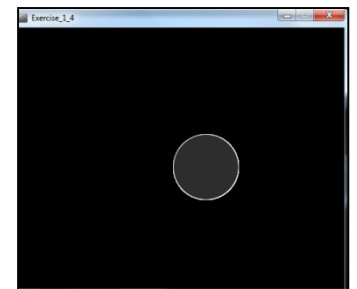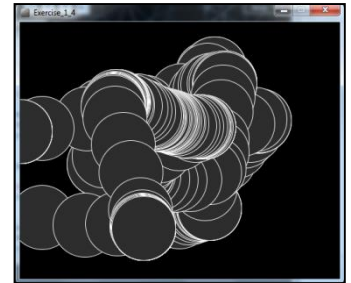

Recap: Processing Example 3.8

```
void setup() {  
  size(500,400);  
  background(0);  
  stroke(255);  
  fill(45,45,45);  
}
```

```
void draw() {  
  
  if (mousePressed) {  
    background(0);  
  }  
  ellipse(mouseX, mouseY, 100, 100);  
}
```

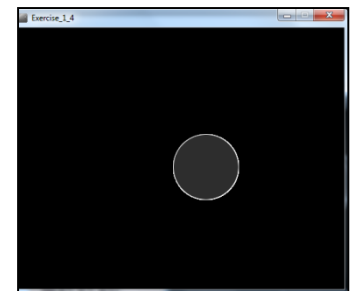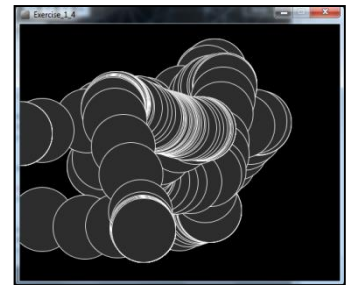

Using mouse methods...version 1

```
void setup()
{
  size(500,400);
  background(0);
  stroke(255);
  fill(45,45,45);
}

void draw(){
  ellipse(mouseX, mouseY, 100, 100);
}
```

```
void mousePressed(){
  background(0);
}
```


Using mouse methods...version 2

```
void setup()
{
  size(500,400);
  background(0);
  stroke(255);
  fill(45,45,45);
}

void draw(){
}
```

```
void mouseMoved(){
  ellipse(mouseX, mouseY, 100, 100);
}

void mouseClicked(){
  background(0);
  ellipse(mouseX, mouseY, 100, 100);
}
```

Questions?





Except where otherwise noted, this content is licensed under a Creative Commons Attribution-NonCommercial 3.0 License.

For more information, please see <http://creativecommons.org/licenses/by-nc/3.0/>



Waterford Institute of Technology
INSTITIÚID TEICNEOLAÍOCHTA PHORT LÁIRGE

Department of Computing and Mathematics
<http://www.wit.ie/>