

Firebase

Using Firebase

- Creating a new Expo app:
 - *npx create-expo-app@latest firebase-app*
 - *cd firebase-app*
- Run reset-project script:
 - *npm run reset-project*
- Install SDK:
 - *npx expo install firebase*

Using Firebase


- Creating a new `firebaseConfig.js` file in your project's root directory:

```
JS firebaseConfig.js > ...
1  import { initializeApp } from "firebase/app";
2
3  const firebaseConfig = {
4    apiKey: "AIzaSyBmhGV-cJOHn2uyXY22x0UII5uXs4DaK8Y",
5    authDomain: "fir-test-app-214bd.firebaseio.com",
6    projectId: "fir-test-app-214bd",
7    storageBucket: "fir-test-app-214bd.firebaseio.com",
8    messagingSenderId: "21913609640",
9    appId: "1:21913609640:web:64b76365338ca140b4e99d"
10 };
11
12 // Initialize Firebase
13 export const app = initializeApp(firebaseConfig);
14
```

- Configure Metro:

- `npx expo customize metro.config.js`

```
JS metro.config.js > ...
1  const { getDefaultConfig } = require('@expo/metro-config');
2
3  const defaultConfig = getDefaultConfig(__dirname);
4  defaultConfig.resolver.sourceExts.push('cjs');
5
6  module.exports = defaultConfig;
7
```

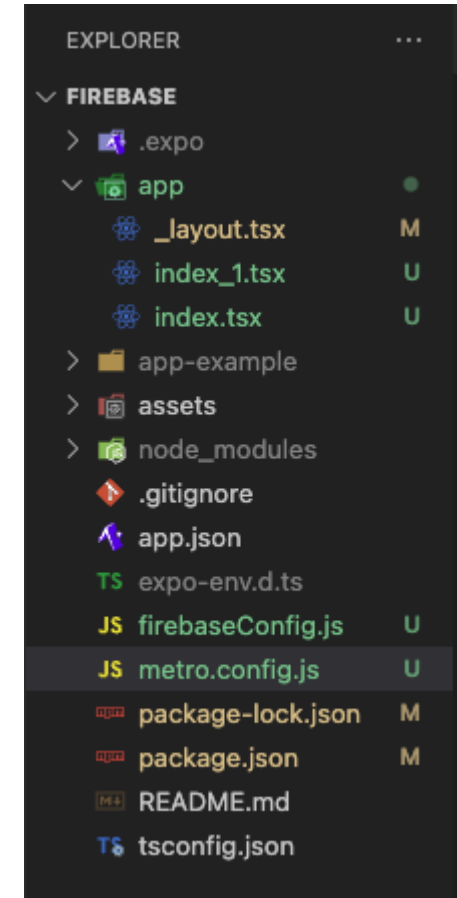





Firebase

Your projects



Create a project

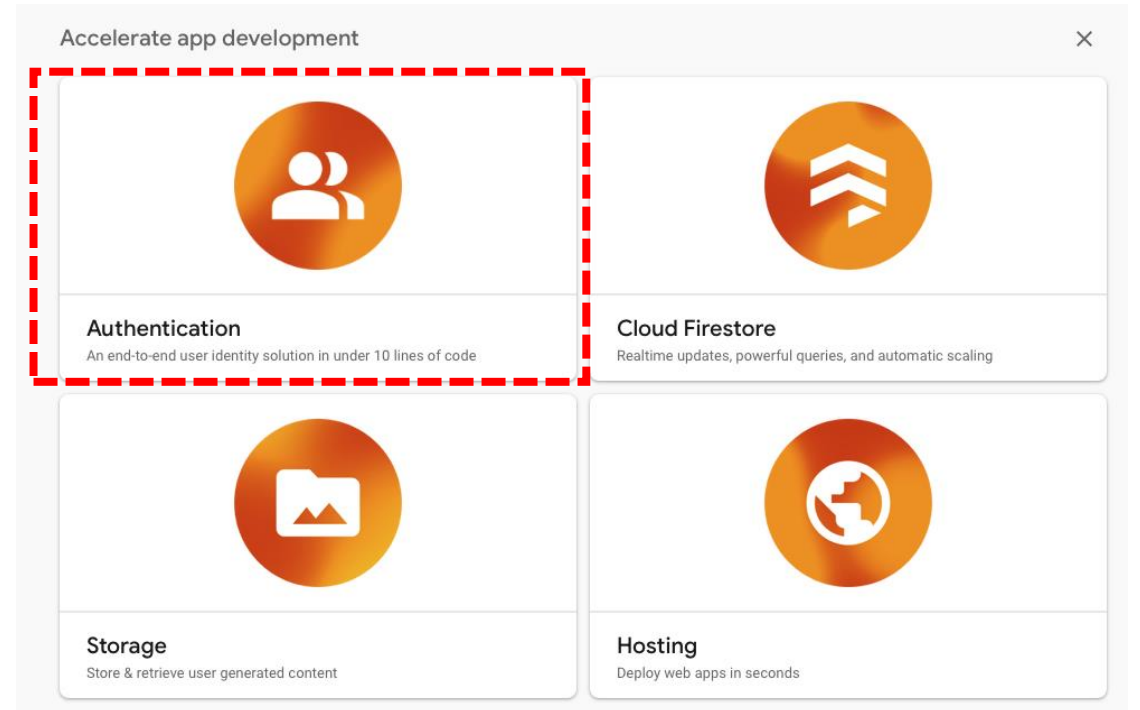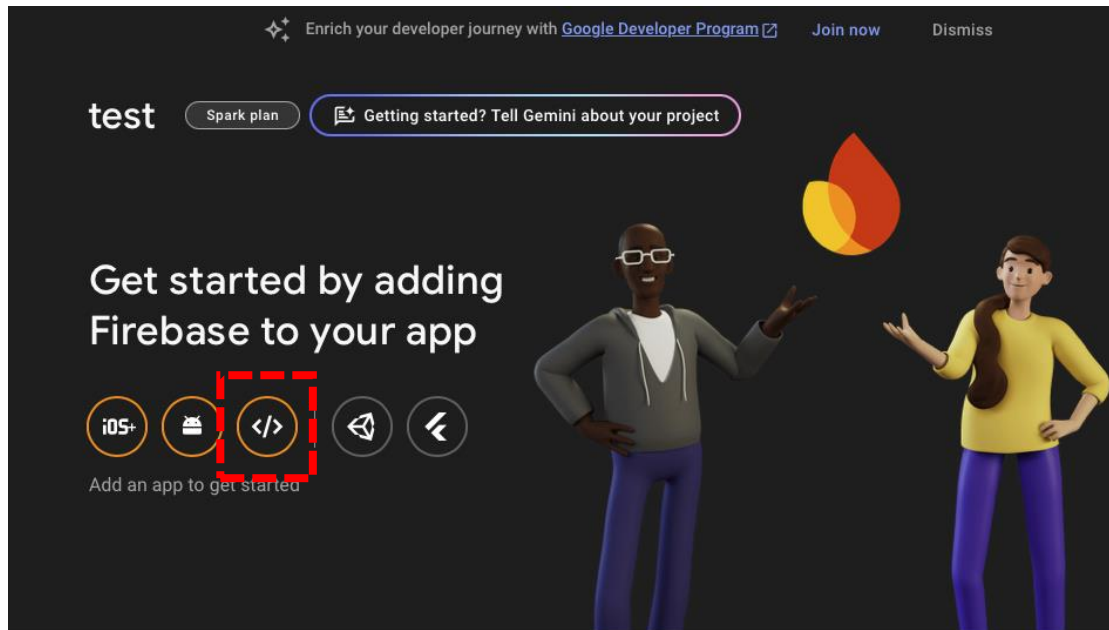

× Add Firebase to your web app

1 Register app

App nickname [?]

test-app

☐ Also set up **Firebase Hosting** for this app. [Learn more](#)

Hosting can also be set up later. There is no cost to get started anytime.

Register app

2 Add Firebase SDK

× Add Firebase to your web app

✓ Register app

2 Add Firebase SDK

☒ Use npm ☐ Use a <script> tag

If you're already using [npm](#) and a module bundler such as [webpack](#) or [Rollup](#), you can run the following command to install the latest SDK ([Learn more](#)):

```
$ npm install firebase
```

Then, initialize Firebase and begin using the SDKs for the products you'd like to use.

```
// Import the functions you need from the SDKs you need
import { initializeApp } from "firebase/app";
// TODO: Add SDKs for Firebase products that you want to use
// https://firebase.google.com/docs/web/setup#available-libraries

// Your web app's Firebase configuration
const firebaseConfig = {
  apiKey: "AIzaSyDaaJsJHdtUDDa5GqD95Gvo1Hr5ENAbC5Q",
  authDomain: "test-329ef.firebaseio.com",
  projectId: "test-329ef",
  storageBucket: "test-329ef.firebaseio.com",
  messagingSenderId: "98621534320",
  appId: "1:98621534320:web:33c2c1c79d04f8e8a084b5"
};

// Initialize Firebase
const app = initializeApp(firebaseConfig);
```

Note: This option uses the [modular JavaScript SDK](#), which provides reduced SDK size.

Learn more about Firebase for web: [Get Started](#), [Web SDK API Reference](#), [Samples](#)

Continue to console

Authentication

Sign-in providers

Get started with Firebase Auth by adding your first sign-in method

Native providers

- Email/Password
- Phone
- Anonymous

Additional providers

- Google
- Facebook
- Play Games
- Game Center
- Apple
- GitHub
- Microsoft
- Twitter
- Yahoo

Custom providers

- OpenID Connect
- SAML

Authentication

Sign-in providers

Email/Password ☒ Enable

Allow users to sign up using their email address and password. Our SDKs also provide email address verification, password recovery, and email address change primitives. [Learn more](#)

Email link (passwordless sign-in) ☐ Enable

Cancel Save