

Water quality assessment of Lake Toba using extreme learning machine

Eric Suwarno, Romi Fadillah Rahmat, Maya Silvi Lydia

Faculty of Computer Science and Information Technology

University of Sumatera Utara

Medan, Indonesia

121402071.es@gmail.com, romi.fadillah@usu.ac.id, maya2@usu.ac.id

Abstract—Lake Toba serves as an important tourism attraction in Indonesia, especially in the region North Sumatera. The development of tourism in Lake Toba increases the concern of environmental issues, especially the water quality. Meanwhile, extreme learning machine (ELM) is a set of neural networks, which has the advantage in the calculation speed. In this paper, we implemented ELM to process water quality data and predict the water quality in Lake Toba. The prediction process is done through the combination of Python and MATLAB environment. Various activation functions is applied to the network to compare the root mean square error rate. The research shows that different activation functions and number of hidden neurons will affect the accuracy of the prediction process.

Index Terms—extreme learning machines (ELM), water quality, Lake Toba, artificial neural networks.

I. INTRODUCTION

HARO *et al.* [1] found that the water in Lake Toba, according to the result of the measurement process done in Haranggaol Horison district of Simalungun regency in North Sumatera province, is described as the water resource containing pollutants, ranging from low to medium level. The waste produced from households, industries, agricultural industries, and public transportations, are the main source of water pollution in Lake Toba. Moreover, the development of water hyacinth population and the waste from river streams flowing into Lake Toba, are also the source of water pollution in Lake Toba.

While the tourism industry develops in North Sumatra, mainly in Lake Toba, the possibility of environmental issues which occurred in Lake Toba, mainly the water quality, is increased. The change of water quality will also affect the water ecosystem in Lake Toba. Therefore, a proper water quality assessment is required in order to control water quality in lake Toba.

Various method has been implemented to process water quality data. Artificial neural network, which has the same working mechanism with the biological brain, has been implemented in several researches, including screw insertion process [2], electric system stability monitoring [3], and wind turbine [4].

The main problem of prediction process using artificial neural network is the computation time, especially when the network receives big amount of data. Shibata & Ikeda [5] found that the number of hidden neurons used in the artificial

neural network correlates with the learning speed of the network itself. Deng *et al.* [6] found that the backpropagation learning algorithm, which is introduced by Werbos [7] and Rumelhart *et al.* [8], has difficulty in processing data with the big size, which results in slower performance.

Researches have been done in improving the learning speed of the artificial neural network. Chandra & Sharma introduce parameterized multilayer perceptron [9] and parameterized deep neural network [10] to improve computational time of the artificial neural network. Hinton & Teh [11] develop the improved deep belief neural networks, resulting in faster learning speed.

Extreme learning machines (ELM) is one of the methods used to improve computational time in artificial neural network. ELM is proposed by Huang *et al.* [12] to improve the performance of single hidden layer feed-forward neural networks (SLFNs), by randomizing hidden layer neurons using Moore-Penrose inverse. This method results in the improvement of computational time.

Extreme learning machine has been implemented in various researches. Fu *et al.* [13] implemented extreme learning machine for liver tumor detection, by examining liver CT scan imagery. Pangaribuan & Suharjito [14] implemented extreme learning machine for diabetes mellitus diagnosis. Meanwhile, Zhai & Du [15] implemented extreme learning machine for vegetation species recognition.

In this research, the water quality data is processed using extreme learning machine. The water quality data is obtained from the research done by Rahmat *et al.* [16], and will be processed by the extreme learning machine. The result of this process will be compared according to the activation function used in the network.

II. THEORETICAL BACKGROUND

In this research, artificial neural network is applied with extreme learning machine, to increase the speed of prediction process. The theoretical background of the methodology used in this research is explained as follows:

A. Artificial neural networks

Hammerstrom [17] defines artificial neural networks as a computational structure, which is developed in line with the working mechanism of the biological brain. According to

The output of the methodology in this research is a graph representing the result of prediction process by the extreme learning machine, followed by the root mean square error and the calculation time of the result.

IV. EXPERIMENT AND RESULT

This section describes the result of experiments done in this research. In this experiment, testing dataset is utilized to perform the experiment. The Graphical User Interface (GUI) from the system built in this research, is shown by Fig 4.

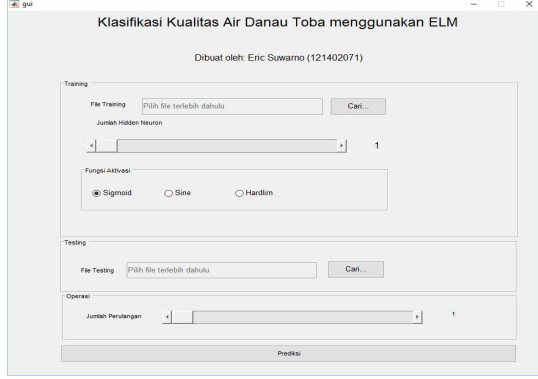


Fig. 4. The Appearance of the System

To perform the water quality prediction process, the training data and testing data have to be provided to the system. The default architecture of the artificial neural network, which will be constructed after training data is loaded, is SLFN with sigmoid function as the activation function. The number of hidden neuron is set to 1 by default, with the range of 1 to 20. The result of the water quality prediction process is shown in a graph, showing training error rate, training time, testing error time, and testing time. The appearance of the result view is shown in Fig 5.

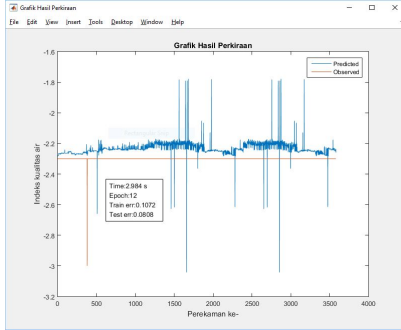


Fig. 5. The Result View of The System

The result shown that the number of hidden neurons applied in training process will affect the accuracy of the testing process. The smaller number of hidden neurons will result in relatively higher error rate, as shown in Table I. The experiment is performed using a training dataset consists of 3583 rows of data, a testing dataset consists of 3582 rows of data, and sine function as activation function.

The accuracy rate also correlates to the activation function defined in the artificial neural networks.

V. CONCLUSION

The water quality prediction is done by implementing extreme learning machines (ELM), based on the water quality

Table I. Error rates of assessment using ELM by number of hidden neuron

Number of hidden neurons	Epoch	Training error (RMSE)	Testing error (RMSE)	Computation Time (s)
6	81	0.09825	0.04968	21.67
7	154	0.09383	0.04556	41.41
8	150	0.08793	0.03725	39.95
9	19	0.09205	0.04649	5.094
10	38	0.08993	0.04733	10.17
11	108	0.09087	0.04348	28.98
12	198	0.08047	0.03744	53.13

data recorded by Rahmat *et al.* [16], by applying different variations of activation functions and number of hidden neurons. The experiment shows that the accuracy rate of the water quality assessment using ELM correlates with the number of hidden neurons and activation functions. The experiment also shows that the accuracy rate of the water quality assessment using ELM correlates with the activation function utilized in the process.

In the future, more activation functions is suggested to ...

REFERENCES

- [1] D. Haro, Y. Djayus and Z. Harahap, "Kondisi Kualitas Air Danau Toba di Kecamatan Haranggaol Horison Kabupaten Simalungun Sumatera Utara", *AQUACOSTMARINE*, vol. 1, no. 1, 2013.
- [2] B. Lara, K. Althoefer and D. Seneviratne, "Use of artificial neural networks for the monitoring of screw insertions," *Proceedings 1999 IEEE/RSJ International Conference on Intelligent Robots and Systems. Human and Environment Friendly Robots with High Intelligence and Emotional Quotients (Cat. No.99CH36289)*, Kyongju, 1999, pp. 579–584 vol.1.
- [3] D. Popović, D. Kukolj, and F. Kulić, "Monitoring and assessment of voltage stability margins using artificial neural networks with a reduced input set," *IEE Proceedings - Generation, Transmission and Distribution*, vol. 145, no. 4, p. 355–362, 1998.
- [4] R. Ata, "Artificial neural networks applications in wind energy systems: A review," *Renewable and Sustainable Energy Reviews*, vol. 49, pp. 534–562, Sep. 2015.
- [5] K. Shibata and Y. Ikeda, "Effect of number of hidden neurons on learning in large-scale layered neural networks," in *ICCAS-SICE*, Fukuoka: IEEE, 2009, pp. 5008–5013.
- [6] C. Deng, G. Huang, J. Xu, and J. Tang, "Extreme learning machines: New trends and applications," *Science China Information Sciences*, vol. 58, no. 2, pp. 020301:1–020301:16, Jan. 2015.
- [7] P. Werbos, "Beyond regression: new tools for prediction and analysis in the behavioral sciences," Harvard University, Cambridge, Massachusetts, 1974.
- [8] D. E. Rumelhart, G. E. Hinton, and R. J. Williams, "Learning representations by back-propagating errors," *Nature*, vol. 323, no. 6088, pp. 533–536, Oct. 1986.
- [9] B. Chandra and R. K. Sharma, "Fast learning for big data applications using parameterized multilayer perceptron," *2014 IEEE International Conference on Big Data (Big Data)*, pp. 17–22, 2014.
- [10] B. Chandra, and R. K. Sharma, "Fast learning in Deep Neural Networks," *Neurocomputing*, vol. 171, pp. 1205–1215, 2016.
- [11] G. E. Hinton, S. Osindero, and Y.-W. Teh, "A fast learning algorithm for deep belief nets," *Neural Computation*, vol. 18, no. 7, pp. 1527–1554, Jul. 2006.
- [12] G.-B. Huang, Q.-Y. Zhu, and C.-K. Siew, "Extreme learning machine: Theory and applications," *Neurocomputing*, vol. 70, no. 1-3, pp. 489–501, Dec. 2006.
- [13] F. Huixuan, W. Yuchao and Z. Hongmei, "Ship rolling motion prediction based on extreme learning machine," *2015 34th Chinese Control Conference (CCC)*, Hangzhou, 2015, pp. 3468–3472.
- [14] J. J. Pangaribuan and Suhajito, "Diagnosis of diabetes mellitus using extreme learning machine," *2014 International Conference on Information Technology Systems and Innovation (ICITSI)*, Bandung, 2014, pp. 33–38.
- [15] C.-M. Zhai and J.-X. Du, "Applying extreme learning machine to plant species identification," *2008 International Conference on Information and Automation*, Changsha, 2008, pp. 879–884.

- [16] R. F. Rahmat, Athmanathan, M. F. Syahputra dan M. S. Lydia, "Real Time Monitoring System for Water Pollution in Lake Toba," in *Proceedings of ICIC 2016*, Lombok, 2016.
- [17] D. Hammerstrom, "Neural networks at work," in *IEEE Spectrum*, vol. 30, no. 6, pp. 26–32, June 1993.
- [18] R. E. Uhrig, "Introduction to artificial neural networks," *Industrial Electronics, Control, and Instrumentation, 1995., Proceedings of the 1995 IEEE IECON 21st International Conference on*, Orlando, FL, 1995, pp. 33–37 vol.1.
- [19] E. Reingnold and J. Nightingale, "Training an artificial neural network," in *Artificial Neural Networks Technology*, University of Toronto. [Online]. Available: <http://www.psych.utoronto.ca/users/reingold/courses/ai/cache/neural3.html>. Accessed: Nov. 18, 2016.
- [20] M. van Heeswijk, "Advances in extreme learning machines," Aalto University, 2015.
- [21] M. Gao, W. Xu, H. Fu, M. Wang and X. Liang, "A Novel Forecasting Method for Large-Scale Sales Prediction Using Extreme Learning Machine," *2014 Seventh International Joint Conference on Computational Sciences and Optimization*, Beijing, 2014, pp. 602–606.
- [22] Patro, G. S. Krishna, and K. Kumar, "Title: Normalization: A Preprocessing stage," 2015. [Online]. Available: <http://arxiv.org/abs/1503.06462>. Accessed: Jan. 5, 2017.
- [23] J. Heaton, *Introduction to neural networks for Java, 2nd ed.* New York, NY, United States: Heaton Research, United States, 2008.
- [24] L. Dorst, "Neural activation functions," in *Applications of basic mathematics in Computer Science*. [Online]. Available: <https://staff.science.uva.nl/l.dorst/math/sigma.pdf>. Accessed: Nov. 22, 2016.
- [25] Q.-Y. Zhu and G.-B. Huang, "Extreme learning machines," 2013. [Online]. Available: http://www.ntu.edu.sg/home/egbhuang/elm_random_hidden_nodes.html. Accessed: Jan. 5, 2017.