



RWANDA REVENUE AUTHORITY
TAXES FOR GROWTH AND DEVELOPMENT
KG 4 Ave 8, Kimihurura, P.O.Box 3987 Kigali, Rwanda

RRA VSDC API DOCUMENTATION

RRA_VSDC_DOC_v1.0.5

16th APRIL, 2022

Document version: 1.0.5

DOCUMENT REVISION

[illegible]

1. VSDC API Specification Document

1. VSDC service	1
1.1. Introduction	1
1.2. Environment	1
2. Technical outline.....	2
2.1. The application process to use VSDC.....	2
2.2. VSDC running process and main configurations	2
2.3. A sample of VSDC Guide document.....	3
3. VSDC business process	4
3.1. VSDC functions.....	4
3.2. Details of VSDC functions.....	7
3.2.1. List of VSDC functions	7
3.3. Specification	12
3.3.1. Device Initialization Sequence	12
3.3.2. Code data Sequence	15
3.3.3. Branch Information Sequence	23
3.3.4. Item Information Sequence	28
3.3.5. Import item Sequence.....	33
3.3.6. Sales Information Sequence.....	37
3.3.7. Purchase Information Sequence.....	42
3.3.8. Stock Information Sequence	51
4. Code Definition.....	58
4.1. Tax Type	58
4.2. Taxpayer Status	58
4.3. Product Type.....	58
4.4. Countries code.....	58
4.5. Packaging Unit.....	64
4.6. Unit of Quantity	65
4.7. Currency	67
4.8. Transaction Type.....	72
4.9. Sales Receipt Type	72
4.10. Payment Method	72
4.11. Transaction Progress.....	72
4.12. Registration Type	72
4.13. Purchase Receipt Type	73
4.14. API Response Code	73
4.15. Stock In/Out Type	73

4.16. Refund Reason Code..... 74

4.17. Item code..... 74

4.18. Import Item status 75

1. VSDC service

1.1. Introduction

Virtual Sales Data Controller known as VSDC is a communication module for private CIS/ERP applications to send/receive various data (sales, purchase transaction data, receipts, etc.) to and from the RRA EBM server in other word it is like a bridge system Between RRA EBM systems and private CIS/ERP.

1.2. Environment

VSDC has two types; Production and Test.

Type	Description	Remark
Production VSDC	Server CIS application utilizes a Production VSDC to send and receive data to and from the RRA EBM API production server.	
Test VSDC	During development, the test application can send and receive test data to and from the RRA EBM API test server using a Test VSDC.	


The following is a Test VSDC technical information

Title	Contents	Remark
Supported Software Language	All / Web services	
Distributed Package	WAR	
API architectural style of web service	REST	
Supported web server	Tomcat, Jetty, Apache HHTP Server,	
Interface data format	JSON	
O/S	Windows 10+, Linux, Unix	
EBM 2.1 API Server Address (Production)		
EBM 2.1 API Server Address (Test)		
VSDC Request form (Production)		
VSDC Request form (Test)		


2. Technical outline

2.1. The application process to use VSDC

To use VSDC, a taxpayer must apply for VSDC service and get approval from RRA.

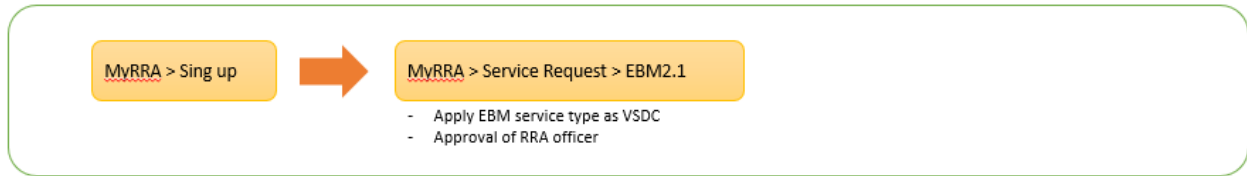

After the approval of VSDC, a WAR file is deployed in your local webserver through its web services a taxpayer can call Initialization service to start activation. When a taxpayer calls the initialization Service URL of VSDC with TIN, branch office, and equipment information as request body, VSDC will begin verification of the device and receive and save keys from the RRA EBM API server.

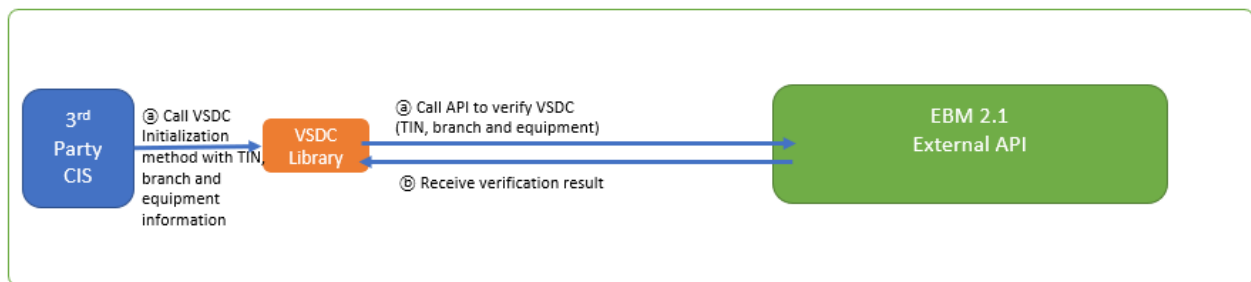


2.2. VSDC running process and main configurations

There are several technical policies that VSDC users have to follow.

1. To use VSDC a WAR file is deployed on your local webserver and need to be up and running locally.
2. Sending/Receiving data to and from EBM 2.1 API Server will be done by calling Methods of VSDC web services from a VSDC WAR deployed on your local webserver
3. To retrieve the latest data from EBM 2.1 API server, VSDC shall send the 'Date and Time' on which the kind of data was finally received from the EBM 2.1 API server. So, the 'Date and Time' of final request should be managed by CIS, and once successfully retrieved, CIS shall update the latest 'Date and Time' to the related data for the next update.
4. If there is no internet connection for 24 hours after VSDC issues a receipt signature and an internal data, VSDC stops issuing a receipt number.

The below diagram shows a basic VSDC running process.

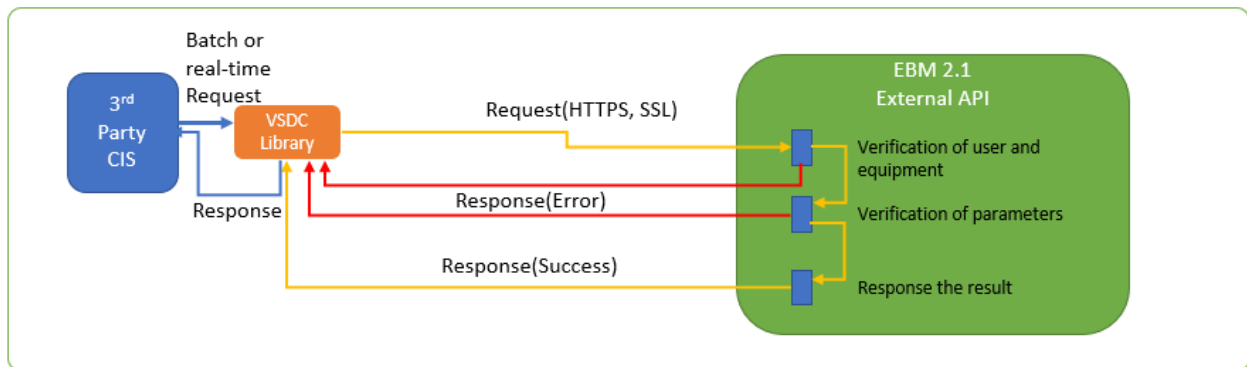

2.3. A sample of VSDC Guide document

Below is a sample Java code to show how developers can make a call to RRA EBM API server through VSDC web services deployed in local server

API Routes (URL Paths)

<http://localhost:8080/initializer/selectInitInfo>

Request Body

```
{
  "tin": "999993204",
  "bhfId": "00",
  "dvcSr1No": "dvc999993204"
}
```

3. VSDC business process

3.1. VSDC functions

The services provided in this VSDC are grouped by its purpose into eight (8) categories. The below briefly introduces the purpose of each category.

1. Data initialization (Send only)
 - a. For a device authentication (VSDC), registration and approval of equipment must be completed.
2. Code data (Get only)
 - a. Methods of this category are used to receive necessary standard codes and data from the EBM 2.1 API Server, which is the basis of generating invoice data. To send Invoice data to the EBM 2.1 API server, the consistency of the data is essential.
 - b. The standard codes and data are including; item classification code for managing item, location code, and package, weight code, TIN list and notice from RRA. For more information, check code definition chapter.
3. Branch information (Send only)
 - a. Methods of this category are to send customer list of head and branch offices and user accounts of branch offices.
 - b. This category has a method which requests branch codes to be used later while sending stock from main branch to branch offices.
4. Item information (Send only)
 - a. Methods of this category are to send registered item and item composition information in a CIS application.
 - b. In case you want to recover your items, you can receive them through EBM2.1 API server.
5. Imported item (Get and Send)
 - a. Methods of this category are to receive data of imported items which is declared by the TIN of CIS application owner and to send confirmation of the received imported items.
 - b. The imported items data are retrieved from RRA customs system and data can be used for stock adjustment.
6. Sales management (Send only)
 - a. Methods of this category are to send data of sales transaction and sales Invoice to EBM server.
 - b. Sales transaction data is composed of sales contract such as Customer TIN, Customer Name, Sales Type Code, Receipt Type Code, Payment Type Code, Invoice Status Code, Validated Date, Sale Date, Stock Released Date, Cancel Requested Date, Canceled Date Refunded Date and etc.
 - c. Sales Invoice data is composed of Invoice information such as Invoice Number, Current Receipt Number, Total Receipt Number, Customer TIN, Customer Mobile Number, Receipt Published Date, Internal Data, Receipt Signature and etc.
7. Purchase information (Get and Send)
 - a. Methods of this category are to request data of purchase transaction of the TIN of CIS application owner to EBM server and send confirmation of the transaction.
 - b. When a seller registers sales transaction and Invoice data to EBM server, buyer can request such data for purchase confirmation and stock adjustment purpose.

8. Stock information (Send only)

- a. Methods of this category are to send inventory in and out and stock status by item of CIS application to EBM server.

The table below outlines the tasks required to send and receive data to and from the EBM API server.

Category	Action of CIS side	Description	Remark
Initialization	Device authentication (VSDC)	Device authentication (VSDC) from RRA. 3rd party users must complete an EBM2.1 service request after joining MyRRA site member. Registration and approval of equipment is completed by RRA after submission of equipment use application (tentative name).	Apply only one time. Refer to '2.1. Applying Process to use VSDC'
Basic data management	Get code list	CIS application can update common standard codes managed by RRA from EBM API server	
	Get item classification list	Server CIS application can update item classification codes managed by RRA from EBM API server.	
	Get all TIN list	CIS application can get latest TIN list from EBM 2.1 server	
	Get the branch list of head office(store)	CIS application can update the branch office information of head office into EBM API server.	
	Get notice list from EBM API server	CIS application gets EBM 2.1 notification managed by RRA from EBM API server.	
Branch information management	Send customer information	CIS application sends customer information of the head & branch offices into EBM server.	
	Send branch user account	CIS application sends branch user account information to upload it in EBM server.	
	Send branch insurance information	CIS application sends insurance information of the head & branch offices and update it in EBM server	Applied to Pharmacy only
Item management	Send Item information	CIS application sends item information (name, unit price, barcode and etc.) of the head or branch offices and updates them in EBM server	Head office(store) role
	Send Item Composition information	CIS application sends item composition information of the head or branch store and updates them in EBM API server. Item composition is used to calculate BOM (Bill of Material) of the final processed items.	Head office(store) role
	Get item list	CIS application gets item information updated to EBM server by CIS application.	
Imported item management	Get imported item information	CIS application gets imported item information managed by RRA customs department. All the import declaration result of an owner of CIS application is provided from EBM server.	Head office(store) role
	Send (converted) imported item information	CIS shall convert the received imported item information into EBM standard item information for sales (inventory). CIS application sends converted imported items information to EBM API server.	Head office(store) role
Sales management	Send sales transaction information	CIS application sends sales transaction information to EBM API server. The sales transaction information must proceed sales Invoice information.	
	Send sales Invoice information and get Internal Data and Signature Data	CIS application sends sales invoice information to the VSDC and gets Receipt counters, Receipt Date, Internal Data and Signature Data.	

Category	Action of CIS side	Description	Remark
		Every sales Invoice information must have its sales transaction information sent in advance to EBM server.	
Purchase transaction management	Get purchase transaction information	CIS application gets purchase transaction information which were registered to EBM server by a seller under CIS application owner's TIN.	Head office(store) role
	Send purchase transaction confirmation	CIS application sends purchase transaction confirmation of received purchase transaction information to EBM server.	Head office(store) role
Stock management	Send stock in/out information	When adjusting inventory quantities or selling items at each branches or head office, CIS application sends the stock in/out information to the EBM server. Every stock in/out information must have its sales Invoice information sent in advance to EBM server.	
	Send stock inventory information	If stock inventory information is changed due to stock IN / OUT, Server CIS application sends the changed information of the inventory master and stores it in the EBM API server. Every stock inventory information must have its stock in/out information sent in advance to EBM server.	

3.2. Details of VSDC functions

3.2.1. List of VSDC functions

Section	Paths/URL	Description	Preconditional method	Argument Object	Return Object
Initialization	/initializer/selectInitInfo	Lookup initial setup information of VSDC Device		InitInfoReq	InitInfoRes
		You can lookup the initial configuration information registered in the server. This function provides authenticated information of VSDC device. For more information, refer to '3.3.1.1 InitReq/Res'			
Basic data management	/code/selectCodes	Lookup list of code		CodeReq	CodeRes
		You can lookup common code list registered in server with this function. This API function provides code classification and code detail at once. For more information, refer to '3.3.2.1 CodeReq/Res'			
	/itemClass/selectItemsClass	Lookup list of item classification		ItemClsReq	ItemClsRes
		You can lookup list of item classification registered in server with this function. This API function provides item category and item list at once. For more information, refer to '3.3.2.2. ItemClsReq/Res'			
	/customers/selectCustomer	Retrieve information for a specified TIN(customer)		CustReq	CustRes
		This API function synchronizes the taxpayer information registered on the server with client. For more information, refer to '3.3.2.3. CustReq/Res'			
	/branches/selectBranches	Lookup list of taxpayer branch information		BhfReq	BhfRes
		You can lookup list of taxpayer branch information registered in server. This API function provides every information of taxpayer branch. For more information, refer to '3.2.2.4. BhfReq/Res'			
	/notices/selectNotices	Lookup the list of notice		NoticeReq	NoticeRes

Section	Paths/URL	Description	Preconditional method	Argument Object	Return Object
Initialization	/initializer/selectInitInfo	Lookup initial setup information of VSDC Device		InitInfoReq	InitInfoRes
		You can lookup the initial configuration information registered in the server. This function provides authenticated information of VSDC device. For more information, refer to '3.3.1.1 InitReq/Res'			
		You can lookup the list of notice in taxpayer client. This API function provides list of notice registered in the server. For more information, refer to '3.2.2.5. NoticeReq/Res'			
Branch information management	/branches/saveBranchCustomers	Save customer of branch		BhfCustSaveReq	BhfCustSaveRes
		You can store branch information in server for recover the client data. This API function stores the client customer information managed by the store on the server. For more information, refer to '3.3.3.1. BhfCustSaveReq/Res'			
	/branches/saveBranchUsers	Save branch user account		BhfUserSaveReq	BhfUserSaveRes
		You can store branch user account in server. This API function stores the user account information of taxpayer branch in server. For more information, refer to '3.3.3.2. BhfUserSaveReq/Res'.			
	/branches/saveBranchInsurances	Save Insurance company information of branch		BhfInsuranceSaveReq	BhfInsuranceSaveRes
		You can save insurance company information which taxpayer branch uses in server. This API function performs storing the insurance company information managed by taxpayer pharmacy. For more information, refer to '3.3.3.3 BhfInsuranceSaveReq/Res'			
Product item management	/items/selectItems	Lookup list of item(product)		ItemReq	ItemRes
		You can lookup the list of Item information in server. This API function provides list of product information for taxpayer registered in server. For more information, refer to '3.3.4.3 ItemReq/Res'			
	/items/saveItems	Save Item		ItemSaveReq	ItemSaveRes
		You can save the product information in server. This API function performs storing item information managed by the taxpayer client in the server. For more information, refer to '3.3.4.1 ItemSaveReq/Res'			
	/items/saveItemComposition	Save Item Composition	saveltem	ItemCpstSaveReq	ItemCpstSaveRes

Section	Paths/URL	Description	Preconditional method	Argument Object	Return Object
Initialization	/initializer/selectInitInfo	Lookup initial setup information of VSDC Device		InitInfoReq	InitInfoRes
		You can lookup the initial configuration information registered in the server. This function provides authenticated information of VSDC device. For more information, refer to '3.3.1.1 InitReq/Res'			
		You can store item composition in server. This API function performs storing taxpayer's item composition information in server. But this information is used during restoration of client. It is not able to be looked up in server. For more information, refer to '3.3.4.2 ItemCpstSaveReq/Res'			
Imported item management	/imports/selectImportItems	Lookup list of imported item		ImptItemReq	ImptItemRes
		You can lookup list of taxpayer's imported item in server. This API function provides information of taxpayer's imported item in server. For more information, refer to '3.3.5.1 ImptItemReq/Res'			
	/imports/updateImportItems	Revise imported item		ImptItemSaveReq	ImptItemSaveRes
		You can revise imported item information in server. The taxpayer adds the imported items to item and purchase date at the client. The imported item information is transferred to the server through this API function. For more information, refer to '3.3.5.2 ImptItemSaveReq/Res'			
Sales transaction management	/trnsSales/saveSales	Save sales transaction		TrnsSalesSaveReq	TrnsSalesSaveRes
		You can save sales transaction information in server. This API function transfers the transaction information of taxpayer client's sales to the server. For more information, refer to '3.3.6.1. TranSalesSaveReq/Res'			
Purchase transaction management	/trnsPurchase/selectTrnsPurchaseSales	Lookup purchases-sales transaction list		TrnsPurchaseSalesReq	TrnsPurchaseSalesRes
		You can look up sales information in order to register purchases on taxpayer's branch registered in server. This API function provides unregistered informations on taxpayer's purchases list among sales list that taxpayer is assigned to transaction party. For more information, refer to '3.3.7.1. TrnsPurchaseSalesReq/Res'			
	/trnsPurchase/savePurchases	Save Purchase information		TrnsPurchaseSaveReq	TrnsPurchaseSaveRes

Section	Paths/URL	Description	Preconditional method	Argument Object	Return Object
Initialization	/initializer/selectInitInfo	Lookup initial setup information of VSDC Device		InitInfoReq	InitInfoRes
		You can lookup the initial configuration information registered in the server. This function provides authenticated information of VSDC device. For more information, refer to '3.3.1.1 InitReq/Res'			
		You can store purchases info in server. This API function sends the purchase transaction information generated from the taxpayer client and stores it. For more information, refer to '3.3.7.2. TrnsPurchaseSaveReq/Res'			
Stock management	/stockMaster/saveStockMaster	Save stock master information	insertStockIO	StockMstSaveReq	StockMstSaveRes
		You can store the stock master information in server. This API function saves the inventory master information managed by taxpayer client to the server. For more information, refer to '3.3.8.3. StockMstSaveReq/Res'			
	/stock/selectStockItems	Lookup the list of stock movement		StockMoveReq	StockMoveRes
		You can look up the stock movement list in server. This API function provides the result of the shifting stock quantity between the head office and the branches. in the server. For more information, refer to '3.3.8.1. StockMoveReq/Res'			
	/saveStockItems/saveStockItems	Save stock in/out		StockIOSaveReq	StockIOSaveRes
		You can store taxpayer stock in/out information in server. This API function performs storing stock in/out data registered by taxpayer client of head/branch in the server. For more information, refer to '3.3.8.2. StockIOSave'			

Below feature illustrate how a module can retrieve code list. This example is intended to help developers understand the contents of the next page “3.3. Specification”.

[VSDC Guide Document]


Section	Class	Method	Description	Argument Object	Return Object
API	<u>CodeExecute</u>	<u>selectCodeList</u>	Common Code List	<u>CodeReq</u>	<u>CodeRes</u>
	<u>ItemClsExcute</u>	<u>selectItemClsList</u>	Item Classification List	<u>ItemClsReq</u>	<u>ItemClsRes</u>

Object ^②				Attribute ^②					
Object-ID ^②	Object-Name ^②	Sub-Object_1 ^②		Attribute-ID ^②	Attribute-Name ^②	Data-Type ^②	Required ^②	Data-Length ^②	Format ^②
		Object-ID ^②	Object-Name ^②						
<u>ItemClsReq</u> ^②	Search-Classification-Request ^②	^②	^②	<u>tin</u> ^②	TIN ^②	CHAR ^②	Y ^②	9 ^②	^②
		^②	^②	<u>bhfid</u> ^②	Branch-ID ^②	CHAR ^②	Y ^②	2 ^②	^②
		^②	^②	<u>lastReqDt</u> ^②	Last-Request-Date ^②	CHAR ^②	Y ^②	14 ^②	ex)20190412092700 ^②
JSON-SAMPLE ^②									
[{"tin":"999991130","bhfid":"00","lastReqDt":"20180523000000"}] ^②									

Object				Attribute					
Object-ID	Object-Name	Sub-Object_1		Attribute-ID	Attribute-Name	Data-Type	Required	Data-Length	Format
		Object-ID	Object-Name						
<u>ItemClsRes</u>	Search Classification Response			<u>resultCd</u>	Result-Code	CHAR		3	
				<u>resultMsg</u>	Result Message	CHAR			
				<u>resultDt</u>	Result Date	CHAR		14	
		<u>ItemCls</u> <List>	Item classification Information	<u>itemClsCd</u>	Item Class Code	CHAR		10	
				<u>itemClsNm</u>	Item Class Name	CHAR		200	
				<u>itemClsLvl</u>	Item Class Level	NUMBER			
				<u>taxTyCd</u>	Taxation-Type Code	CHAR		5	See '3.1 Tax Type'

3.3. Specification

3.3.1. Device Initialization Sequence

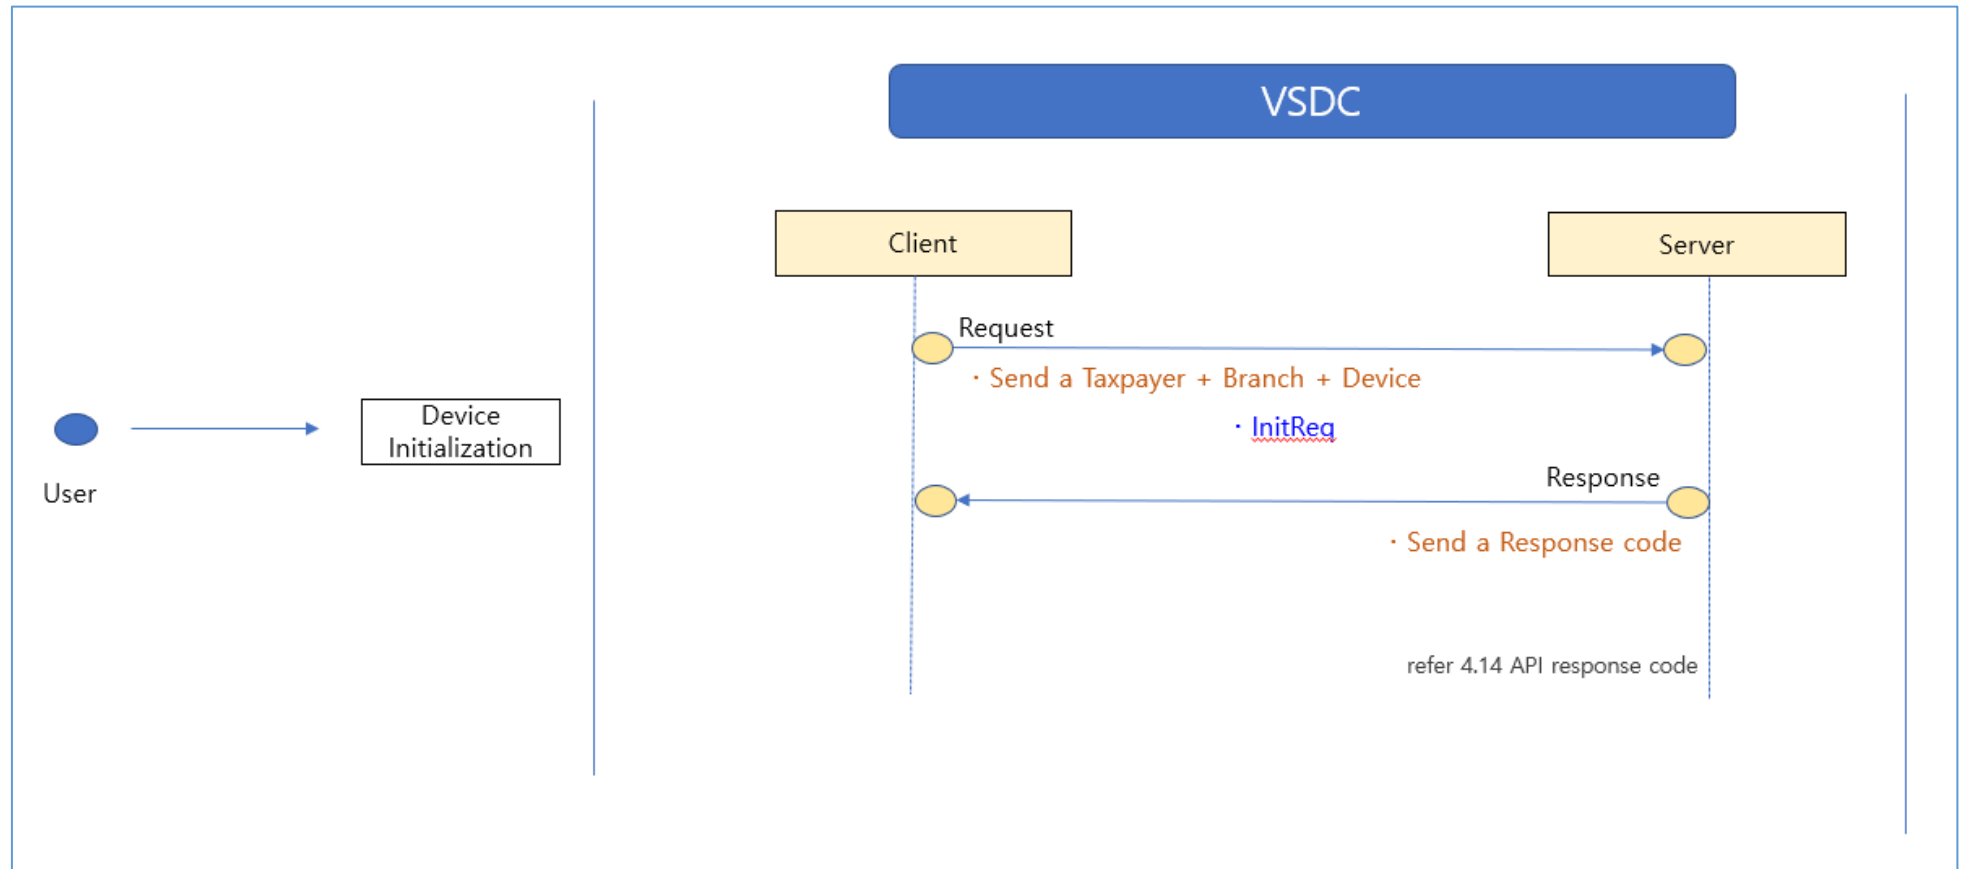

3.3.1.1. Initialization Request/Response

This part describes the components of API function (Paths : [/initializer/selectInitInfo](#)) and data types for each Initial Information attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The InitReq is an Argument Object of Request body , The InitRes is a Return Object of Response.

Object				Attribute				
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name					
InitInfoReq	Initialization Request of VSDC device authentication			tin	TIN	CHAR	Y	9
				bhflId	Branch ID	CHAR	Y	2
				dvcSrlNo	Device Serial Number	CHAR	Y	100
JSON REQUEST SAMPLE								
{ "tin": "999991130", "bhflId": "00", "dvcSrlNo": "dvcv1130" }								

※ The contents of the JSON SAMPLE column are example code of JSON data transmitted when sending / receiving API.

Object				Attribute				
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name					
InitInfoRes	Response of VSDC device authentication			resultCd	Result Code	CHAR		3
				resultMsg	Result Message	CHAR		
				resultDt	Result Date	CHAR		14
		InitTaxpayer	Taxpayer information	tin	TIN	CHAR		9
				taxprNm	Taxpayer Name	CHAR		60
				bsnsActv	Business Activity	CHAR		100
		InitBranch	Branch information	bhflId	Branch Office Id	CHAR		2
				bhfNm	Branch Office Name	CHAR		60
				bhfOpenDt	Branch Date Created	CHAR		8
				prvncNm	Province Name	CHAR		100
				dstrtNm	District Name	CHAR		100
				sctrNm	Sector Name	CHAR		100
				locDesc	Location Description	CHAR		100
				hqYn	Head Quarter	CHAR		1
				mgrNm	Manager Name	CHAR		60
				mgrTelNo	Manager Contract Number	CHAR		20
				mgrEmail	Manage Email	CHAR		50

Object				Attribute				
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name					
		InitDevice	Device information	dvcId	Device id	CHAR		20
				sdicId	SDC id	CHAR		12
				mrcNo	MRC No	CHAR		11
				intrlKey	INTERNAL KEY	CHAR		255
				signKey	SIGN KEY	CHAR		255
				cmcKey	Communication KEY	CHAR		255
				lastSaleInvNo	Last Sale Invoice Number	NUMBER		38
				lastPchsInvNo	Last Purchase Invoice Number	NUMBER		38
				lastSaleRcptNo	Last Sale Receipt Number	NUMBER		38
				lastInvNo	Last CIS invoice number	NUMBER		38
				lastTrainInvNo	Last Training Invoice Number	NUMBER		38
				lastProfrmInvNo	Last Proforma Invoice Number	NUMBER		38
				lastCopyInvNo	Last Copy Invoice Number	NUMBER		38
JSON RESPONSE SAMPLE								
<pre>{ "resultCd": "000","resultMsg": "It is succeeded","resultDt": "20220130101912", "data": { "info": { "tin": "9990000099", "taxprNm": "TEST VSDC", "bsnsActv": "TESTING ", "bhfId": "00", "bhfNm": "Headquarter", "bhfOpenDt": "20210214", "prvncNm": "KIGALI CITY", "dstrtNm": "GASABO", "sctrNm": "JALI", "locDesc": "KN 5 St.", "hqYn": "Y", "mgrNm": "Minsoo", "mgrTelNo": "0780000000", "mgrEmail": "test@gao.in.kr", "sdicId": null, "mrcNo": null, "dvcId": "9990000997006310", "intrlKey": null, "signKey": null, "cmcKey": null, "lastPchsInvNo": 0, "lastSaleRcptNo": 0, "lastInvNo": null, "lastSaleInvNo": 0, "lastTrainInvNo": null, "lastProfrmInvNo": null, "lastCopyInvNo": null } } }</pre>								

3.3.2. Code data Sequence

3.3.2.1. Code Request/Response

This part describes the items of code API function (Path: [/code/selectCodes](#)) and data types for each Code base attribute. API functions are divided into 'Request: Argument' and 'Response: Return Object'. The CodeReq is an Argument Object of Request, The CodeRes is a Return Object of Response.

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
CodeReq	Search code Request	-	-	-	-	tin	TIN	CHAR	Y	9
		-	-	-	-	bhfld	Branch ID	CHAR	Y	2
		-	-	-	-	lastReqDt	Last Request Date	CHAR	Y	14
JSON REQUEST SAMPLE										
{ "tin": "999991130", "bhfld": "00", "lastReqDt": "20180520000000" }										

※ 'lastReqDt' is the search condition. Based on the 'lastReqDt' of date Argument, the server provides code registered or modified after the date.

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
CodeRes	Search code Response	-	-	-	-	resultCd	Result Code	CHAR		3
		-	-	-	-	resultMsg	Result Message	CHAR		
		-	-	-	-	resultDt	Result Date	CHAR		14
		CodeCls <List>	Code classification information			cdCls	Code Class	CHAR		2
						cdClsNm	Code Class Name	CHAR		60
						cdClsDesc	Code Class Description	CHAR		500
						userDfnNm1	User Define Name 1	CHAR		60
						userDfnNm2	User Define Name 2	CHAR		60
						userDfnNm3	User Define Name 3	CHAR		60
						useYn	Use Yes or No	CHAR		1
				Code	Code Details	cd	Code	CHAR		5

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
				<List>	information	cdNm	Code Name	CHAR		60
						cdDesc	Code Description	CHAR		500
						srtOrd	Sort Order	NUMBER		5
						userDfnCd1	User Define Code 1	CHAR		20
						userDfnCd2	User Define Code 2	CHAR		20
						userDfnCd3	User Define Code 3	CHAR		20
						useYn	Use Yes or No	CHAR		1
JSON RESPONSE SAMPLE										
<pre>{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226143506", "data": { "clsList": [{ "cdCls": "04", "cdClsNm": "Tax", "Type": "Type", "cdClsDesc": null, "useYn": "Y", "userDfnNm1": "Tax", "Rate": "Rate", "userDfnNm2": null, "userDfnNm3": null, "dtlList": [{ "cd": "A", "cdNm": "A-EX", "cdDesc": "...", "useYn": "Y", "srtOrd": 1, "userDfnCd1": "0", "userDfnCd2": null, "userDfnCd3": null, { "cd": "B", "cdNm": "B-18.00%", "cdDesc": "B-18.00%", "useYn": "Y", "srtOrd": 2, "userDfnCd1": "18", "userDfnCd2": null, "userDfnCd3": null, { "cd": "C", "cdNm": "C", "cdDesc": "C", "useYn": "Y", "srtOrd": 3, "userDfnCd1": "0", "userDfnCd2": null, "userDfnCd3": null, { "cd": "D", "cdNm": "D", "cdDesc": "D", "useYn": "Y", "srtOrd": 4, "userDfnCd1": "0", "userDfnCd2": null, "userDfnCd3": null } } }] }] } } }</pre>										

※ ‘resultCd’ is response code. The resultCd 000 means ‘It is succeeded’. For more information, refer to ‘4.14. API Response Code’.

3.3.2.2. ItemCls Request /Response

This part describes the item Classification API function (Paths : [/itemClass/selectItemsClass](#)) of product classification and data types for each item Class attribute. API functions are divided into 'Request:Argument' and 'Response:Return Object'. The ItemClsReq is an Argument Object of Request, The ItemClsRes is a Return Object of Response.

Object				Attribute					
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name						
ItemClsReq	Search Classification Request			tin	TIN	CHAR	Y	9	
				bhflId	Branch ID	CHAR	Y	2	
				lastReqDt	Last Request Date	CHAR	Y	14	ex)20190412092700
JSON REQUEST SAMPLE									
{ "tin": "999991130", "bhflId": "00", "lastReqDt": "20180523000000" }									

Object				Attribute					
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name						
ItemClsRes	Search Classification Response			resultCd	Result Code	CHAR		3	
				resultMsg	Result Message	CHAR			
				resultDt	Result Date	CHAR		14	
		ItemCls <List>	Item classification information	itemClsCd	Item Class Code	CHAR		10	
				itemClsNm	Item Class Name	CHAR		200	
				itemClsLvl	Item Class Level	NUMBER			
				taxTyCd	Taxation Type Code	CHAR		5	See ‘4.1 Tax Type’
				mjrTgYn	Whether it is Major Taget	CHAR		1	
				useYn	Used / UnUsed	CHAR		1	
JSON RESPONSE SAMPLE									
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226185625", "data": { "itemClsList": [{ "itemClsCd": "14111400", "itemClsNm": "Paper products no use", "itemClsLvl": 3, "taxTyCd": null, "mjrTgYn": null, "useYn": "Y" }, { "itemClsCd": "14111401", "itemClsNm": "Paper products no use Commodity", "itemClsLvl": 4, "taxTyCd": null, "mjrTgYn": null, "useYn": "Y" }, { "itemClsCd": "3133130600", "itemClsNm": "Non assemblies", "itemClsLvl": 5, "taxTyCd": "B", "mjrTgYn": "N", "useYn": "Y" }] } }									

3.3.2.3. Customers Request/Response

This part describes the Customer API function(Paths : [/customers/selectCustomer](#)) and data types for each Registered Customer Entity attribute. The Customer means the taxpayer of Rwanda. API functions are divided into 'Request:Argument' and 'Response:Return Object'. The CustReq is an Argument Object of Request, The CustRes is a Return Object of Response. Based on the 'custmTin', the server provides customer information registered on the specified Customer TIN.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
CustReq	Search Customer Request					tin	TIN	CHAR	Y	9	
						bhfId	Branch ID	CHAR	Y	2	
						custmTin	Customer Tin	CHAR	Y	9	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhfId": "00", "custmTin": "100600570" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
CustRes	Search Customer Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
		Cust	Taxpayer information			tin	Taxpayer TIN	CHAR		9	
						taxprNm	Taxpayer Name	CHAR		60	
						taxprSttsCd	Taxpayer Status Code	CHAR		5	See '4.2. Taxpayer Status'
						prvncNm	Province Name	CHAR		100	
						dstrtnNm	District Name	CHAR		100	
						sctrNm	Sector Name	CHAR		100	
				resultCd	Telephone Number	CHAR		3			
JSON RESPONSE SAMPLE											
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226192053", "data": { "custList": [{ "tin": "841562115", "taxprNm": "TAXPAYER1", "taxprSttsCd": "A", "prvncNm": "KIGALI CITY", "dstrtnNm": "KICUKIRO", "sctrNm": "KAGARAMA", "locDesc": "Kicukiro" }, { "tin": "451848361", "taxprNm": "TAXPAYER2", "taxprSttsCd": "A", "prvncNm": "KIGALI" }] }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
CITY","dstrNm":"KICUKIRO","setrNm":"KAGARAMA","locDesc":"123-233"}}}											

3.3.2.4. Bhf Request/Response

This part describes the components of API function(Path : </branches/selectBranches>) and data types for each Branch Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The BhfReq is an Argument Object of Request, The BhfRes is a Return Object of Response.

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfReq	Search Branch Request					tin	TIN	CHAR	Y	9
						bhfId	Branch ID	CHAR	Y	2
						lastReqDt	Last Request Date	CHAR	Y	14
JSON REQUEST SAMPLE										
{ "tin": "999991130", "bhfId": "00", "lastReqDt": "20191130000000" }										

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfRes	Search Branch Response					resultCd	Result Code	CHAR		3
						resultMsg	Result Message	CHAR		
						resultDt	Result Date	CHAR		14
		Bhf <List>	Branch Information			tin	TIN	CHAR		9
						bhfId	Branch Office ID	CHAR		2
						bhfNm	Branch Office Name	CHAR		60
						bhfSttsCd	Branch Status Code	CHAR		5
						prvncNm	Province Name	CHAR		100
						dstrtNm	District Name	CHAR		100
						sctrNm	Sector Name	CHAR		100
						locDesc	Location Description	CHAR		100
						mgrNm	Manager Name	CHAR		60
						mgrTelNo	Manager Contact	CHAR		20

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
						mgrEmail	Manager Email	CHAR		100
						hqYn	Head Office Yes/No	CHAR		1
JSON RESPONSE SAMPLE										
<pre>{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226193023", "data": { "bhfList": [{ "tin": "999991130", "bhfId": "00", "bhfNm": "Headquater", "bhfSttsCd": "01", "prvncNm": "KIGALI CITY", "dstrNm": "GASABO", "sctrNm": "KACYIRU", "locDesc": null, "mgrNm": "manage1130_00", "mgrTelNo": "0789001130", "mgrEmail": "manage113000@test.com", "hqYn": "Y" }, { "tin": "999991130", "bhfId": "01", "bhfNm": "Branch01", "bhfSttsCd": "01", "prvncNm": "KIGALI CITY", "dstrNm": "KICUKIRO", "sctrNm": "KAGARAMA", "locDesc": null, "mgrNm": "manage1130_01", "mgrTelNo": "0789011130", "mgrEmail": "manage113001@test.com", "hqYn": "N" }] } }</pre>										


3.3.2.5. Notice Request/Response

This part describes the components of Notice API function (Path: [/notices/selectNotices](#)) and data types for each Notice Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The NoticeReq is an Argument Object of Request, The NoticeRes is a Return Object of Response.

Object				Attribute				
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name					
NoticeReq	Search Notice Request			tin	Taxpayer identification Number	CHAR	Y	9
				bhflId	Branch user ID	CHAR	Y	2
				lastReqDt	Last Request date time	CHAR	Y	14
JSON REQUEST SAMPLE								
{ "tin": "999991130", "bhflId": "00", "lastReqDt": "20200218191141" }								

Object				Attribute				
Object ID	Object Name	Sub Object_1		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name					
NoticeRes	Search Notice Response			resultCd	Result Code	CHAR		3
				resultMsg	Result Message	CHAR		
				resultDt	Result Date time	CHAR		14
		notice <List>	Search Information	noticeNo	Notice Number	NUMBER		
				title	Title	CHAR		1000
				cont	Contents	CHAR		4000
				dtlUrl	detail URL	CHAR		200
				regrNm	Registration name	CHAR		60
				regDt	Registration date time	CHAR		14
JSON RESPONSE SAMPLE								
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226191722", "data": { "noticeList": [{ "noticeNo": 42, "title": "Notice Test [2020.02.18]", "cont": "Notice Test [2020.02.18]\r\n\r\nNotice Test [2020.02.18]", "dtlUrl": "http://localhost:9980/common/link/ebm/receipt/indexEbmNotice?noticeNo=42", "regrNm": "Administrator", "regDt": "20200218191141" }] } }								

3.3.3. Branch Information Sequence

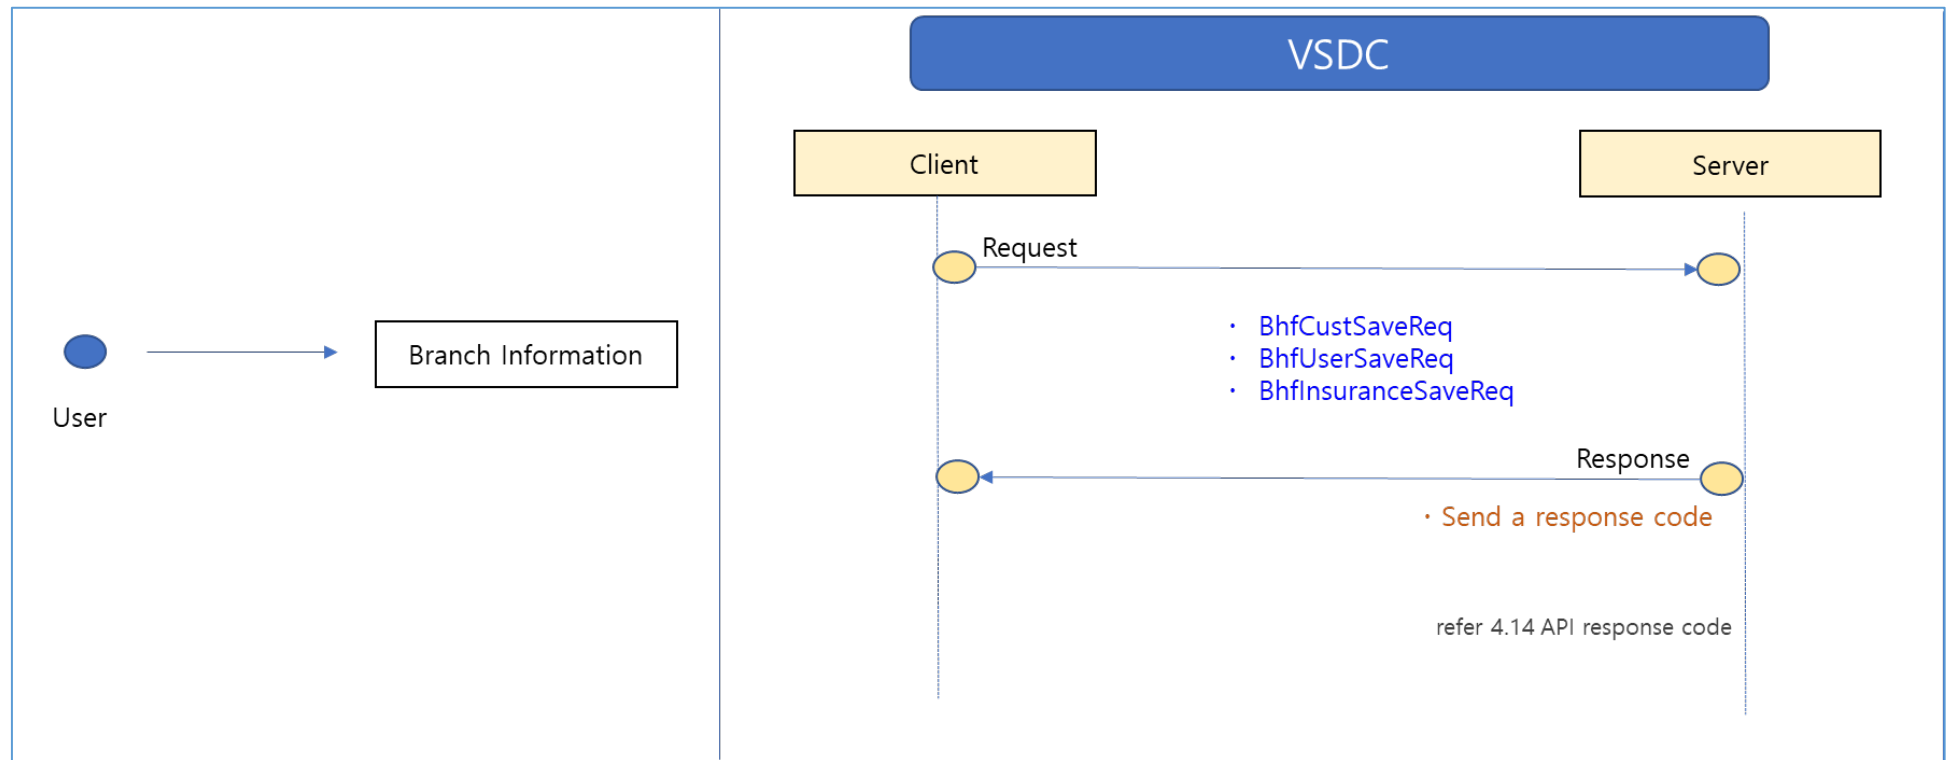

3.3.3.1. Branch Customer save Request/Response

This part describes the components of branch customer API function (Path: [/branches/saveBrancheCustomers](#)) and data types for each Branch Customer Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The BhfCustSaveReq is an Argument Object of Request, The BhfCustSaveRes is a Return Object of Response.

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfCustSaveReq	Store branch customers Request					tin	TIN	CHAR	Y	9
						bhfId	Branch ID	CHAR	Y	2
						custNo	Customer Number	CHAR	Y	9
						custTin	Customer TIN	CHAR	Y	9
						custNm	Customer Name	CHAR	Y	60
						adrs	Address	CHAR	N	300
						telNo	Contact	CHAR	N	20
						email	Email	CHAR	N	50
						faxNo	Fax Number	CHAR	N	20
						useYn	Used (Y/N)	CHAR	Y	1
						remark	Remark	CHAR	N	1000
						regrNm	Registrant Name	CHAR	Y	60
						regrId	Registrant ID	CHAR	Y	20
						modrNm	Modifier Name	CHAR	Y	60
						modrId	Modifier ID	CHAR	Y	20
JSON REQUEST SAMPLE										
{ "tin": "999000099", "bhfId": "00", "custNo": "999991113", "custTin": "107397100", "custNm": "ERIRWANDA", "adrs": null, "telNo": null, "email": null, "faxNo": null, "useYn": "Y", "remark": null, "regrNm": "Admin", "regrId": "Admin", "modrNm": "Admin", "modrId": "Admin" }										

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfCustSaveRes	Store branch customers Response					resultCd	Result Code	CHAR		3
						resultMsg	Result Message	CHAR		
						resultDt	Result Date	CHAR		14
JSON RESPONSE SAMPLE										
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226193115", "data": null }										

3.3.3.2. Branch Users Save Request/Response

This part describes the components of branch user account API function (Path: [/branches/saveBrancheUsers](#)) and data types for each Branch Users Entity attribute. This function send branch user(employee) account to server and stores it. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The BhfUserSaveReq is an Argument Object of Request, The BhfUserSaveRes is a Return Object of Response.

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfUserSaveReq	Save Branch User Request					tin	TIN	CHAR	Y	9
						bhfId	Branch ID	CHAR	Y	2
						userId	User ID	CHAR	Y	20
						userNm	User Name	CHAR	Y	60
						pwd	Password	CHAR	Y	255
						adrs	Address	CHAR	N	200
						cntc	Contact	CHAR	N	20
						authCd	Authority Code	CHAR	N	100
						remark	Remark	CHAR	N	2000
						useYn	Used / UnUsed	CHAR	Y	1
						regrNm	Registrant Name	CHAR	Y	60
						regrId	Registrant ID	CHAR	Y	20
						modrNm	Modifier Name	CHAR	Y	60
						modrId	Modifier ID	CHAR	Y	20

JSON REQUEST SAMPLE									
{ "tin": "999000099", "bhflId": "00", "userId": "userId3", "userNm": "UserName3", "pwd": "12341234", "adrs": null, "cntc": null, "authCd": null, "remark": null, "useYn": "Y", "regrNm": "Admin", "regrId": "Admin", "modrNm": "Admin", "modrId": "Admin" }									

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfUserSaveRes	Save Branch User Response					resultCd	Result Code	CHAR		3
						resultMsg	Result Message	CHAR		
						resultDt	Result Date	CHAR		14
JSON SAMPLE										
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226192427", "data": null }										

3.3.3.3. Branch Insurance save Request/Response


This part describes the components of branch Insurance API function (Path : [/branches/saveBrancheInsurances](#)) and data types for each Branch Insurance Entity attribute. This function sends the insurance company information to server and stores it. The insurance company information are insurance code, insurance name and insurance rate. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The BhfInsuranceSaveReq is an Argument Object of Request, The BhfInsuranceSaveRes is a Return Object of Response.(This API is mostly used by Pharmacy)

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhfInsuranceSaveReq	Save Insurance Branch Request					tin	TIN	CHAR	Y	9
						bhflId	Branch ID	CHAR	Y	2
						isrccCd	Insurance Code	CHAR	Y	10
						isrccNm	Insurance Name	CHAR	Y	100
						isrcRt	Premium Rate	NUMBER	Y	3
						useYn	Used / UnUsed	CHAR	Y	1
						regrNm	Registrant Name	CHAR	Y	60
						regrId	Registrant ID	CHAR	Y	20
						modrNm	Modifier Name	CHAR	Y	60

						modrId	Modifier ID	CHAR	Y	20
JSON REQUEST SAMPLE										
{ "tin": "999000099", "bhflId": "00", "isrecCd": "ISRCC01", "isrecNm": "RSSB Insurance", "isrcRt": "20", "useYn": "Y", "regrNm": "Admin", "regrId": "Admin", "modrNm": "Admin", "modrId": "Admin" }										

Object						Attribute				
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length
		Object ID	Object Name	Object ID	Object Name					
BhflInsuranceSaveRes	Save Insurance Branch Response					resultCd	Result Code	CHAR		3
						resultMsg	Result Message	CHAR		
						resultDt	Result Date	CHAR		14
JSON RESPONSE SAMPLE										
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226192852", "data": null }										

3.3.4. Item Information Sequence

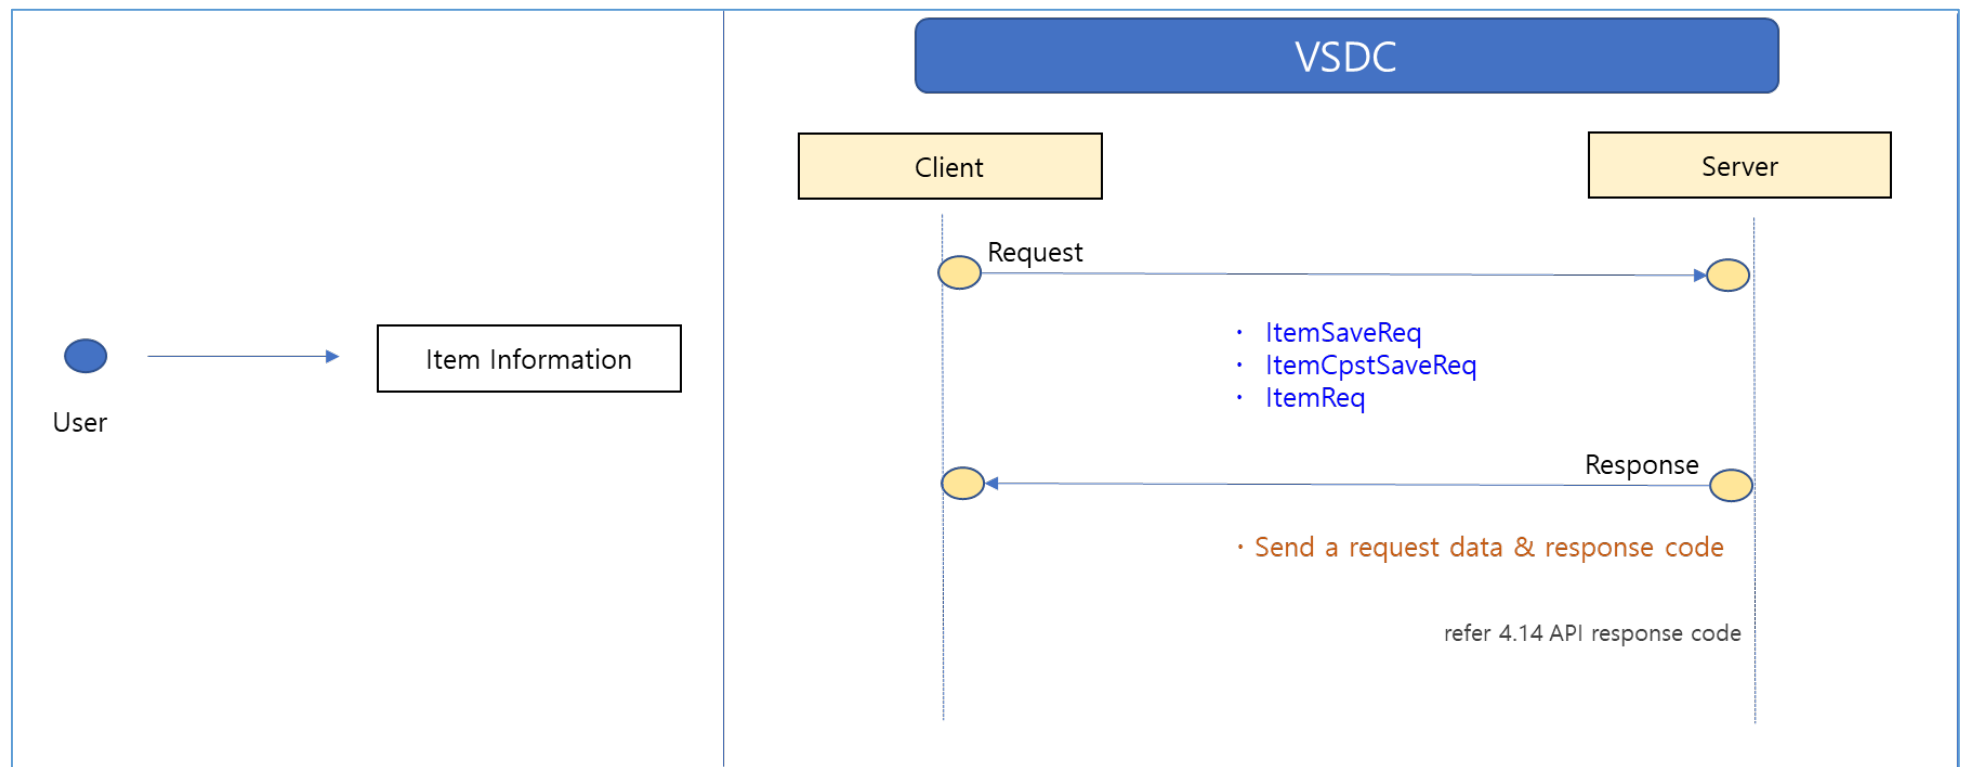

3.3.4.1. Item save Request/Response

This part describes the components of SaveItem API function (Path : </items/saveItems>) and data types for each Item save Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The ItemSaveReq is an Argument Object of Request, The ItemSaveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ItemSaveReq	Save Item Request					tin	TIN	CHAR	Y	9	
						bhfld	Branch ID	CHAR	Y	2	
						itemClsCd	Item Code	CHAR	Y	10	
						itemCd	Item Classification Code	CHAR	Y	20	See '4.17. Item code'
						itemTyCd	item Type Code	CHAR	Y	5	See '4.3. Product type'
						itemNm	item Name	CHAR	Y	200	
						itemStdNm	Item Standard Name	CHAR	N	200	
						orgnNatCd	Origin Place Code (Nation)	CHAR	Y	5	See '4.4. Nation'
						pkgUnitCd	Packaging Unit Code	CHAR	Y	5	See '4.5. Packaging Unit'
						qtyUnitCd	Quantity Unit Code	CHAR	Y	5	See '4.6. Unit of Quantity'
						taxTyCd	Taxation Type Code	CHAR	Y	5	See '4.1. Tax Type'
						btchNo	Batch Number	CHAR	N	10	
						bcd	Barcode	CHAR	N	20	
						dftPrc	Default Unit Price	NUMBER	Y	18,2	
						grpPrcL1	Group1 Unit Price	NUMBER	N	18,2	
						grpPrcL2	Group2 Unit Price	NUMBER	N	18,2	
						grpPrcL3	Group3 Unit Price	NUMBER	N	18,2	
						grpPrcL4	Group4 Unit Price	NUMBER	N	18,2	
						grpPrcL5	Group5 Unit Price	NUMBER	N	18,2	
						addInfo	Additional Information	CHAR	N	7	
						sftyQty	Safety Quantity	NUMBER	N	13,2	
						isrcAplcbYn	Insurance Applicable(Y/N)	CHAR	Y	1	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						useYn	Used / UnUsed	CHAR	Y	1	
						regrNm	Registrant Name	CHAR	Y	60	
						regrId	Registrant ID	CHAR	Y	20	
						modrNm	Modifier Name	CHAR	Y	60	
						modrId	Modifier ID	CHAR	Y	20	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhflId": "00", "itemCd": "RW1NTXU0000006", "itemClsCd": "5059690800", "itemTyCd": "1", "itemNm": "test material item 3", "itemStdNm": null, "orgnNatCd": "RW", "pkgUnitCd": "NT", "qtyUnitCd": "U", "taxTyCd": "B", "btchNo": null, "bed": null, "dftPrc": 3500, "grpPrcL1": 3500, "grpPrcL2": 3500, "grpPrcL3": 3500, "grpPrcL4": 3500, "grpPrcL5": null, "addInfo": null, "sftyQty": null, "srcAplebYn": "N", "useYn": "Y", "regrNm": "Admin", "regrId": "Admin", "modrNm": "Admin", "modrId": "Admin" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ItemSaveRes	Save Item Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
JSON RESPONSE SAMPLE											
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226193918", "data": null }											

3.3.4.2. Item Select Request/Response

This part describes the components of Select Item API function (Path: </items/selectItems>) and data types for each Select Items Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The ItemReq is an Argument Object of Request, The ItemRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ItemReq	Search Item Request					tin	TIN	CHAR	Y	9	
						bhflId	Branch ID	CHAR	Y	2	
						lastReqDt	Last Request Date	CHAR	Y	14	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhflId": "00", "lastReqDt": "20160523000000" }											

※ bhfId is branch ID. '00' means head office, 01~n is branch office.


Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ItemRes	Search Item Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
		Item <List>	Item information			tin	TIN	CHAR		9	
						itemClsCd	Item Classification Code	CHAR		10	
						itemCd	Item Code	CHAR		20	
						itemTyCd	item Type Code	CHAR		5	See '4.3. Product type'
						itemNm	item Name	CHAR		200	
						itemStdNm	Item Standard Name	CHAR		200	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						orgnNatCd	Origin Place Code (Nation)	CHAR		5	See ‘4.4. Nation’
						pkgUnitCd	Packaging Unit Code	CHAR		5	See ‘4.5. Packaging Unit’
						qtyUnitCd	Quantity Unit Code	CHAR		5	See ‘4.6. Unit of Quantity’
						taxTyCd	Taxation Type Code	CHAR		5	See ‘4.1. Tax Type’
						btchNo	Batch Number	CHAR		10	
						regBhfld	Regist Branch Office ID	CHAR		2	
						bcd	Barcode	CHAR		20	
						dftPrc	Default Unit Price	NUMBER		18,2	
						grpPrcL1	Group1 Unit Price	NUMBER		18,2	
						grpPrcL2	Group2 Unit Price	NUMBER		18,2	
						grpPrcL3	Group3 Unit Price	NUMBER		18,2	
						grpPrcL4	Group4 Unit Price	NUMBER		18,2	
						grpPrcL5	Group5 Unit Price	NUMBER		18,2	
						addInfo	Add Information	CHAR		7	
						sftyQty	Safety Quantity	NUMBER		13,2	
						isrcAplcbYn	Insurance Applicable Y/N	CHAR		1	
						rraModYn	RRA Modify Y/N (Item Classification Code)	CHAR		1	
						useYn	Used / UnUsed	CHAR		1	

JSON RESPONSE SAMPLE

```
{
  "resultCd": "000",
  "resultMsg": "It is succeeded",
  "resultDt": "20200226193501",
  "data": {
    "itemList": [
      {
        "tin": "999991130",
        "itemCd": "KR2AMXBLL0000001",
        "itemClsCd": "1110160600",
        "itemTyCd": "2",
        "itemNm": "restitem#1",
        "itemStdNm": null,
        "orgnNatCd": "KR",
        "pkgUnitCd": "AM",
        "qtyUnitCd": "BLL",
        "taxTyCd": "B",
        "btchNo": null,
        "regBhfld": "00",
        "bcd": "8801234567061",
        "dftPrc": 21000,
        "grpPrcL1": 0,
        "grpPrcL2": 0,
        "grpPrcL3": 0,
        "grpPrcL4": 0,
        "grpPrcL5": 0,
        "addInfo": null,
        "sftyQty": 0,
        "isrcAplcbYn": "N",
        "rraModYn": "N",
        "useYn": "Y",
        {
          "tin": "999991130",
          "itemCd": "KR2AMXCAX0000001",
          "itemClsCd": "1110170400",
          "itemTyCd": "2",
          "itemNm": "coke1",
          "itemStdNm": null,
          "orgnNatCd": "KR",
          "pkgUnitCd": "AM",
          "qtyUnitCd": "CA",
          "taxTyCd": "B",
          "btchNo": null,
          "regBhfld": "00",
          "bcd": "8801234567891",
          "dftPrc": 5000,
          "grpPrcL1": 0,
          "grpPrcL2": 0,
          "grpPrcL3": 0,
          "grpPrcL4": 0,
          "grpPrcL5": 0,
          "addInfo": null,
          "sftyQty": 0,
          "isrcAplcbYn": "Y",
          "rraModYn": "N",
          "useYn": "Y"
        }
      ]
    }
  }
}
```

3.3.5. Import item Sequence

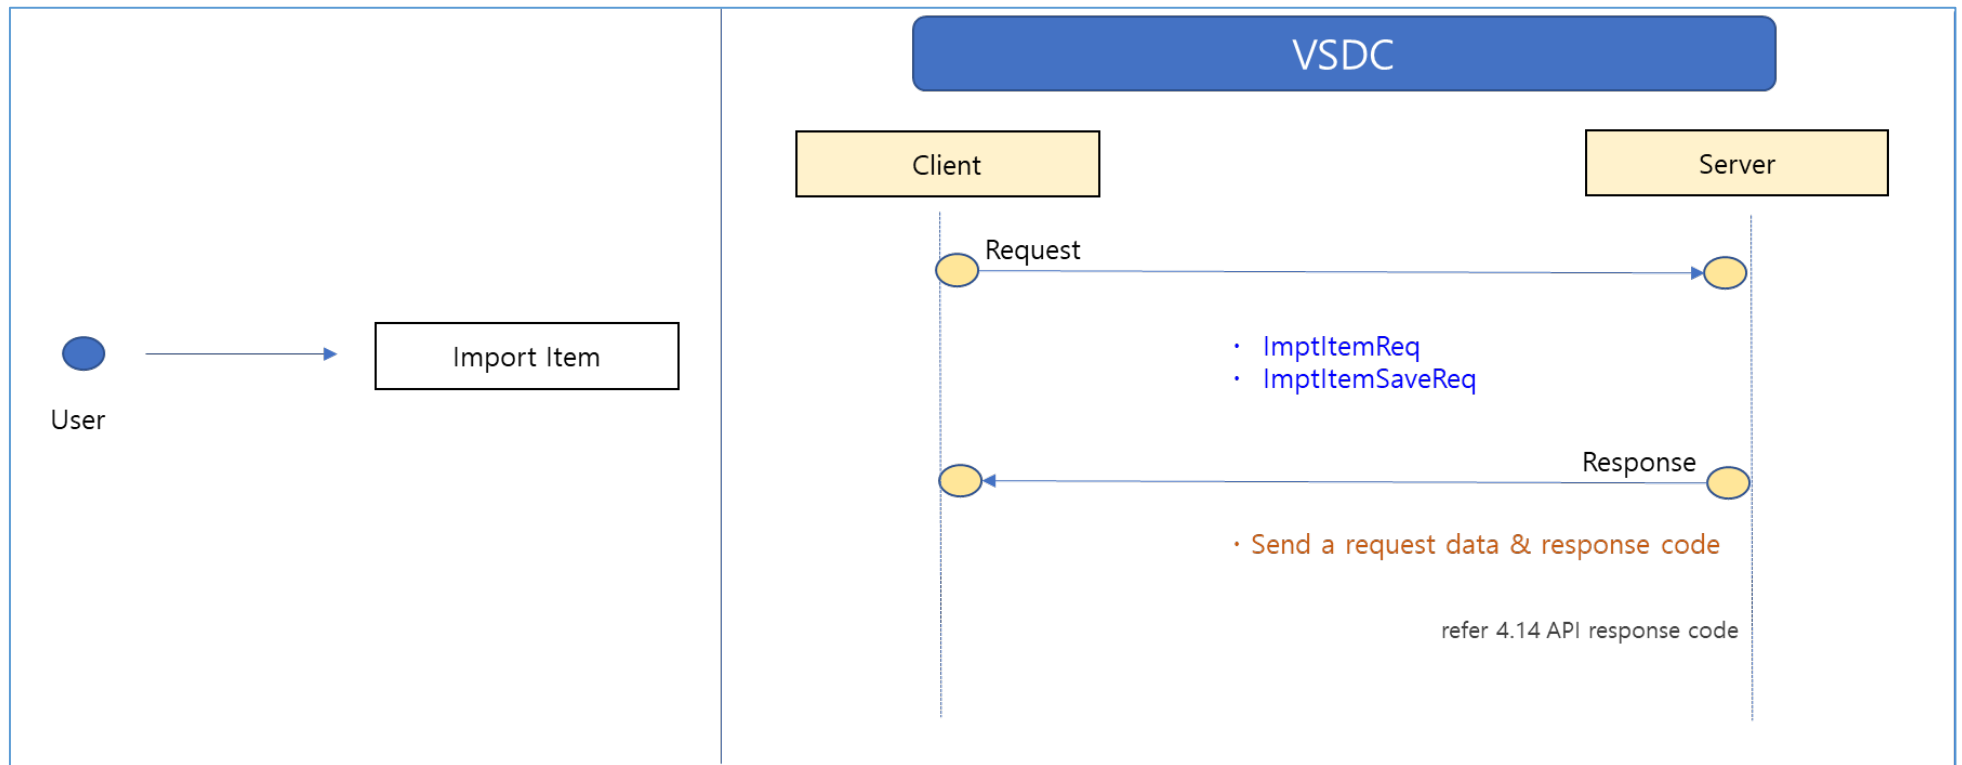

3.3.5.1. Import Items Request /Response

This part describes the components of Import Items API call function (Path : </imports/selectImportItems>) and data types for each Import Items Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The ImptItemReq is an Argument Object of Request, The ImptItemRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ImptItemReq	Search Import Item Request					tin	TIN	CHAR	Y	9	
						bhflId	Branch ID	CHAR	Y	2	
						lastReqDt	Last Request Date	CHAR	Y	14	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhflId": "00", "lastReqDt": "20190524000000" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ImptItemRes	Search Import Item Response					resultCd	Result Code	CHAR		3	
	Response					resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
		ImportItem <List>	Item information			taskCd	Task Code	CHAR		50	
		<List>				dclDe	Declaration Date	CHAR		8	
						itemSeq	Item Sequence	NUMBER		10	
						dclNo	Declaration Number	CHAR		50	
						hsCd	HS Code	CHAR		17	
						itemNm	Item Name	CHAR		500	
						orgnNatCd	Import Item Status Code	CHAR		5	See '4.4. Nation'

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						exptNatCd	Origin Nation Code	CHAR		5	
						pkg	Export Nation Code	NUMBER		13,2	
						pkgUnitCd	Package	CHAR		5	See ‘4.5. Packaging Unit’
						qty	Packaging Unit Code	NUMBER		13,2	
						qtyUnitCd	Quantity	CHAR		5	See ‘4.6. Unit of Quantity’
						totWt	Quantity Unit Code	NUMBER		13,2	
						netWt	Gross Weight	NUMBER		13,2	
						spplrNm	Net Weight	CHAR		500	
						agntNm	Supplier's name	CHAR		500	
						invFcurAmt	Agent name	NUMBER		18,2	See ‘4.1. Tax Type’
						invFcurCd	Invoice Foreign Currency Amount	CHAR		5	See ‘4.7. Currency’
						invFcurExcert	Invoice Foreign Currency	NUMBER		18,2	
JSON RESPONSE SAMPLE											
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226194118", "data": { "itemList": [{ "taskCd": "2239078", "dclDe": "-1", "itemSeq": 1, "dclNo": "C3460-2019-TZDL", "hsCd": "20055900000", "itemNm": "BAKED BEANS", "imptItemsttsCd": "2", "orgnNatCd": "BR", "exptNatCd": "BR", "pkg": 2922, "pkgUnitCd": null, "qty": 19946, "qtyUnitCd": "KGM", "totWt": 19945.57, "netWt": 19945.57, "spplrNm": "ODERICH CONSERVA QUALIDADE\nBRASIL", "agntNm": "BN METRO Ltd", "invFcurAmt": 296865.6, "invFcurCd": "USD", "invFcurExcert": 929.79 }] } }											

3.3.5.2. Import Items Status update Request /Response

This part describes the components of Imported Item status update API function (Path : [/imports/updateImportItems](#)) and data types for each Import Item Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The ImptItemSaveReq is an Argument Object of Request, The ImptItemSaveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ImptItemSaveReq	Update Item Request					tin	TIN	CHAR	Y	9	
						bhflId	Branch ID	CHAR	Y	2	
						taskCd	Task Code	CHAR	Y	50	
						dclDe	Declaration Date	CHAR	Y	8	
						itemSeq	Item Sequence	NUMBER	Y	10	
						hsCd	HS Code	CHAR	Y	17	
						itemClCd	Item Classification Code	CHAR	Y	10	
						itemCd	Item Code	CHAR	Y	20	
						imptItemsttsCd	Import Item Status Code	CHAR	Y	5	See ‘4.18. Import Item status’
						remark	Remark	CHAR	N	400	
						modrNm	Modifier Name		Y	60	
						modrId	Modifier ID		Y	20	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhflId": "00", "taskCd": "2231943", "dclDe": "20191217", "itemSeq": 1, "hsCd": "1231531231", "itemClsCd": "5022110801", "itemCd": "RW1NTXU0000001", "imptItemSttsCd": "1", "remark": "remark", "modrNm": "Admin", "modrId": "Admin" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
ImptItemSaveRes	Update Item Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
JSON RESPONSE SAMPLE											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226194253", "data": null }											

3.3.6. Sales Information Sequence

3.3.6.1. Sales Transaction save Request /Response

This part describes the components of Sales Transaction Save API function (Path: [/trnsSales/saveSales](#)) and data types for each Sales Transaction Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The TrnsSalesSaveReq is an Argument Object of Request, The TrnsSalesSaveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
TrnsSalesSaveWrReq	Save Sales Request					tin	TIN	CHAR	Y	9	
						bhflId	Branch ID	CHAR	Y	2	
						invNo	Invoice Number	NUMBER	Y	38	
						orgInvNo	Original Invoice Number	NUMBER	Y	38	
						custTin	Customer TIN	CHAR	N	9	
						prcOrdCd	Purchase code	CHAR	Y*	6	For Business customers the purchase code is mandatory, for individuals it is optional
						custNm	Customer Name	CHAR	N	60	
						salesTyCd	Sales Type Code	CHAR	Y	5	See '4.8. Transaction Type' Send only 'N' type
						rcptTyCd	Receipt Type Code	CHAR	Y	5	See '4.9. Sale Receipt Type'


Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						pmtTyCd	Payment Type Code	CHAR	N	5	See '4.10. Payment Method'
						salesSttsCd	Invoice Status Code	CHAR	Y	5	See '4.11. Transaction Progress'
						cfmDt	Validated Date	CHAR	Y	14	yyyyMMddhhmmss
						salesDt	Sale Date	CHAR	Y	8	yyyyMMdd
						stockRlsDt	Stock Released Date	CHAR	N	14	yyyyMMddhhmmss
						cnclReqDt	Cancel Requested Date	CHAR	N	14	yyyyMMddhhmmss
						cnclDt	Canceled Date	CHAR	N	14	yyyyMMddhhmmss
						rfdDt	Refunded Date	CHAR	N	14	yyyyMMddhhmmss
						rfdRsnCd	Refunded Reason Code	CHAR	N	5	See '4.15. Transaction Progress'
						totItemCnt	Total Item Count	NUMBER	Y	10	
						taxblAmtA	Taxable Amount A	NUMBER	Y	18,2	
						taxblAmtB	Taxable Amount B	NUMBER	Y	18,2	
						taxblAmtC	Taxable Amount C	NUMBER	Y	18,2	
						taxblAmtD	Taxable Amount D	NUMBER	Y	18,2	
						taxRtA	Tax Rate A	NUMBER	Y	7,2	
						taxRtB	Tax Rate B	NUMBER	Y	7,2	
						taxRtC	Tax Rate C	NUMBER	Y	7,2	
						taxRtD	Tax Rate D	NUMBER	Y	7,2	
						taxAmtA	Tax Amt A	NUMBER	Y	18,2	
						taxAmtB	Tax Amt B	NUMBER	Y	18,2	
						taxAmtC	Tax Amt C	NUMBER	Y	18,2	
						taxAmtD	Tax Amt D	NUMBER	Y	18,2	
						totTaxblAmt	Total Taxable Amount	NUMBER	Y	18,2	
						totTaxAmt	Total Tax Amount	NUMBER	Y	18,2	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						totAmt	Total Amount	NUMBER	Y	18,2	
						prchrAcpteYn	Purchase Accept Y/N	CHAR	Y	1	
						remark	Remark	CHAR	N	400	
						regrNm	Registrant Name	CHAR	Y	60	
						regrId	Registrant ID	CHAR	Y	20	
						modrNm	Modifier Name	CHAR	Y	60	
						modrId	Modifier ID	CHAR	Y	20	
						custTIn	Customer TIN	CHAR	N	9	
						custMblNo	Customer Mobile Number	CHAR	N	20	
						rptNo	Report Number	NUMBER	Y	38	
						trdeNm	Trade Name	CHAR	N	20	
						adrs	Address	CHAR	N	200	
						topMsg	Top Message	CHAR	N	20	
						btmMsg	Bottom Message	CHAR	N	20	
						prchrAcpteYn	Whether buyers receive item or not.	CHAR	Y	1	
		List<Trns SalesSave WrItem>	Sales items information			itemSeq	Item Sequence Number	NUMBER	Y	3	
						itemClsCd	Item Code	CHAR	N	10	
						itemCd	Item Classification Code	CHAR	Y	20	
						itemNm	Item Name	CHAR	Y	200	
						bcd	Barcode	CHAR	N	20	
						pkgUnitCd	Packaging Unit Code	CHAR	Y	5	See '4.5. Packaging Unit'
						pkg	Package	NUMBER	Y	13,2	
						qtyUnitCd	Quantity Unit Code	CHAR	Y	5	See '4.6. Unit of Quantity'
						qty	Quantity	NUMBER	Y	13,2	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						prc	Unit Price	NUMBER	Y	18,2	
						splyAmt	Supply Amount	NUMBER	Y	18,2	
						dcRt	Discount Rate	NUMBER	Y	5,2	
						dcAmt	Discount Amount	NUMBER	Y	18,2	
						isrccCd	Insurance Company Code	CHAR	N	10	
						isrccNm	Insurance Company Name	CHAR	N	100	
						isrcRt	Insurance Rate	NUMBER	N	3	
						isrcAmt	Insurance Amount	NUMBER	N	18,2	
						taxTyCd	Taxation Type Code	CHAR	Y	5	See ‘4.1. Tax Type’
						taxblAmt	Taxable Amount	NUMBER	Y	18,2	
						totTaxAmt	Tax Amount	NUMBER	Y	18,2	
						totAmt	Total Amount	NUMBER	Y	18,2	
JSON REQUEST SAMPLE											
{ "tin": "999999991", "bhflId": "00", "invcNo": 15, "orgInvcNo": 0, "custTin": "999999992", prcOrdCd": "123456", "custNm": "RRA", "salesTyCd": "N", "rcptTyCd": "S", "pmtTyCd": "01", "salesSttsCd": "02", "cfmDt": "20210709120300", "salesDt": "20210709", "stockRlsDt": "20210709120300", "cnclReqDt": null, "cnclDt": null, "rfdDt": null, "rfdRsnCd": null, "totItemCnt": 2, "taxblAmtA": 0, "taxblAmtB": 250000, "taxblAmtC": 0, "taxblAmtD": 0, "taxRtA": 0, "taxRtB": 18, "taxRtC": 0, "taxRtD": 0, "taxAmtA": 0, "taxAmtB": 94576, "taxAmtC": 0, "taxAmtD": 0, "totTaxblAmt": 250000, "totTaxAmt": 38135, "totAmt": 250000, "prchrAcpteYn": "N", "remark": null, "regId": "11999", "regrNm": "Test VSDC", "modrId": "45678", "modrNm": "TestVSDC", "receipt": { "custTin": "100110263", "custMblNo": null, "rptNo": 1, "trdeNm": "", "adrs": "", "topMsg": "Shopwithus", "btmMsg": "Welcome", "prchrAcpteYn": "N" }, "itemList": [{ "itemSeq": 1, "itemCd": "RW1NTXU0000001", "itemClsCd": "5059690800", "itemNm": "OutDoorUnit", "bcd": null, "pkgUnitCd": "NT", "pkg": 1, "qtyUnitCd": "U", "qty": 1, "prc": 200000, "splyAmt": 200000, "dcRt": 0, "dcAmt": 0, "isrccCd": null, "isrccNm": null, "isrcRt": null, "isrcAmt": null, "taxTyCd": "B", "taxblAmt": 200000, "taxAmt": 30508, "totAmt": 200000 }, { "itemSeq": 2, "itemCd": "RW1NTXU0000002", "itemClsCd": "5022110801", "itemNm": "NetworkCable", "bcd": null, "pkgUnitCd": "NT", "pkg": 1, "qtyUnitCd": "U", "qty": 1, "prc": 50000, "splyAmt": 50000, "dcRt": 0, "dcAmt": 0, "isrccCd": null, "isrccNm": null, "isrcRt": null, "isrcAmt": null, "taxTyCd": "B", "taxblAmt": 50000, "taxAmt": 7627, "totAmt": 50000 }] }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
TrnsSalesSaveWrRes	Save Sales Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result DateTime	CHAR		14	
						data	Response data	OBJECT			
JSON RESPONSE SAMPLE											
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226194328", "data": { "rcptNo": 27, "intrlData": "GZGGIZLYTJSSD7YLYLGIIG6FCY", "rcptSign": "TQZMKL57AGBMSTPO", "totRcptNo": 32, "vsdcRcptPbctDate": "20211027162114", "sdcId": "SDC010000005", "mrcNo": "WIS01006230" } }											

3.3.7. Purchase Information Sequence

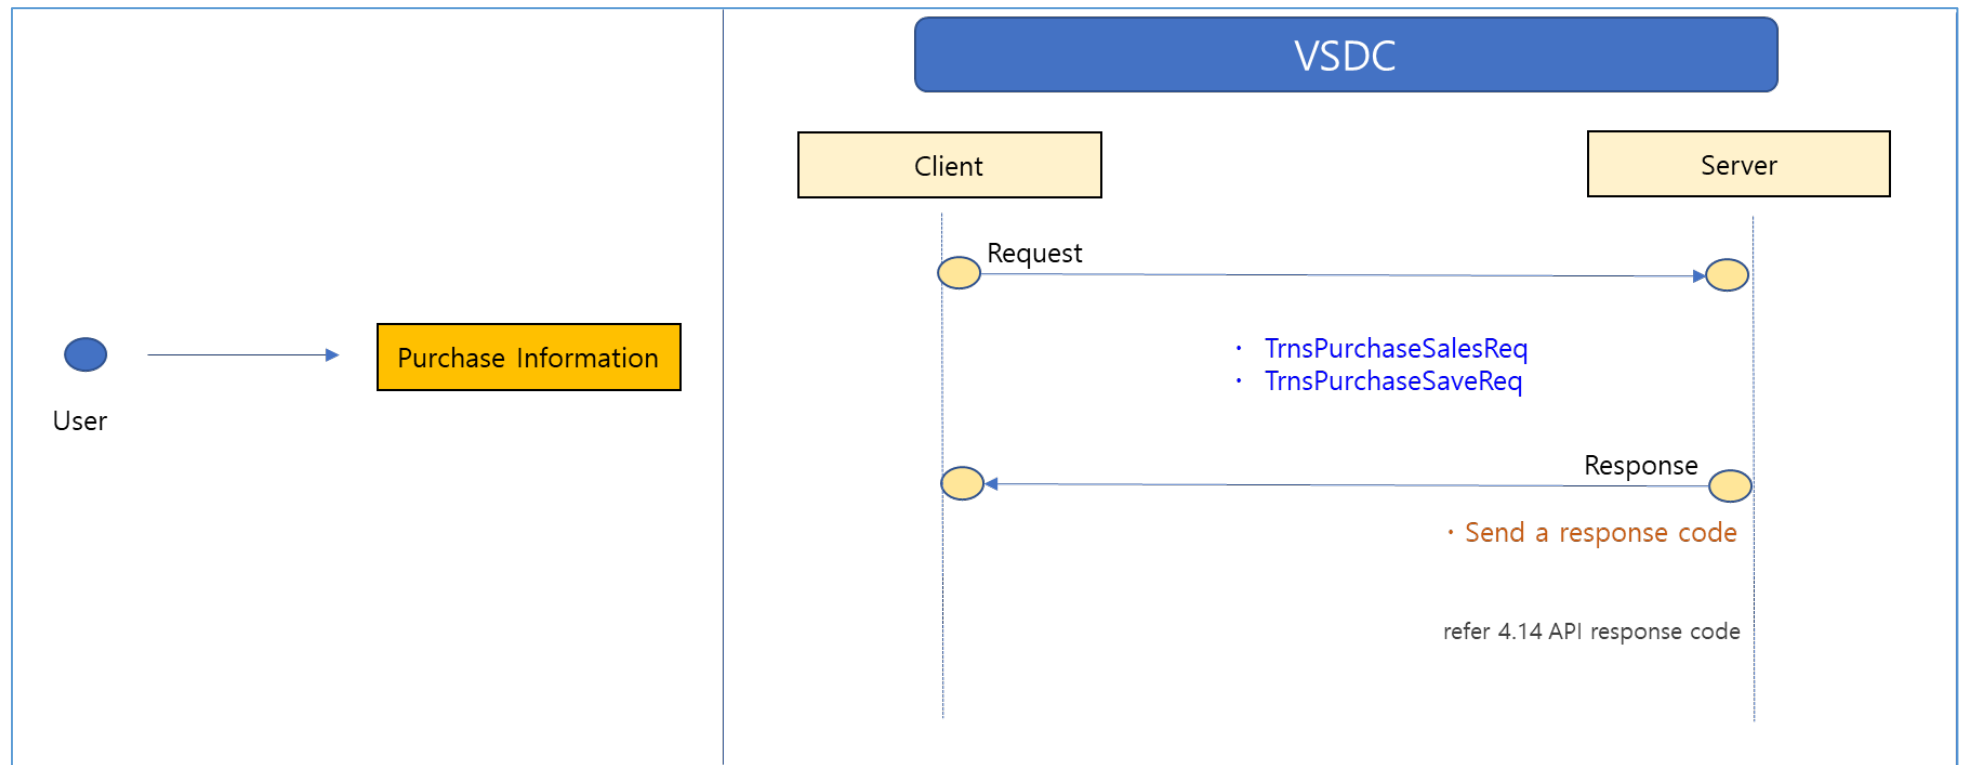

3.3.7.1. Purchase Sales Transaction Select Request /Response

This part describes the components of Purchase-Sales Transaction API function (Path : [/trnsPurchase/selectTrnsPurchaseSales](#)) and data types for each Transaction Sales Purchase Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The TrnsPurchaseSalesReq is an Argument Object of Request, The TrnsPurchaseSalesRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
TrnsPurchaseSalesReq	Search Purchase/Sales Request					tin	TIN	CHAR		9	
						bhfld	Branch ID	CHAR		2	
						lastReqDt	Last Request Date	CHAR		14	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhfld": "00", "lastReqDt": "20190524000000" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
TrnsPurchaseSalesRes	Search Purchase/Sales Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
	TrnsPurchaseSales <List>	Transaction purchase sales information				spplrTin	Supplier TIN	CHAR		9	
						spplrNm	Supplier Name	CHAR		60	
						spplrBhfld	Supplier Branch ID	CHAR		2	
						spplrInvNo	Supplier Invoice Number	NUMBER		38	
						prcOrdCd	Purchase code	CHAR	Y*	6	For Business customers the purchase code is mandatory, for individuals it is optional
						rcptTyCd	Receipt Type	CHAR		5	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
							Code				
						pmtTyCd	Payment Type Code	CHAR		5	
						cfmDt	Validated Date	CHAR		19	YYYY-MM-DD HH24:MI:SS
						salesDt	Sale Date	CHAR		8	YYYYMMDD
						stockRlsDt	Stock Released Date	CHAR		19	YYYY-MM-DD HH24:MI:SS
						totItemCnt	Total Item Count	NUMBER		10	
						taxblAmtA	Taxable Amount A	NUMBER		18,2	
						taxblAmtB	Taxable Amount B	NUMBER		18,2	
						taxblAmtC	Taxable Amount C	NUMBER		18,2	
						taxblAmtD	Taxable Amount D	NUMBER		18,2	
						taxRtA	Tax Rate A	NUMBER		7,2	
						taxRtB	Tax Rate B	NUMBER		7,2	
						taxRtC	Tax Rate C	NUMBER		7,2	
						taxRtD	Tax Rate D	NUMBER		7,2	
						taxAmtA	Tax Amt A	NUMBER		18,2	
						taxAmtB	Tax Amt B	NUMBER		18,2	
						taxAmtC	Tax Amt C	NUMBER		18,2	
						taxAmtD	Tax Amt D	NUMBER		18,2	
						totTaxblAmt	Total Taxable Amount	NUMBER		18,2	
						totTaxAmt	Total Tax Amount	NUMBER		18,2	
						totAmt	Total Amount	NUMBER		18,2	
						remark	Remark	CHAR		400	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
				TrnsPurchaseSalesItem <List>	Transaction purchase sales item information	itemSeq	Item Sequence Number	NUMBER		3	
						itemClsCd	Item Classification Code	CHAR		10	
						itemCd	Item Code	CHAR		20	
						itemNm	Item Name	CHAR		200	
						bcd	Barcode	CHAR		20	
						pkgUnitCd	Packaging Unit Code	CHAR		5	See '4.5. Packaging Unit'
						pkg	Package	NUMBER		13,2	
						qtyUnitCd	Quantity Unit Code	CHAR		5	
						qty	Quantity	NUMBER		13,2	
						prc	Unit Price	NUMBER		18,2	
						splyAmt	Supply Amount	NUMBER		18,2	
						dcRt	Discount Rate	NUMBER		5,2	
						dcAmt	Discount Amount	NUMBER		18,2	
						taxTyCd	Taxation Type Code	NUMBER		5	
						taxblAmt	Taxable Amount	NUMBER		18,2	
						taxAmt	Tax Amount	NUMBER		18,2	
						totAmt	Total Amount	NUMBER		18,2	
JSON RESPONSE SAMPLE											
<pre>{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226195420", "data": { "saleList": [{ "spplrTin": "999991111", "spplrNm": "Taxpayer1111", "spplrBhfId": "00", "spplrInvcNo": "2", "prcOrdCd": "123456", "spplrSdcId": "SDC007000001", "spplrMrcNo": "WIS01000101", "rcptTyCd": "S", "pmtTyCd": "01", "cfmDt": "2020-01-27 21:03:00", "salesDt": "20200127", "stockRlsDt": "2020-01-27 21:03:00", "totItemCnt": "2", "taxblAmtA": "0", "taxblAmtB": "10500", "taxblAmtC": "0", "taxblAmtD": "0", "taxRtA": "0", "taxRtB": "18", "taxRtC": "0", "taxRtD": "0", "taxAmtA": "0", "taxAmtB": "1890", "taxAmtC": "0", "taxAmtD": "0", "totTaxblAmt": "10500", "totTaxAmt": "1890", "totAmt": "10500", "remark": null, "itemList": [{ "itemSeq": "1", "itemCd": "RW1NTXU0000001", "itemClsCd": "5059690800", "itemNm": "test item 1", "bcd": null, "pkgUnitCd": "NT", "pkg": "2", "qtyUnitCd": "U", "qty": "2", "prc": "3500", "splyAmt": "7000", "dcRt": "0", "dcAmt": "0", "taxTyCd": "B", "taxblAmt": "7000", "taxAmt": "1260", "totAmt": "10500" }, { "itemSeq": "2", "itemCd": "RW1NTXU000002", "itemClsCd": "5022110801", "itemNm": "test item 2", "bcd": null, "pkgUnitCd": "NT", "pkg": "1", "qtyUnitCd": "U", "qty": "1", "prc": "3500", "splyAmt": "3500", "dcRt": "0", "dcAmt": "0", "taxTyCd": "B", "taxblAmt": "3500", "taxAmt": "630", "totAmt": "10500" }] }] } }</pre>											

3.3.7.2. Purchase Sales Transaction save Request /Response

This part describes the components of Purchase-Transaction-Save API function (Path : [/trnsPurchase/savePurchases](#)) and data types for each item. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The TrnsPurchaseSaveReq is an Argument Object of Request, The TrnsPurchaseSaveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
TrnsPurchaseSaveReq	Save Purchase Request					tin	TIN	CHAR	Y	9	
						bhflId	Branch ID	CHAR	Y	2	
						spplrTin	Supplier TIN	CHAR	N	9	
						invcNo	Invoice Number	NUMBER	Y	38	
						orgInvcNo	Original Invoice Number	NUMBER	Y	38	
						spplrBhflId	Supplier Branch ID	CHAR	N	2	
						spplrNm	Supplier Name	CHAR	N	60	
						spplrInvcNo	Supplier Invoice Number	NUMBER	N	38	
						spplrSdcId	Supplier SDC ID (for EBM2.0)	CHAR	N	12	
						regTyCd	Registration Type Code	CHAR	Y	5	See '4.12. Transaction Progress'
						pchsTyCd	Purchase Type Code	CHAR	Y	5	See '4.8. Transaction Type'
						rcptTyCd	Receipt Type Code	CHAR	Y	5	See '4.13. Purchase Receipt Type'
						pmtTyCd	Payment Type Code	CHAR	Y	5	See '4.10. Payment Method'
						pchsSttsCd	Purchase Status Code	CHAR	Y	5	See '4.11. Transaction Progress'
						cfmDt	Validated Date	CHAR	N	14	yyyyMMddhhmmss
						pchsDt	Purchase Date	CHAR	Y	8	yyyyMMdd
						wrhsDt	Warehousing Date	CHAR	N	14	yyyyMMddhhmmss
						cnclReqDt	Cancel Requested	CHAR	N	14	yyyyMMddhhmmss


Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
							Date				
						cnclDt	Canceled Date	CHAR	N	14	yyyyMMddhhmmss
						rfdDt	Refunded Date	CHAR	N	14	yyyyMMddhhmmss
						totItemCnt	Total Item Count	NUMBER	Y	10	
						taxblAmtA	Taxable Amount A	NUMBER	Y	18,2	
						taxblAmtB	Taxable Amount B	NUMBER	Y	18,2	
						taxblAmtC	Taxable Amount C	NUMBER	Y	18,2	
						taxblAmtD	Taxable Amount D	NUMBER	Y	18,2	
						taxRtA	Tax Rate A	NUMBER	Y	7,2	
						taxRtB	Tax Rate B	NUMBER	Y	7,2	
						taxRtC	Tax Rate C	NUMBER	Y	7,2	
						taxRtD	Tax Rate D	NUMBER	Y	7,2	
						taxAmtA	Tax Amt A	NUMBER	Y	18,2	
						taxAmtB	Tax Amt B	NUMBER	Y	18,2	
						taxAmtC	Tax Amt C	NUMBER	Y	18,2	
						taxAmtD	Tax Amt D	NUMBER	Y	18,2	
						totTaxblAmt	Total Taxable Amount	NUMBER	Y	18,2	
						totTaxAmt	Total Tax Amount	NUMBER	Y	18,2	
						totAmt	Total Amount	NUMBER	Y	18,2	
						remark	Remark	CHAR	N	400	
						regrNm	Registrant Name	CHAR	Y	60	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						regrId	Registrant ID	CHAR	Y	20	
						modrNm	Modifier Name	CHAR	Y	60	
						modrId	Modifier ID	CHAR	Y	20	
		TrnsPurchaseSaveItem<List>	Save transaction purchase item information			itemSeq	Item Sequence Number	NUMBER	Y	3	
		<List>	Items Information			itemCd	Item Code	CHAR	N	20	
						itemClsCd	Item Classification Code	CHAR	Y	10	
						itemNm	Item Name	CHAR	Y	200	
						bcd	Barcode	CHAR	N	20	
						spplrItemClsCd	Supplier Item Classification Code	CHAR	N	10	
						spplrItemCd	Supplier Item Code	CHAR	N	20	
						spplrItemNm	Supplier Item Name	CHAR	N	200	
						pkgUnitCd	Packaging Unit Code	CHAR	N	5	See '4.5. Packaging Unit'
						pkg	Package	NUMBER	Y	13,2	
						qtyUnitCd	Quantity Unit Code	CHAR	Y	5	See '4.6. Unit of Quantity'
						qty	Quantity	NUMBER	Y	13,2	
						prc	Unit Price	NUMBER	Y	18,2	
						splyAmt	Supply Price	NUMBER	Y	18,2	
						dcRt	Discount Rate	NUMBER	Y	5,2	
						dcAmt	Discaount Amount	NUMBER	Y	18,2	
						taxblAmt	Taxable Amout	NUMBER	Y	18,2	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						taxTyCd	Taxation Type Code	NUMBER	Y	5	See '4.1. Tax Type'
						taxAmt	Tax Amount	NUMBER	Y	18,2	
						totAmt	Total Amount	NUMBER	Y	18,2	
						itemExprDt	Item Expired Date	CHAR	N	8	yyyyMMdd
JSON REQUEST SAMPLE											
<pre>{ "tin": "999991130", "bhfl": "00", "invNo": 1, "orgInvNo": 0, "spplrTin": null, "spplrBhfl": null, "spplrNm": null, "spplrInvNo": null, "regTyCd": "M", "pchsTyCd": "N", "rcptTyCd": "P", "pmtTyCd": "01", "pchsSttsCd": "02", "cfmDt": "20200127210300", "pchsDt": "20200127", "wrhsDt": "", "enclReqDt": "", "enclDt": "", "rfdDt": "", "totItemCnt": 2, "taxblAmtA": 0, "taxblAmtB": 10500, "taxblAmtC": 0, "taxblAmtD": 0, "taxRtA": 0, "taxRtB": 18, "taxRtC": 0, "taxRtD": 0, "taxAmtA": 0, "taxAmtB": 1890, "taxAmtC": 0, "taxAmtD": 0, "totTaxblAmt": 10500, "totTaxAmt": 1890, "totAmt": 10500, "remark": null, "regrNm": "Admin", "regrId": "Admin", "modrNm": "Admin", "modrId": "Admin", "itemList": [{ "itemSeq": 1, "itemCd": "RW1NTXU0000001", "itemClsCd": "5059690800", "itemNm": "test item 1", "bcd": "", "spplrItemClsCd": null, "spplrItemCd": null, "spplrItemNm": null, "pkgUnitCd": "NT", "pkg": 2, "qtyUnitCd": "U", "qty": 2, "prc": 3500, "splyAmt": 7000, "dcRt": 0, "dcAmt": 0, "taxblAmt": 7000, "taxTyCd": "B", "taxAmt": 1260, "totAmt": 7000, "itemExprDt": null }, { "itemSeq": 2, "itemCd": "RW1NTXU0000002", "itemClsCd": "5022110801", "itemNm": "test item 2", "bcd": "", "spplrItemClsCd": null, "spplrItemCd": null, "spplrItemNm": null, "pkgUnitCd": "NT", "pkg": 1, "qtyUnitCd": "U", "qty": 1, "prc": 3500, "splyAmt": 3500, "dcRt": 0, "dcAmt": 0, "taxblAmt": 3500, "taxTyCd": "B", "taxAmt": 630, "totAmt": 3500, "itemExprDt": null }] }</pre>											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
TrnsPurchaseSaveRes	Save Purchase Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result DateTime	CHAR		14	
JSON RESPONSE SAMPLE											
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226194650", "data": null }											

3.3.8. Stock Information Sequence

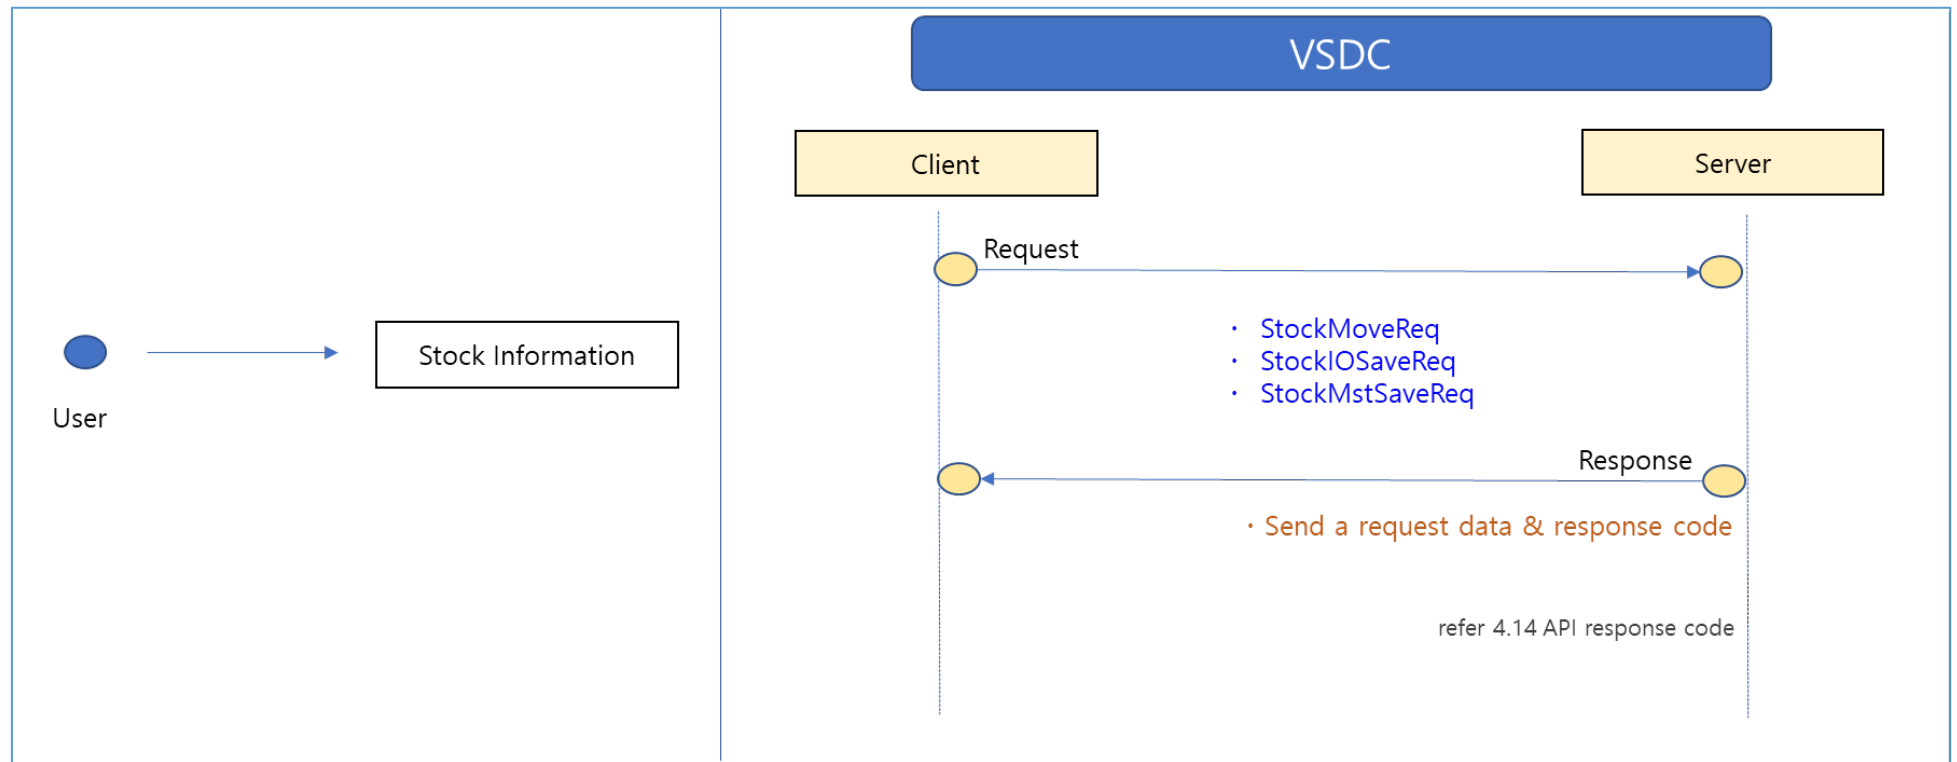

3.3.8.1. Stock Move Request/Response

This part describes the components of Stock Movement API function (Path : [/stock/selectStockItems](#)) and data types for each Stock Move Item Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The StockMoveReq is an Argument Object of Request, The StockMoveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
StockMoveReq	Search Stock Movement Request					tin	TIN	CHAR	Y	9	
						bhfid	Branch ID	CHAR	Y	2	
						lastReqDt	Last Request date time	CHAR	Y	14	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhfid": "00", "lastReqDt": "20180524000000" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
StockMoveRes	Search Stock Movement Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
		StockMove<List>	Stock movement information			custTin	Customer TIN	CHAR		9	
						custBhfid	Customer Branch Office ID	CHAR		2	
						sarNo	Stored and released Number	NUMBER		38	
						ocrnDt	Occurred Date	CHAR		8	yyyyMMdd
						totItemCnt	Total Item Count	NUMBER		10	
						totTaxblAmt	Total Supply Price	NUMBER		18,2	
						totTaxAmt	Total VAT	NUMBER		18,2	
						totAmt	Total Amount	NUMBER		18,2	
						remark	Remark	CHAR		400	
				StockMoveItem	Stock	itemSeq	Item Sequence	NUMBER		3	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
				<List>	movement Item	itemClsCd	Item Class Code	CHAR		10	
						itemCd	Item Code	CHAR		20	
						itemNm	Item Name	CHAR		200	
						bcd	Barcode	CHAR		20	
						pkgUnitCd	Package unit code	CHAR		5	
						pkg	Package Quantity	NUMBER		13,2	
						qtyUnitCd	Unit Quantity Code	CHAR		5	
						qty	Unit Quantity	NUMBER		13,2	
						itemExprDt	Item Expired Date	CHAR		8	yyyyMMdd
						prc	Unit Price	NUMBER		15,2	
						splyAmt	Supply Amount	NUMBER		18,2	
						totDcAmt	Discount Rate	NUMBER		18,2	
						taxblAmt	Taxable Amount	NUMBER		18,2	
						taxTyCd	Taxation Type Code	CHAR		5	See '4.1. Tax Type'
						taxAmt	Tax Amount	NUMBER		18,2	
						totAmt	Total Amount	NUMBER		18,2	0
JSON RESPONSE SAMPLE											
<pre>{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226200723", "data": { "stockList": [{ "custTin": "999991130", "custBhflD": "00", "sarNo": 6, "ocrnDt": "20200120", "totItemCnt": 1, "totTaxblAmt": 1800000, "totTaxAmt": 274576.27, "totAmt": 1800000, "remark": null, "itemList": [{ "itemSeq": 1, "itemCd": "KR2BZX0000001", "itemClsCd": "1110162100", "itemNm": "Grocery_Item#1", "bcd": "8801234567051", "pkgUnitCd": "BZ", "pkg": 0, "qtyUnitCd": "CA", "qty": 450, "itemExprDt": null, "prc": 4000, "splyAmt": 1800000, "totDcAmt": 0, "taxblAmt": 1800000, "taxTyCd": "B", "taxAmt": 274576.27, "totAmt": 1800000 }] }, { "custTin": "999991130", "custBhflD": "00", "sarNo": 59, "ocrnDt": "20200110", "totItemCnt": 1, "totTaxblAmt": 660000, "totTaxAmt": 100677.97, "totAmt": 660000, "remark": null, "itemList": [{ "itemSeq": 1, "itemCd": "KR2AMXCRX0000001", "itemClsCd": "1110151600", "itemNm": "sample_nudle#1", "bcd": "8801234567001", "pkgUnitCd": "AM", "pkg": 0, "qtyUnitCd": "CR", "qty": 600, "itemExprDt": null, "prc": 1100, "splyAmt": 660000, "totDcAmt": 0, "taxblAmt": 660000, "taxTyCd": "B", "taxAmt": 100677.97, "totAmt": 660000 }] }] } }</pre>											

3.3.8.2. Stock In /Out save Request/ Response

This part describes the components of Stock In/Out-Save API function (Path: [/stock/saveStockItems](#)) and data types for each Stock In/Out-Save Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The StockIOSaveReq is an Argument Object of Request, The StockIOSaveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
StockIOSaveReq	Save Stock In/Out Request					tin	TIN	CHAR	Y	9	
						bhflId	Branch ID	CHAR	Y	2	
						sarNo	Stored and released Number	NUMBER	Y	38	
						orgSarNo	Original Stored and released Number	NUMBER	Y	38	
						regTyCd	Registration Type Code	CHAR	Y	5	
						custTin	Customer TIN	CHAR	N	9	
						custNm	Customer Name	CHAR	N	100	
						custBhflId	Customer BHF ID	CHAR	N	2	
						sarTyCd	Stored and released Type Code	CHAR	Y	5	See '4.15. Stock In/Out Type'
						ocrnDt	Occurred Date time	CHAR	Y	8	yyyyMMdd
						totItemCnt	Total Item Count	NUMBER	Y	10	
						totTaxblAmt	Total Supply Price	NUMBER	Y	18,2	
						totTaxAmt	Total VAT	NUMBER	Y	18,2	
						totAmt	Total Amount	NUMBER	Y	18,2	
						remark	Remark	CHAR	N	400	
						regrNm	Registrant Name	CHAR	Y	60	
						regrId	Registrant ID	CHAR	Y	20	
						modrNm	Modifier Name	CHAR	Y	60	
						modrId	Modifier ID	CHAR	Y	20	
		StockIOSaveItem <List>	Stock in/out item information			itemSeq	Item Sequence	NUMBER	Y	3	
						itemCd	Item Code	CHAR	N	20	

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
						itemClsCd	Item Class Code	CHAR	Y	10	
						itemNm	Item Name	CHAR	Y	200	
						bcd	Barcode	CHAR	N	20	
						pkgUnitCd	Package unit code	CHAR	Y	5	
						pkg	Package Quantity	NUMBER	Y	13,2	
						qtyUnitCd	Unit Quantity Code	CHAR	Y	5	See '4.5. Packaging Unit'
						qty	Unit Quantity	NUMBER	Y	13,2	
						itemExprDt	Item Expired Date	CHAR	N	8	yyyyMMdd
						prc	Unit Price	NUMBER	Y	15,2	
						splyAmt	Supply Amount	NUMBER	Y	18,2	
						totDcAmt	Discount Amount	NUMBER	Y	18,2	
						taxblAmt	Taxable Amount	NUMBER	Y	18,2	
						taxTyCd	Taxation Type Code	CHAR	Y	5	See '4.1 Tax Type'
						taxAmt	Tax Amount	NUMBER	Y	18,2	
						totAmt	Total Amount	NUMBER	Y	18,2	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhflD": "00", "sarNo": 2, "orgSarNo": 2, "regTyCd": "M", "custTin": null, "custNm": null, "custBhflD": null, "sarTyCd": "11", "ocrnDt": "20200126", "totItemCnt": 2, "totTaxblAmt": 70000, "totTaxAmt": 12000, "totAmt": 70000, "remark": null, "regrId": "Admin", "regrNm": "Admin", "modrNm": "Admin", "modrId": "Admin", "itemList": [{ "itemSeq": 1, "itemCd": "RW1NTXU0000001", "itemClsCd": "5059690800", "itemNm": "test item 1", "bcd": null, "pkgUnitCd": "NI", "pkg": 10, "qtyUnitCd": "U", "qty": 10, "itemExprDt": null, "prc": 3500, "splyAmt": 35000, "totDcAmt": 0, "taxblAmt": 35000, "taxTyCd": "B", "taxAmt": 6000, "totAmt": 35000 }, { "itemSeq": 2, "itemCd": "RW1NTXU0000002", "itemClsCd": "5059690800", "itemNm": "test item 2", "bcd": null, "pkgUnitCd": "NI", "pkg": 10, "qtyUnitCd": "U", "qty": 10, "itemExprDt": null, "prc": 3500, "splyAmt": 35000, "totDcAmt": 0, "taxblAmt": 35000, "taxTyCd": "B", "taxAmt": 6000, "totAmt": 35000 }] }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
StockIOSaveRes	Save Stock In/Out Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	

JSON RESPONSE SAMPLE

<pre>{"resultCd":"000","resultMsg":"It is succeeded","resultDt":"20200226195801","data":null}</pre>

3.3.8.3. Stock Master Save Request/Response

This part describes the components of Save-StockMaster API function (Path: [/stockMaster/saveStockMaster](#)) and data types for each Stock Master Save Entity attribute. This API function is divided into 'Request: Argument' and 'Response: Return Object'. The StockMstSaveReq is an Argument Object of Request, The StockMstSaveRes is a Return Object of Response.

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
StockMstSaveReq	Save Stock Master Request					tin	TIN	CHAR	Y	9	
						bhfld	Branch ID	CHAR	Y	2	
						itemCd	Item Code	CHAR	Y	20	
						rsdQty	Remain Quantity	NUMBER	Y	13,2	
						regrNm	Registrant Name	CHAR	Y	60	
						regrId	Registrant ID	CHAR	Y	20	
						modrNm	Modifier Name	CHAR	Y	60	
						modrId	Modifier ID	CHAR	Y	20	
JSON REQUEST SAMPLE											
{ "tin": "999991130", "bhfld": "00", "itemCd": "RW1NTXU0000002", "rsdQty": 10, "regrId": "Admin", "regrNm": "Admin", "modrNm": "Admin", "modrId": "Admin" }											

Object						Attribute					
Object ID	Object Name	Sub Object_1		Sub Object_2		Attribute ID	Attribute Name	Data Type	Required	Data Length	Format
		Object ID	Object Name	Object ID	Object Name						
StockMstSaveRes	Save Stock Master Response					resultCd	Result Code	CHAR		3	
						resultMsg	Result Message	CHAR			
						resultDt	Result Date	CHAR		14	
JSON RESPONSE SAMPLE											
{ "resultCd": "000", "resultMsg": "It is succeeded", "resultDt": "20200226195637", "data": null }											

4. Code Definition

4.1. Tax Type

Code Classification			Code Classification Name	
04			Tax Type	
Code	Sort Order	Code Name	Code Description	remark
A	1	A-EX	A-EX	
B	2	B-18.00%	B-18.00%	
C	3	C	C	
D	4	D	D	

4.2. Taxpayer Status

Code Classification			Code Classification Name	
15			Taxpayer Status	
Code	Sort Order	Code Name	Code Description	remark
A	1	Active	Active	
D	2	Discard	Discard	

4.3. Product Type

Code Classification			Code Classification Name	
24			Product Type	
Code	Sort Order	Code Name	Code Description	remark
1	1	Raw Material	Raw Material	
2	2	Finished Product	Finished Product	
3	3	Service	Service without stock	

4.4. Countries code

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
AC	1	ASCENSION ISLAND	ASCENSION ISLAND	
AD	2	ANDORRA	ANDORRA	
AE	3	UNITED ARAB EMIRATES	UNITED ARAB EMIRATES	
AG	4	ANTIGUA AND BARBUDA	ANTIGUA AND BARBUDA	
AI	5	ANGUILLA	ANGUILLA	
AL	6	ALBANIA	ALBANIA	
AM	7	ARMENIA	ARMENIA	
AN	8	NETHERLANDS ANTILLES	NETHERLANDS ANTILLES	
AO	9	ANGOLA	ANGOLA	
AQ	10	ANTARCTICA	ANTARCTICA	
AR	11	ARGENTINA	ARGENTINA	
AS	12	AMERICAN SAMOA	AMERICAN SAMOA	
AT	13	AUSTRIA	AUSTRIA	
AU	14	AUSTRALIA	AUSTRALIA	
AW	15	ARUBA	ARUBA	
AX	16	ALAND ISLANDS	ALAND ISLANDS	

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
AZ	17	AZERBAIJAN	AZERBAIJAN	
BA	18	BOSNIA AND HERZEGOVINA	BOSNIA AND HERZEGOVINA	
BB	19	BARBADOS	BARBADOS	
BD	20	BANGLADESH	BANGLADESH	
BE	21	BELGIUM	BELGIUM	
BF	22	BURKINA FASO	BURKINA FASO	
BG	23	BULGARIA	BULGARIA	
BH	24	BAHRAIN	BAHRAIN	
BI	25	BURUNDI	BURUNDI	
BJ	26	BENIN	BENIN	
BM	27	BERMUDA	BERMUDA	
BN	28	BRUNEI DARUSSALAM	BRUNEI DARUSSALAM	
BO	29	BOLIVIA	BOLIVIA	
BR	30	BRAZIL	BRAZIL	
BS	31	BAHAMAS	BAHAMAS	
BT	32	BHUTAN	BHUTAN	
BV	33	BOUVET ISLAND	BOUVET ISLAND	
BW	34	BOTSWANA	BOTSWANA	
BY	35	BELARUS	BELARUS	
BZ	36	BELIZE	BELIZE	
CA	37	CANADA	CANADA	
CC	38	COCOS (KEELING) ISLANDS	COCOS (KEELING) ISLANDS	
CD	39	CONGO, DEMOCRATIC REPUBLIC	CONGO, DEMOCRATIC REPUBLIC	
CF	40	CENTRAL AFRICAN REPUBLIC	CENTRAL AFRICAN REPUBLIC	
CG	41	CONGO	CONGO	
CH	42	SWITZERLAND	SWITZERLAND	
CI	43	COTE D'IVOIRE (IVORY COAST)	COTE D'IVOIRE (IVORY COAST)	
CK	44	COOK ISLANDS	COOK ISLANDS	
CL	45	CHILE	CHILE	
CM	46	CAMEROON	CAMEROON	
CN	47	CHINA	CHINA	
CO	48	COLOMBIA	COLOMBIA	
CR	49	COSTA RICA	COSTA RICA	
CS	50	CZECHOSLOVAKIA (FORMER)	CZECHOSLOVAKIA (FORMER)	
CU	51	CUBA	CUBA	
CV	52	CAPE VERDE	CAPE VERDE	
CX	53	CHRISTMAS ISLAND	CHRISTMAS ISLAND	
CY	54	CYPRUS	CYPRUS	
CZ	55	CZECH REPUBLIC	CZECH REPUBLIC	
DE	56	GERMANY	GERMANY	
DJ	57	DJIBOUTI	DJIBOUTI	
DK	58	DENMARK	DENMARK	
DM	59	DOMINICA	DOMINICA	

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
DO	60	DOMINICAN REPUBLIC	DOMINICAN REPUBLIC	
DZ	61	ALGERIA	ALGERIA	
EC	62	ECUADOR	ECUADOR	
EE	63	ESTONIA	ESTONIA	
EG	64	EGYPT	EGYPT	
EH	65	WESTERN SAHARA	WESTERN SAHARA	
ER	66	ERITREA	ERITREA	
ES	67	SPAIN	SPAIN	
ET	68	ETHIOPIA	ETHIOPIA	
EU	69	EUROPEAN UNION	EUROPEAN UNION	
FI	70	FINLAND	FINLAND	
FJ	71	FIJI	FIJI	
FK	72	FALKLAND ISLANDS (MALVINAS)	FALKLAND ISLANDS (MALVINAS)	
FM	73	MICRONESIA	MICRONESIA	
FO	74	FAROE ISLANDS	FAROE ISLANDS	
FR	75	FRANCE	FRANCE	
FX	76	FRANCE, METROPOLITAN	FRANCE, METROPOLITAN	
GA	77	GABON	GABON	
GB	78	GREAT BRITAIN (UK)	GREAT BRITAIN (UK)	
GD	79	GRENADA	GRENADA	
GE	80	GEORGIA	GEORGIA	
GF	81	FRENCH GUIANA	FRENCH GUIANA	
GG	82	GUERNSEY	GUERNSEY	
GH	83	GHANA	GHANA	
GI	84	GIBRALTAR	GIBRALTAR	
GL	85	GREENLAND	GREENLAND	
GM	86	GAMBIA	GAMBIA	
GN	87	GUINEA	GUINEA	
GP	88	GUADELOUPE	GUADELOUPE	
GQ	89	EQUATORIAL GUINEA	EQUATORIAL GUINEA	
GR	90	GREECE	GREECE	
GS	91	S. GEORGIA AND S. SANDWICH ISLS.	S. GEORGIA AND S. SANDWICH ISLS.	
GT	92	GUATEMALA	GUATEMALA	
GU	93	GUAM	GUAM	
GW	94	GUINEA BISSAU	GUINEA BISSAU	
GY	95	GUYANA	GUYANA	
HK	96	HONG KONG	HONG KONG	
HM	97	HEARD AND MCDONALD ISLANDS	HEARD AND MCDONALD ISLANDS	
HN	98	HONDURAS	HONDURAS	
HR	99	CROATIA (HRVATSKA)	CROATIA (HRVATSKA)	
HT	100	HAITI	HAITI	
HU	101	HUNGARY	HUNGARY	
ID	102	INDONESIA	INDONESIA	
IE	103	IRELAND	IRELAND	

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
IL	104	ISRAEL	ISRAEL	
IM	105	ISLE OF MAN	ISLE OF MAN	
IN	106	INDIA	INDIA	
IO	107	BRITISH INDIAN OCEAN TERRITORY	BRITISH INDIAN OCEAN TERRITORY	
IQ	108	IRAQ	IRAQ	
IR	109	IRAN	IRAN	
IS	110	ICELAND	ICELAND	
IT	111	ITALY	ITALY	
JE	112	JERSEY	JERSEY	
JM	113	JAMAICA	JAMAICA	
JO	114	JORDAN	JORDAN	
JP	115	JAPAN	JAPAN	
KE	116	KENYA	KENYA	
KG	117	KYRGYZSTAN	KYRGYZSTAN	
KH	118	CAMBODIA	CAMBODIA	
KI	119	KIRIBATI	KIRIBATI	
KM	120	COMOROS	COMOROS	
KN	121	SAINT KITTS AND NEVIS	SAINT KITTS AND NEVIS	
KP	122	NORTH KOREA	NORTH KOREA	
KR	123	SOUTH KOREA	SOUTH KOREA	
KW	124	KUWAIT	KUWAIT	
KY	125	CAYMAN ISLANDS	CAYMAN ISLANDS	
KZ	126	KAZAKHSTAN	KAZAKHSTAN	
LA	127	LAOS	LAOS	
LB	128	LEBANON	LEBANON	
LC	129	SAINT LUCIA	SAINT LUCIA	
LI	130	LIECHTENSTEIN	LIECHTENSTEIN	
LK	131	SRI LANKA	SRI LANKA	
LR	132	LIBERIA	LIBERIA	
LS	133	LESOTHO	LESOTHO	
LT	134	LITHUANIA	LITHUANIA	
LU	135	LUXEMBOURG	LUXEMBOURG	
LV	136	LATVIA	LATVIA	
LY	137	LIBYA	LIBYA	
MA	138	MOROCCO	MOROCCO	
MC	139	MONACO	MONACO	
MD	140	MOLDOVA	MOLDOVA	
ME	141	MONTENEGRO	MONTENEGRO	
MG	142	MADAGASCAR	MADAGASCAR	
MH	143	MARSHALL ISLANDS	MARSHALL ISLANDS	
MK	144	F.Y.R.O.M. (MACEDONIA)	F.Y.R.O.M. (MACEDONIA)	
ML	145	MALI	MALI	
MM	146	MYANMAR	MYANMAR	
MN	147	MONGOLIA	MONGOLIA	
MO	148	MACAU	MACAU	

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
MP	149	NORTHERN MARIANA ISLANDS	NORTHERN MARIANA ISLANDS	
MQ	150	MARTINIQUE	MARTINIQUE	
MR	151	MAURITANIA	MAURITANIA	
MS	152	MONTSERRAT	MONTSERRAT	
MT	153	MALTA	MALTA	
MU	154	MAURITIUS	MAURITIUS	
MV	155	MALDIVES	MALDIVES	
MW	156	MALAWI	MALAWI	
MX	157	MEXICO	MEXICO	
MY	158	MALAYSIA	MALAYSIA	
MZ	159	MOZAMBIQUE	MOZAMBIQUE	
NA	160	NAMIBIA	NAMIBIA	
NC	161	NEW CALEDONIA	NEW CALEDONIA	
NE	162	NIGER	NIGER	
NF	163	NORFOLK ISLAND	NORFOLK ISLAND	
NG	164	NIGERIA	NIGERIA	
NI	165	NICARAGUA	NICARAGUA	
NL	166	NETHERLANDS	NETHERLANDS	
NO	167	NORWAY	NORWAY	
NP	168	NEPAL	NEPAL	
NR	169	NAURU	NAURU	
NT	170	NEUTRAL ZONE	NEUTRAL ZONE	
NU	171	NIUE	NIUE	
NZ	172	NEW ZEALAND (AOTEAROA)	NEW ZEALAND (AOTEAROA)	
OM	173	OMAN	OMAN	
PA	174	PANAMA	PANAMA	
PE	175	PERU	PERU	
PF	176	FRENCH POLYNESIA	FRENCH POLYNESIA	
PG	177	PAPUA NEW GUINEA	PAPUA NEW GUINEA	
PH	178	PHILIPPINES	PHILIPPINES	
PK	179	PAKISTAN	PAKISTAN	
PL	180	POLAND	POLAND	
PM	181	ST. PIERRE AND MIQUELON	ST. PIERRE AND MIQUELON	
PN	182	PITCAIRN	PITCAIRN	
PR	183	PUERTO RICO	PUERTO RICO	
PS	184	PALESTINIAN TERRITORY, OCCUPIED	PALESTINIAN TERRITORY, OCCUPIED	
PT	185	PORTUGAL	PORTUGAL	
PW	186	PALAU	PALAU	
PY	187	PARAGUAY	PARAGUAY	
QA	188	QATAR	QATAR	
RE	189	REUNION	REUNION	
RO	190	ROMANIA	ROMANIA	
RS	191	SERBIA	SERBIA	
RU	192	RUSSIAN FEDERATION	RUSSIAN FEDERATION	

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
RW	193	RWANDA	RWANDA	
SA	194	SAUDI ARABIA	SAUDI ARABIA	
SB	195	SOLOMON ISLANDS	SOLOMON ISLANDS	
SC	196	SEYCHELLES	SEYCHELLES	
SD	197	SUDAN	SUDAN	
SE	198	SWEDEN	SWEDEN	
SG	199	SINGAPORE	SINGAPORE	
SH	200	ST. HELENA	ST. HELENA	
SI	201	SLOVENIA	SLOVENIA	
SJ	202	SVALBARD & JAN MAYEN ISLANDS	SVALBARD & JAN MAYEN ISLANDS	
SK	203	SLOVAK REPUBLIC	SLOVAK REPUBLIC	
SL	204	SIERRA LEONE	SIERRA LEONE	
SM	205	SAN MARINO	SAN MARINO	
SN	206	SENEGAL	SENEGAL	
SO	207	SOMALIA	SOMALIA	
SR	208	SURINAME	SURINAME	
ST	209	SAO TOME AND PRINCIPE	SAO TOME AND PRINCIPE	
SU	210	USSR (FORMER)	USSR (FORMER)	
SV	211	EL SALVADOR	EL SALVADOR	
SY	212	SYRIA	SYRIA	
SZ	213	SWAZILAND	SWAZILAND	
TC	214	TURKS AND CAICOS ISLANDS	TURKS AND CAICOS ISLANDS	
TD	215	CHAD	CHAD	
TF	216	FRENCH SOUTHERN TERRITORIES	FRENCH SOUTHERN TERRITORIES	
TG	217	TOGO	TOGO	
TH	218	THAILAND	THAILAND	
TJ	219	TAJIKISTAN	TAJIKISTAN	
TK	220	TOKELAU	TOKELAU	
TM	221	TURKMENISTAN	TURKMENISTAN	
TN	222	TUNISIA	TUNISIA	
TO	223	TONGA	TONGA	
TP	224	EAST TIMOR	EAST TIMOR	
TR	225	TURKEY	TURKEY	
TT	226	TRINIDAD AND TOBAGO	TRINIDAD AND TOBAGO	
TV	227	TUVALU	TUVALU	
TW	228	TAIWAN	TAIWAN	
TZ	229	TANZANIA	TANZANIA	
UA	230	UKRAINE	UKRAINE	
UG	231	UGANDA	UGANDA	
UK	232	UNITED KINGDOM	UNITED KINGDOM	
UM	233	US MINOR OUTLYING ISLANDS	US MINOR OUTLYING ISLANDS	
US	234	UNITED STATES	UNITED STATES	
UY	235	URUGUAY	URUGUAY	
UZ	236	UZBEKISTAN	UZBEKISTAN	

Code Classification			Code Classification Name	
05			Nation	
Code	Sort Order	Code Name	Code Description	remark
VA	237	VATICAN CITY STATE (HOLY SEE)	VATICAN CITY STATE (HOLY SEE)	
VC	238	SAINT VINCENT & THE GRENADINES	SAINT VINCENT & THE GRENADINES	
VE	239	VENEZUELA	VENEZUELA	
VG	240	BRITISH VIRGIN ISLANDS	BRITISH VIRGIN ISLANDS	
VI	241	VIRGIN ISLANDS (U.S.)	VIRGIN ISLANDS (U.S.)	
VN	242	VIET NAM	VIET NAM	
VU	243	VANUATU	VANUATU	
WF	244	WALLIS AND FUTUNA ISLANDS	WALLIS AND FUTUNA ISLANDS	
WS	245	SAMOA	SAMOA	
YE	246	YEMEN	YEMEN	
YT	247	MAYOTTE	MAYOTTE	
YU	248	SERBIA AND MONTENEGRO (FORMER)	SERBIA AND MONTENEGRO (FORMER)	
ZA	249	SOUTH AFRICA	SOUTH AFRICA	
ZM	250	ZAMBIA	ZAMBIA	
ZR	251	(ZAIRE) SEE CD CONGO, DEMOCRATIC REPUBLIC	(ZAIRE) SEE CD CONGO, DEMOCRATIC REPUBLIC	
ZW	252	ZIMBABWE	ZIMBABWE	

4.5. Packaging Unit

Code Classification			Code Classification Name	
17			Packaging Unit	
Code	Sort Order	Code Name	Code Description	remark
AM	1	Ampoule	Ampoule	
BA	2	Barrel	Barrel	
BC	3	Bottlecrate	Bottlecrate	
BE	4	Bundle	Bundle	
BF	5	Balloon, non-protected	Balloon, non-protected	
BG	6	Bag	Bag	
BJ	7	Bucket	Bucket	
BK	8	Basket	Basket	
BL	9	Bale	Bale	
BQ	10	Bottle, protected cylindrical	Bottle, protected cylindrical	
BR	11	Bar	Bar	
BV	12	Bottle, bulbous	Bottle, bulbous	
BZ	13	Bag	Bag	
CA	14	Can	Can	
CH	15	Chest	Chest	
CJ	16	Coffin	Coffin	
CL	17	Coil	Coil	
CR	18	Wooden Box, Wooden Case	Wooden Box, Wooden Case	
CS	19	Cassette	Cassette	

Code Classification			Code Classification Name	
17			Packaging Unit	
Code	Sort Order	Code Name	Code Description	remark
CT	20	Carton	Carton	
CTN	21	Container	Container	
CY	22	Cylinder	Cylinder	
DR	23	Drum	Drum	
GT	24	Extra Countable Item	Extra Countable Item	
HH	25	Hand Baggage	Hand Baggage	
IZ	26	Ingots	Ingots	
JR	27	Jar	Jar	
JU	28	Jug	Jug	
JY	29	Jerry CAN Cylindrical	Jerry CAN Cylindrical	
KZ	30	Canester	Canester	
LZ	31	Logs, in bundle/bunch/truss	Logs, in bundle/bunch/truss	
NT	32	Net	Net	
OU	33	Non-Exterior Packaging Unit	Non-Exterior Packaging Unit	
PD	34	Poddon	Poddon	
PG	35	Plate	Plate	
PI	36	Pipe	Pipe	
PO	37	Pilot	Pilot	
PU	38	Traypack	Traypack	
RL	39	Reel	Reel	
RO	40	Roll	Roll	
RZ	41	Rods, in bundle/bunch/truss	Rods, in bundle/bunch/truss	
SK	42	Skeletoncase	Skeletoncase	
TY	43	Tank, cylindrical	Tank, cylindrical	
VG	44	Bulk,gas(at 1031 mbar 15 oC)	Bulk,gas(at 1031 mbar 15 oC)	
VL	45	Bulk,liquid(at normal temperature/pressure)	Bulk,liquid(at normal temperature/pressure)	
VO	46	Bulk, solid, large particles(nodules)	Bulk, solid, large particles("nodules")	
VQ	47	Bulk, gas (liquefied at abnormal temperature/pressure)	Bulk, gas(liquefied at abnormal temperature/pressure)	
VR	48	Bulk, solid, granular particles(grains)	Bulk, solid, granular particles("grains")	
VT	49	Extra Bulk Item	Extra Bulk Item	
VY	50	Bulk, fine particles(powder)	Bulk, fine particles("powder")	
ML	51	Mills	cigarette Mills	
TN	52	TAN	1TAN REFER TO 20BAGS	

4.6. Unit of Quantity

Code Classification			Code Classification Name	
10			Unit of Quantity	
Code	Sort Order	Code Name	Code Description	remark
4B	1	Pair	Pair	
AV	2	Cap	Cap	
BA	3	Barrel	Barrel	
BE	4	bundle	bundle	

Code Classification			Code Classification Name	
10			Unit of Quantity	
Code	Sort Order	Code Name	Code Description	remark
BG	5	bag	bag	
BL	6	block	block	
BLL	7	BLL Barrel	BLL Barrel (petroleum) (158,987 dm3)	
BX	8	box	box	
CA	9	Can	Can	
CEL	10	Cell	Cell	
CMT	11	centimetre	centimetre	
CR	12	CARAT	CARAT	
DR	13	Drum	Drum	
DZ	14	Dozen	Dozen	
GLL	15	Gallon	Gallon	
GRM	16	Gram	Gram	
GRO	17	Gross	Gross	
KG	18	Kilo-Gramme	Kilo-Gramme	
KTM	19	kilometre	kilometre	
KWT	20	kilowatt	kilowatt	
L	21	Litre	Litre	
LBR	22	pound	pound	
LK	23	link	link	
LTR	24	Litre	Litre	
M	25	Metre	Metre	
M2	26	Square Metre	Square Metre	
M3	27	Cubic Metre	Cubic Metre	
MGM	28	milligram	milligram	
MTR	29	metre	metre	
MWT	30	megawatt hour (1000 kW.h)	megawatt hour (1000 kW.h)	
NO	31	Number	Number	
NX	32	part per thousand	part per thousand	
PA	33	packet	packet	
PG	34	plate	plate	
PR	35	pair	pair	
RL	36	reel	reel	
RO	37	roll	roll	
SET	38	set	set	
ST	39	sheet	sheet	
TNE	40	tonne (metric ton)	tonne (metric ton)	
TU	41	tube	tube	
U	42	Pieces/item [Number]	Pieces/item [Number]	
YRD	43	yard	yard	

4.7. Currency

Code Classification			Code Classification Name	
33			Currency	
Code	Sort Order	Code Name	Code Description	remark
AED	1	United Arab Emirates dirham	United Arab Emirates dirham	
AFN	2	Afghan afghani	Afghan afghani	
ALL	3	Albanian lek	Albanian lek	
AMD	4	Armenian dram	Armenian dram	
ANG	5	Netherlands Antillean guilder	Netherlands Antillean guilder	
AOA	6	Angolan kwanza	Angolan kwanza	
ARS	7	Argentine peso	Argentine peso	
AUD	8	Australian dollar	Australian dollar	
AWG	9	Aruban florin	Aruban florin	
AZN	10	Azerbaijani manat	Azerbaijani manat	
BAM	11	Bosnia and Herzegovina convertible mark	Bosnia and Herzegovina convertible mark	
BBD	12	Barbados dollar	Barbados dollar	
BDT	13	Bangladeshi taka	Bangladeshi taka	
BGN	14	Bulgarian lev	Bulgarian lev	
BHD	15	Bahraini dinar	Bahraini dinar	
BIF	16	Burundian franc	Burundian franc	
BMD	17	Bermudian dollar	Bermudian dollar	
BND	18	Brunei dollar	Brunei dollar	
BOB	19	Boliviano	Boliviano	
BOV	20	Bolivian Mvdol (funds code)	Bolivian Mvdol (funds code)	
BRL	21	Brazilian real	Brazilian real	
BSD	22	Bahamian dollar	Bahamian dollar	
BTN	23	Bhutanese ngultrum	Bhutanese ngultrum	
BWP	24	Botswana pula	Botswana pula	
BYN	25	New Belarusian ruble	New Belarusian ruble	
BYR	26	Belarusian ruble	Belarusian ruble	
BZD	27	Belize dollar	Belize dollar	
CAD	28	Canadian dollar	Canadian dollar	
CDF	29	Congolese franc	Congolese franc	
CHE	30	WIR Euro (complementary currency)	WIR Euro (complementary currency)	
CHF	31	Swiss franc	Swiss franc	
CHW	32	WIR Franc (complementary currency)	WIR Franc (complementary currency)	
CLF	33	Unidad de Fomento (funds code)	Unidad de Fomento (funds code)	
CLP	34	Chilean peso	Chilean peso	
CNY	35	Chinese yuan	Chinese yuan	
COP	36	Colombian peso	Colombian peso	
COU	37	Unidad de Valor Real (UVR) (funds code)	Unidad de Valor Real (UVR) (funds code)	
CRC	38	Costa Rican colon	Costa Rican colon	
CUC	39	Cuban convertible peso	Cuban convertible peso	
CUP	40	Cuban peso	Cuban peso	
CVE	41	Cape Verde escudo	Cape Verde escudo	

Code Classification			Code Classification Name	
33			Currency	
Code	Sort Order	Code Name	Code Description	remark
CZK	42	Czech koruna	Czech koruna	
DJF	43	Djiboutian franc	Djiboutian franc	
DKK	44	Danish krone	Danish krone	
DOP	45	Dominican peso	Dominican peso	
DZD	46	Algerian dinar	Algerian dinar	
EGP	47	Egyptian pound	Egyptian pound	
ERN	48	Eritrean nakfa	Eritrean nakfa	
ETB	49	Ethiopian birr	Ethiopian birr	
EUR	50	Euro	Euro	
FJD	51	Fiji dollar	Fiji dollar	
FKP	52	Falkland Islands pound	Falkland Islands pound	
GBP	53	Pound sterling	Pound sterling	
GEL	54	Georgian lari	Georgian lari	
GHS	55	Ghanaian cedi	Ghanaian cedi	
GIP	56	Gibraltar pound	Gibraltar pound	
GMD	57	Gambian dalasi	Gambian dalasi	
GNF	58	Guinean franc	Guinean franc	
GTQ	59	Guatemalan quetzal	Guatemalan quetzal	
GYD	60	Guyanese dollar	Guyanese dollar	
HKD	61	Hong Kong dollar	Hong Kong dollar	
HNL	62	Honduran lempira	Honduran lempira	
HRK	63	Croatian kuna	Croatian kuna	
HTG	64	Haitian gourde	Haitian gourde	
HUF	65	Hungarian forint	Hungarian forint	
IDR	66	Indonesian rupiah	Indonesian rupiah	
ILS	67	Israeli new shekel	Israeli new shekel	
INR	68	Indian rupee	Indian rupee	
IQD	69	Iraqi dinar	Iraqi dinar	
IRR	70	Iranian rial	Iranian rial	
ISK	71	Icelandic króna	Icelandic króna	
JMD	72	Jamaican dollar	Jamaican dollar	
JOD	73	Jordanian dinar	Jordanian dinar	
JPY	74	Japanese yen	Japanese yen	
KES	75	Kenyan shilling	Kenyan shilling	
KGS	76	Kyrgyzstani som	Kyrgyzstani som	
KHR	77	Cambodian riel	Cambodian riel	
KMF	78	Comoro franc	Comoro franc	
KPW	79	North Korean won	North Korean won	
KRW	80	South Korean won	South Korean won	
KWD	81	Kuwaiti dinar	Kuwaiti dinar	
KYD	82	Cayman Islands dollar	Cayman Islands dollar	
KZT	83	Kazakhstani tenge	Kazakhstani tenge	
LAK	84	Lao kip	Lao kip	
LBP	85	Lebanese pound	Lebanese pound	
LKR	86	Sri Lankan rupee	Sri Lankan rupee	
LRD	87	Liberian dollar	Liberian dollar	

Code Classification			Code Classification Name	
33			Currency	
Code	Sort Order	Code Name	Code Description	remark
LSL	88	Lesotho loti	Lesotho loti	
LYD	89	Libyan dinar	Libyan dinar	
MAD	90	Moroccan dirham	Moroccan dirham	
MDL	91	Moldovan leu	Moldovan leu	
MGA	92	Malagasy ariary	Malagasy ariary	
MKD	93	Macedonian denar	Macedonian denar	
MMK	94	Myanmar kyat	Myanmar kyat	
MNT	95	Mongolian tögrög	Mongolian tögrög	
MOP	96	Macanese pataca	Macanese pataca	
MRO	97	Mauritanian ouguiya	Mauritanian ouguiya	
MUR	98	Mauritian rupee	Mauritian rupee	
MVR	99	Maldivian rufiyaa	Maldivian rufiyaa	
MWK	100	Malawian kwacha	Malawian kwacha	
MXN	101	Mexican peso	Mexican peso	
MXV	102	Mexican Unidad de Inversion (UDI) (funds code)	Mexican Unidad de Inversion (UDI) (funds code)	
MYR	103	Malaysian ringgit	Malaysian ringgit	
MZN	104	Mozambican metical	Mozambican metical	
NAD	105	Namibian dollar	Namibian dollar	
NGN	106	Nigerian naira	Nigerian naira	
NIO	107	Nicaraguan córdoba	Nicaraguan córdoba	
NOK	108	Norwegian krone	Norwegian krone	
NPR	109	Nepalese rupee	Nepalese rupee	
NZD	110	New Zealand dollar	New Zealand dollar	
OMR	111	Omani rial	Omani rial	
PAB	112	Panamanian balboa	Panamanian balboa	
PEN	113	Peruvian Sol	Peruvian Sol	
PGK	114	Papua New Guinean kina	Papua New Guinean kina	
PHP	115	Philippine peso	Philippine peso	
PKR	116	Pakistani rupee	Pakistani rupee	
PLN	117	Polish złoty	Polish złoty	
PYG	118	Paraguayan guaraní	Paraguayan guaraní	
QAR	119	Qatari riyal	Qatari riyal	
RON	120	Romanian leu	Romanian leu	
RSD	121	Serbian dinar	Serbian dinar	
RUB	122	Russian ruble	Russian ruble	
RWF	123	Rwandan franc	Rwandan franc	
SAR	124	Saudi riyal	Saudi riyal	
SBD	125	Solomon Islands dollar	Solomon Islands dollar	
SCR	126	Seychelles rupee	Seychelles rupee	
SDG	127	Sudanese pound	Sudanese pound	
SEK	128	Swedish krona/kronor	Swedish krona/kronor	
SGD	129	Singapore dollar	Singapore dollar	
SHP	130	Saint Helena pound	Saint Helena pound	
SLL	131	Sierra Leonean leone	Sierra Leonean leone	
SOS	132	Somali shilling	Somali shilling	

Code Classification			Code Classification Name	
33			Currency	
Code	Sort Order	Code Name	Code Description	remark
SRD	133	Surinamese dollar	Surinamese dollar	
SSP	134	South Sudanese pound	South Sudanese pound	
STD	135	São Tomé and Príncipe dobra	São Tomé and Príncipe dobra	
SVC	136	Salvadoran colón	Salvadoran colón	
SYP	137	Syrian pound	Syrian pound	
SZL	138	Swazi lilangeni	Swazi lilangeni	
THB	139	Thai baht	Thai baht	
TJS	140	Tajikistani somoni	Tajikistani somoni	
TMT	141	Turkmenistani manat	Turkmenistani manat	
TND	142	Tunisian dinar	Tunisian dinar	
TOP	143	Tongan pa'anga	Tongan pa'anga	
TRY	144	Turkish lira	Turkish lira	
TTD	145	Trinidad and Tobago dollar	Trinidad and Tobago dollar	
TWD	146	New Taiwan dollar	New Taiwan dollar	
TZS	147	Tanzanian shilling	Tanzanian shilling	
UAH	148	Ukrainian hryvnia	Ukrainian hryvnia	
UGX	149	Ugandan shilling	Ugandan shilling	
USD	150	United States dollar	United States dollar	
USN	151	United States dollar (next day) (funds code)	United States dollar (next day) (funds code)	
UYI	152	Uruguay Peso en Unidades Indexadas (URUIURUI) (funds code)	Uruguay Peso en Unidades Indexadas (URUIURUI) (funds code)	
UYU	153	Uruguayan peso	Uruguayan peso	
UZS	154	Uzbekistan som	Uzbekistan som	
VEF	155	Venezuelan bolívar	Venezuelan bolívar	
VND	156	Vietnamese dong	Vietnamese dong	
VUV	157	Vanuatu vatu	Vanuatu vatu	
WST	158	Samoan tala	Samoan tala	
XAF	159	CFA franc BEAC	CFA franc BEAC	
XAG	160	Silver (one troy ounce)	Silver (one troy ounce)	
XAU	161	Gold (one troy ounce)	Gold (one troy ounce)	
XBA	162	European ComCISite Unit (EURCO) (bond market unit)	European ComCISite Unit (EURCO) (bond market unit)	
XBB	163	European Monetary Unit (E.M.U.-6) (bond market unit)	European Monetary Unit (E.M.U.-6) (bond market unit)	
XBC	164	European Unit of Account 9 (E.U.A.-9) (bond market unit)	European Unit of Account 9 (E.U.A.-9) (bond market unit)	
XBD	165	European Unit of Account 17 (E.U.A.-17) (bond market unit)	European Unit of Account 17 (E.U.A.-17) (bond market unit)	
XCD	166	East Caribbean dollar	East Caribbean dollar	
XDR	167	Special drawing rights	Special drawing rights	
XOF	168	CFA franc BCEAO	CFA franc BCEAO	
XPD	169	Palladium (one troy ounce)	Palladium (one troy ounce)	
XPF	170	CFP franc (franc Pacifique)	CFP franc (franc Pacifique)	
XPT	171	Platinum (one troy ounce)	Platinum (one troy ounce)	

Code Classification			Code Classification Name	
33			Currency	
Code	Sort Order	Code Name	Code Description	remark
XSU	172	SUCRE	SUCRE	
XTS	173	Code reserved for testing purCISes	Code reserved for testing purCISes	
XUA	174	ADB Unit of Account	ADB Unit of Account	
XXX	175	No currency	No currency	
YER	176	Yemeni rial	Yemeni rial	
ZAR	177	South African rand	South African rand	
ZMW	178	Zambian kwacha	Zambian kwacha	
ZWL	179	Zimbabwean dollar A/10	Zimbabwean dollar A/10	

4.8. Transaction Type

Code Classification			Code Classification Name	
14			Transaction Type	
Code	Sort Order	Code Name	Code Description	remark
C	1	Copy	Sales and purchase type : Copy	
N	2	Normal	Sales and purchase type : Normal	
P	3	Proforma	Sales and purchase type : Proforma	Proforma invoice
T	4	Training	Sales and purchase type : Training	

4.9. Sales Receipt Type

Code Classification			Code Classification Name	
37			Sales Receipt Type	
Code	Sort Order	Code Name	Code Description	remark
S	10	Sale	Sale	
R	11	Refund after Sale	Refund after Sale	

4.10. Payment Method

Code Classification			Code Classification Name	
07			Payment Method	
Code	Sort Order	Code Name	Code Description	remark
01	1	CASH	CASH	
02	2	CREDIT	CREDIT	
03	3	CASH/CREDIT	CASH/CREDIT	
04	4	BANK CHECK	BANK CHECK PAYMENT	
05	5	DEBIT&CREDIT CARD	PAYMENT USING CARD	
06	6	MOBILE MONEY	ANY TRANSACTION USING MOBILE MONEY SYSTEM	
07	7	OTHER	OTHER MEANS OF PAYMENT	

4.11. Transaction Progress

Code Classification			Code Classification Name	
11			Unit of Quantity	
Code	Sort Order	Code Name	Code Description	remark
01	1	Wait for Approval	Wait for Approval	
02	2	Approved	Approved	
03	3	Cancel Requested	Cancel Requested	
04	4	Canceled	Canceled	
05	5	Refunded	Refunded	
06	6	Transferred	Transferred	

4.12. Registration Type

Code Classification			Code Classification Name	
31			Registration Type	
Code	Sort Order	Code Name	Code Description	remark
A	1	Automatic	Automatic	
M	2	Manual	Manual	

4.13. Purchase Receipt Type

Code Classification			Code Classification Name	
38			Purchase Receipt Type	
Code	Sort Order	Code Name	Code Description	remark
P	1	Purchase	Purchase	
R	2	Refund after Purchase	Refund after Purchase	

4.14. API Response Code

Code	System	Description
000	Server	It is succeeded
001	Server	There is no search result
881	Client	Purchase is mandatory
882	Client	Purchase code is invalid
883	Client	Purchase already used
884	Client	Invalid customer TIN was provided
891	Client	An error occurred while Request URL is created.
892	Client	An error occurred while Request Header data is created.
893	Client	An error occurred while Request Body data is created.
894	Client	An error regarding server communication occurred.
895	Client	An error regarding unallowed Request Method occurred.
896	Client	An error regarding Request Status occurred.
899	Client	An error regarding Client occurred.
900	Server	There is no Header information
901	Server	It is not valid device
902	Server	This device is installed
903	Server	Only VSDC device can be verified.
910	Server	Request parameter error
911	Server	There is no request full text
912	Server	There is a request Method error.
921	Server	Sales or sales invoice data which is declared cannot be received.
922	Server	Sales invoice data can be received after receiving the sales data.
990	Server	The maxium number of views are exceeded
991	Server	There is an error during registration
992	Server	There is an error during modification
993	Server	There is an error during deletion
994	Server	There is an overlapped Data
995	Server	There is no downloaded file
999	Server	There is an unknown error. Please ask it administrator

4.15. Stock In/Out Type

Code Classification			Code Classification Name	
12			Stock In/Out Type	
Code	Sort Order	Code Name	Code Description	remark
01	1	Import	Incoming-Import	
02	2	Purchase	Incoming- Purchase	
03	3	Return	Incoming- Return	
04	4	Stock Movement	Incoming- Stock Movement	
05	5	Processing	Incoming- Processing	

Code Classification			Code Classification Name	
12			Stock In/Out Type	
Code	Sort Order	Code Name	Code Description	remark
06	6	Adjustment	Incoming- Adjustment	
11	11	Sale	Outgoing- Sale	
12	12	Return	Outgoing- Return	
13	13	Stock Movement	Outgoing- Stock Movement	
14	14	Processing	Outgoing- Processing	
15	15	Discarding	Outgoing- Discarding	
16	16	Adjustment	Outgoing- Adjustment	

4.16. Refund Reason Code

32			Refund reason code	
Code	Sort Order	Code Name	Code Description	remark
01	1	Missing Quantity	Missing Quantity	
02	2	Missing Item	Missing Item	
03	3	Damaged	Damaged	
04	4	Wasted	Wasted	
05	5	Raw Material Shortage	Raw Material Shortage	
06	6	Refund	Refund	
07	7	Wrong Customer TIN	Wrong Customer TIN	
08	8	Wrong Customer name	Wrong Customer name	
09	9	Wrong Amount/price	Wrong Amount/price	
10	10	Wrong Quantity	Wrong Quantity	
11	11	Wrong Item(s)	Wrong Item(s)	
12	12	Wrong tax type	Wrong tax type	
13	13	Other reason	Other reason	

4.17. Item code

itemCd is mandatory and it has to be unique. In other words, each item has its unique itemCd.

Below is how item code is generated.

For example:

itemCd: RW2NTBA0000012

RW: Country of Origin (Rwanda)

2: Product Type (Finished Product)

NT: Packaging Unit (NET)

BA: Quantity Unity (Barrel)

0000012: increments from 0000001 to N value

4.18. Import Item status

Code Classification			Code Classification Name	
26			Import item Status	
Code	Sort Order	Code Name	Code Description	remark
1	1	Unsent		
2	2	Waiting		
3	3	Approved		
4	4	Cancelled		