

Beamer Theme

Your Name

April 4, 2020

Outline

Introduction

Beamer Basic

- Highlight

- Other Environments

Beamer More

- Split Screen

- Table

- Math

Conclusion

Beamer Theme

Your Name

Introduction

Beamer Basic

- Highlight

- Other Environments

Beamer More

- Split Screen

- Table

- Math

Conclusion

Introduction

Beamer Basic

Highlight

Other Environments

Beamer More

Split Screen

Table

Math

Conclusion

LaTeX is a high-quality typesetting system; it includes features designed for the production of technical and scientific documentation.

LaTeX is a high-quality typesetting system; it includes features designed for the production of technical and scientific documentation.

Beamer is a LaTeX class to create powerful, flexible and nice-looking presentations and slides.

The beamer class is focussed on producing (on-screen) presentations, along with support material such as handouts and speaker notes.

Pythagorean theorem

$$a^2 + b^2 = c^2$$

where c represents the length of the hypotenuse and a and b the lengths of the triangle's other two sides.

Remark

- ▶ the environment above is **block**
- ▶ the environment here is **alertblock**

Pythagorean theorem

$$a^2 + b^2 = c^2$$

Proof.

$$3^2 + 4^2 = 5^2$$

$$5^2 + 12^2 = 13^2$$



Data: this text

Result: how to write algorithm with $\text{\LaTeX}2\text{e}$ initialization;

while *not at end of this document* **do**

 read current;

if *understand* **then**

 go to next section;

 current section becomes this one;

else

 go back to the beginning of current section;

end

end

Algorithm 1: How to write algorithms (copied from here)

An Algorithm For Finding Primes Numbers.

Beamer Theme

Your Name

Introduction

Beamer Basic

Highlight

Other Environments

Beamer More

Split Screen

Table

Math


Conclusion

```
int main (void)
{
    std::vector<bool> is_prime (100, true);
    for (int i = 2; i < 100; i++)
        if (is_prime[i])
        {
            std::cout << i << " ";
            for (int j = i; j < 100; is_prime [j] = false, j+=i);
        }
    return 0;
}
```

Note the use of \alert.

More environments such as

- ▶ Definition
- ▶ lemma
- ▶ corollary
- ▶ example

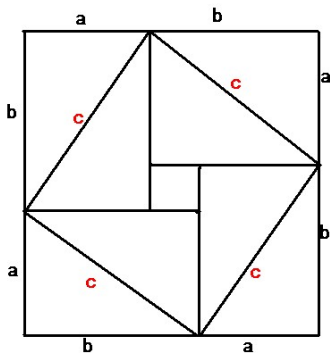

1. item
2. another
3. more
 - ▶ first
 - ▶ second
 - ▶ third

This is a text in first column.

$$E = mc^2$$

- ▶ First item
- ▶ Second item

first block

columns achieves splitting the screen

second block

stack block in columns

Create Tables

Beamer Theme

Your Name

Introduction

Beamer Basic

Highlight

Other Environments

Beamer More

Split Screen

Table

Math

Conclusion

first	second	third
1	2	3
4	5	6
7	8	9

Equation1

Beamer Theme

Your Name

Introduction

Beamer Basic

Highlight

Other Environments

Beamer More

Split Screen

Table

Math

Conclusion

A matrix in text must be set smaller: $\begin{pmatrix} a & b \\ c & d \end{pmatrix}$ to not increase leading in a portion of text.

$$f(n) = \begin{cases} n/2 & \text{if } n \text{ is even} \\ -(n+1)/2 & \text{if } n \text{ is odd} \end{cases}$$

$$50\text{apples} \times 100\text{apples} = \text{lotsofapples}^2$$

$$\sum_{\substack{0 \leq i < m \\ 0 \leq j < n}} P(i, j) = \int_a^b \prod P(i, j)$$

$$P\left(A = 2 \left| \frac{A^2}{B} > 4 \right.\right)$$

$$(a), [b], \{c\}, |d|, \|e\|, \langle f \rangle, \lfloor g \rfloor, \lceil h \rceil, \lceil i \rceil$$

$$Q(\alpha) = \alpha_i \alpha_j y_i y_j (x_i \cdot x_j)$$

$$Q(\alpha) = \alpha^i \alpha^j y^{(i)} y^{(j)} (x^i \cdot x^j)$$

$$\Gamma = \beta + \alpha + \gamma + \rho$$

End

The last page.

Beamer Theme

Your Name

Introduction

Beamer Basic

Highlight

Other Environments

Beamer More

Split Screen

Table

Math

Conclusion