

Regularization

Ryan Henning

- Shortcomings of Ordinary Linear Regression
- Ridge Regression
- Lasso Regression
- When to use each!


Linear Regression Example

Data: 20 examples x 10 features


Predict: y




Linear Regression Example (x_0 vs y)

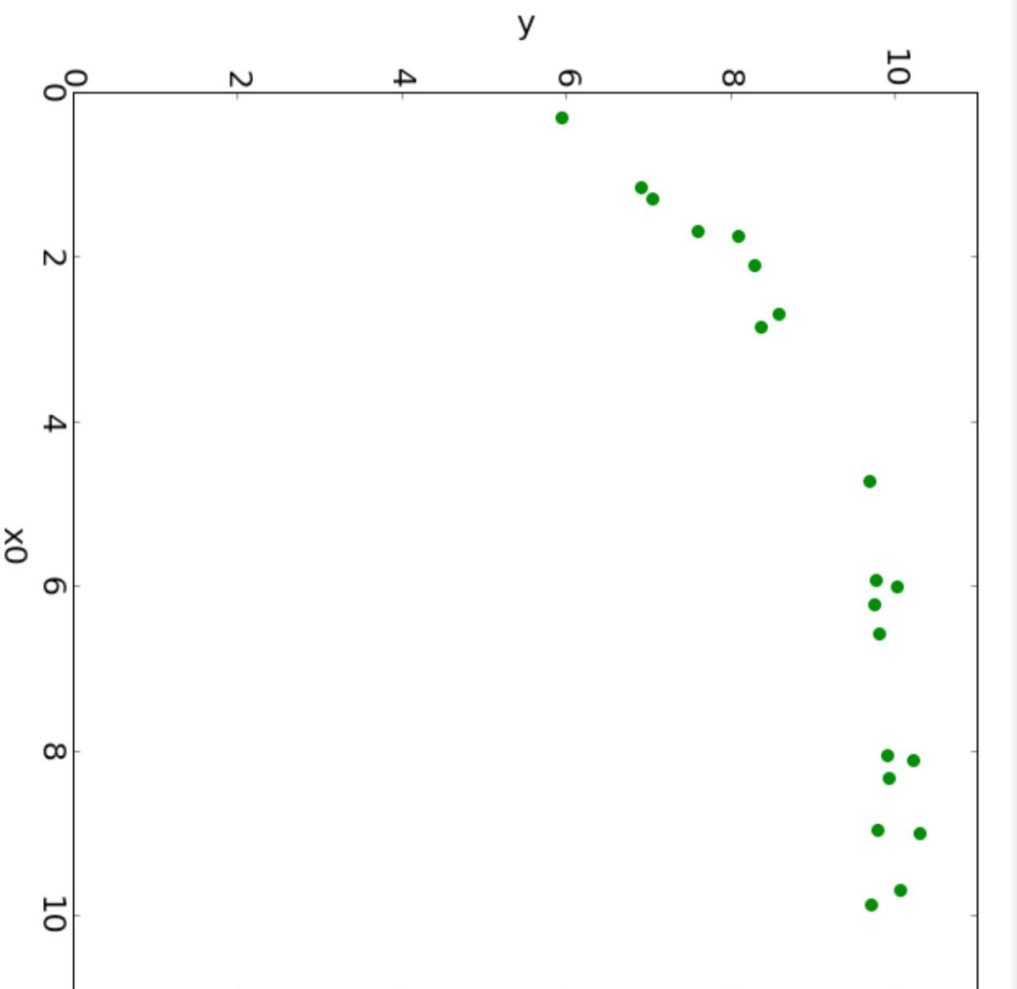


Linear Regression Example (x_0 vs y , model over all features)

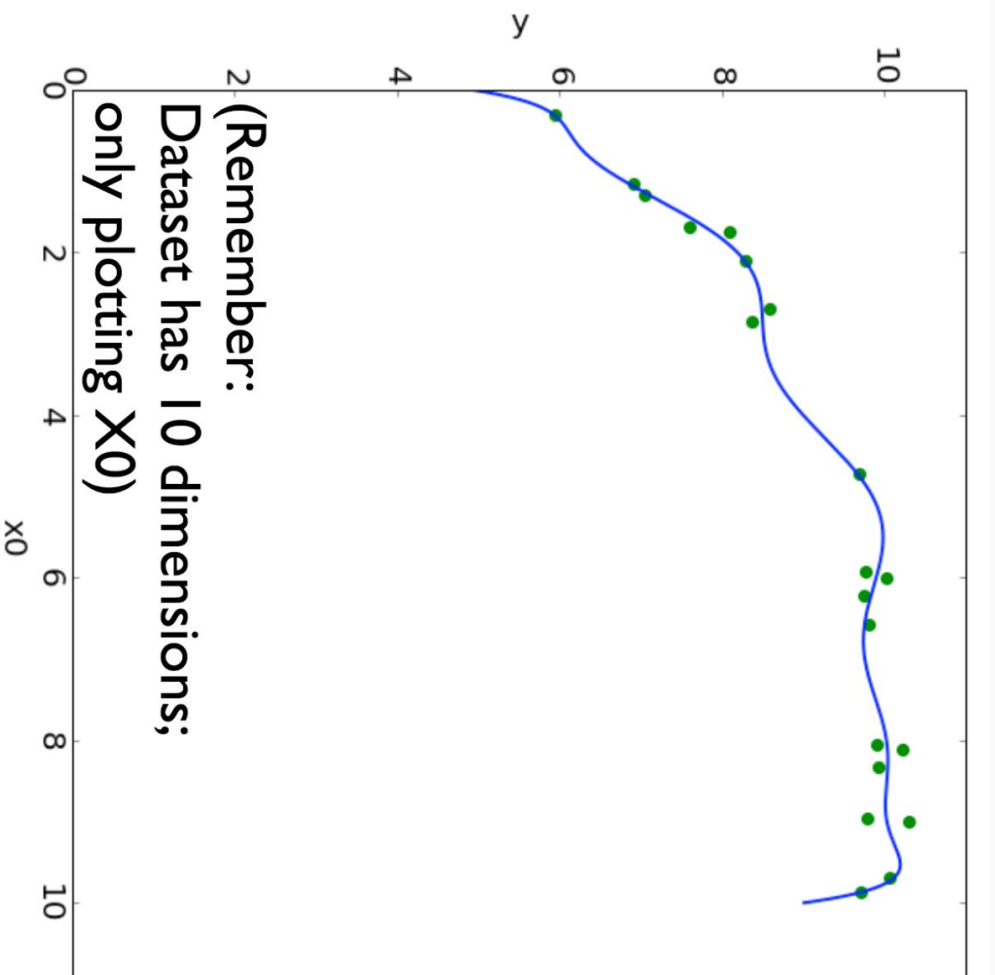

Linear Regression Example (x0 vs y, model over all features)

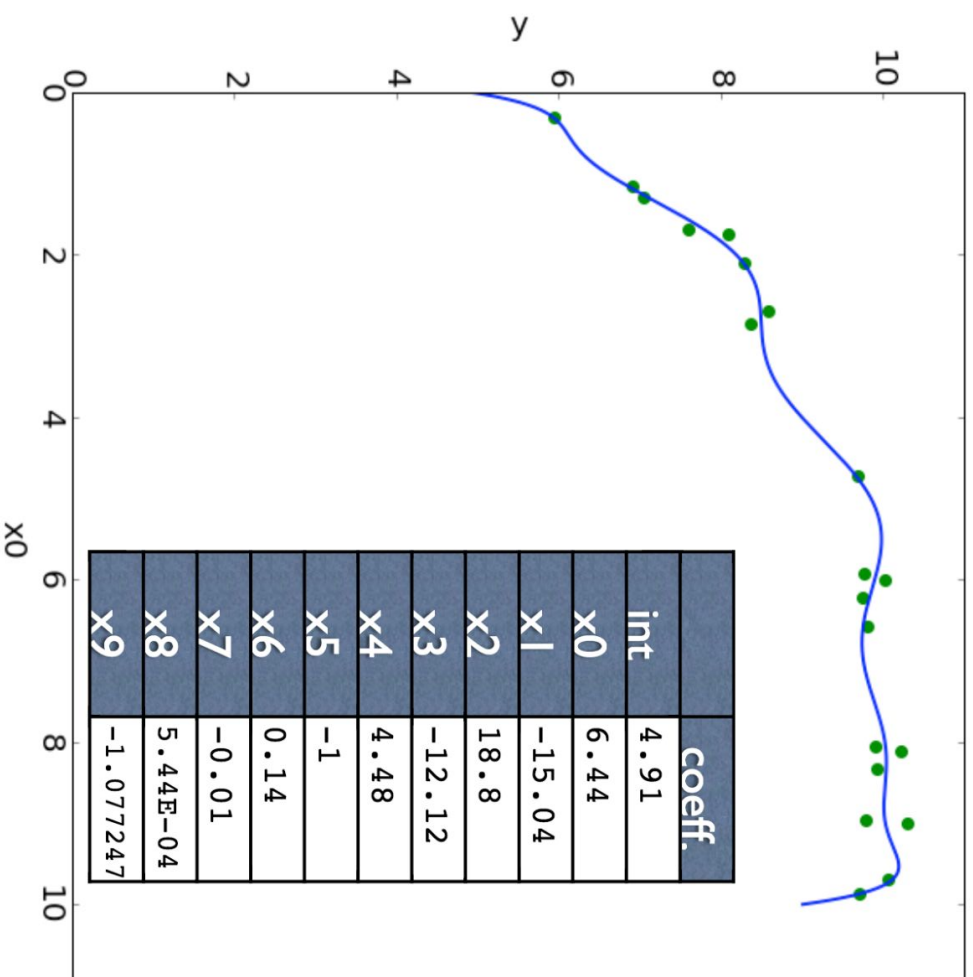

Linear Regression Example (x_0 vs y , model over only x_0 features)

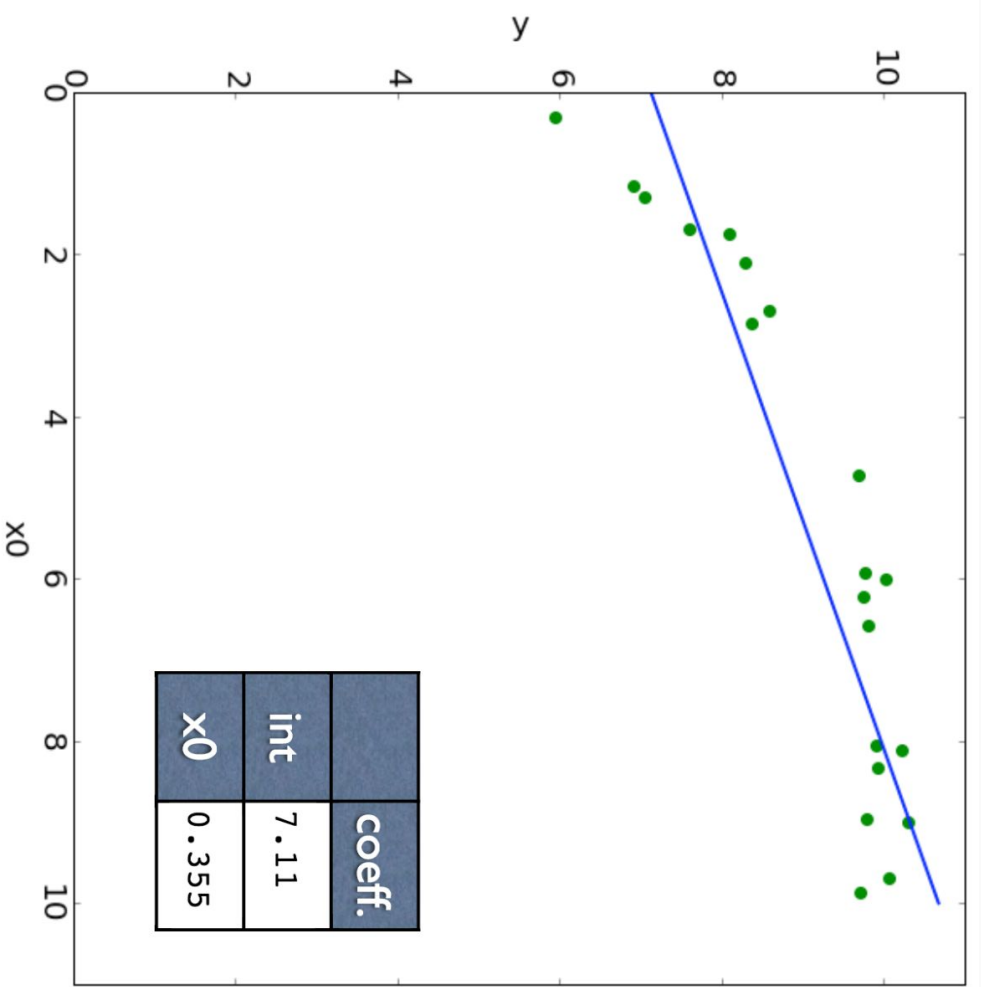

In high dimensions, data is (usually) sparse

Again... the **Curse of Dimensionality** bites us.

(we'll talk more about this in a later lecture)

Linear regression can have high variance (i.e. tends to overfit) on high dimensional data...

We'd like to restrict ("normalize", or "regularize") the model so that it has less variance.

Take the 20 example x 10 feature dataset as an example... when we fit over all features, the complexity of the model grew dramatically.
(and keep in mind, some datasets have thousands of features)

Linear Regression (another review)

We model the world as:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \dots + \beta_p X_p + \epsilon$$

We estimate the model parameters by minimizing:

$$\sum_{i=1}^N (y_i - \hat{\beta}_0 - \sum_{j=1}^p x_{ij} \hat{\beta}_j)^2$$

Ridge Regression

(Linear Regression w/ Tikhonov (L2) Regularization)

We model the world as:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \dots + \beta_p X_p + \epsilon$$

→ (same as before)

We estimate the model parameters by minimizing:

$$\sum_{i=1}^N (y_i - \hat{\beta}_0 - \sum_{j=1}^p x_{ij} \hat{\beta}_j)^2 + \underbrace{\lambda \sum_{i=1}^p \hat{\beta}_i^2}_{\text{(new term!)}}$$

(the “regularization” parameter)

Ridge Regression

$$\sum_{i=1}^N (y_i - \hat{\beta}_0 - \sum_{j=1}^p x_{ij} \hat{\beta}_j)^2 + \lambda \sum_{i=1}^p \hat{\beta}_i^2$$

What if we set the lambda equal to zero?

What does the new term accomplish?

What happens to a features whose corresponding coefficient value (beta) is zero?

Ridge Regression


$$\sum_{i=1}^N (y_i - \hat{\beta}_0 - \sum_{j=1}^p x_{ij} \hat{\beta}_j)^2 + \lambda \sum_{i=1}^p \hat{\beta}_i^2$$

Notice, we do not penalize β_0 .


Changing lambda changes the amount that large coefficients are penalized.

Increasing lambda increases the model's bias and decreases its variance. ← **this is cool!**

Linear Regression

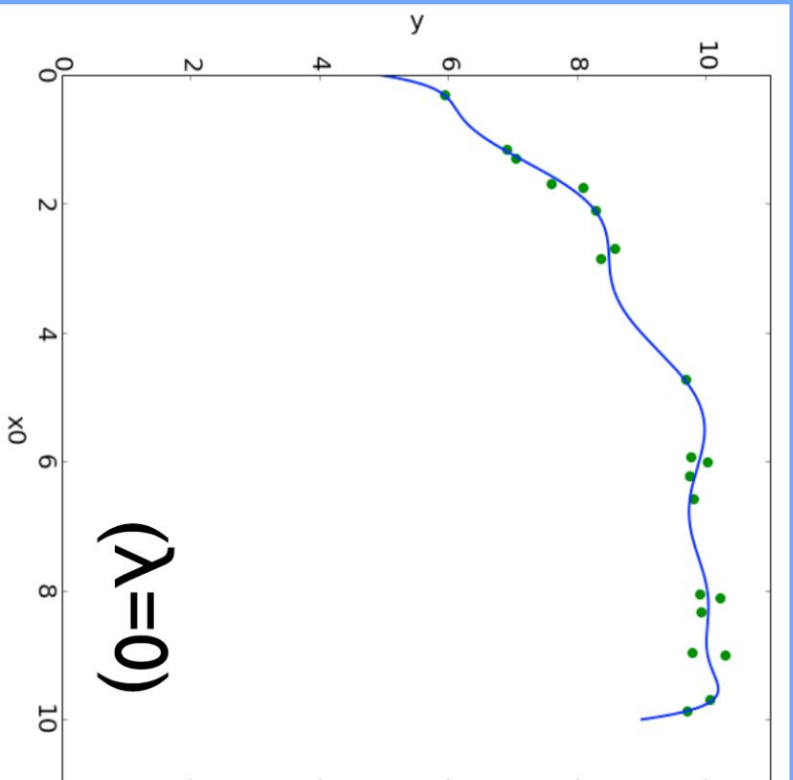


Ridge Regression

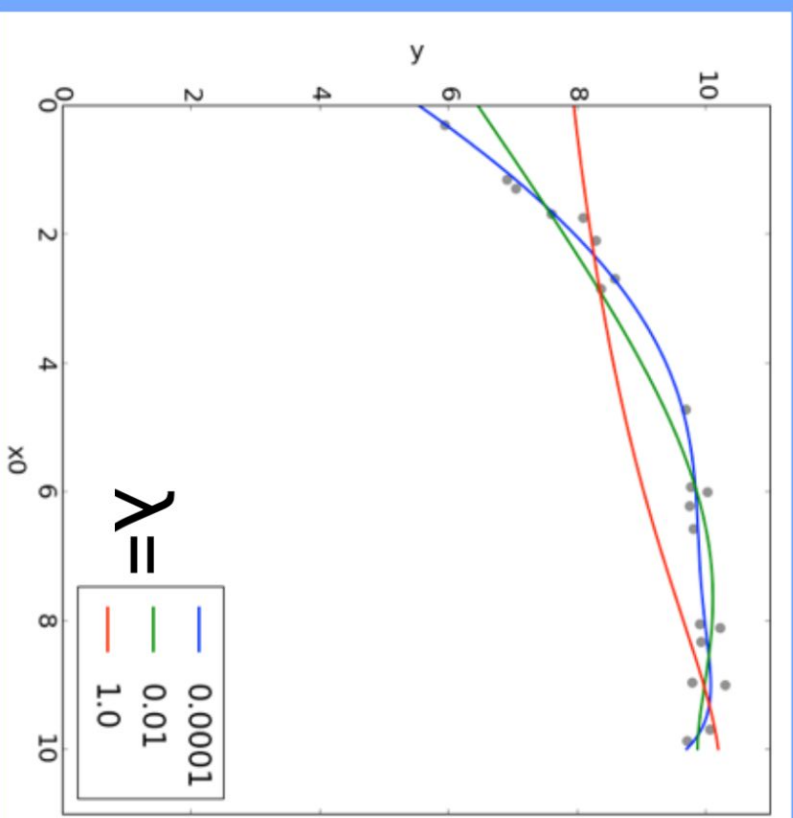


Ridge Regression

Normalized Data

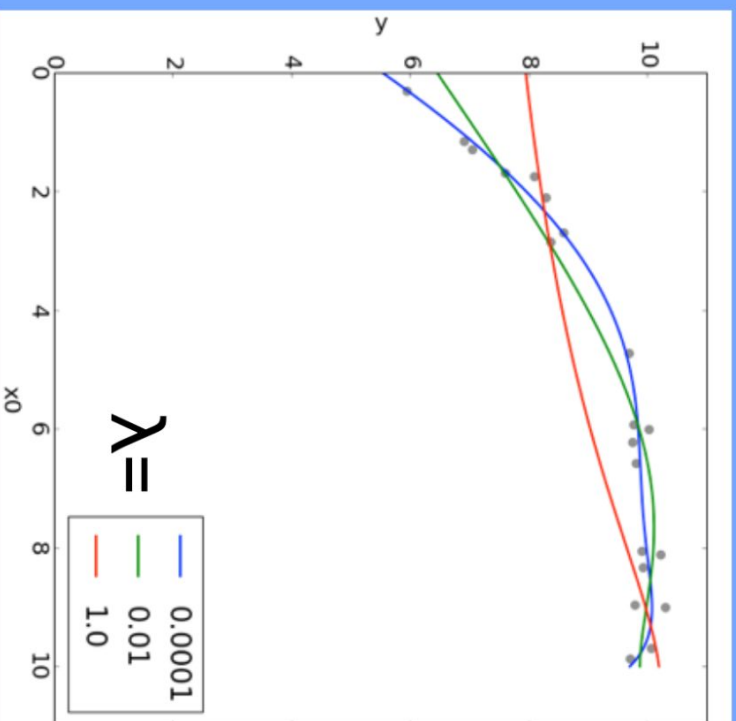

Non-Normalized Data

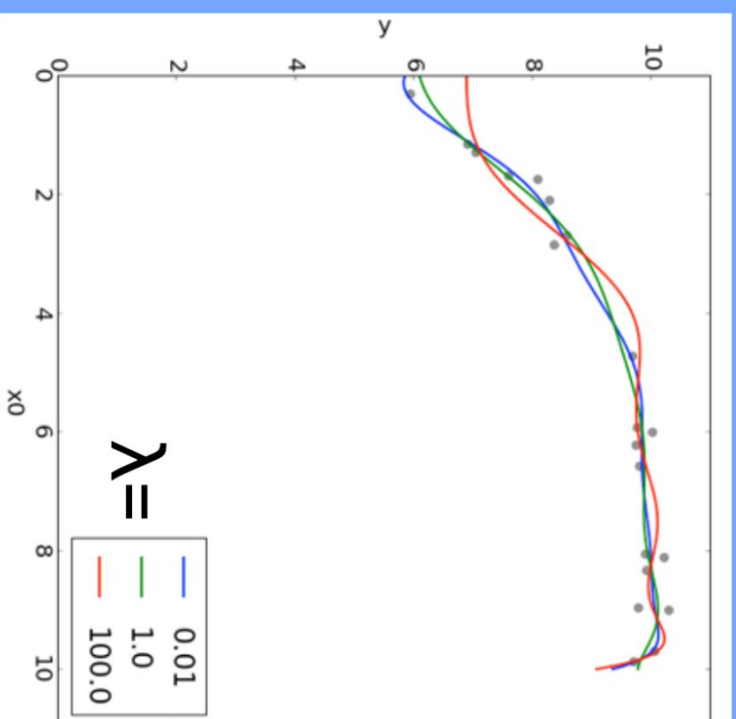

Single value for λ assumes features are on the same scale!!

LASSO Regression

(Linear Regression w/ LASSO (L1) Regularization)

We model the world as:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \dots + \beta_p X_p + \epsilon$$

→ (same as before)

We estimate the model parameters to minimizing:


$$\sum_{i=1}^N (y_i - \hat{\beta}_0 - \sum_{j=1}^p x_{ij} \hat{\beta}_j)^2 + \lambda \sum_{i=1}^p |\hat{\beta}_i|$$

(the “regularization” parameter)


→ (absolute value instead of squared)

Lasso Regression



Ridge Regression

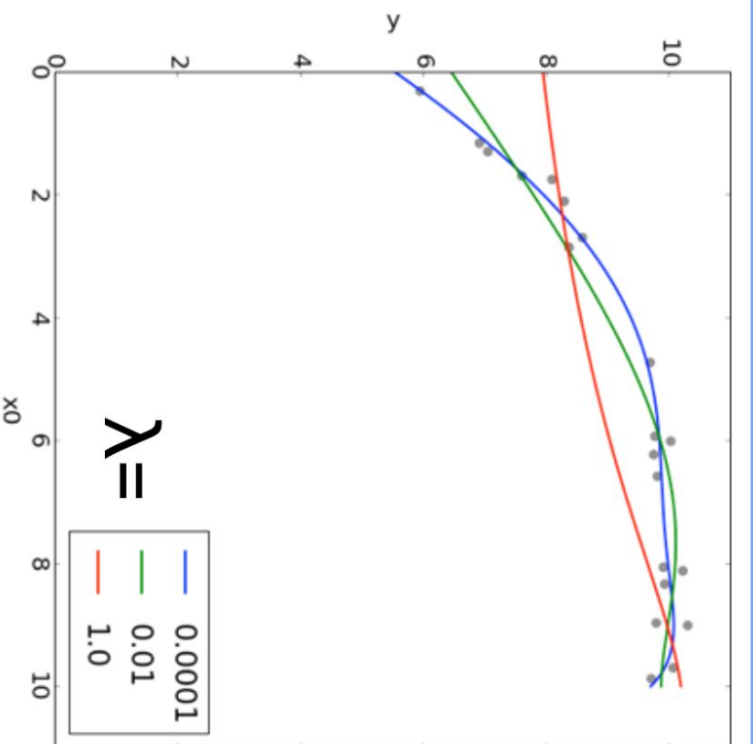

Lasso Regression

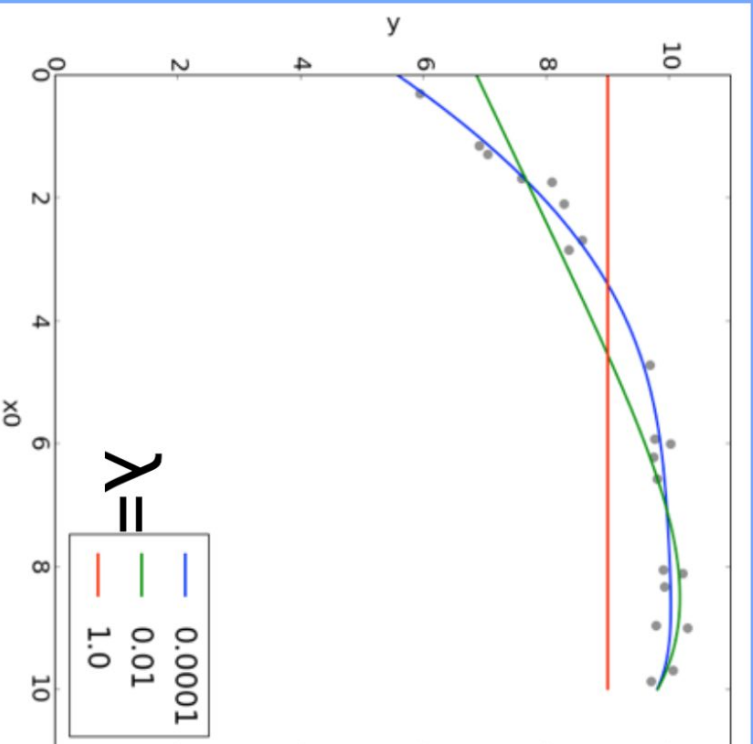

Ridge vs. Lasso

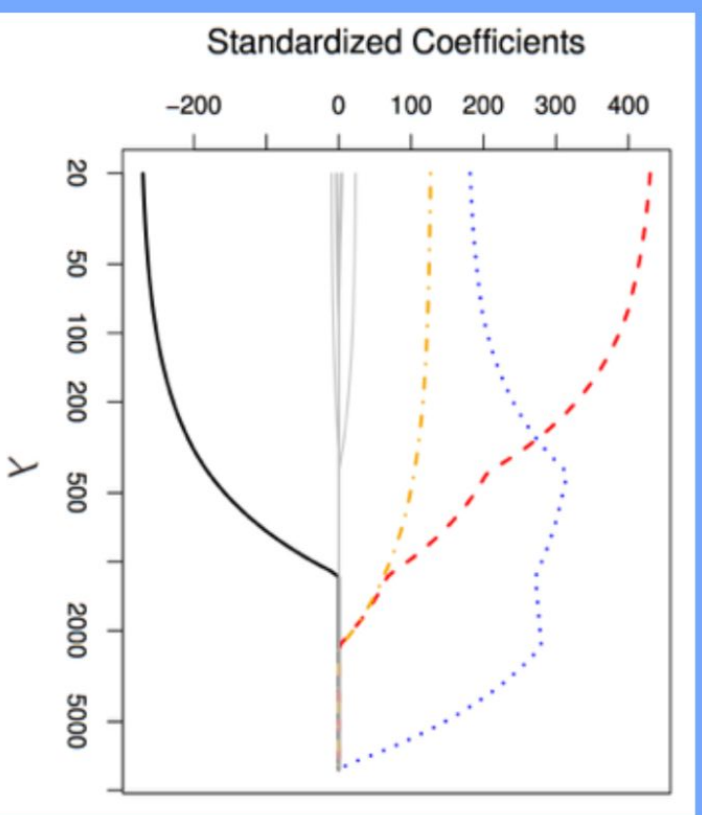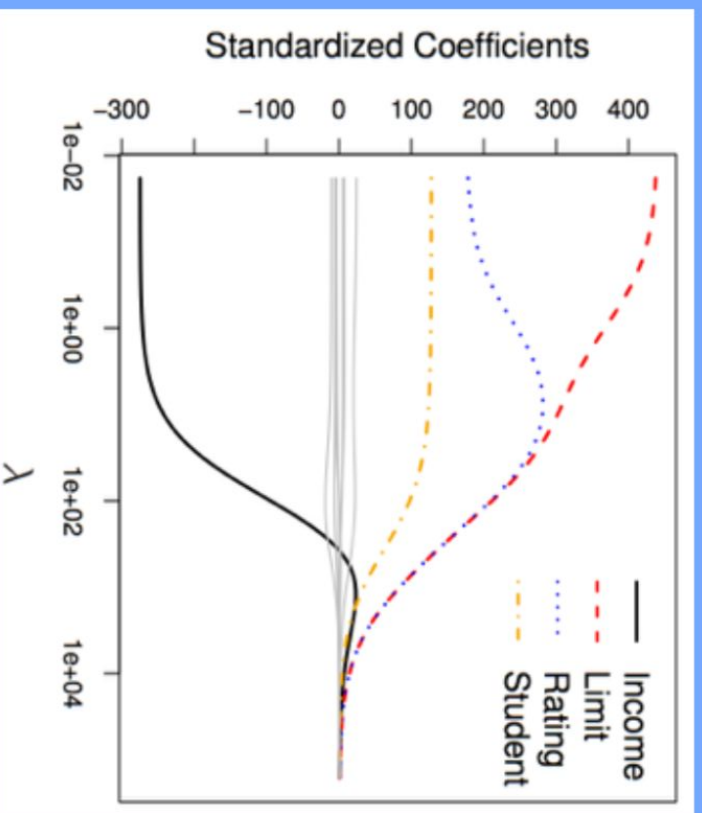


Ridge vs LASSO

- Ridge forces parameters to be small + Ridge is computationally easier because it is differentiable
- Lasso tends to set coefficients exactly equal to zero
 - This is useful as a sort-of “automatic feature selection” mechanism,
 - leads to “sparse” models, and
 - serves a similar purpose to stepwise features selection


Which is better depends on your dataset!

True sparse models will benefit from lasso; true dense models will benefit from ridge.


Ridge vs. Lasso

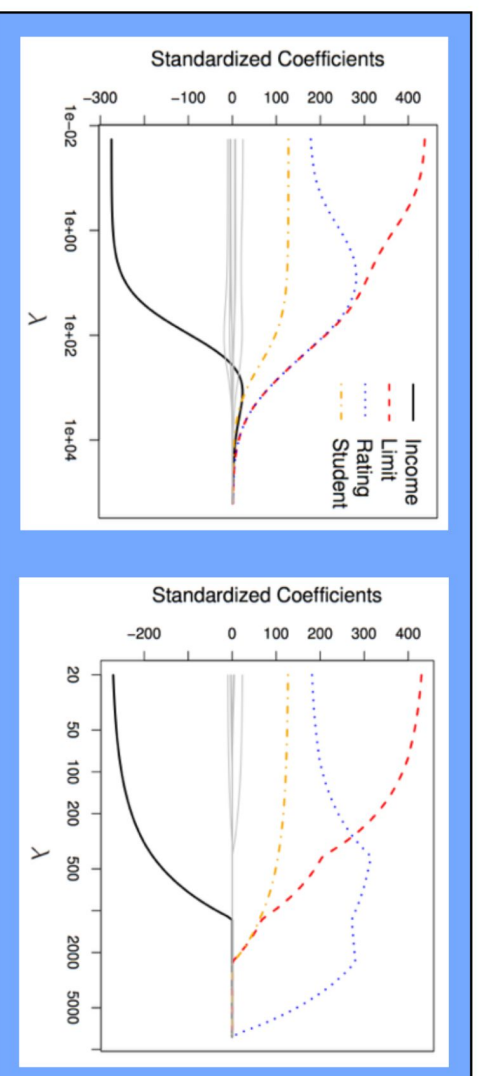

Ridge vs LASSO

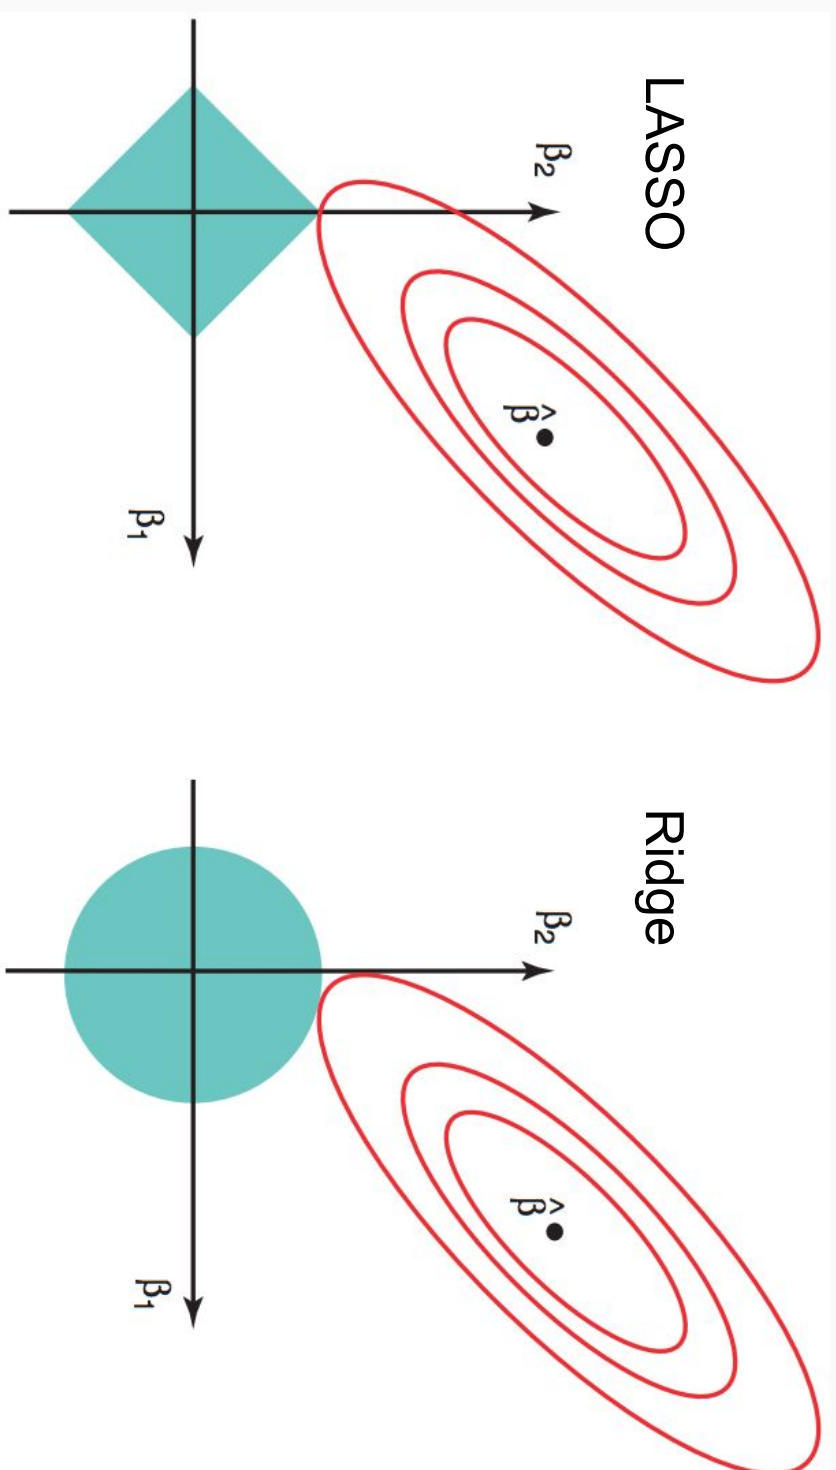

Chose lambda via Cross-Validation

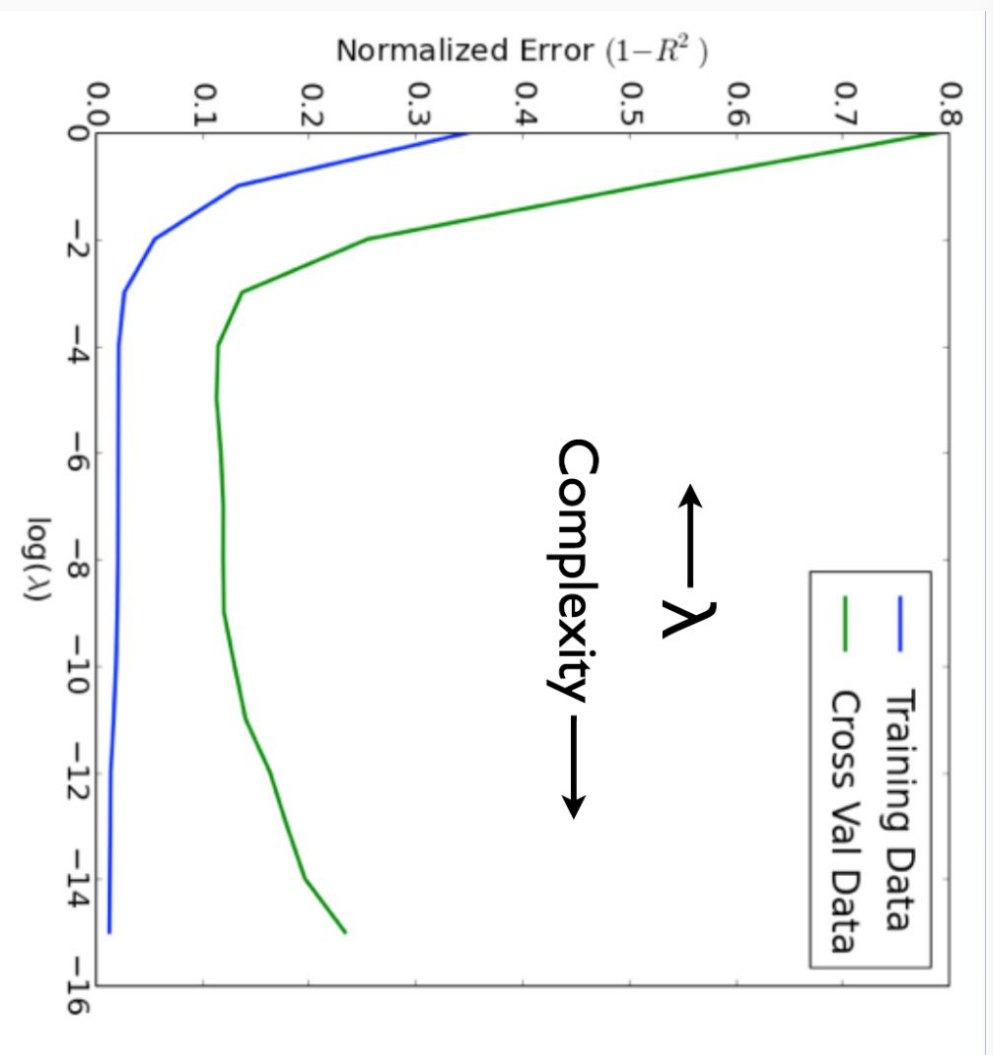

scikit-learn

Classes:

- `sklearn.linear_model.LinearRegression(...)`
- `sklearn.linear_model.Ridge(alpha=my_alpha, ...)`
- `sklearn.linear_model.Lasso(alpha=my_alpha, ...)`

All have these methods:

- `fit(X, y)`
- `predict(X)`
- `score(X, y)`