

WMDR2-core

Package in package 'Model'

WMDR2-core

Version 0.2.5 Phase 1.0 Proposed

jkl created on 2026-03-06. Last modified 2026-06-29

WMDR2-core diagram

Class diagram in package 'WMDR2-core'

wmdr2-core v0.2.x

v0.2.5

- break association between Deployment and ObservationSeries in favor of an association Deployment-ObservingConfiguration. This ObservingConfiguration is the new class name for ObservingMethod.
- rename association roles to conventional UML naming.

WMDR2-core

Version 0.2.5

jkl created on 2026-03-06. Last modified 2026-06-29

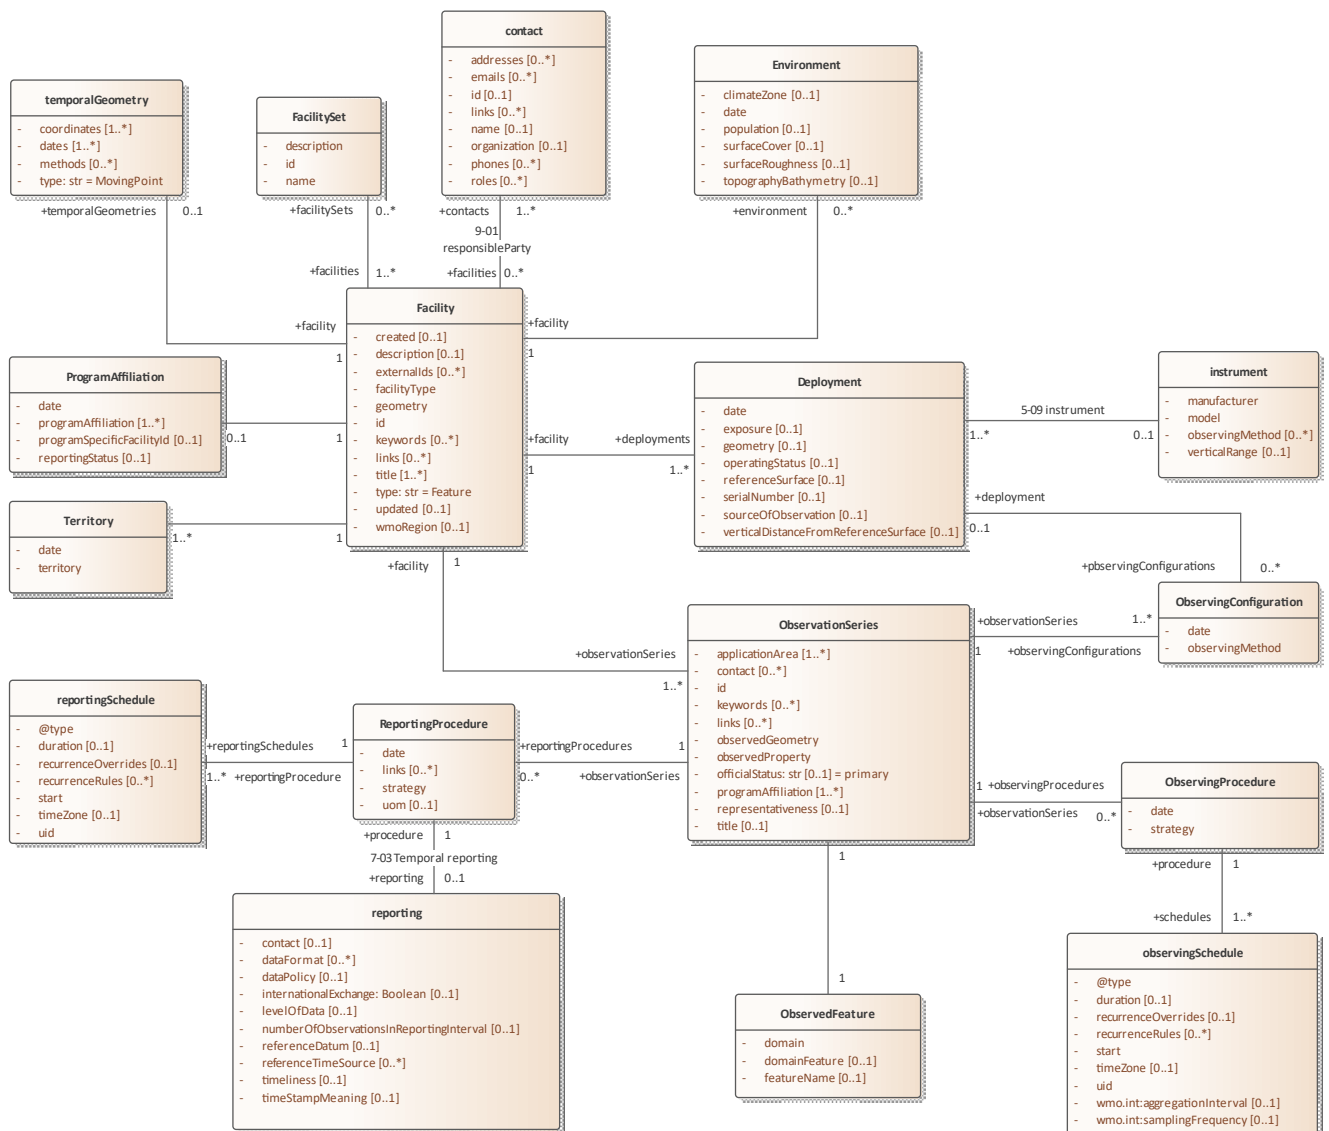


Figure 1: WMDR2-core

contact

Class in package 'WMDR2-core'

WMDR2 core JSON class: contact.

contact
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-11. Last modified 2026-06-25

ATTRIBUTES	
 addresses : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Postal addresses.	[Is static True. Containment is Not Specified.]
 emails : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Email contacts.	[Is static True. Containment is Not Specified.]
 id : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Optional stable contact identifier.	[Is static True. Containment is Not Specified.]
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Online resources associated with the contact.	[Is static True. Containment is Not Specified.]
 name : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Either a full name, or a sequence of name parts. Examples: Dr. Jörg Klausen (this corresponds to FN in vcard) Klausen;Jörg;Dr.; (this corresponds to N in vcard)	[Is static True. Containment is Not Specified.]
 organization : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Example: ORG:Federal Office of Meteorology and Climatology MeteoSwiss	[Is static True. Containment is Not Specified.]
 phones : Private	

ATTRIBUTES	
Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Phone contacts.	[Is static True. Containment is Not Specified.]
 roles : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Specific contact roles such as owner, pointOfContact, principalInvestigator.	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
 Association (direction: Unspecified) 9-01 responsibleParty Source: Public facilities (Class) Facility Cardinality: [0..*]	Target: Public contacts (Class) contact Cardinality: [1..*]

Deployment

Class in package 'WMDR2-core'

Deployment
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-22. Last modified 2026-06-25

ATTRIBUTES	
 date : Private	[Is static True. Containment is Not Specified.]
 exposure : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Values from http://codes.wmo.int/wmdr/Exposure	[Is static True. Containment is Not Specified.]
 geometry : Private Alias: temporalGeometry Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) geometry is the OGC Records name for geolocation. Meaningful only for fixed facilities, do not use for mobile facilities.	[Is static True. Containment is Not Specified.]
 operatingStatus : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) values refer to http://codes.wmo.int/wmdr/InstrumentOperatingStatus	[Is static True. Containment is Not Specified.]

ATTRIBUTES					
 referenceSurface : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Linked to heightAboveReferenceSurface, from http://codes.wmo.int/wmdr/ReferenceSurfaceType [Is static True. Containment is Not Specified.]					
 serialNumber : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) [Is static True. Containment is Not Specified.]					
 sourceOfObservation : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/SourceOfObservation. If sourceOfObservation=="humanObservation", several attributes of "observations" are expected to be null. [Is static True. Containment is Not Specified.]					
 verticalDistanceFromReferenceSurface : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) implement as an array of objects: { "value": float, "uom": str }, whereby "uom" from http://codes.wmo.int/wmdr/unit [Is static True. Containment is Not Specified.]					
ASSOCIATIONS					
 Association (direction: Unspecified) 5-09 instrument <table> <tr> <td>Source: Public (Class) Deployment</td><td>Target: Public (Class) instrument</td></tr> <tr> <td>Cardinality: [1..*]</td><td>Cardinality: [0..1]</td></tr> </table>		Source: Public (Class) Deployment	Target: Public (Class) instrument	Cardinality: [1..*]	Cardinality: [0..1]
Source: Public (Class) Deployment	Target: Public (Class) instrument				
Cardinality: [1..*]	Cardinality: [0..1]				
 Association (direction: Unspecified) <table> <tr> <td>Source: Public facility (Class) Facility</td><td>Target: Public deployments (Class) Deployment</td></tr> <tr> <td>Cardinality: [1]</td><td>Cardinality: [1..*]</td></tr> </table>		Source: Public facility (Class) Facility	Target: Public deployments (Class) Deployment	Cardinality: [1]	Cardinality: [1..*]
Source: Public facility (Class) Facility	Target: Public deployments (Class) Deployment				
Cardinality: [1]	Cardinality: [1..*]				
 Association (direction: Unspecified) <table> <tr> <td>Source: Public pbservingConfigurations (Class) ObservingConfiguration</td><td>Target: Public deployment (Class) Deployment</td></tr> <tr> <td>Cardinality: [0..*]</td><td>Cardinality: [0..1]</td></tr> </table>		Source: Public pbservingConfigurations (Class) ObservingConfiguration	Target: Public deployment (Class) Deployment	Cardinality: [0..*]	Cardinality: [0..1]
Source: Public pbservingConfigurations (Class) ObservingConfiguration	Target: Public deployment (Class) Deployment				
Cardinality: [0..*]	Cardinality: [0..1]				

Environment

Class in package 'WMDR2-core'

Facility-environment object containing climate, surface-cover, population, and topography/bathymetry histories.

Environment
Version 1.0 Phase 1.0 Proposed
ChatGPT created on 2026-06-02. Last modified 2026-06-25

ATTRIBUTES	
 climateZone : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 date : Private	[Is static True. Containment is Not Specified.]
 population : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Population in 10 and 50 km radius around the facility	[Is static True. Containment is Not Specified.]
 surfaceCover : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 surfaceRoughness : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 topographyBathymetry : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public facility (Class) Facility Cardinality: [1]	Target: Public environment (Class) Environment Cardinality: [0..*]

Extension

Class in package 'WMDR2-core'

Retained from previous UML model; not part of the current WMDR2 core full-record JSON schema.

Extension
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-11. Last modified 2026-06-26

ASSOCIATIONS

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public describes (Class) ObservationSeries Cardinality: [1..*]	Target: Public uses (Class) Extension Cardinality: [0..1]
	ObservingProcedure(s)

Facility

Class in package 'WMDR2-core'

Facility properties payload of the WMDR2 full record. Root Features geometry/time are modeled on fullRecord, not here.

Facility
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	
 created : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Record creation date/time metadata.	[Is static True. Containment is Not Specified.]
 description : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Facility description.	[Is static True. Containment is Not Specified.]
 externalIds : Private Alias: 3-06 (primary & additional) WSIs Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) External identifiers such as WMO:WIGOS.	[Is static True. Containment is Not Specified.]
 facilityType : Private Alias: 3-04 facilityType Compact WMDR facility type code value.	[Is static True. Containment is Not Specified.]
 geometry : Private Alias: 3-07 current geolocation geometry = geolocation = coordinates + elevation	[Is static True. Containment is Not Specified.]
 id : Private	

ATTRIBUTES	
Alias: 3-06 (primary) WSI to prefixed with name space "facility:"	[Is static True. Containment is Not Specified.]
 keywords : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Discovery/search keywords retained in the core JSON.	[Is static True. Containment is Not Specified.]
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Related links.	[Is static True. Containment is Not Specified.]
 title : Private Alias: 3-03 facilityName Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) properties.title = 3-03 facilityName	[Is static True. Containment is Not Specified.]
 type : str Private = Feature Facility properties type; const facility.	[Is static True. Containment is Not Specified.]
 updated : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Record update date/time metadata.	[Is static True. Containment is Not Specified.]
 wmoRegion : Private Alias: 3-01 wmoRegion Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) mandatory for fixed facilities, optional for mobile facilities.	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public facility (Class) Facility Cardinality: [1]	Target: Public environment (Class) Environment Cardinality: [0..*]
 Association (direction: Unspecified) Source: Public (Class) Facility	Target: Public (Class) Territory

ASSOCIATIONS	
Cardinality: [1]	Cardinality: [1..*]
 Association (direction: Unspecified)	
Source: Public facilities (Class) Facility Cardinality: [1..*]	Target: Public facilitySets (Class) FacilitySet Cardinality: [0..*]
 Association (direction: Unspecified)	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public temporalGeometries (Class) temporalGeometry Cardinality: [0..1]
 Association (direction: Unspecified)	
Source: Public (Class) Facility Cardinality: [1]	Target: Public (Class) ProgramAffiliation Cardinality: [0..1]
 Association (direction: Unspecified)	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public observationSeries (Class) ObservationSeries Cardinality: [1..*]
 Association (direction: Unspecified)	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public deployments (Class) Deployment Cardinality: [1..*]
 Association (direction: Unspecified) 9-01 responsibleParty	
Source: Public facilities (Class) Facility Cardinality: [0..*]	Target: Public contacts (Class) contact Cardinality: [1..*]

FacilitySet

Class in package 'WMDR2-core'

Retained from previous UML model; not part of the current WMDR2 core full-record JSON schema.

FacilitySet
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	
 description : Private	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
 id : Private [Is static True. Containment is Not Specified.]	
 name : Private Alias: title [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public facilities (Class) Facility Cardinality: [1..*] Target: Public facilitySets (Class) FacilitySet Cardinality: [0..*]	

instrument

Class in package 'WMDR2-core'

Describes instrument capabilities, not a specific instrument instance.

For semantic consistency, terms like `observedProperty` and `observedGeometry` are used, even though they just describe the instrument capabilities, not the actual observations. With this, `instrument` becomes re-usable between deployments and even facilities.

instrument
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-05-22. Last modified 2026-06-25

ATTRIBUTES	
 manufacturer : Private Alias: 5-09 manufacturer [Is static True. Containment is Not Specified.]	
 model : Private Alias: 5-09 model [Is static True. Containment is Not Specified.]	
 observingMethod : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) [Is static True. Containment is Not Specified.]	
 verticalRange : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Specify using an array of [lower boundary, upper boundary] in meter. This is a capability of an instrument as specified, not the actually accessible vertical range. [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public groups (Class) instrument Cardinality: [0..1]	Target: Public belongs_to (Class) instrumentSet Cardinality: [0..1]
 Association (direction: Unspecified) 5-09 instrument	
Source: Public (Class) Deployment Cardinality: [1..*]	Target: Public (Class) instrument Cardinality: [0..1]

instrumentSet

Class in package 'WMDR2-core'

instrumentSet
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-22. Last modified 2026-06-25

ATTRIBUTES	
 description : Private	[Is static True. Containment is Not Specified.]
 id : Private	[Is static True. Containment is Not Specified.]
 name : Private Alias: title	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public groups (Class) instrument Cardinality: [0..1]	Target: Public belongs_to (Class) instrumentSet Cardinality: [0..1]

ObservationSeries

Class in package 'WMDR2-core'

WMDR2 core JSON class: observation.

ObservationSeries
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	

ATTRIBUTES
 applicationArea : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Value(s) from http://codes.wmo.int/wmdr/ApplicationArea [Is static True. Containment is Not Specified.]
 contact : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Observation-level contacts. [Is static True. Containment is Not Specified.]
 id : Private Observation identifier, e.g. observation:<observedVariable>. [Is static True. Containment is Not Specified.]
 keywords : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Observation keywords. [Is static True. Containment is Not Specified.]
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Observation links. [Is static True. Containment is Not Specified.]
 observedGeometry : Private cf. http://codes.wmo.int/wmdr/Geometry [Is static True. Containment is Not Specified.]
 observedProperty : Private Alias: OMS:ObservedProperty, iop:Variable The observedVariable is constructed following I-ADOPT ontology approaches, with elements described in a unified vocabulary hosted at codes.wmo.int/wmdr2. NB: observedVariable will be a LONG list of entries, each record comprised of notation, name, description. The notation is a unique identifier, not necessarily human-readable. The name is potentially human-readable. The description is a fully fledged definition, human-readable and describing all relevant aspects of an observed variable. It is derived from the observedProperty, the object of interest, the matrix and domain, as well as constraints. Matrix and constraints are defined in controlled vocabularies that may be domain-specific. Examples include: - observableProperty: state variable (e.g., temperature, pressure, leaf-area-index (LAI), ...), or another property (e.g., thickness, concentration, scattering coefficient, color, ...) - objectOfInterest: sea ice, CO2, aerosol particles, chlorophyll - observablePropertyConstraints: a conventional level above ground (e.g., 2m above ground for temperature measurements), a size fraction (e.g., PM2.5), a specific wavelength (e.g., 635 nm), a pressure (range), a temperature (range), a humidity (range), etc., as relevant for the result of the observation. Constraints shall be documented as name-value pairs, where the names shall come from a code list, and the values shall come from a code list depending on the name, or be free text. - matrix: atmosphere, interstitial air in the root space, air in an ice core, sea surface, soil, dry air, ... These elements will be supported by code lists from codes.wmo.int/wmdr2.

ATTRIBUTES

Applications may want to guide users to select a specific observedVariable by offering groupings, filtering, or tree-like visualizations according to matrix, objectOfInterest, etc.

[Is static True. Containment is Not Specified.]

 **officialStatus** : str Private = primary
Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

Values from <http://codes.wmo.int/wmdr/ObservationStatus>

Defaults to "primary" if not provided.

[Is static True. Containment is Not Specified.]

 **programAffiliation** : Private
Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False)

Program-affiliation timeline fragments inherited from WMDR1 observations.

[Is static True. Containment is Not Specified.]

 **representativeness** : Private
Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

<http://codes.wmo.int/wmdr/Representativeness>

[Is static True. Containment is Not Specified.]

 **title** : Private
Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

Human-readable title derived from domain, geometry, observed variable, and optional label.

[Is static True. Containment is Not Specified.]

ASSOCIATIONS

 Association (direction: Unspecified)

Source: Public describes (Class) ObservationSeries
Cardinality: [1]

Target: Public has (Class) OfficialStatus
Cardinality: [0..1]

 Association (direction: Unspecified)

Source: Public (Class) ObservationSeries
Cardinality: [1]

Target: Public (Class) ObservedFeature
Cardinality: [1]

 Association (direction: Unspecified)

Source: Public observationSeries (Class) ObservationSeries
Cardinality: [1]

Target: Public reportingProcedures (Class)
ReportingProcedure
Cardinality: [0..*]

 Association (direction: Unspecified)

Source: Public observationSeries (Class) ObservationSeries
Cardinality: [1]

Target: Public observingConfigurations (Class)
ObservingConfiguration

ASSOCIATIONS	
Cardinality: [1..*]	
 Association (direction: Unspecified)	
Source: Public (Class) ObservationSeries	Target: Public (Class) ReferenceSurface
 Association (direction: Unspecified)	
Source: Public groups (Class) ObservationSeries Cardinality: [1..*]	Target: Public belongs_to (Class) ObservationSeriesSet Cardinality: [0..*]
 Association (direction: Unspecified) 3-07 temporalGeometry	
Source: Public (Class) ObservationSeries Cardinality: [1]	Target: Public (Class) temporalGeometry Cardinality: [0..1]
describes	has_geolocatino
 Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public observingProcedures (Class) ObservingProcedure Cardinality: [0..*]
 Association (direction: Unspecified)	
Source: Public describes (Class) ObservationSeries Cardinality: [1..*]	Target: Public uses (Class) Extension Cardinality: [0..1]
	ObservingProcedure(s)
 Association (direction: Unspecified)	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public observationSeries (Class) ObservationSeries Cardinality: [1..*]

ObservationSeriesSet

Class in package 'WMDR2-core'

grouping of observations (which are themselves time series)

ObservationSeriesSet
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES
 description : Private

ATTRIBUTES	
Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Deployment temporal extent, date-resolution interval or null. [Is static True. Containment is Not Specified.]	
 id : Private Deployment identifier; source XML id is preserved when available. [Is static True. Containment is Not Specified.]	
 name : Private [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public groups (Class) ObservationSeries Cardinality: [1..*] Target: Public belongs_to (Class) ObservationSeriesSet Cardinality: [0..*]	

ObservedFeature

Class in package 'WMDR2-core'

Describes the physical domain, i.e. larger-scale environmental target or ultimate-feature-of-interest, of an observation.

ObservedFeature
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-10. Last modified 2026-06-25

ATTRIBUTES	
 domain : Private The largest scale in WIGOS, cf. http://codes.wmo.int/wmdr/Domain [Is static True. Containment is Not Specified.]	
 domainFeature : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Describes the type of the larger-scale environmental target or ultimate-feature-of-interest, of an observation. Concept motivated by requirements from hydrology, but may be useful elsewhere. New code list is proposed, with terms like - river basin - lake - river - catchment - canopy - epilimnion - hypolimnion	

ATTRIBUTES

- troposphere
- tropopause
- stratosphere

- thermocline (useful as a general term, but needs "domain")
- boundary layer (useful as a general term, but needs "domain")

- ...

[Is static True. Containment is Not Specified.]

 featureName : Private
 Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

free text field, e.g., "Danube Basin", "Amazon rain forest", "Amazon river Basin"

[Is static True. Containment is Not Specified.]

ASSOCIATIONS

 Association (direction: Unspecified)

Source: Public (Class) ObservationSeries
 Cardinality: [1]

Target: Public (Class) ObservedFeature
 Cardinality: [1]

ObservingConfiguration

Class in package 'WMDR2-core'

ObservingConfiguration
 Version 1.0 Phase 1.0 Proposed
 jkl created on 2026-06-26. Last modified 2026-06-29

ATTRIBUTES

 date : Private

[Is static True. Containment is Not Specified.]

 observingMethod : Private

from (new) unified code list of observing methods, based on
<http://codes.wmo.int/wmdr/ObservingMethodAtmosphere>
<http://codes.wmo.int/wmdr/ObservingMethodTerrestrial>
<http://codes.wmo.int/wmdr/ObservingMethodEarth>

[Is static True. Containment is Not Specified.]

ASSOCIATIONS

 Association (direction: Unspecified)

Source: Public pbserveingConfigurations (Class)
 ObservingConfiguration
 Cardinality: [0..*]

Target: Public deployment (Class) Deployment
 Cardinality: [0..1]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public observingConfigurations (Class) ObservingConfiguration Cardinality: [1..*]

ObservingProcedure

Class in package 'WMDR2-core'

When are observations made? Describes an observingStrategy, and depending on it, a temporal schedule/coverage, e.g. "from Feb-Oct on working days from 06-18 UTC".
Implement as array of objects

ObservingProcedure
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-11. Last modified 2026-06-25

ATTRIBUTES	
 date : Private Date from when on the schedule is valid	
	[Is static True. Containment is Not Specified.]
 strategy : Private Values from http://codes.wmo.int/wmdr/SamplingStrategy	
	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public procedure (Class) ObservingProcedure Cardinality: [1]	Target: Public schedules (Class) observingSchedule Cardinality: [1..*]
 Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public observingProcedures (Class) ObservingProcedure Cardinality: [0..*]

observingSchedule

Class in package 'WMDR2-core'

Reusable JSCalendar Event schedule used by deployment.temporalObservingSchedule references. WMDR-specific extensions are represented with wmo.int:* properties.

May be expected for strategy "continuous" or "discrete"

observingSchedule
Version 1.0 Phase 1.0 Proposed
ChatGPT created on 2026-06-01. Last modified 2026-06-25

ATTRIBUTES	
 @type : Private JSCalendar object type; const Event.	[Is static True. Containment is Not Specified.]
 duration : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Occurrence duration describing coverage window or sampling duration.	[Is static True. Containment is Not Specified.]
 recurrenceOverrides : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) JSCalendar recurrence override patches; null override values are invalid.	[Is static True. Containment is Not Specified.]
 recurrenceRules : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) JSCalendar recurrence rules.	[Is static True. Containment is Not Specified.]
 start : Private Canonical JSCalendar recurrence anchor; date 0001-01-01 with time from coverage start.	[Is static True. Containment is Not Specified.]
 timeZone : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) IANA time zone or UTC default.	[Is static True. Containment is Not Specified.]
 uid : Private JSCalendar-safe schedule uid.	[Is static True. Containment is Not Specified.]
 wmo.int:aggregationInterval : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Describes the smallest interval over which raw/ level 0 observations are aggregated and stored. Implement as {"value": int, "uom": str}	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
 wmo.int:samplingFrequency : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) The frequency at which raw / level 0 observations are obtained. Implement as {"value": int, "uom": str} [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public procedure (Class) ObservingProcedure Cardinality: [1] Target: Public schedules (Class) observingSchedule Cardinality: [1..*]	

OfficialStatus

Class in package 'WMDR2-core'

OfficialStatus
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-25. Last modified 2026-06-25

ATTRIBUTES	
 date : Private [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public describes (Class) ObservationSeries Cardinality: [1] Target: Public has (Class) OfficialStatus Cardinality: [0..1]	

ProgramAffiliation

Class in package 'WMDR2-core'

ProgramAffiliation
Version 1.0 Phase 1.0 Proposed
ChatGPT created on 2026-06-01. Last modified 2026-06-25
Alias temporalProgramAffiliation

ATTRIBUTES	
 date : Private [Is static True. Containment is Not Specified.]	

ATTRIBUTES	
 programAffiliation : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 programSpecificFacilityId : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 reportingStatus : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) http://codes.wmo.int/wmdr/ReportingStatus	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public (Class) Facility Cardinality: [1]	Target: Public (Class) ProgramAffiliation Cardinality: [0..1]

ReferenceSurface

Class in package 'WMDR2-core'

ReferenceSurface
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-26. Last modified 2026-06-26

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public (Class) ObservationSeries	Target: Public (Class) ReferenceSurface

reporting

Class in package 'WMDR2-core'

Reusable reporting template.

reporting
Version 1.0 Phase 1.0 Proposed
ChatGPT created on 2026-06-01. Last modified 2026-06-23

ATTRIBUTES	
 contact : Private	

ATTRIBUTES	
Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 dataFormat : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Aligned array, values from http://codes.wmo.int/wmdr/DataFormat .	[Is static True. Containment is Not Specified.]
 dataPolicy : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/DataPolicy .	[Is static True. Containment is Not Specified.]
 internationalExchange : Boolean Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 levelOfData : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/LevelOfData .	[Is static True. Containment is Not Specified.]
 numberOfObservationsInReportingInterval : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 referenceDatum : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/CoordinateReferenceSystem .	[Is static True. Containment is Not Specified.]
 referenceTimeSource : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Single value or array, values from http://codes.wmo.int/wmdr/ReferenceTime .	[Is static True. Containment is Not Specified.]
 timeliness : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Expected timeliness of reporting, an object with value and uom (default: seconds)	[Is static True. Containment is Not Specified.]
 timeStampMeaning : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Aligned array, values from http://codes.wmo.int/wmdr/TimeStampMeaning .	

ATTRIBUTES	
[Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) 7-03 Temporal reporting Source: Public procedure (Class) ReportingProcedure Cardinality: [1]	
Target: Public reporting (Class) reporting Cardinality: [0..1]	

ReportingProcedure

Class in package 'WMDR2-core'

ReportingProcedure
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-23. Last modified 2026-06-25

ATTRIBUTES	
 date : Private	[Is static True. Containment is Not Specified.]
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) URL to related WIS record, entry point for data discovery and retrieval.	[Is static True. Containment is Not Specified.]
 strategy : Private	[Is static True. Containment is Not Specified.]
 uom : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Values from http://codes.wmo.int/wmdr/unit .	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public reportingProcedure (Class) ReportingProcedure Cardinality: [1]	
Target: Public reportingSchedules (Class) reportingSchedule Cardinality: [1..*]	
 Association (direction: Unspecified) 7-03 Temporal reporting Source: Public procedure (Class) ReportingProcedure Cardinality: [1]	
Target: Public reporting (Class) reporting Cardinality: [0..1]	

ASSOCIATIONS

 Association (direction: Unspecified)

Source: Public observationSeries (Class) ObservationSeries
Cardinality: [1]

Target: Public reportingProcedures (Class)
ReportingProcedure
Cardinality: [0..*]

reportingSchedule

Class in package 'WMDR2-core'

Reusable JSCalendar Event schedule used by deployment.temporalObservingSchedule references. WMDR-specific extensions are represented with wmo.int:* properties.

reportingSchedule
Version 1.0 Phase 1.0 Proposed
ChatGPT created on 2026-06-25. Last modified 2026-06-25

ATTRIBUTES

 @type : Private

JSCalendar object type; const Event.

[Is static True. Containment is Not Specified.]

 duration : Private

Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

Occurrence duration describing coverage window or sampling duration.

[Is static True. Containment is Not Specified.]

 recurrenceOverrides : Private

Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

JSCalendar recurrence override patches; null override values are invalid.

[Is static True. Containment is Not Specified.]

 recurrenceRules : Private

Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False)

JSCalendar recurrence rules.

To be used for "reportingInterval"; use start, duration and other elements to evaluate constraints if needed.

[Is static True. Containment is Not Specified.]

 start : Private

Canonical JSCalendar recurrence anchor; date 0001-01-01 with time from coverage start.

[Is static True. Containment is Not Specified.]

 timeZone : Private

Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)

ATTRIBUTES	
IANA time zone or UTC default.	[Is static True. Containment is Not Specified.]
 uid : Private JSCalendar-safe schedule uid.	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public reportingProcedure (Class) ReportingProcedure Cardinality: [1]	Target: Public reportingSchedules (Class) reportingSchedule Cardinality: [1..*]

temporalGeometry

Class in package 'WMDR2-core'

temporalGeometry
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-03-11. Last modified 2026-06-25
Alias temporalGeometry

ATTRIBUTES	
 coordinates : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Coordinate history array; each entry is lon, lat[, elevation].	[Is static True. Containment is Not Specified.]
 dates : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Date array aligned with coordinates.	[Is static True. Containment is Not Specified.]
 methods : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) use http://codes.wmo.int/wmdr/GeopositioningMethod	[Is static True. Containment is Not Specified.]
 type : str Private = MovingPoint	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	

ASSOCIATIONS

 Association (direction: Unspecified)

Source: Public facility (Class) Facility
Cardinality: [1]

Target: Public temporalGeometries (Class)
temporalGeometry
Cardinality: [0..1]

temporalGeometry

Class in package 'WMDR2-core'

WMDR2 core JSON class: temporalGeometry.

temporalGeometry
Version 1.0 Phase 1.0 Proposed
jkl created on 2026-06-12. Last modified 2026-06-02

ATTRIBUTES

 coordinates : Private
Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False)

Coordinate history array; each entry is lon, lat[, elevation].

[Is static True. Containment is Not Specified.]

 dates : Private
Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False)

Date array aligned with coordinates.

[Is static True. Containment is Not Specified.]

 methods : Private
Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False)

use <http://codes.wmo.int/wmdr/GeopositioningMethod>

[Is static True. Containment is Not Specified.]

ASSOCIATIONS

 Association (direction: Unspecified) 3-07 temporalGeometry

Source: Public (Class) ObservationSeries
Cardinality: [1]

Target: Public (Class) temporalGeometry
Cardinality: [0..1]

describes

has_geolocatio

Territory

Class in package 'WMDR2-core'

WMDS reference: 3-02

mandatory for fixed facilities, optional for mobile facilities.

Implemented as [{"date": date, "territory": str}, {}] like other historical<Name> classes.

Territory

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-23. Last modified 2026-06-25

ATTRIBUTES

 date : Private

[Is static True. Containment is Not Specified.]

 territory : Private

Alias: temporal Territory

Values from <http://codes.wmo.int/wmdr/TerritoryName>

[Is static True. Containment is Not Specified.]

ASSOCIATIONS

 Association (direction: Unspecified)

Source: Public (Class) Facility

Cardinality: [1]

Target: Public (Class) Territory

Cardinality: [1..*]