

WMDR2-core

Package in package 'Model'

WMDR2-core

Version 0.2.5.2 Phase 1.0 Proposed

jkl created on 2026-03-06. Last modified 2026-07-01

WMDR2-core diagram

Class diagram in package 'WMDR2-core'

wmdr2-core v0.2.x

v0.2.5

- break association between Deployment and ObservationSeries in favor of an association
Deployment-ObservingConfiguration. This ObservingConfiguration is the new class name for ObservingMethod.
- rename association roles to conventional UML naming.

v0.2.5.1

- drop observingConfiguration.date as being redundant to Deployment.date for almost all use cases identified.

v0.2.5.2

- Deployment.exposure moved to ObservingConfiguration.exposure
- Deployment.operatingStatus moved to ObservingConfiguration.operatingStatus
- Deployment.date moved to ObservingConfiguration.date to facilitate reconstruction of ObservationSeries history
- facility.time [1] declares date established and (optionally) date closed.

WMDR2-core

Version 0.2.5.2

jkl created on 2026-03-06. Last modified 2026-07-03

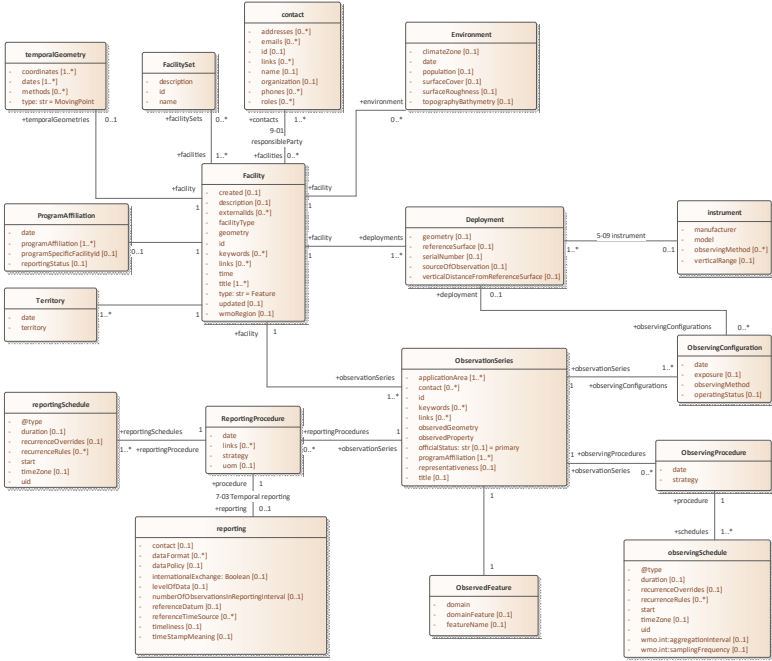


Figure 1: WMDR2-core

contact

Class in package 'WMDR2-core'

WMDR2 core JSON class: contact.

contact

Version 1.0 Phase 1.0 Proposed

jdk created on 2026-03-11. Last modified 2026-06-25

ATTRIBUTES	
addresses : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False)	
Postal addresses.	[Is static True. Containment is Not Specified.]
emails : Private	

ATTRIBUTES	
Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Email contacts. [Is static True. Containment is Not Specified.]	
 id : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Optional stable contact identifier. [Is static True. Containment is Not Specified.]	
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Online resources associated with the contact. [Is static True. Containment is Not Specified.]	
 name : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Either a full name, or a sequence of name parts. Examples: Dr. Jörg Klausen (this corresponds to FN in vcard) Klausen;Jörg;Dr.; (this corresponds to N in vcard) [Is static True. Containment is Not Specified.]	
 organization : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Example: ORG:Federal Office of Meteorology and Climatology MeteoSwiss [Is static True. Containment is Not Specified.]	
 phones : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Phone contacts. [Is static True. Containment is Not Specified.]	
 roles : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Specific contact roles such as owner, pointOfContact, principalInvestigator. [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) 9-01 responsibleParty Source: Public facilities (Class) Facility Cardinality: [0..*] Target: Public contacts (Class) contact Cardinality: [1..*]	

Deployment

Class in package 'WMDR2-core'

Deployment

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-22. Last modified 2026-06-25

ATTRIBUTES
geometry : Private Alias: temporalGeometry Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) geometry is the OGC Records name for geolocation. Meaningful only for fixed facilities, do not use for mobile facilities. [Is static True. Containment is Not Specified.]
referenceSurface : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Linked to heightAboveReferenceSurface, from http://codes.wmo.int/wmdr/ReferenceSurfaceType [Is static True. Containment is Not Specified.]
serialNumber : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) [Is static True. Containment is Not Specified.]
sourceOfObservation : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/SourceOfObservation. If sourceOfObservation=="humanObservation", several attributes of "observations" are expected to be null. [Is static True. Containment is Not Specified.]
verticalDistanceFromReferenceSurface : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) implement as an array of objects: { "value": float, "uom": str }, whereby "uom" from http://codes.wmo.int/wmdr/unit [Is static True. Containment is Not Specified.]
ASSOCIATIONS
Association (direction: Unspecified) 5-09 instrument Source: Public (Class) Deployment Cardinality: [1..*] Target: Public (Class) instrument Cardinality: [0..1]
Association (direction: Unspecified)

ASSOCIATIONS	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public deployments (Class) Deployment Cardinality: [1..*]
✍ Association (direction: Unspecified)	
Source: Public observingConfigurations (Class) ObservingConfiguration Cardinality: [0..*]	Target: Public deployment (Class) Deployment Cardinality: [0..1]

Environment

Class in package 'WMDR2-core'

Facility-environment object containing climate, surface-cover, population, and topography/bathymetry histories.

Environment

Version 1.0 Phase 1.0 Proposed

ChatGPT created on 2026-06-02. Last modified 2026-06-25

ATTRIBUTES	
🔗 climateZone : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
🔗 date : Private	[Is static True. Containment is Not Specified.]
🔗 population : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Population in 10 and 50 km radius around the facility	[Is static True. Containment is Not Specified.]
🔗 surfaceCover : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
🔗 surfaceRoughness : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
🔗 topographyBathymetry : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	

ASSOCIATIONS	
✍ Association (direction: Unspecified)	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public environment (Class) Environment Cardinality: [0..*]

Extension

Class in package 'WMDR2-core'

Retained from previous UML model; not part of the current WMDR2 core full-record JSON schema.

Extension

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-03-11. Last modified 2026-06-26

ASSOCIATIONS	
✍ Association (direction: Unspecified)	
Source: Public describes (Class) ObservationSeries Cardinality: [1..*]	Target: Public uses (Class) Extension Cardinality: [0..1]
	ObservingProcedure(s)

Facility

Class in package 'WMDR2-core'

Facility properties payload of the WMDR2 full record. Root Features geometry/time are modeled on fullRecord, not here.

Facility

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	
✍ created : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Record creation date/time metadata. [Is static True. Containment is Not Specified.]	
✍ description : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Facility description. [Is static True. Containment is Not Specified.]	
✍ externalIds : Private Alias: 3-06 (primary & additional) WSIs Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False)	

ATTRIBUTES	
External identifiers such as WMO-WIGOS.	[Is static True. Containment is Not Specified.]
facilityType : Private Alias: 3-04 facilityType Compact WMDR facility type code value.	[Is static True. Containment is Not Specified.]
geometry : Private Alias: 3-07 current geolocation geometry = geolocation = coordinates + elevation	[Is static True. Containment is Not Specified.]
id : Private Alias: 3-06 (primary) WSI to prefixed with name space "facility:"	[Is static True. Containment is Not Specified.]
keywords : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Discovery/search keywords retained in the core JSON.	[Is static True. Containment is Not Specified.]
links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Related links.	[Is static True. Containment is Not Specified.]
time : Private Alias: [dateEstablished, dateClosed] mandatory element in OGC Records API Part 1, an interval. Used to declare [dateEstablished, dateClosed]	[Is static True. Containment is Not Specified.]
title : Private Alias: 3-03 facilityName Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) properties.title = 3-03 facilityName	[Is static True. Containment is Not Specified.]
type : str Private = Feature Facility properties type; const facility.	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
 updated : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Record update date/time metadata.	[Is static True. Containment is Not Specified.]
 wmoRegion : Private Alias: 3-01 wmoRegion Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) mandatory for fixed facilities, optional for mobile facilities.	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public facility (Class) Facility Cardinality: [1] Target: Public environment (Class) Environment Cardinality: [0..*]	
 Association (direction: Unspecified) Source: Public (Class) Facility Cardinality: [1] Target: Public (Class) Territory Cardinality: [1..*]	
 Association (direction: Unspecified) Source: Public facilities (Class) Facility Cardinality: [1..*] Target: Public facilitySets (Class) FacilitySet Cardinality: [0..*]	
 Association (direction: Unspecified) Source: Public facility (Class) Facility Cardinality: [1] Target: Public temporalGeometries (Class) temporalGeometry Cardinality: [0..1]	
 Association (direction: Unspecified) Source: Public (Class) Facility Cardinality: [1] Target: Public (Class) ProgramAffiliation Cardinality: [0..1]	
 Association (direction: Unspecified) Source: Public facility (Class) Facility Cardinality: [1] Target: Public observationSeries (Class) ObservationSeries Cardinality: [1..*]	
 Association (direction: Unspecified) Source: Public facility (Class) Facility Target: Public deployments (Class) Deployment	

ASSOCIATIONS	
Cardinality: [1]	Cardinality: [1..*]
Association (direction: Unspecified) 9-01 responsibleParty Source: Public facilities (Class) Facility Cardinality: [0..*] Target: Public contacts (Class) contact Cardinality: [1..*]	

FacilitySet

Class in package 'WMDR2-core'

Retained from previous UML model; not part of the current WMDR2 core full-record JSON schema.

FacilitySet

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	
description : Private	[Is static True. Containment is Not Specified.]
id : Private	[Is static True. Containment is Not Specified.]
name : Private Alias: title	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
Association (direction: Unspecified) Source: Public facilities (Class) Facility Cardinality: [1..*] Target: Public facilitySets (Class) FacilitySet Cardinality: [0..*]	

instrument

Class in package 'WMDR2-core'

Describes instrument capabilities, not a specific instrument instance.
For semantic consistency, terms like observedProperty and observedGeometry are used, even though they just describe the instrument capabilities, not the actual observations. With this, instrument becomes re-usable between deployments and even facilities.

instrument

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-05-22. Last modified 2026-06-25

ATTRIBUTES	
 manufacturer : Private Alias: 5-09 manufacturer [Is static True. Containment is Not Specified.]	
 model : Private Alias: 5-09 model [Is static True. Containment is Not Specified.]	
 observingMethod : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) [Is static True. Containment is Not Specified.]	
 verticalRange : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Specify using an array of [lower boundary, upper boundary] in meter. This is a capability of an instrument as specified, not the actually accessible vertical range. [Is static True. Containment is Not Specified.]	

ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public groups (Class) instrument Cardinality: [0..1] Target: Public belongs_to (Class) instrumentSet Cardinality: [0..1]	
 Association (direction: Unspecified) 5-09 instrument Source: Public (Class) Deployment Cardinality: [1..*] Target: Public (Class) instrument Cardinality: [0..1]	

instrumentSet

Class in package 'WMDR2-core'

instrumentSet

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-22. Last modified 2026-06-25

ATTRIBUTES	
 description : Private [Is static True. Containment is Not Specified.]	
 id : Private [Is static True. Containment is Not Specified.]	
 name : Private	

ATTRIBUTES	
Alias: title	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public groups (Class) instrument Cardinality: [0..1]	Target: Public belongs_to (Class) instrumentSet Cardinality: [0..1]

ObservationSeries

Class in package 'WMDR2-core'

WMDR2 core JSON class: observation.

ObservationSeries

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	
 applicationArea : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Value(s) from http://codes.wmo.int/wmdr/ApplicationArea	[Is static True. Containment is Not Specified.]
 contact : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Observation-level contacts.	[Is static True. Containment is Not Specified.]
 id : Private Observation identifier, e.g. observation:<observedVariable>.	[Is static True. Containment is Not Specified.]
 keywords : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Observation keywords.	[Is static True. Containment is Not Specified.]
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Observation links.	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
 observedGeometry : Private cf. http://codes.wmo.int/wmdr/Geometry	[Is static True. Containment is Not Specified.]
 observedProperty : Private Alias: OMS:ObservedProperty, iop:Variable The observedVariable is constructed following I-ADOPT ontology approaches, with elements described in a unified vocabulary hosted at codes.wmo.int/wmdr2. NB: observedVariable will be a LONG list of entries, each record comprised of notation, name, description. The notation is a unique identifier, not necessarily human-readable. The name is potentially human-readable. The description is a fully fledged definition, human-readable and describing all relevant aspects of an observed variable. It is derived from the observedProperty, the object of interest, the matrix and domain, as well as constraints. Matrix and constraints are defined in controlled vocabularies that may be domain-specific. Examples include: - observableProperty: state variable (e.g., temperature, pressure, leaf-area-index (LAI), ...), or another property (e.g., thickness, concentration, scattering coefficient, color, ...) - objectOfInterest: sea ice, CO2, aerosol particles, chlorophyll - observablePropertyConstraints: a conventional level above ground (e.g., 2m above ground for temperature measurements), a size fraction (e.g., PM2.5), a specific wavelength (e.g., 635 nm), a pressure (range), a temperature (range), a humidity (range), etc., as relevant for the result of the observation. Constraints shall be documented as name-value pairs, where the names shall come from a code list, and the values shall come from a code list depending on the name, or be free text. - matrix: atmosphere, interstitial air in the root space, air in an ice core, sea surface, soil, dry air, ... These elements will be supported by code lists from codes.wmo.int/wmdr2. Applications may want to guide users to select a specific observedVariable by offering groupings, filtering, or tree-like visualizations according to matrix, objectOfInterest, etc.	[Is static True. Containment is Not Specified.]
 officialStatus : str Private = primary Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Values from http://codes.wmo.int/wmdr/ObservationStatus Defaults to "primary" if not provided.	[Is static True. Containment is Not Specified.]
 programAffiliation : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Program-affiliation timeline fragments inherited from WMDR1 observations.	[Is static True. Containment is Not Specified.]
 representativeness : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) http://codes.wmo.int/wmdr/Representativeness	[Is static True. Containment is Not Specified.]
 title : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Human-readable title derived from domain, geometry, observed variable, and optional label.	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
ASSOCIATIONS	
Association (direction: Unspecified)	
Source: Public describes (Class) ObservationSeries Cardinality: [1]	Target: Public has (Class) OfficialStatus Cardinality: [0..1]
Association (direction: Unspecified)	
Source: Public (Class) ObservationSeries Cardinality: [1]	Target: Public (Class) ObservedFeature Cardinality: [1]
Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public reportingProcedures (Class) ReportingProcedure Cardinality: [0..*]
Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public observingConfigurations (Class) ObservingConfiguration Cardinality: [1..*]
Association (direction: Unspecified)	
Source: Public (Class) ObservationSeries	Target: Public (Class) ReferenceSurface
Association (direction: Unspecified)	
Source: Public groups (Class) ObservationSeries Cardinality: [1..*]	Target: Public belongs_to (Class) ObservationSeriesSet Cardinality: [0..*]
Association (direction: Unspecified) 3-07 temporalGeometry	
Source: Public (Class) ObservationSeries Cardinality: [1]	Target: Public (Class) temporalGeometry Cardinality: [0..1]
describes	has_geolocatino
Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public observingProcedures (Class) ObservingProcedure Cardinality: [0..*]
Association (direction: Unspecified)	

ASSOCIATIONS	
Source: Public describes (Class) ObservationSeries Cardinality: [1..*]	Target: Public uses (Class) Extension Cardinality: [0..1] ObservingProcedure(s)
✍ Association (direction: Unspecified)	
Source: Public facility (Class) Facility Cardinality: [1]	Target: Public observationSeries (Class) ObservationSeries Cardinality: [1..*]

ObservationSeriesSet

Class in package 'WMDR2-core'

grouping of observations (which are themselves time series)

ObservationSeriesSet

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-03-06. Last modified 2026-06-25

ATTRIBUTES	
🔍 description : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Deployment temporal extent, date-resolution interval or null.	[Is static True. Containment is Not Specified.]
🔍 id : Private Deployment identifier; source XML id is preserved when available.	[Is static True. Containment is Not Specified.]
🔍 name : Private	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
✍ Association (direction: Unspecified)	
Source: Public groups (Class) ObservationSeries Cardinality: [1..*]	Target: Public belongs_to (Class) ObservationSeriesSet Cardinality: [0..*]

ObservedFeature

Class in package 'WMDR2-core'

Describes the physical domain, i.e. larger-scale environmental target or ultimate-feature-of-interest, of an observation.

ATTRIBUTES
 domain : Private The largest scale in WIGOS, cf. http://codes.wmo.int/wmdr/Domain [Is static True. Containment is Not Specified.]
 domainFeature : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Describes the type of the larger-scale environmental target or ultimate-feature-of-interest, of an observation. Concept motivated by requirements from hydrology, but may be useful elsewhere. New code list is proposed, with terms like - river basin - lake - river - catchment - canopy - epilimnion - hypolimnion - troposphere - tropopause - stratosphere - thermocline (useful as a general term, but needs "domain") - boundary layer (useful as a general term, but needs "domain") - ... [Is static True. Containment is Not Specified.]
 featureName : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) free text field, e.g., "Danube Basin", "Amazon rain forest", "Amazon river Basin" [Is static True. Containment is Not Specified.]
ASSOCIATIONS
 Association (direction: Unspecified) Source: Public (Class) ObservationSeries Cardinality: [1] Target: Public (Class) ObservedFeature Cardinality: [1]

ObservingConfiguration

Class in package 'WMDR2-core'

ATTRIBUTES	
 date : Private [Is static True. Containment is Not Specified.]	
 exposure : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Values from http://codes.wmo.int/wmdr/Exposure [Is static True. Containment is Not Specified.]	
 observingMethod : Private from (new) unified code list of observing methods, based on http://codes.wmo.int/wmdr/ObservingMethodAtmosphere http://codes.wmo.int/wmdr/ObservingMethodTerrestrial http://codes.wmo.int/wmdr/ObservingMethodEarth [Is static True. Containment is Not Specified.]	
 operatingStatus : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) values refer to http://codes.wmo.int/wmdr/InstrumentOperatingStatus [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
 Association (direction: Unspecified) Source: Public observingConfigurations (Class) ObservingConfiguration Cardinality: [0..*] Target: Public deployment (Class) Deployment Cardinality: [0..1]	
 Association (direction: Unspecified) Source: Public observationSeries (Class) ObservationSeries Cardinality: [1] Target: Public observingConfigurations (Class) ObservingConfiguration Cardinality: [1..*]	

ObservingProcedure

Class in package 'WMDR2-core'

When are observations made? Describes an observingStrategy, and depending on it, a temporal schedule/coverage, e.g. "from Feb-Oct on working days from 06-18 UTC".
Implement as array of objects

ATTRIBUTES	
 date : Private	
Date from when on the schedule is valid	[Is static True. Containment is Not Specified.]
 strategy : Private	
Values from http://codes.wmo.int/wmdr/SamplingStrategy	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public procedure (Class) ObservingProcedure Cardinality: [1]	Target: Public schedules (Class) observingSchedule Cardinality: [1..*]
 Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public observingProcedures (Class) ObservingProcedure Cardinality: [0..*]

observingSchedule

Class in package 'WMDR2-core'

Reusable JSCalendar Event schedule used by deployment.temporalObservingSchedule references. WMDR-specific extensions are represented with wmo.int:* properties.

May be expected for strategy "continuous" or "discrete"

observingSchedule

Version 1.0 Phase 1.0 Proposed

ChatGPT created on 2026-06-01. Last modified 2026-06-25

ATTRIBUTES	
 @type : Private	
JSCalendar object type; const Event.	[Is static True. Containment is Not Specified.]
 duration : Private	
Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	
Occurrence duration describing coverage window or sampling duration.	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
recurrenceOverrides : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) JSCalendar recurrence override patches; null override values are invalid. [Is static True. Containment is Not Specified.]	
recurrenceRules : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) JSCalendar recurrence rules. [Is static True. Containment is Not Specified.]	
start : Private Canonical JSCalendar recurrence anchor; date 0001-01-01 with time from coverage start. [Is static True. Containment is Not Specified.]	
timeZone : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) IANA time zone or UTC default. [Is static True. Containment is Not Specified.]	
uid : Private JSCalendar-safe schedule uid. [Is static True. Containment is Not Specified.]	
wmo.int:aggregationInterval : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Describes the smallest interval over which raw/ level 0 observations are aggregated and stored. Implement as {"value": int, "uom": str} [Is static True. Containment is Not Specified.]	
wmo.int:samplingFrequency : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) The frequency at which raw / level 0 observations are obtained. Implement as {"value": int, "uom": str} [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
Association (direction: Unspecified) Source: Public procedure (Class) ObservingProcedure Cardinality: [1] Target: Public schedules (Class) observingSchedule Cardinality: [1..*]	

OfficialStatus

Class in package 'WMDR2-core'

OfficialStatus

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-25. Last modified 2026-06-25

ATTRIBUTES	
 date : Private	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public describes (Class) ObservationSeries Cardinality: [1]	Target: Public has (Class) OfficialStatus Cardinality: [0..1]

ProgramAffiliation

Class in package 'WMDR2-core'

ProgramAffiliation

Version 1.0 Phase 1.0 Proposed

ChatGPT created on 2026-06-01. Last modified 2026-06-25

Alias temporalProgramAffiliation

ATTRIBUTES	
 date : Private	[Is static True. Containment is Not Specified.]
 programAffiliation : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 programSpecificFacilityId : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 reportingStatus : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) http://codes.wmo.int/wmdr/ReportingStatus	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
 Association (direction: Unspecified)	

ASSOCIATIONS	
Source: Public (Class) Facility Cardinality: [1]	Target: Public (Class) ProgramAffiliation Cardinality: [0..1]

ReferenceSurface

Class in package 'WMDR2-core'

ReferenceSurface

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-26. Last modified 2026-06-26

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public (Class) ObservationSeries	Target: Public (Class) ReferenceSurface

reporting

Class in package 'WMDR2-core'

Reusable reporting template.

reporting

Version 1.0 Phase 1.0 Proposed

ChatGPT created on 2026-06-01. Last modified 2026-06-23

ATTRIBUTES	
 contact : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]
 dataFormat : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Aligned array, values from http://codes.wmo.int/wmdr/DataFormat.	[Is static True. Containment is Not Specified.]
 dataPolicy : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/DataPolicy.	[Is static True. Containment is Not Specified.]
 internationalExchange : Boolean Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	[Is static True. Containment is Not Specified.]

ATTRIBUTES	
levelOfData : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/LevelOfData. [Is static True. Containment is Not Specified.]	
numberOfObservationsInReportingInterval : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) [Is static True. Containment is Not Specified.]	
referenceDatum : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Value from http://codes.wmo.int/wmdr/CoordinateReferenceSystem. [Is static True. Containment is Not Specified.]	
referenceTimeSource : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) Single value or array, values from http://codes.wmo.int/wmdr/ReferenceTime. [Is static True. Containment is Not Specified.]	
timeliness : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Expected timeliness of reporting, an object with value and uom (default: seconds) [Is static True. Containment is Not Specified.]	
timeStampMeaning : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Aligned array, values from http://codes.wmo.int/wmdr/TimeStampMeaning. [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
Association (direction: Unspecified) 7-03 Temporal reporting Source: Public procedure (Class) ReportingProcedure Cardinality: [1] Target: Public reporting (Class) reporting Cardinality: [0..1]	

ReportingProcedure

Class in package 'WMDR2-core'

ReportingProcedure

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-23. Last modified 2026-06-25

ATTRIBUTES	
 date : Private	[Is static True. Containment is Not Specified.]
 links : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False)	
URL to related WIS record, entry point for data discovery and retrieval.	[Is static True. Containment is Not Specified.]
 strategy : Private	[Is static True. Containment is Not Specified.]
 uom : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False)	
Values from http://codes.wmo.int/wmdr/unit.	[Is static True. Containment is Not Specified.]

ASSOCIATIONS	
 Association (direction: Unspecified)	
Source: Public reportingProcedure (Class) ReportingProcedure Cardinality: [1]	Target: Public reportingSchedules (Class) reportingSchedule Cardinality: [1..*]
 Association (direction: Unspecified) 7-03 Temporal reporting	
Source: Public procedure (Class) ReportingProcedure Cardinality: [1]	Target: Public reporting (Class) reporting Cardinality: [0..1]
 Association (direction: Unspecified)	
Source: Public observationSeries (Class) ObservationSeries Cardinality: [1]	Target: Public reportingProcedures (Class) ReportingProcedure Cardinality: [0..*]

reportingSchedule

Class in package 'WMDR2-core'

Reusable JSCalendar Event schedule used by deployment.temporalObservingSchedule references. WMDR-specific extensions are represented with wmo.int:* properties.

reportingSchedule

Version 1.0 Phase 1.0 Proposed

ChatGPT created on 2026-06-25. Last modified 2026-06-25

ATTRIBUTES

ATTRIBUTES	
@type : Private JSCalendar object type; const Event. [Is static True. Containment is Not Specified.]	
duration : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) Occurrence duration describing coverage window or sampling duration. [Is static True. Containment is Not Specified.]	
recurrenceOverrides : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) JSCalendar recurrence override patches; null override values are invalid. [Is static True. Containment is Not Specified.]	
recurrenceRules : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) JSCalendar recurrence rules. To be used for "reportingInterval"; use start, duration and other elements to evaluate constraints if needed. [Is static True. Containment is Not Specified.]	
start : Private Canonical JSCalendar recurrence anchor; date 0001-01-01 with time from coverage start. [Is static True. Containment is Not Specified.]	
timeZone : Private Multiplicity: ([0..1], Allow duplicates: 0, Is ordered: False) IANA time zone or UTC default. [Is static True. Containment is Not Specified.]	
uid : Private JSCalendar-safe schedule uid. [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
Association (direction: Unspecified) Source: Public reportingProcedure (Class) ReportingProcedure Cardinality: [1] Target: Public reportingSchedules (Class) reportingSchedule Cardinality: [1..*]	

temporalGeometry

Class in package 'WMDR2-core'

temporalGeometry

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-03-11. Last modified 2026-06-25

Alias temporalGeometry

ATTRIBUTES	
coordinates : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Coordinate history array; each entry is lon, lat[, elevation]. [Is static True. Containment is Not Specified.]	
dates : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Date array aligned with coordinates. [Is static True. Containment is Not Specified.]	
methods : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) use http://codes.wmo.int/wmdr/GeopositioningMethod [Is static True. Containment is Not Specified.]	
type : str Private = MovingPoint [Is static True. Containment is Not Specified.]	
ASSOCIATIONS	
Association (direction: Unspecified) Source: Public facility (Class) Facility Cardinality: [1]	Target: Public temporalGeometries (Class) temporalGeometry Cardinality: [0..1]

temporalGeometry

Class in package 'WMDR2-core'

WMDR2 core JSON class: temporalGeometry.

temporalGeometry

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-12. Last modified 2026-06-02

ATTRIBUTES
coordinates : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False)

ATTRIBUTES	
Coordinate history array; each entry is lon, lat[, elevation].	[Is static True. Containment is Not Specified.]
dates : Private Multiplicity: ([1..*], Allow duplicates: 0, Is ordered: False) Date array aligned with coordinates.	[Is static True. Containment is Not Specified.]
methods : Private Multiplicity: ([0..*], Allow duplicates: 0, Is ordered: False) use http://codes.wmo.int/wmdr/GeopositioningMethod	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
Association (direction: Unspecified) 3-07 temporalGeometry Source: Public (Class) ObservationSeries Cardinality: [1] Target: Public (Class) temporalGeometry Cardinality: [0..1] describes has_geolocatino	

Territory

Class in package 'WMDR2-core'

WMDS reference: 3-02
mandatory for fixed facilities, optional for mobile facilities.
Implemented as [{"date": date, "territory": str}, {}] like other historical<Name> classes.

Territory

Version 1.0 Phase 1.0 Proposed

jkl created on 2026-06-23. Last modified 2026-06-25

ATTRIBUTES	
date : Private [Is static True. Containment is Not Specified.]	
territory : Private Alias: temporal Territory Values from http://codes.wmo.int/wmdr/TerritoryName	[Is static True. Containment is Not Specified.]
ASSOCIATIONS	
Association (direction: Unspecified)	

ASSOCIATIONS	
Source: Public (Class) Facility Cardinality: [1]	Target: Public (Class) Territory Cardinality: [1..*]