

COIT20258 Software Engineering

Week 6 Software Testing

Topics

- ✧ Development testing
- ✧ Test-driven development
- ✧ Release testing
- ✧ User testing

Program Testing

- ✧ Testing is intended to show that a program does what it is intended to do & to discover program defects before it is put into use
- ✧ When you test software, you execute a program using artificial data
- ✧ You check the results of the test run for errors, anomalies or information about the program's non-functional attributes
- ✧ Can reveal the presence of errors **NOT** their absence
- ✧ Testing is part of a more general **verification & validation (V&V)** process, which also includes static validation techniques

Two Testing Goals


✧ Validation testing

- To demonstrate to the developer & the system customer that the software meets its requirements
- A successful test shows that the system operates as intended

✧ Defect testing

- To discover faults or defects in the software where its behavior is incorrect or not in conformance with its specification
- A successful test is a test that makes the system perform incorrectly & so exposes a defect in the system

An Input-Output Model of Program Testing

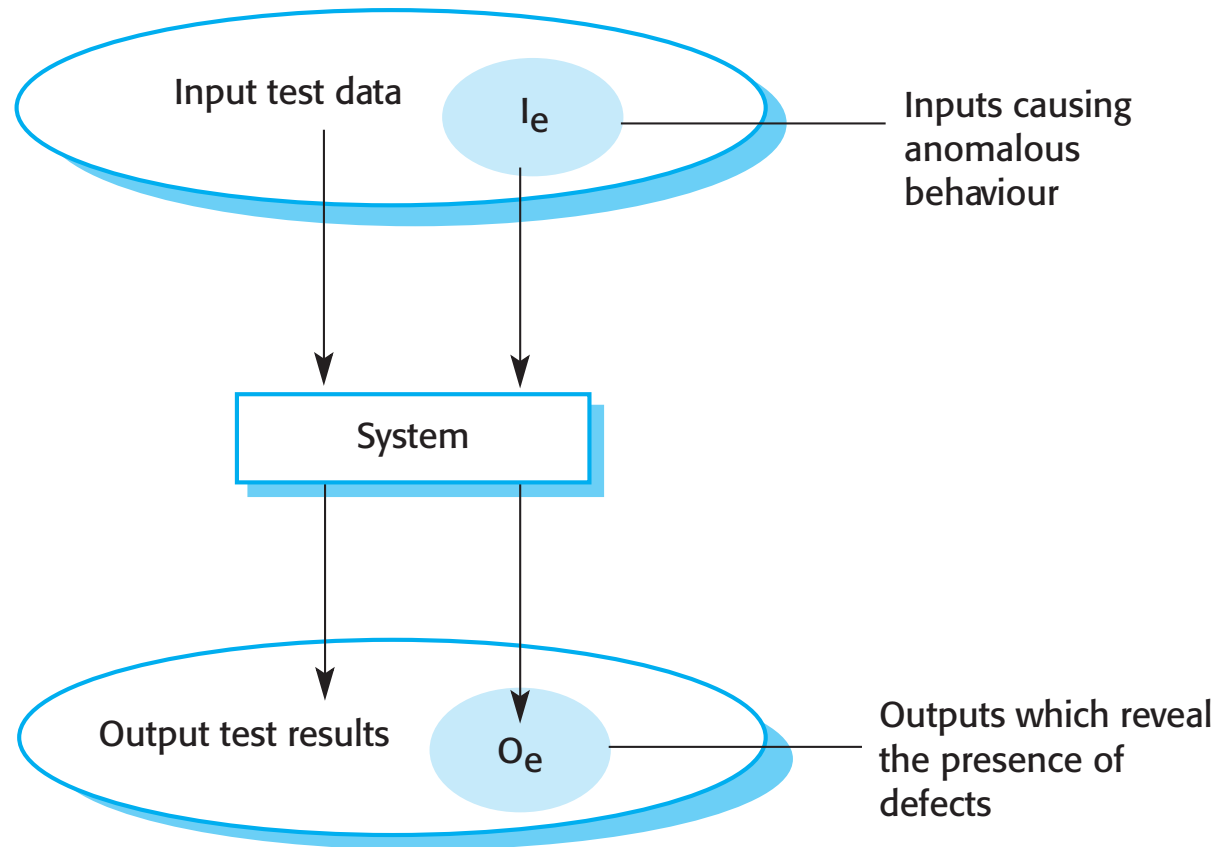

Validation & Verification (V&V)

✧ Validation

“Are we building the right product?”

- The software should do what the user really requires; related to validation testing

✧ Verification

“Are we building the product right?”

- The software should conform to its specification; related to defect testing


V&V Confidence

- ✧ Aim of V&V is to establish confidence that the system is “fit for purpose”
- ✧ Depends on system’s purpose, user expectations & marketing environment
 - Software purpose
 - The level of confidence depends on how critical the software is to an organization
 - User expectations
 - Users may have low expectations of certain kinds of software
 - Marketing environment
 - Getting a product to market early may be more important than finding defects in the program

Inspections & Testing

- ✧ Software inspections concerned with analysis of the **static** system representation to discover problems (static verification)
 - May be supplement by tool-based document & code analysis
- ✧ Software testing concerned with exercising & observing product behaviour (**dynamic** verification)
 - The system is executed with test data & its operational behaviour is observed

... Inspections & Testing

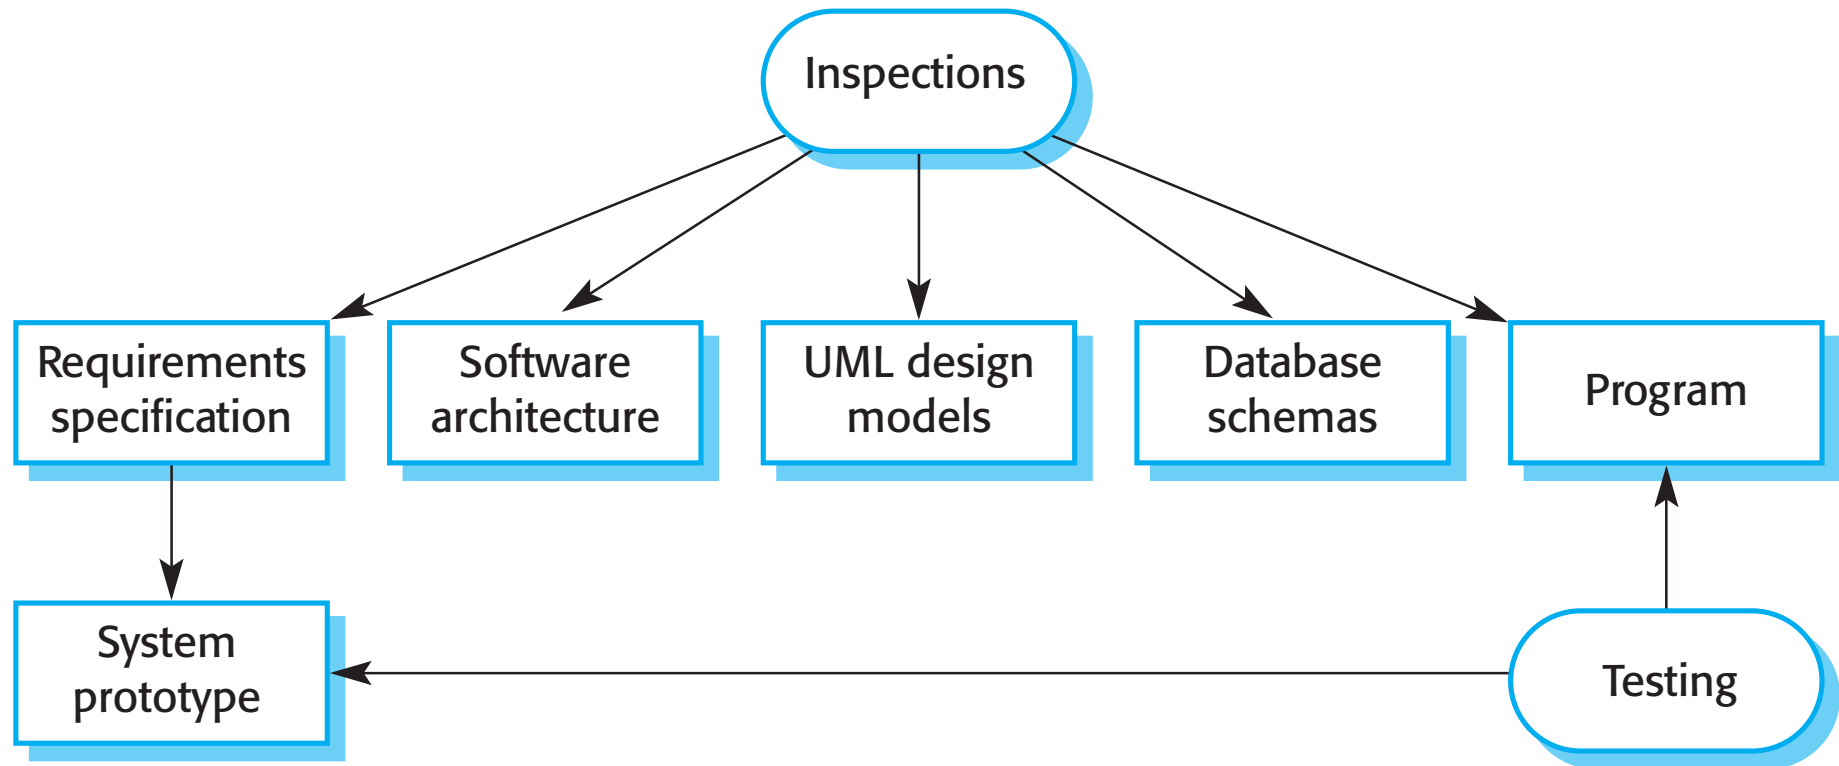


Software Inspection

- ✧ These involve people examining the source representation with the aim of discovering anomalies & defects
- ✧ Inspections **not** require execution of a system so may be used before implementation
- ✧ They may be applied to any representation of the system (e.g., requirements, design, configuration data, & test data)
- ✧ They have been shown to be an effective technique for discovering program errors

Inspections & Testing

- ✧ Inspections & testing are complementary
- ✧ Both should be used during the V&V process
- ✧ Inspections can check conformance with a specification but not conformance with the customer's real requirements
- ✧ Inspections cannot check non-functional characteristics such as performance & usability

A Model of the Software Testing Process

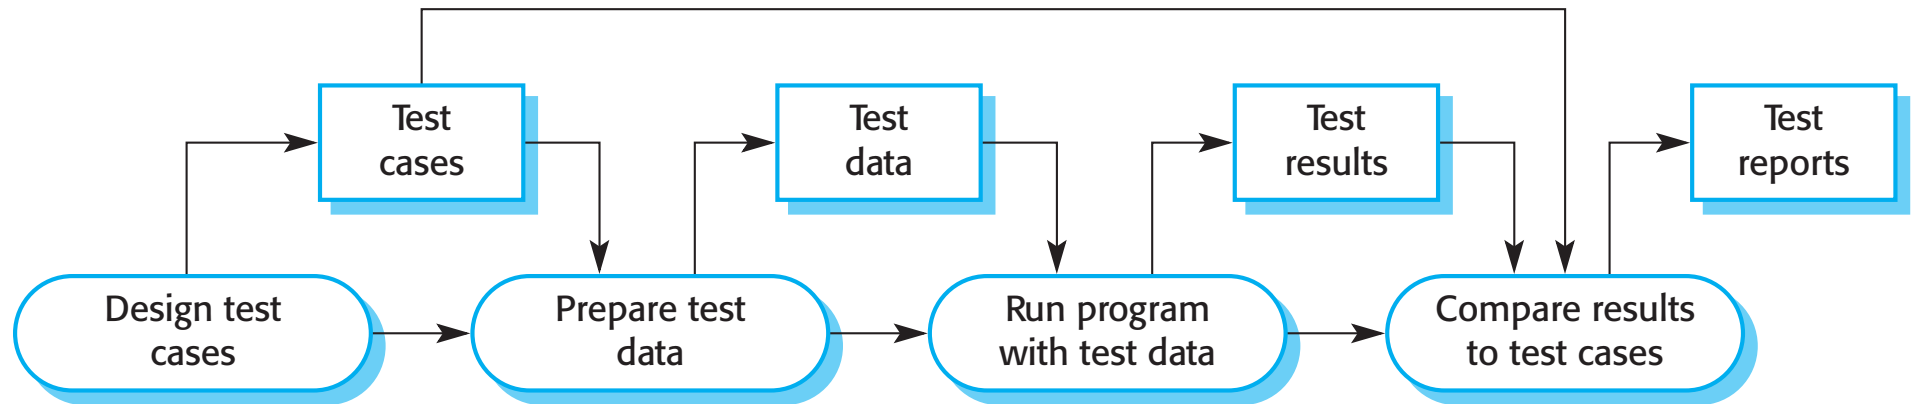

Stages of Testing

- ✧ **Development testing**, where the system is tested during development to discover bugs & defects
- ✧ **Release testing**, where a separate testing team test a complete version of the system before it is released to users
- ✧ **User testing**, where users or potential users of a system test the system in their own environment

Development Testing

- ✧ Development testing includes all testing activities that are carried out by the team developing the system
 - **Unit testing:** Individual program units or object classes are tested. Unit testing should focus on testing the functionality of objects or methods.
 - **Component testing:** Several individual units are integrated to create composite components. Component testing should focus on testing component interfaces.
 - **System testing:** Some or all of the components in a system are integrated & the system is tested as a whole. System testing should focus on testing component interactions.

Unit Testing

- ✧ Unit testing is the process of testing individual components in isolation
- ✧ It is a defect testing process
- ✧ Units may be:
 - Individual functions or methods within an object
 - Object classes with several attributes & methods
 - Composite components with defined interfaces used to access their functionality

Object Class Testing

- ✧ Complete test coverage of a class involves:
 - Testing all operations associated with an object
 - Setting & interrogating all object attributes
 - Exercising the object in all possible states
- ✧ Inheritance makes it more difficult to design object class tests as the information to be tested is not localized

The Weather Station Object Interface

WeatherStation
identifier
reportWeather () reportStatus () powerSave (instruments) remoteControl (commands) reconfigure (commands) restart (instruments) shutdown (instruments)

Weather Station Testing

- ✧ Need to define test cases for reportWeather, calibrate, test, startup & shutdown
- ✧ Using a state model, identify sequences of state transitions to be tested & the event sequences to cause these transitions
- ✧ For example:
 - Shutdown -> Running-> Shutdown
 - Configuring-> Running-> Testing -> Transmitting -> Running
 - Running-> Collecting-> Running-> Summarizing -> Transmitting -> Running

Automated Testing

- ✧ Whenever possible, unit testing should be automated so that tests are run & checked without manual intervention
- ✧ In automated unit testing, you make use of a test automation framework (such as JUnit) to write & run your program tests

Automated Test Components

- ✧ A **setup part**, where you initialize the system with the test case, namely the inputs & expected outputs
- ✧ A **call part**, where you call the object or method to be tested
- ✧ An **assertion part** where you compare the result of the call with the expected result. If the assertion evaluates to true, the test has been successful if false, then it has failed.

Choosing Unit Test Cases

- ✧ The test cases should show that, when used as expected, the component that you are testing does what it is supposed to do
- ✧ If there are defects in the component, these should be revealed by test cases
- ✧ This leads to 2 types of unit test case:
 - The first of these should reflect **normal operation** of a program & should show that the component works as expected
 - The other kind of test case should be based on testing experience of where common problems arise. It should use **abnormal inputs** to check that these are properly processed & do not crash the component.


Testing Strategies

- ✧ **Partition testing:** Identify groups of inputs that have common characteristics & should be processed in the same way
 - You should choose tests from within each of these groups
- ✧ **Guideline-based testing:** Use testing guidelines to choose test cases
 - These guidelines reflect previous experience of the kinds of errors that programmers often make when developing components


Partition Testing

- ✧ Input data & output results often fall into different classes where all members of a class are related
- ✧ Each of these classes is an **equivalence partition or domain** where the program behaves in an equivalent way for each class member
- ✧ Test cases should be chosen from each partition


Equivalence Partitioning

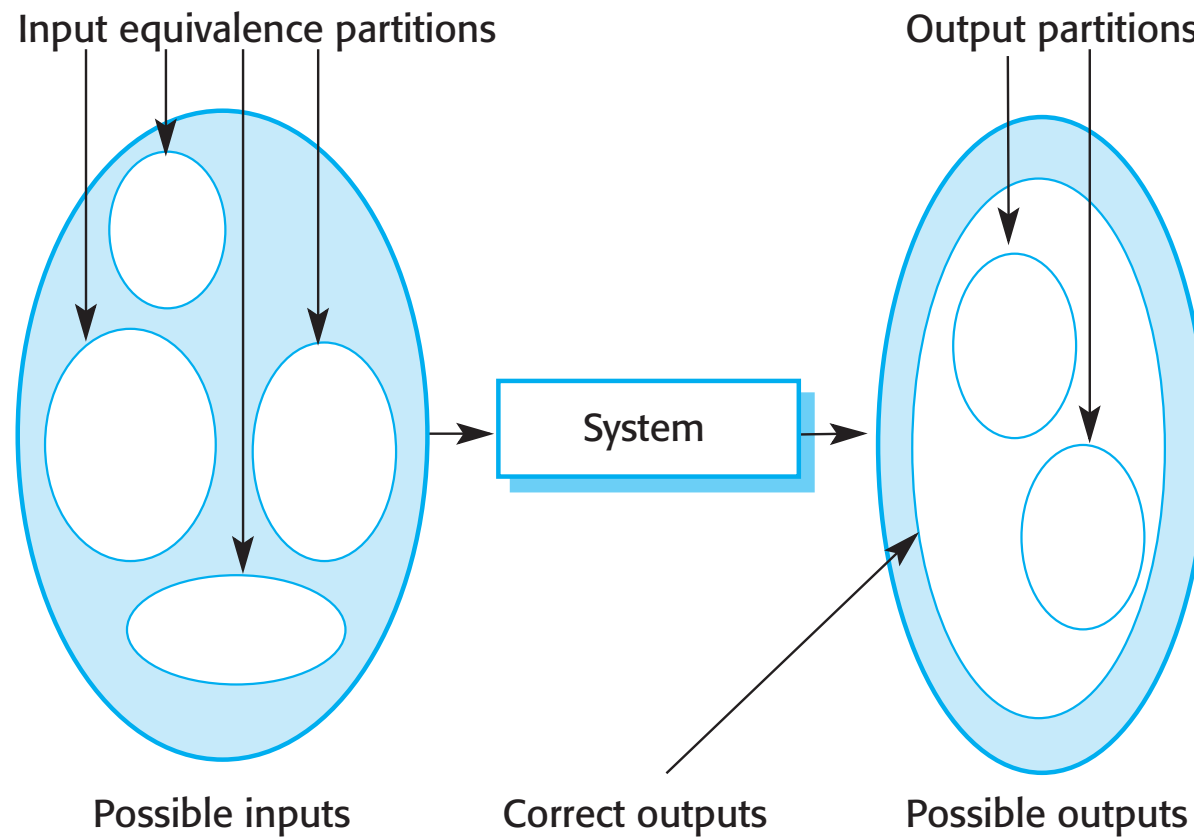

Equivalence Partitions

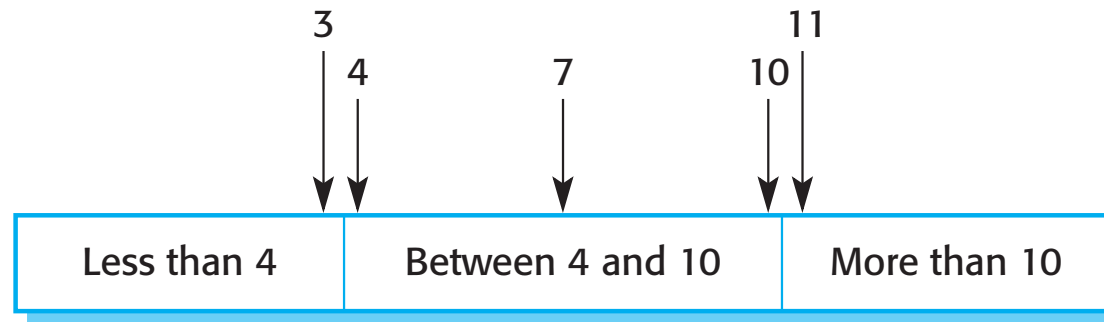

Number of input values

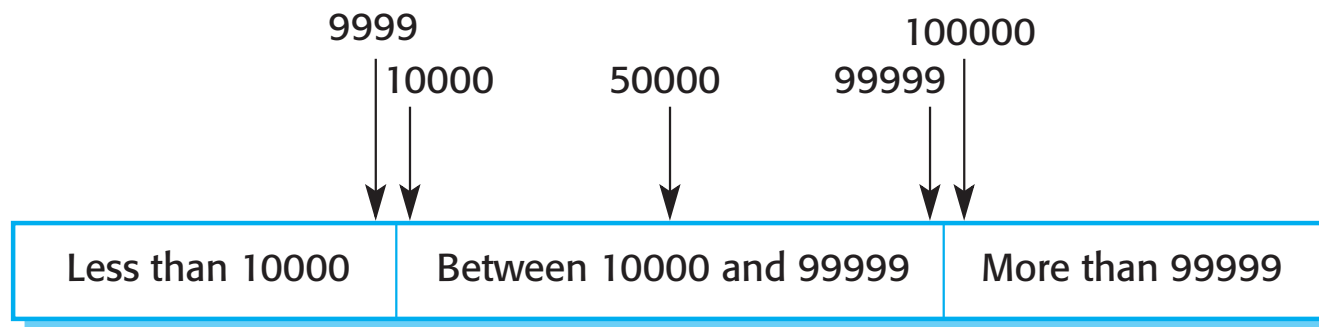

Input values

Testing Guidelines (Sequences)

- ✧ Test software with sequences which have only a single value
- ✧ Use sequences of different sizes in different tests
- ✧ Derive tests so that the first, middle & last elements of the sequence are accessed
- ✧ Test with sequences of zero length

General Testing Guidelines

- ✧ Choose inputs that force the system to generate all error messages
- ✧ Design inputs that cause input buffers to overflow
- ✧ Repeat the same input or series of inputs numerous times
- ✧ Force invalid outputs to be generated
- ✧ Force computation results to be too large or too small


Component Testing

- ✧ Software components are often composite components that are made up of several interacting objects
 - For example, in the weather station system, the reconfiguration component includes objects that deal with each aspect of the reconfiguration
- ✧ You access the functionality of these objects through the defined component interface
- ✧ Testing composite components should therefore focus on showing that the component interface behaves according to its specification
 - You can assume that unit tests on the individual objects within the component have been completed

Interface Testing

- ✧ The objective is to detect faults due to interface errors or invalid assumptions about interfaces
- ✧ Interface types
 - **Parameter interfaces:** Data passed from one method or procedure to another
 - **Shared memory interfaces:** Block of memory is shared between procedures or functions
 - **Procedural interfaces:** Sub-system encapsulates a set of procedures to be called by other sub-systems
 - **Message passing interfaces:** Sub-systems request services from other sub-systems

... Interface Testing

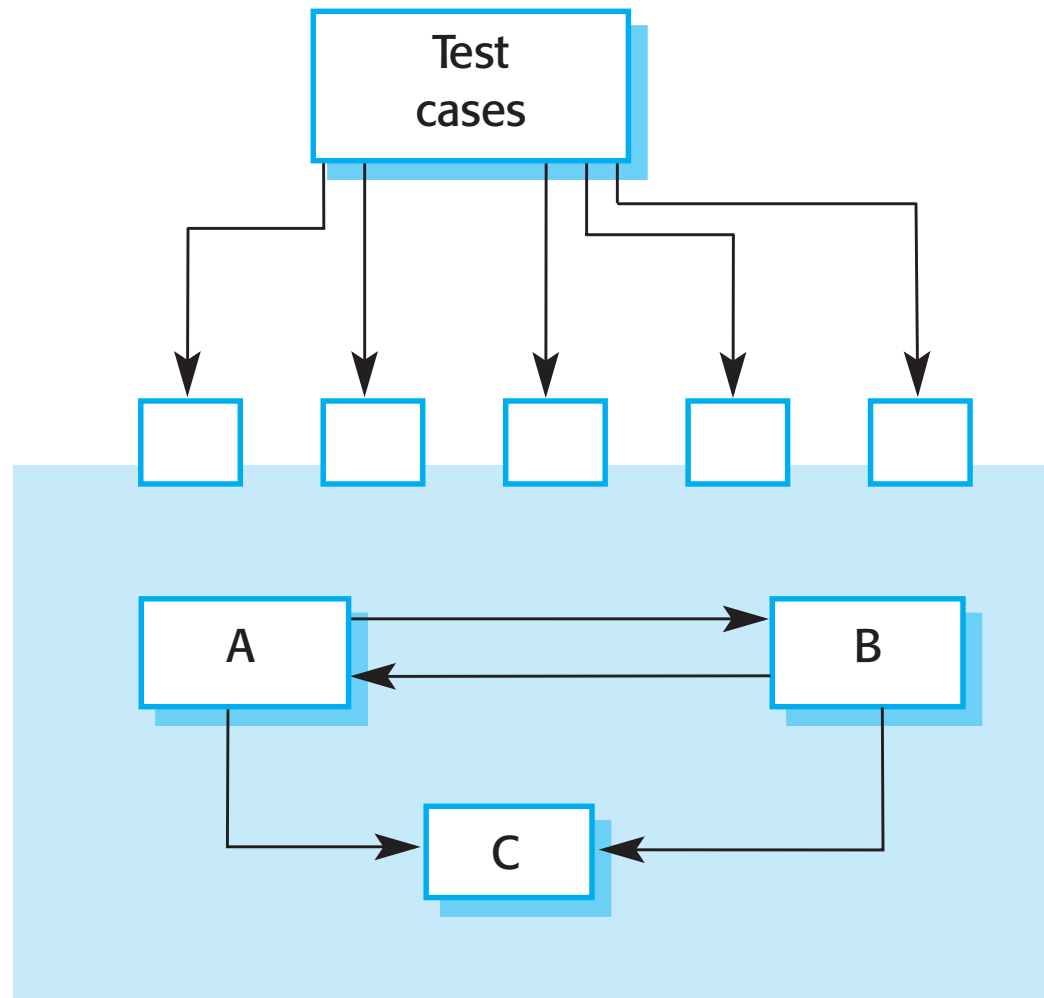

Interface Errors

✧ Interface misuse

- A calling component calls another component & makes an error in its use of its interface e.g., parameters in the wrong order

✧ Interface misunderstanding

- A calling component embeds assumptions about the behaviour of the called component which are incorrect

✧ Timing errors

- The called & the calling component operate at different speeds & out-of-date information is accessed

Interface Testing Guidelines

- ✧ Design tests so that parameters to a called procedure are at the extreme ends of their ranges
- ✧ Always test pointer parameters with null pointers
- ✧ Design tests which cause the component to fail
- ✧ Use stress testing in message passing systems
- ✧ In shared memory systems, vary the order in which components are activated


System Testing

- ✧ System testing during development involves integrating components to create a version of the system & then testing the integrated system
- ✧ The focus in system testing is testing the interactions between components
- ✧ System testing checks that components are compatible, interact correctly & transfer the right data at the right time across their interfaces
- ✧ System testing tests the emergent behavior of a system

Use-Case Testing

- ✧ **Use cases** developed to identify system interactions can be used as a basis for system testing
- ✧ Each use case usually involves several system components so testing the use case forces these interactions to occur
- ✧ The **sequence diagrams** associated with the use case documents the components & interactions that are being tested

Collect Weather Data Sequence Chart

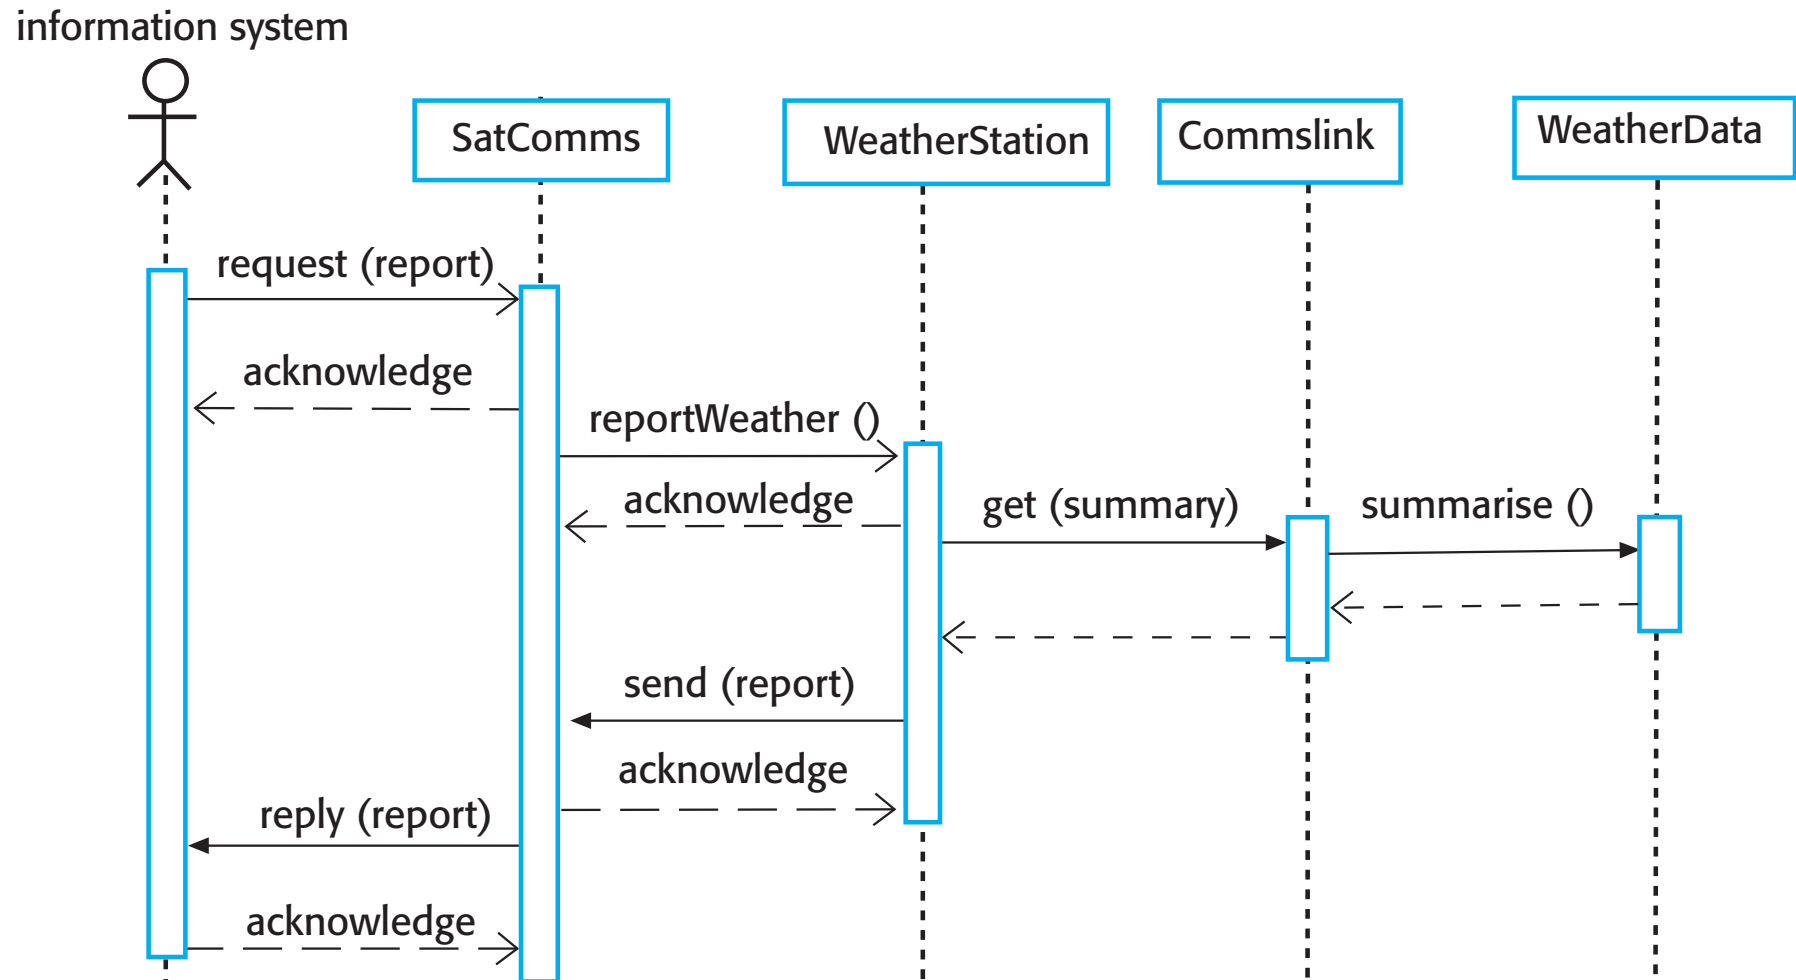

Test Cases Derived from Sequence Diagram

- ✧ An input of a request for a report should have an associated acknowledgement. A report should ultimately be returned from the request.
 - You should create summarized data that can be used to check that the report is correctly organized
- ✧ An input request for a report to WeatherStation results in a summarized report being generated
 - Can be tested by creating raw data corresponding to the summary that you have prepared for the test of SatComms & checking that the WeatherStation object correctly produces this summary. This raw data is also used to test the WeatherData object.


Testing Policies

- ✧ Exhaustive system testing is impossible so testing policies which define the required system test coverage may be developed
- ✧ Examples of testing policies:
 - All system functions that are accessed through menus should be tested
 - Combinations of functions (e.g., text formatting) that are accessed through the same menu must be tested
 - Where user input is provided, all functions must be tested with both correct & incorrect input

Test-Driven Development

- ✧ Test-driven development (TDD) is an approach to program development in which you inter-leave testing & code development
- ✧ Tests are written **before** code & “passing” the tests is the critical driver of development
- ✧ You develop code incrementally, along with a test for that increment. You don’t move on to the next increment until the code that you have developed passes its test.
- ✧ TDD was introduced as part of agile methods such as Extreme Programming. However, it can also be used in plan-driven development processes.

... Test-Driven Development

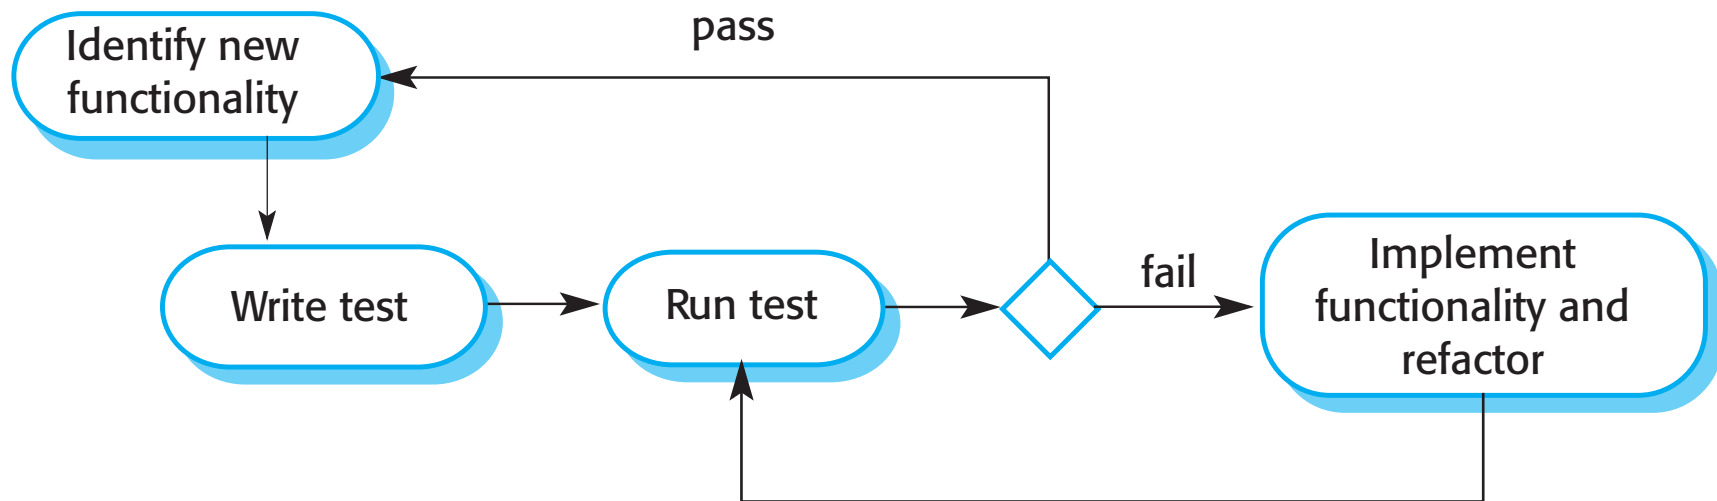

TDD Process Activities

- ✧ Start by identifying the increment of functionality that is required. This should normally be small & implementable in a few lines of code.
- ✧ Write a test for this functionality & implement this as an automated test
- ✧ Run the test, along with all other tests that have been implemented. Initially, you have not implemented the functionality so the new test will fail.
- ✧ Implement the functionality & re-run the test
- ✧ Once all tests run successfully, you move on to implementing the next chunk of functionality

Benefits of TDD

✧ Code coverage

- Every code segment that you write has at least one associated test so all code written has at least one test

✧ Regression testing

- A regression test suite is developed incrementally as a program is developed

✧ Simplified debugging

- When a test fails, it should be obvious where the problem lies. The newly written code needs to be checked & modified.

✧ System documentation

- The tests themselves are a form of documentation that describe what the code should be doing

Regression Testing

- ✧ Regression testing is testing the system to check that changes have not “broken” previously working code
- ✧ In a manual testing process, regression testing is expensive but, with automated testing, it is simple & straightforward. All tests are rerun every time a change is made to the program.
- ✧ Tests must run “successfully” before the change is committed

Release Testing

- ✧ Release testing is the process of testing a particular release of a system that is intended for use outside of the development team
- ✧ The primary goal of the release testing process is to convince the supplier of the system that it is good enough for use
- ✧ Release testing is usually a **black-box testing** process where tests are only derived from the system specification

Release Testing & System Testing

✧ Release testing is a form of system testing

✧ Important differences:

- A separate team that has not been involved in the system development, should be responsible for release testing
- System testing by the development team should focus on discovering bugs in the system (defect testing). The objective of release testing is to check that the system meets its requirements & is good enough for external use (validation testing).

Requirements-Based Testing

- ✧ Requirements-based testing involves examining each requirement & developing a test or tests for it
- ✧ Mentcare system requirements:
 - If a patient is known to be allergic to any particular medication, then prescription of that medication shall result in a warning message being issued to the system user
 - If a prescriber chooses to ignore an allergy warning, they shall provide a reason why this has been ignored

Requirements Tests

- ✧ Set up a patient record with no known allergies. Prescribe medication for allergies that are known to exist. Check that a warning message is not issued by the system.
- ✧ Set up a patient record with a known allergy. Prescribe the medication to that the patient is allergic to, & check that the warning is issued by the system.
- ✧ Set up a patient record in which allergies to two or more drugs are recorded. Prescribe both of these drugs separately & check that the correct warning for each drug is issued.
- ✧ Prescribe two drugs that the patient is allergic to. Check that two warnings are correctly issued.
- ✧ Prescribe a drug that issues a warning & overrule that warning. Check that the system requires the user to provide information explaining why the warning was overruled.

A Usage Scenario for the Mentcare System

George is a nurse who specializes in mental healthcare. One of his responsibilities is to visit patients at home to check that their treatment is effective & that they are not suffering from medication side effects.

On a day for home visits, George logs into the Mentcare system & uses it to print his schedule of home visits for that day, along with summary information about the patients to be visited. He requests that the records for these patients be downloaded to his laptop. He is prompted for his key phrase to encrypt the records on the laptop.

One of the patients that he visits is Jim, who is being treated with medication for depression. Jim feels that the medication is helping him but believes that it has the side effect of keeping him awake at night. George looks up Jim's record & is prompted for his key phrase to decrypt the record. He checks the drug prescribed & queries its side effects. Sleeplessness is a known side effect so he notes the problem in Jim's record & suggests that he visits the clinic to have his medication changed. Jim agrees so George enters a prompt to call him when he gets back to the clinic to make an appointment with a physician. George ends the consultation & the system re-encrypts Jim's record.

After, finishing his consultations, George returns to the clinic & uploads the records of patients visited to the database. The system generates a call list for George of those patients who He has to contact for follow-up information & make clinic appointments.

Features Tested by Scenario Tests

- ✧ Authentication by logging on to the system
- ✧ Downloading & uploading of specified patient records to a laptop
- ✧ Home visit scheduling
- ✧ Encryption & decryption of patient records on a mobile device
- ✧ Record retrieval & modification
- ✧ Links with the drugs database that maintains side-effect information
- ✧ The system for call prompting

Performance Testing

- ✧ Part of release testing may involve testing the emergent properties of a system, such as **performance & reliability**
- ✧ Tests should reflect the profile of use of the system
- ✧ Performance tests usually involve planning a series of tests where the load is steadily increased until the system performance becomes unacceptable
- ✧ **Stress testing** is a form of performance testing where the system is deliberately overloaded to test its failure behavior

User Testing

- ✧ User or customer testing is a stage in the testing process in which users or customers provide input & advice on system testing
- ✧ User testing is essential, even when comprehensive system & release testing have been carried out
 - The reason for this is that influences from the user's working environment have a major effect on the reliability, performance, usability & robustness of a system. These cannot be replicated in a testing environment.

Types of User Testing

✧ Alpha testing

- Users of the software work with the development team to test the software at the developer's site


✧ Beta testing

- A release of the software is made available to users to allow them to experiment & to raise problems that they discover with the system developers

✧ Acceptance testing

- Customers test a system to decide whether or not it is ready to be accepted from the system developers & deployed in the customer environment. Primarily for custom systems.

The Acceptance Testing Process

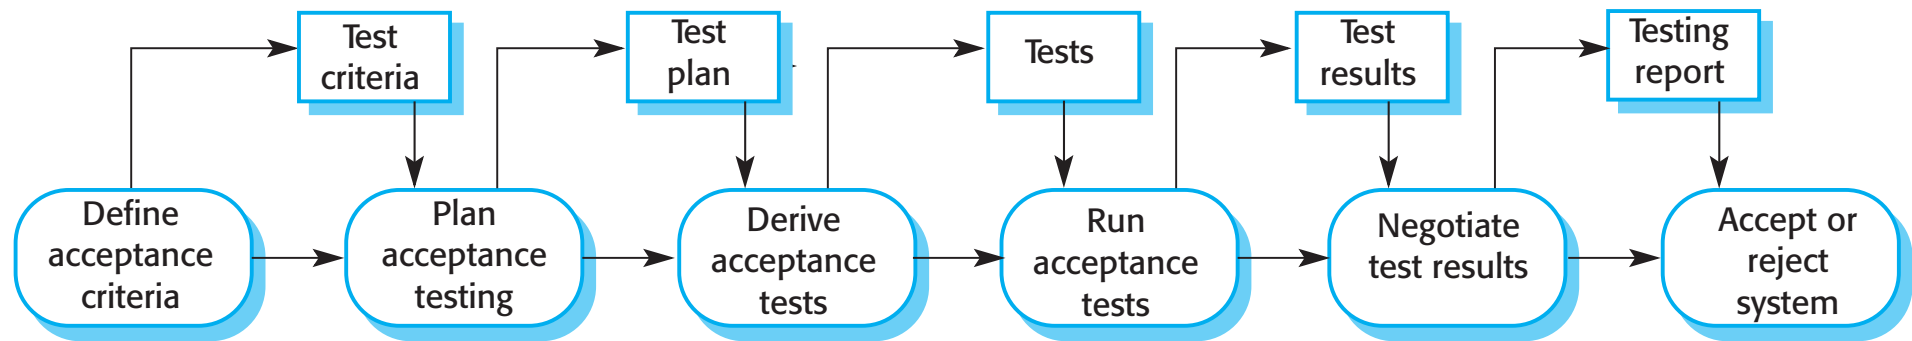

Stages of the Acceptance Testing

- ✧ Define acceptance criteria
- ✧ Plan acceptance testing
- ✧ Derive acceptance tests
- ✧ Run acceptance tests
- ✧ Negotiate test results
- ✧ Reject/accept system

Agile Methods & Acceptance Testing

- ✧ In agile methods, the user/customer is part of the development team & is responsible for making decisions on the acceptability of the system
- ✧ Tests are defined by the user/customer & are integrated with other tests in that they are run automatically when changes are made
- ✧ There is no separate acceptance testing process
- ✧ Main problem here is whether or not the embedded user is 'typical' & can represent the interests of all system stakeholders

Key Points

- ✧ Testing can only show the presence of errors in a program. It cannot demonstrate that there are no remaining faults.
- ✧ Development testing is the responsibility of the software development team. A separate team should be responsible for testing a system before it is released to customers.
- ✧ Development testing includes unit testing, in which you test individual objects & methods component testing in which you test related groups of objects & system testing, in which you test partial or complete systems

... Key points

- ✧ When testing software, you should try to 'break' the software by using experience & guidelines to choose types of test case that have been effective in discovering defects in other systems
- ✧ Wherever possible, you should write automated tests. The tests are embedded in a program that can be run every time a change is made to a system.
- ✧ Test-first development is an approach to development where tests are written before the code to be tested
- ✧ Scenario testing involves inventing a typical usage scenario & using this to derive test cases
- ✧ Acceptance testing is a user testing process where the aim is to decide if the software is good enough to be deployed & used in its operational environment

*** * * End *****