

Link to the source code: [GitHub Repository \(https://github.com/wojbog/evolutionary_computation\)](https://github.com/wojbog/evolutionary_computation).


Authors

- Wojciech Bogacz 156034
- Krzysztof Skrobała 156039

Problem Description

The problem considered in this project involves a set of nodes, each represented by three integer values: two coordinates (x, y) that define the node's position in a two-dimensional plane, and a cost value associated with the node. The objective is to select exactly 50% of all available nodes (if the total number of nodes is odd, the number of selected nodes is rounded up) and construct a Hamiltonian cycle — that is, a closed path visiting each selected node exactly once and returning to the starting node. The goal is to minimize the sum of two components: 1. The total length of the constructed cycle, and 2. The total cost of all selected nodes. The distances between nodes are calculated using the Euclidean metric, rounded to the nearest integer.

Implemented Algorithms

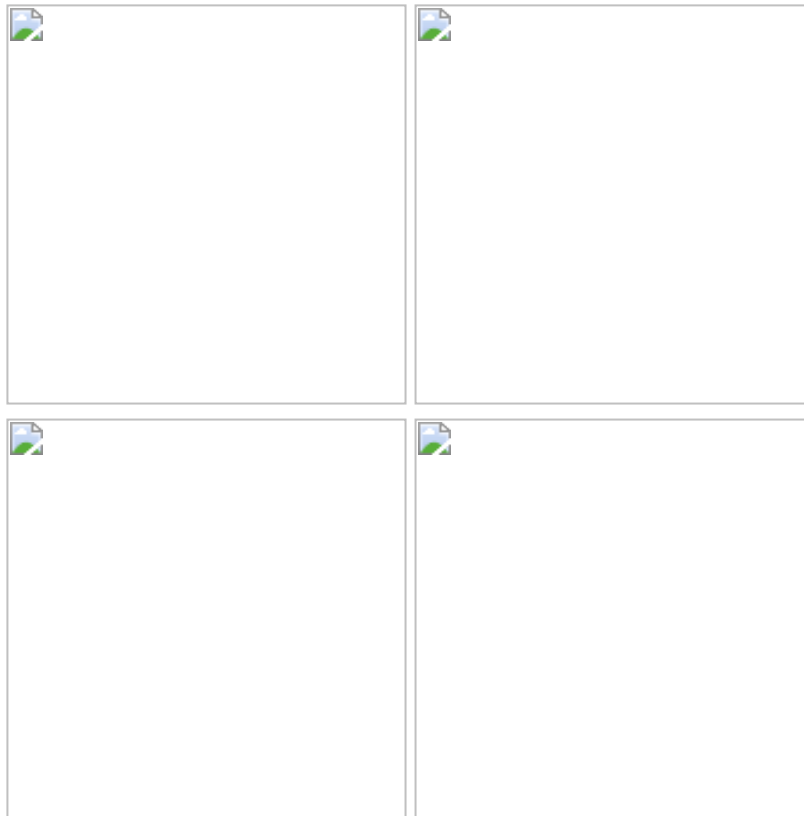

Results

Comparison of previous methods results

Instance A

Method	Best	Worst	Average
random	235308	292123	264677.17
nn_end	89198	123123	104012.785
nn_anywhere	71488	74410	72635.72
greedy cycle	72639	72639	72639.0
2-Regret Insertion	105852	123428	115474.93
Weighted Sum ($\alpha=1.00$, $\beta=1.00$)	71108	73438	72130.85
greedy_intra:edges_start:greedy	70663	72648	71594.055

Method	Best	Worst	Average
greedy_intra:edges_start:random	71564	76328	73528.81
greedy_intra:nodes_start:greedy	70687	73027	71739.395
greedy_intra:nodes_start:random	79677	99035	86909.13
steepest_intra:edges_start:greedy	70510	72614	71463.08
steepest_intra:edges_start:random	71246	78153	73699.995
steepest_intra:nodes_start:greedy	70626	73004	71615.93
steepest_intra:nodes_start:random	81322	95342	87939.335
steepest_intra:edges_start:random**	71246	78153	73699.995
steepest_intra:edges_start:random with Cand mech.	73076	85487	77866.91
steepest_lm_intra:edges_start:random	71265	78247	73856.275
ILS_intra:edges_start:random	70135	72831	71094.05
steepest_multi_start_intra:edges_start:random	70518	72995	71665.45

New Methods Results

Method	best	worst	average
LNS_no_search_intra:edges_start:random	73877	100946	81003.805
LNS_with_search_intra:edges_start:random	69646	72165	70830.13

Number of main loops iterations

Method	best	worst	average
LNS_no_search_intra:edges_start:random	5	31	17.97
LNS_with_search_intra:edges_start:random	1	7	2.8

Instance B

Method	Best	Worst	Average
--------	------	-------	---------

Method	Best	Worst	Average
random	193234	234798	214279.235
nn_end	62606	77453	69764.43
nn_anywhere	49001	57324	51400.905
greedy cycle	50243	50243	50243.0
2-Regret Insertion	66505	77072	72454.77
Weighted Sum ($\alpha=1.00$, $\beta=1.00$)	47144	55700	50918.82
greedy_intra:edges_start:greedy	46178	55471	50172.67
greedy_intra:edges_start:random	45537	51687	48154.865
greedy_intra:nodes_start:greedy	46373	55385	50347.525
greedy_intra:nodes_start:random	53417	71474	61453.295
steepest_intra:edges_start:greedy	45867	54814	49907.205
steepest_intra:edges_start:random	45903	51416	48195.845
steepest_intra:nodes_start:greedy	46371	55385	50201.47
steepest_intra:nodes_start:random	55686	71546	62955.885
steepest_intra:edges_start:random	45903	51416	48195.845
steepest_intra:edges_start:random with Cand. Mech.	45798	52670	48474.64
steepest_lm_intra:edges_start:random	45941	51587	48214.715
ILS_intra:edges_start:random	45250	46331	45749.15
steepest_multi_start_intra:edges_start:random	46272	51158	48124.05

New Methods Results

Method	best	worst	average
LNS_no_search_intra:edges_start:random	48815	72910	57516.195
LNS_with_search_intra:edges_start:random	43830	48594	45299.75


Number of main loops iterations

Method	best	worst	average
LNS_no_search_intra:edges_start:random	7	33	17.485
LNS_with_search_intra:edges_start:random	1	7	2.92


Paths visualization

Instance A

LNS without local search variant

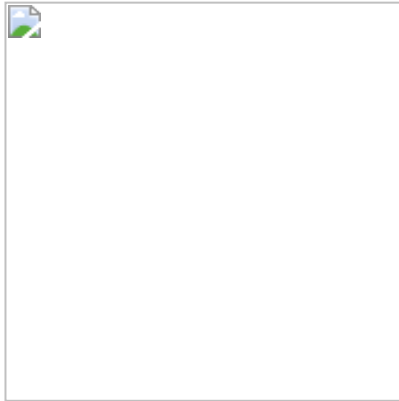


LNS with local search variant

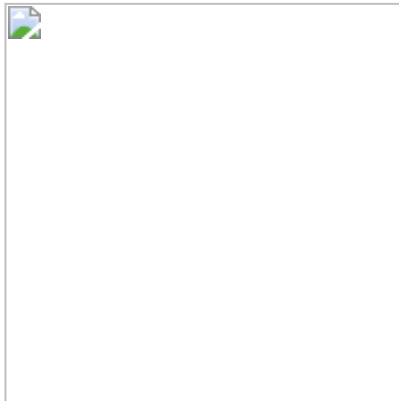


Instance B

LNS without local search variant

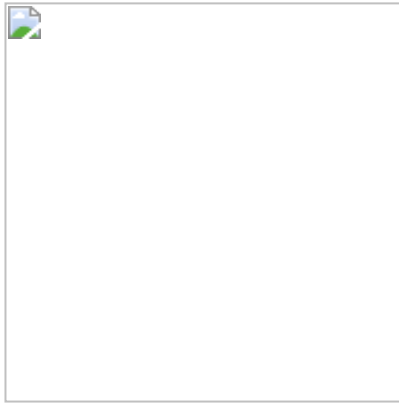

LNS with local search variant

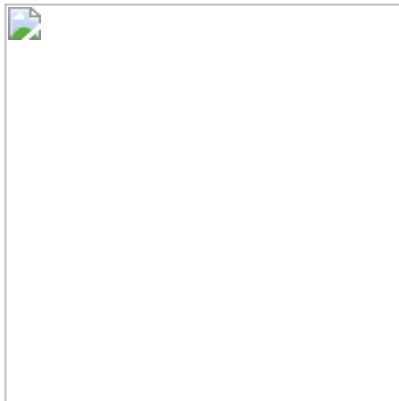

Time

Instance A

Method	min	max	average
greedy_intra:edges_start:greedy	0.00	0.006	0.003
greedy_intra:edges_start:random	0.062	0.099	0.080
greedy_intra:nodes_start:greedy	0.000	0.005	0.002
greedy_intra:nodes_start:random	0.066	0.118	0.085
steepest_intra:edges_start:greedy	0.001	0.005	0.002
steepest_intra:nodes_start:greedy	0.000	0.005	0.002
steepest_intra:nodes_start:random	0.049	0.142	0.071
steepest_intra:edges_start:random	0.039	0.050	0.045

Method	min	max	average
steepest_intra:edges_start:random with Can. Mech.	0.008	0.019	0.011
steepest_lm_intra:edges_start:random	0.025	0.049	0.030
ILS_intra:edges_start:random	0.053	0.297	0.09
steepest_multi_start_intra:edges_start:random	10.296	10.524	10.406

New Methods Results

Method	min	max	average
LNS_no_search_intra:edges_start:random	0.023	0.19	0.09
LNS_with_search_intra:edges_start:random	0.032	0.082	0.048

Instance B

Method	min	max	average
greedy_intra:edges_start:greedy	0.0	0.01	0.004
greedy_intra:edges_start:random	0.064	0.102	0.081
greedy_intra:nodes_start:greedy	0.0	0.007	0.003
greedy_intra:nodes_start:random	0.058	0.107	0.082
steepest_intra:edges_start:greedy	0.001	0.01	0.004
steepest_intra:nodes_start:greedy	0.001	0.007	0.004
steepest_intra:nodes_start:random	0.048	0.086	0.063
steepest_intra:edges_start:random	0.038	0.054	0.045
steepest_intra:edges_start:random with CAn. Mech.	0.009	0.05	0.012
steepest_lm_intra:edges_start:random	0.020	0.053	0.035
ILS_intra:edges_start:random	0.054	0.177	0.079
steepest_multi_start_intra:edges_start:random	10.358	13.195	10.869

Method	min	max	average
LNS_no_search_intra:edges_start:random	0.035	0.181	0.088
LNS_with_search_intra:edges_start:random	0.034	0.097	0.052

Conclusions

LMS performed the best among all tested methods, achieving the lowest average costs for both instances A and B. Its strategy of exploring multiple starting points allowed it to escape local minima effectively, leading to superior solutions. Moreover, its computational time was reasonable given the quality of solutions obtained.