


KUBERNETES INTRODUCTION

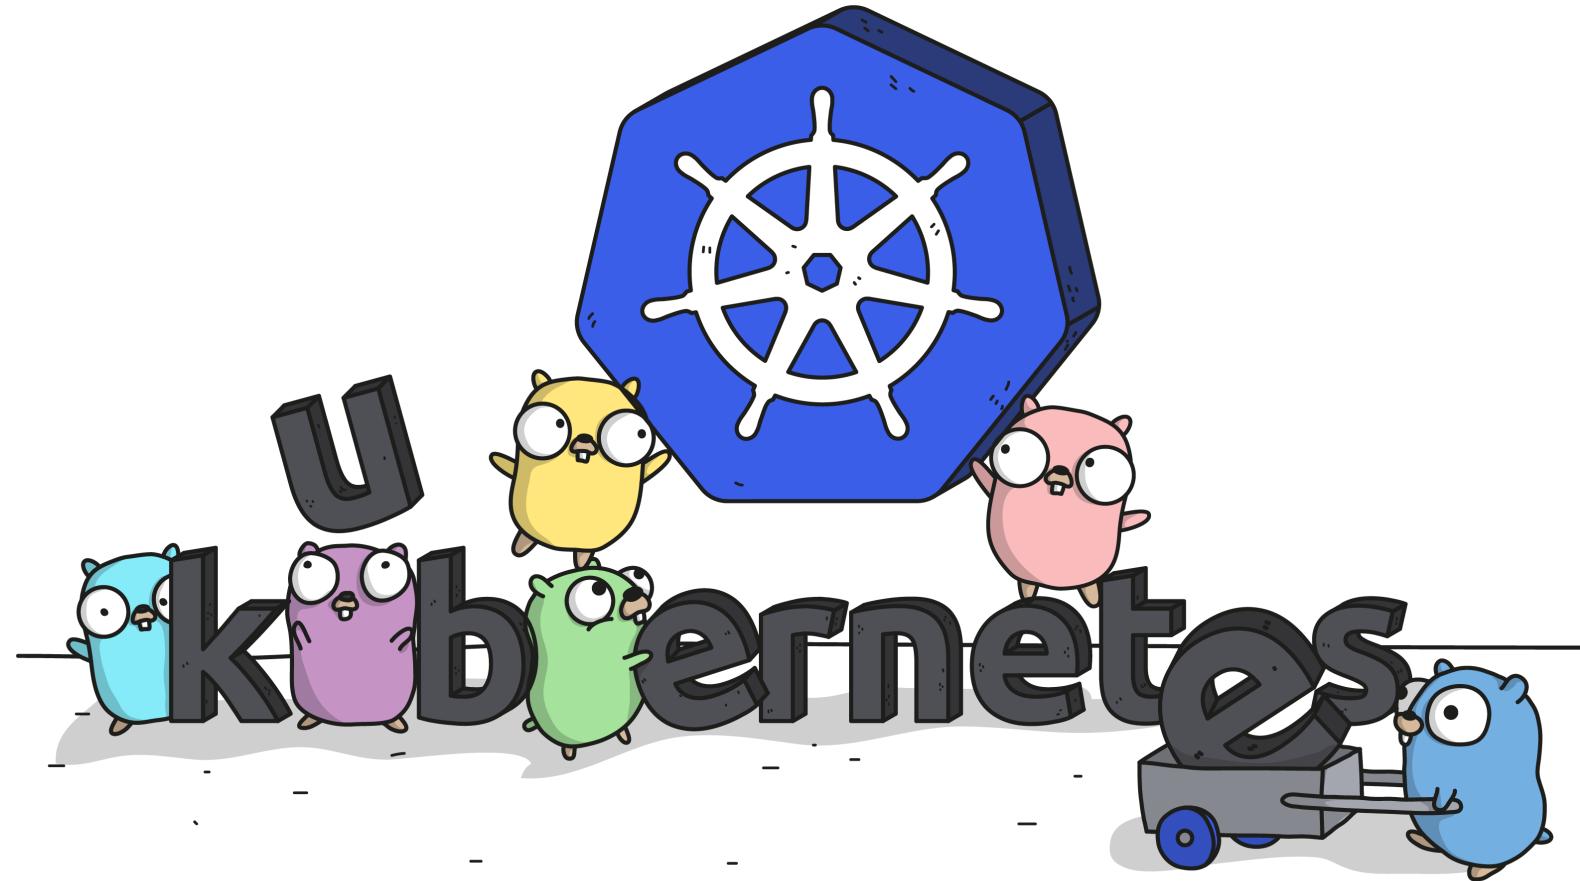

Wojciech Barczyński - [Hypatos.ai](https://hypatos.ai)
wbarczynski.pro@gmail.com

GOLANG WARSAW WORKSHOPS

Idea / An experiment:

- member2member
- only at the meetup
- encourage active feedback: going / notgoing
- Grow the community to 1000 persons
- 50-60 per meeting

Vision: be community driven

GOLANG WARSAW WORKSHOPS

Take the stage:

- One or more trainers
- min 1 talk at the Meetup in the last 8 months
- Topic important for you
- 10-15
- 2-8 hours
- OK to promote its commercial version

Contact me: wb@hypatos.ai

GOLANG WARSAW WORKSHOPS

Topics:

- Introduction to Golang
- Golang Advanced:
Internals, Concurrency, Performance
- Getting started with K8S/CloudNative
- ...

GOLANG WARSAW WORKSHOPS

Process:

- Send email to organizers Contact me: wb@hypatos.ai
- if OK, we manage the rest
- find a venue
- announce on [meetup.com](https://www.meetup.com)
- and black-listing ;)

WOJCIECH BARCZYŃSKI

- Lead Software Developer & System Engineer
- Organizer Golang Warsaw Meetup
- Visiting Lecturer at WSB and ALK
- Trainings & Consultancy



STORY

Kubernetes + Go + ...

- **SMACC** - Fintech / ML - since 2017
- **Lyke** - Mobile Fashion app - since 2016

I do not like Infra


Slow delivery


Continuous Deployment?

Fear

Frustration

XX% Idle Machines

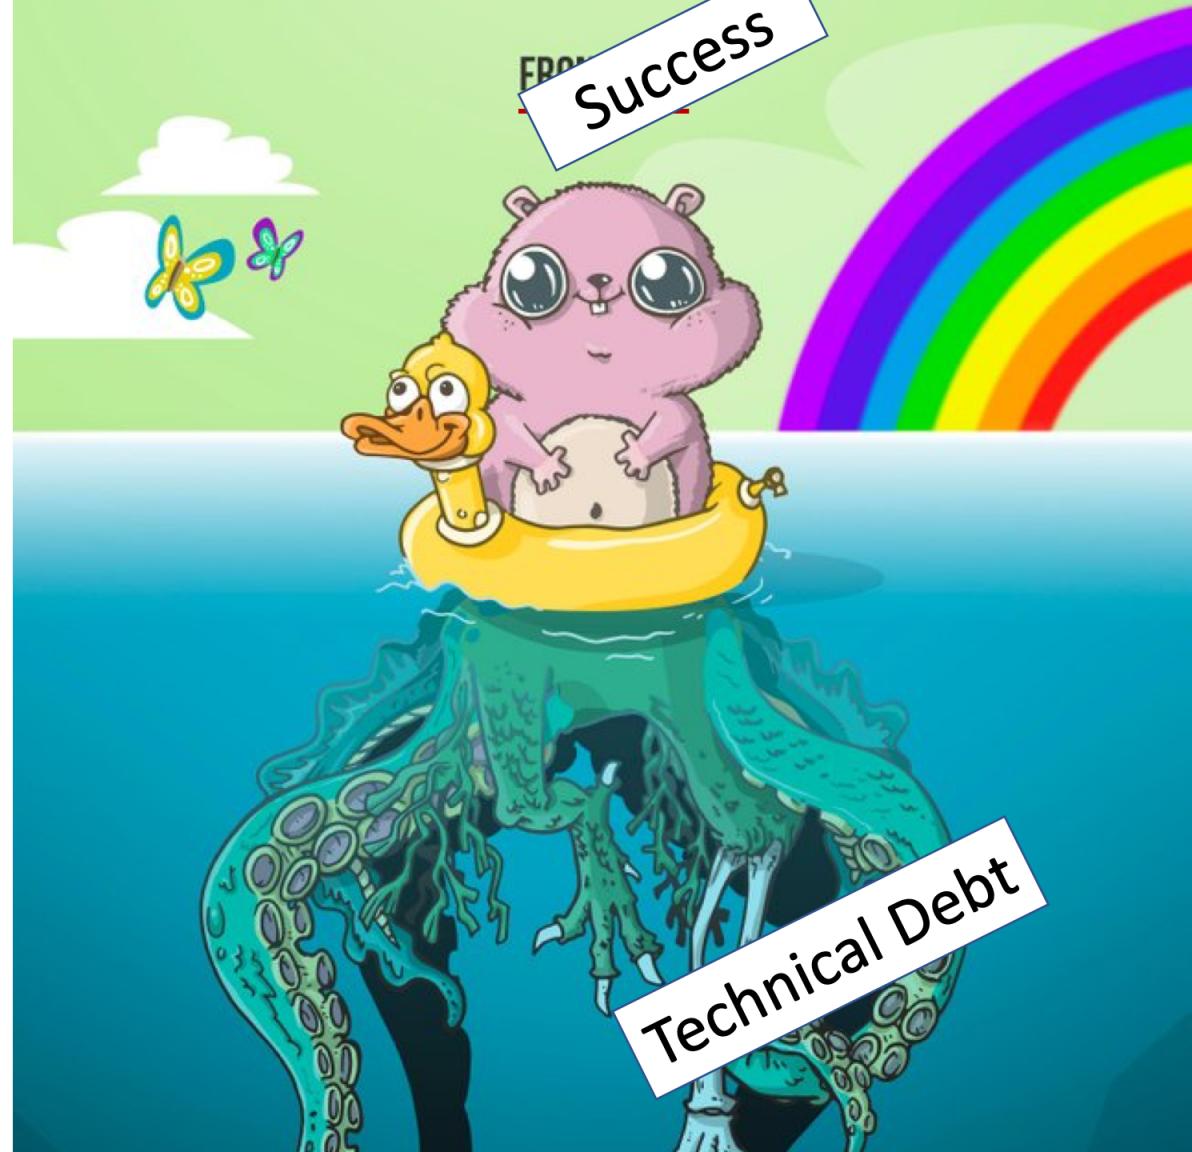

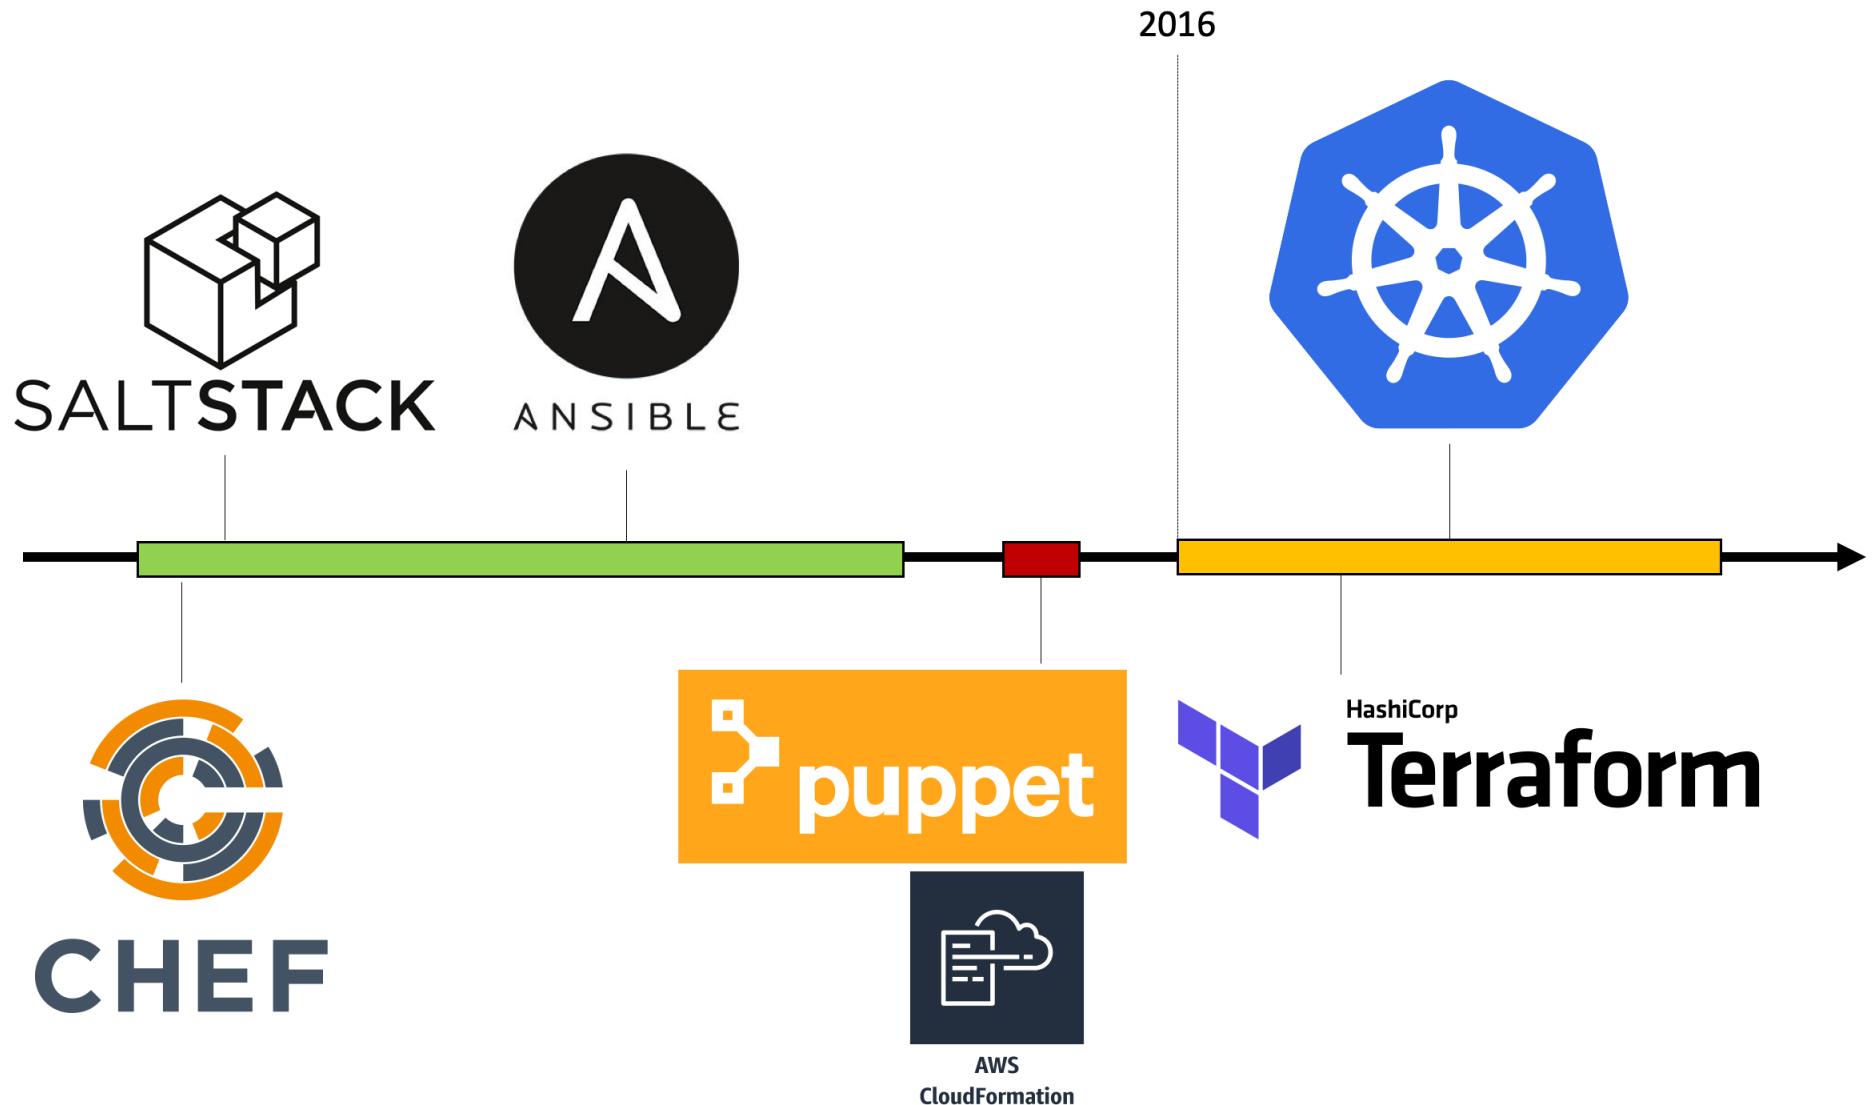

Black (Blue) Box


Infrastructure (almost) invisible

Easy* Continuous Deployment





[https://en.wikipedia.org/wiki/File:Dr_Who_\(316350537\).jpg](https://en.wikipedia.org/wiki/File:Dr_Who_(316350537).jpg)

Common
Language
Artifacts
Platform

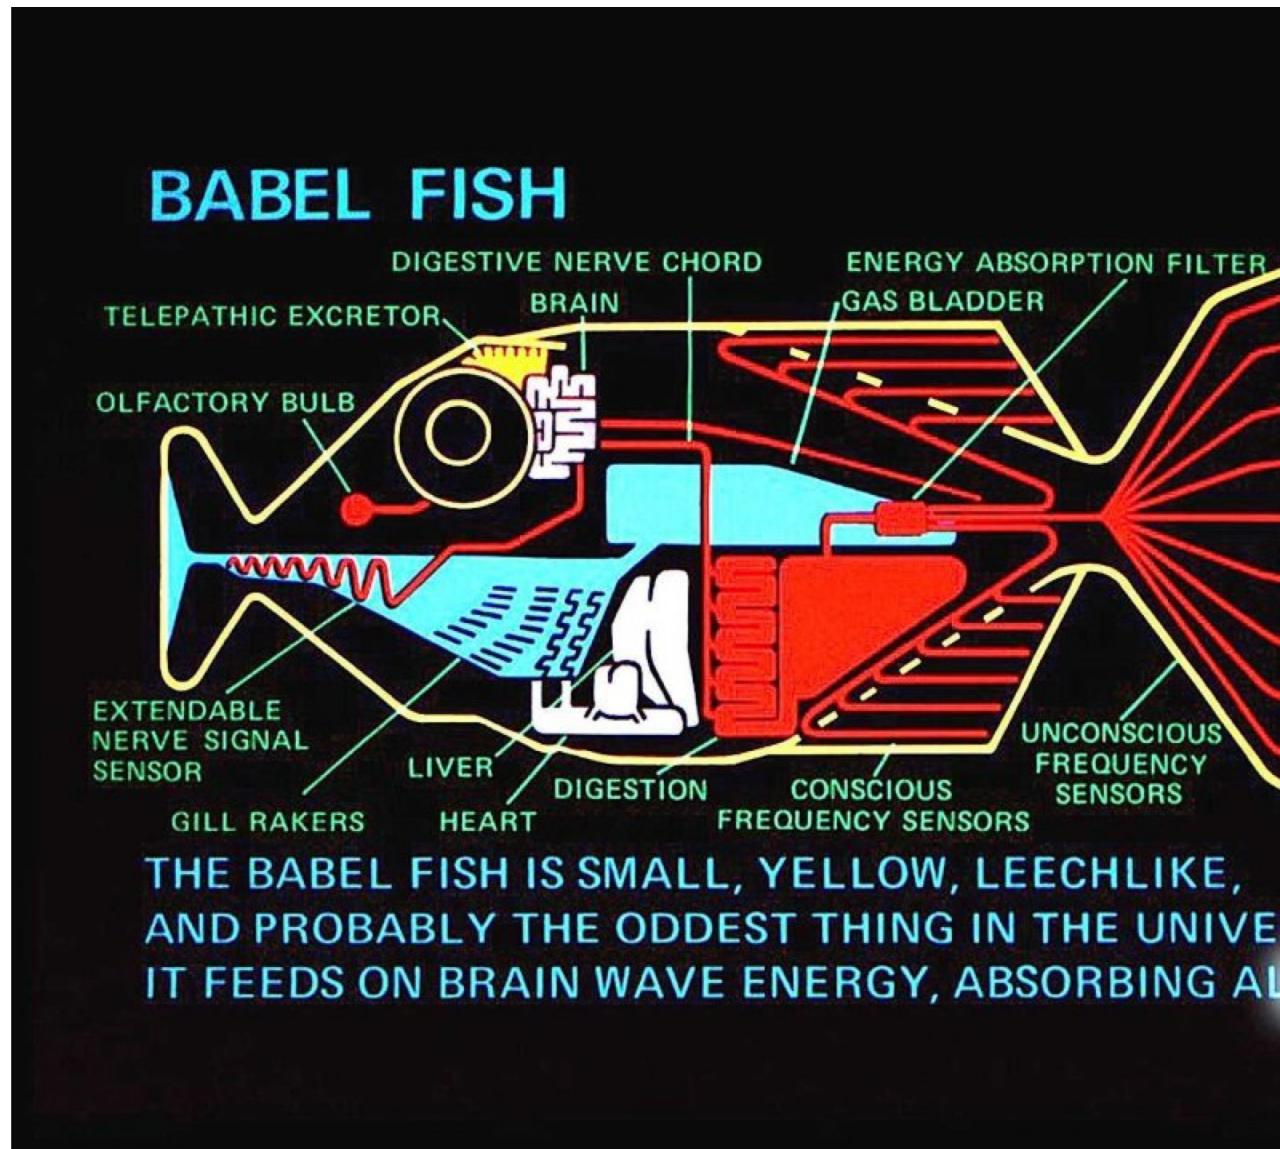

Learn-as-you-go

1. Deploy Cloud-Native app
2. Make a Hell of Mistakes
3. Get it right or Postpone

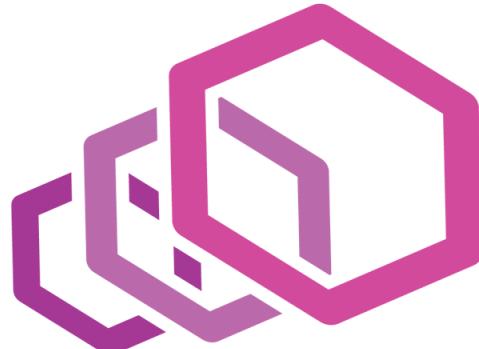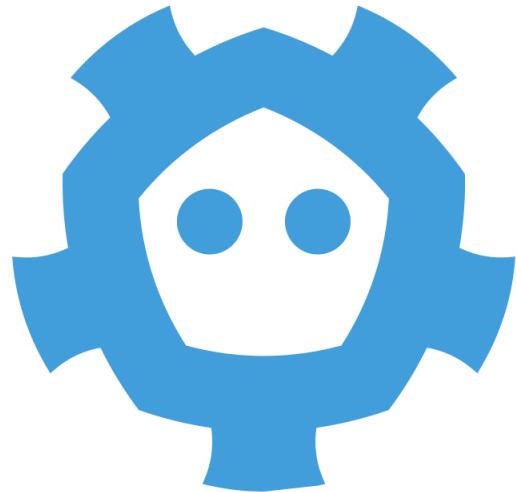

envoy




No free lunch - application way smarter
(12factorapps, coordination, metrics, ...)

<https://www.flickr.com/photos/160866001@N07/>

KUBERNETES


- Container management
- Battery for 12factor apps
- ...heading to integration platform
- ...becoming a framework for your Xubernetes

KUBERNETES

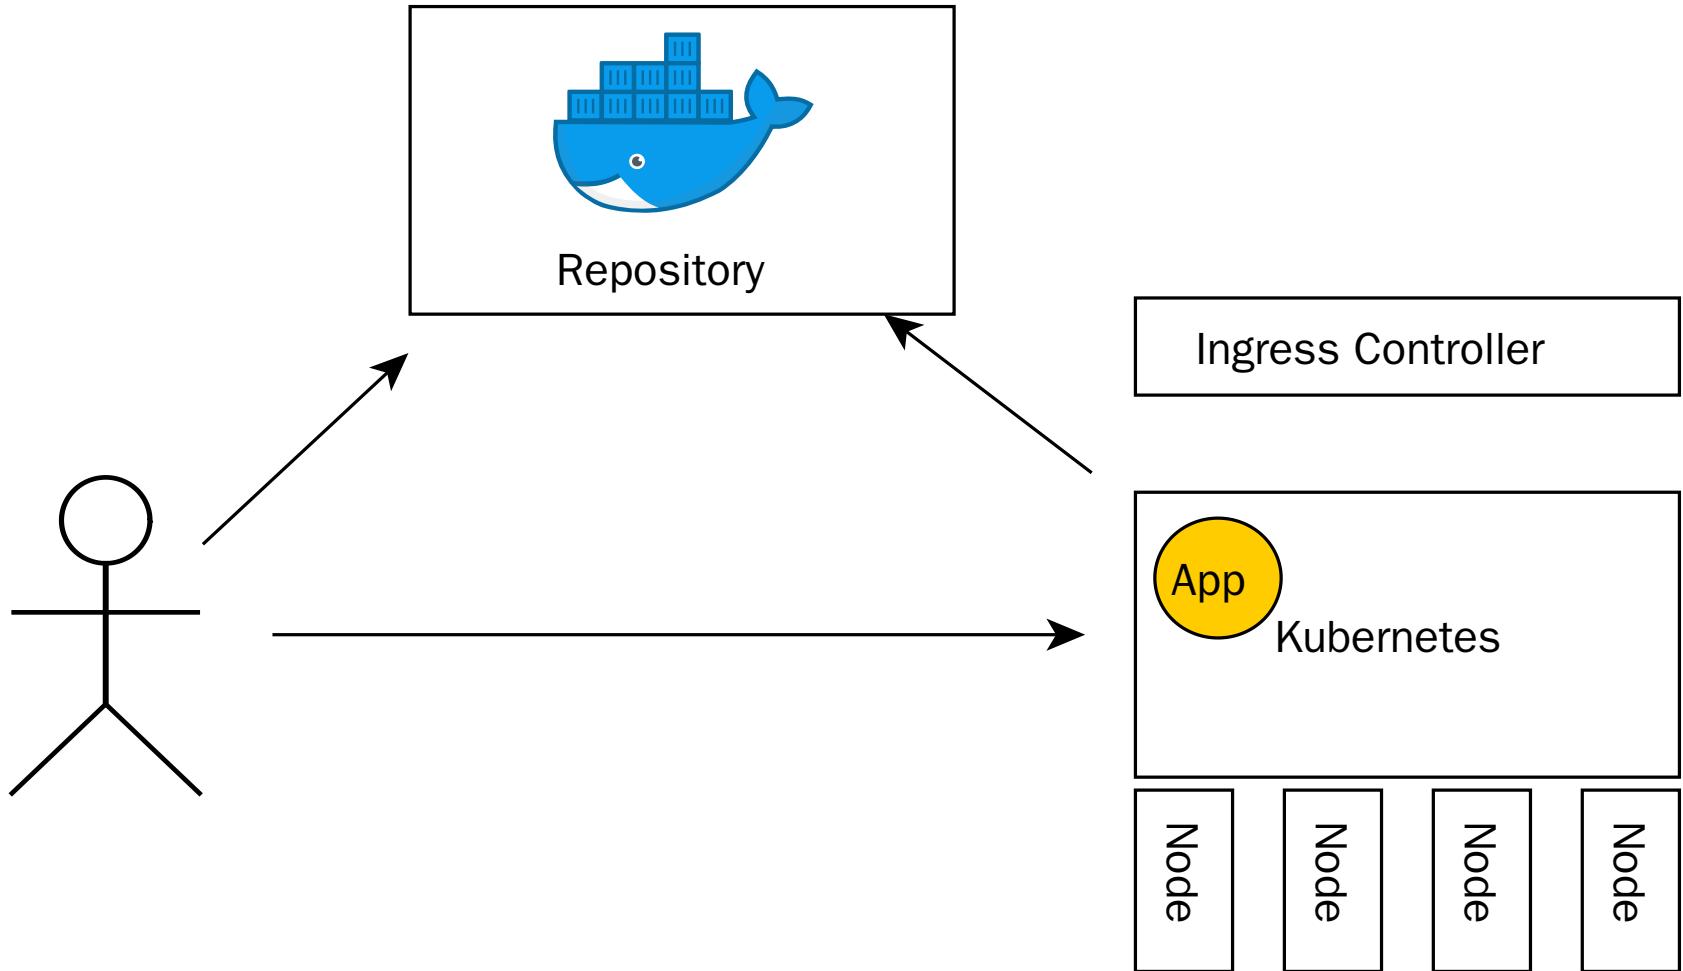


make docker_push; kubectl create -f app-srv-dpl.yaml

SCALE UP! SCALE DOWN!

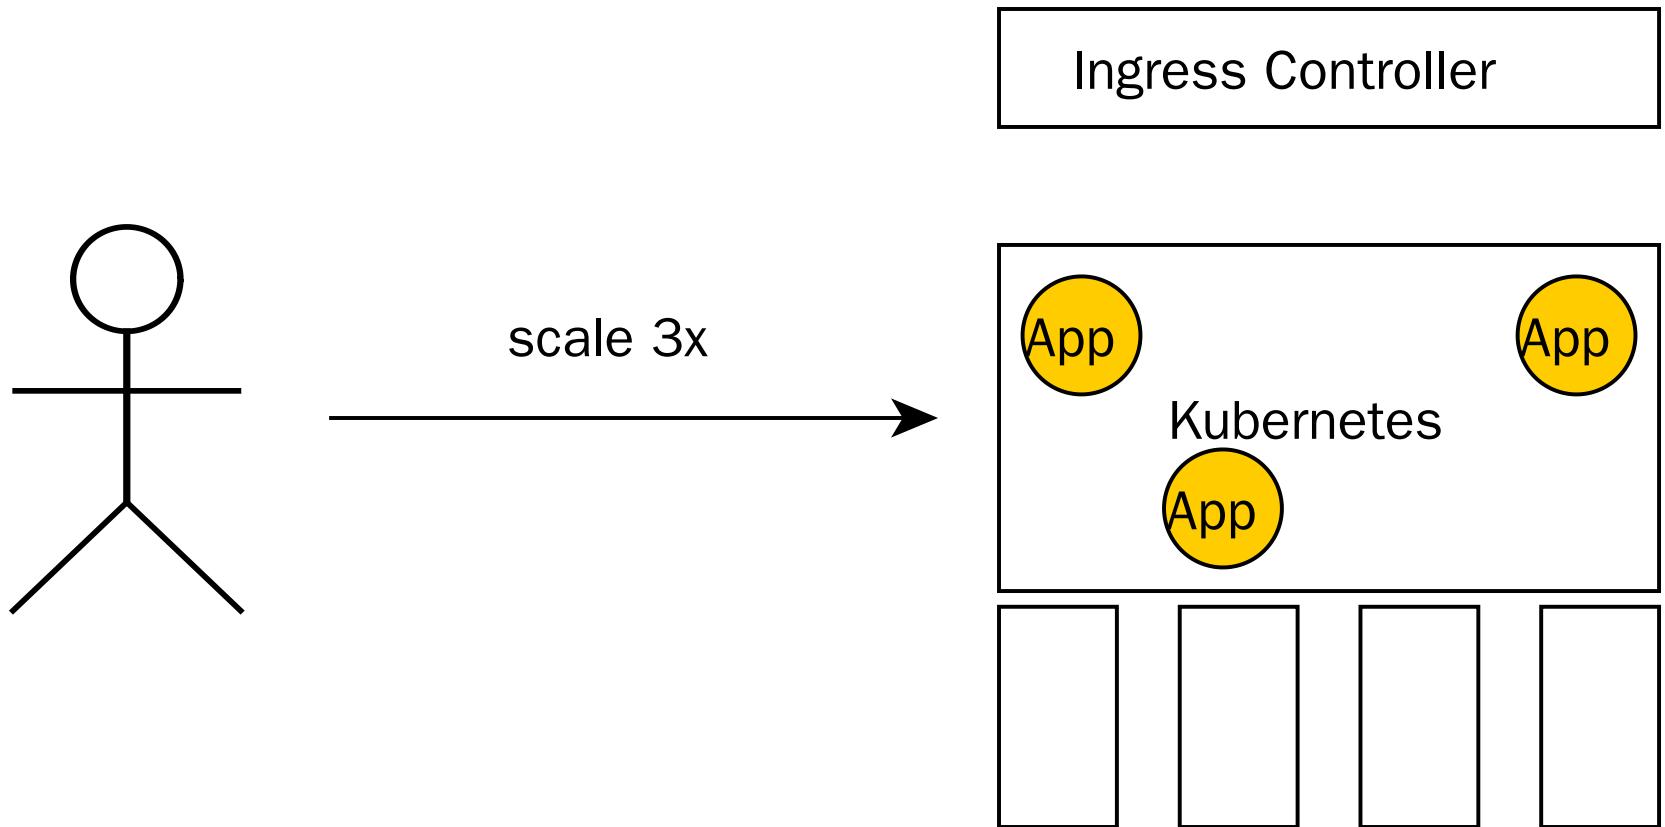


```
kubectl --replicas=3 -f app-srv-dpl.yaml
```

DEPLOYMENT AND PODS

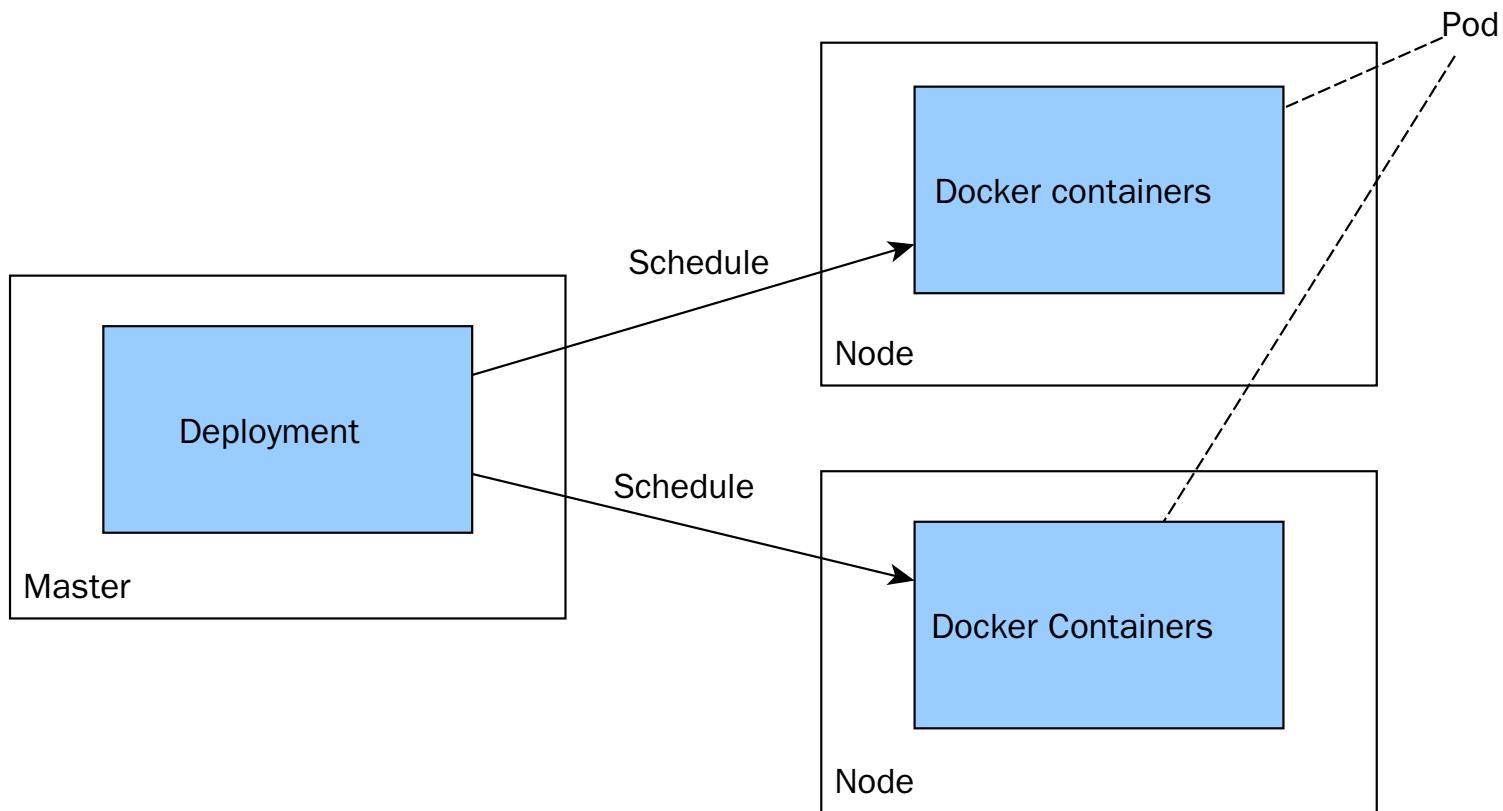

SERVICE AND PODS

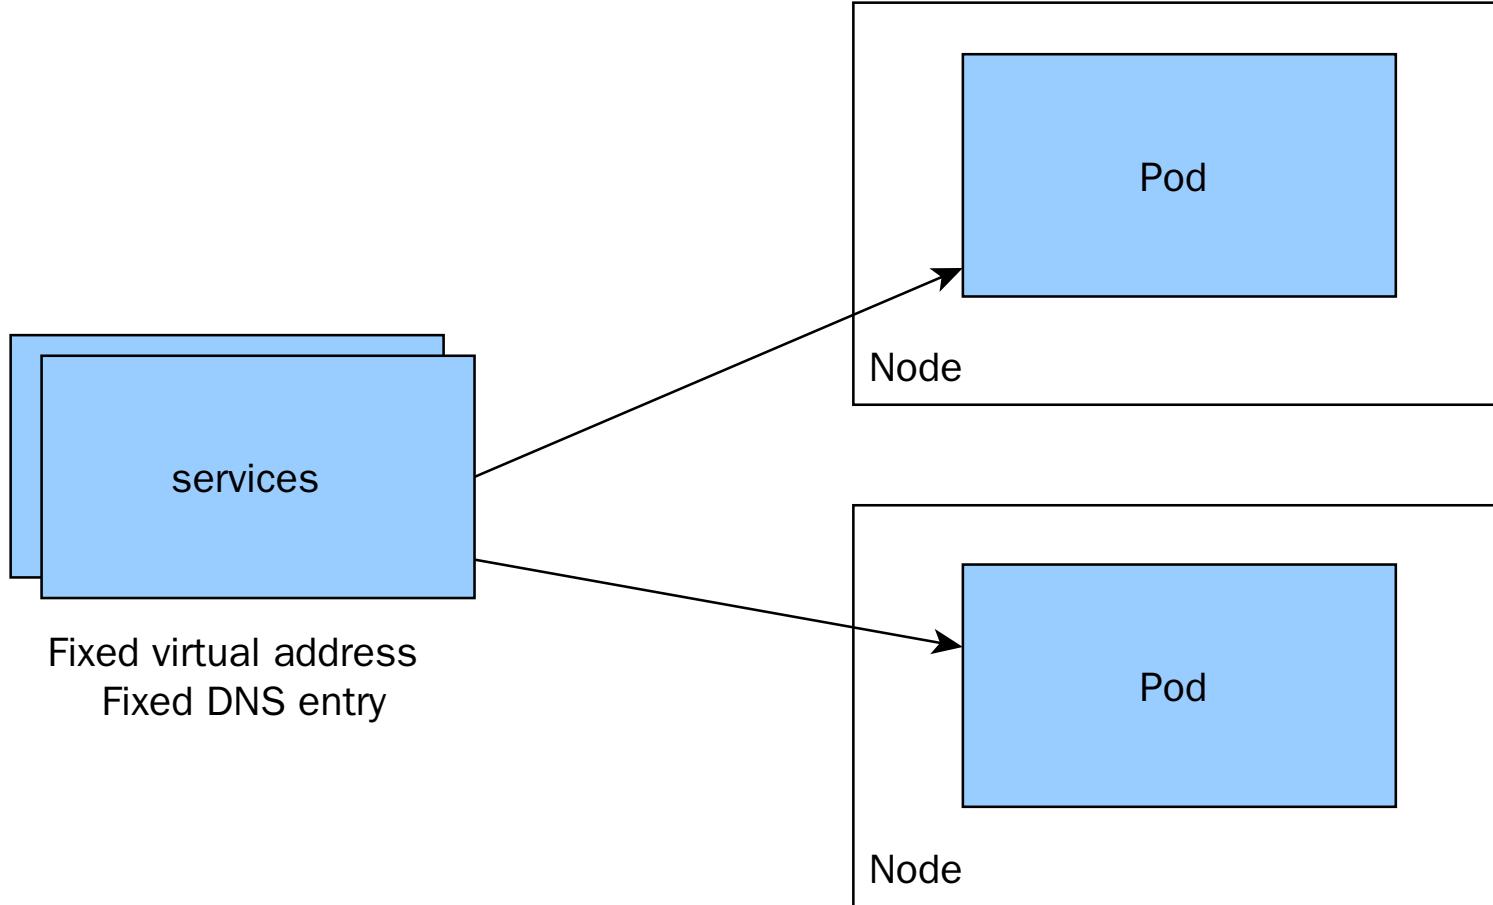

Service matches pods based on labels

INGRESS

Pattern

api.smacc.io/v1/users

Target App Service

users-v1


api.smacc.io/v2/users

users-v2

smacc.io

web

INGRESS CONTROLLER

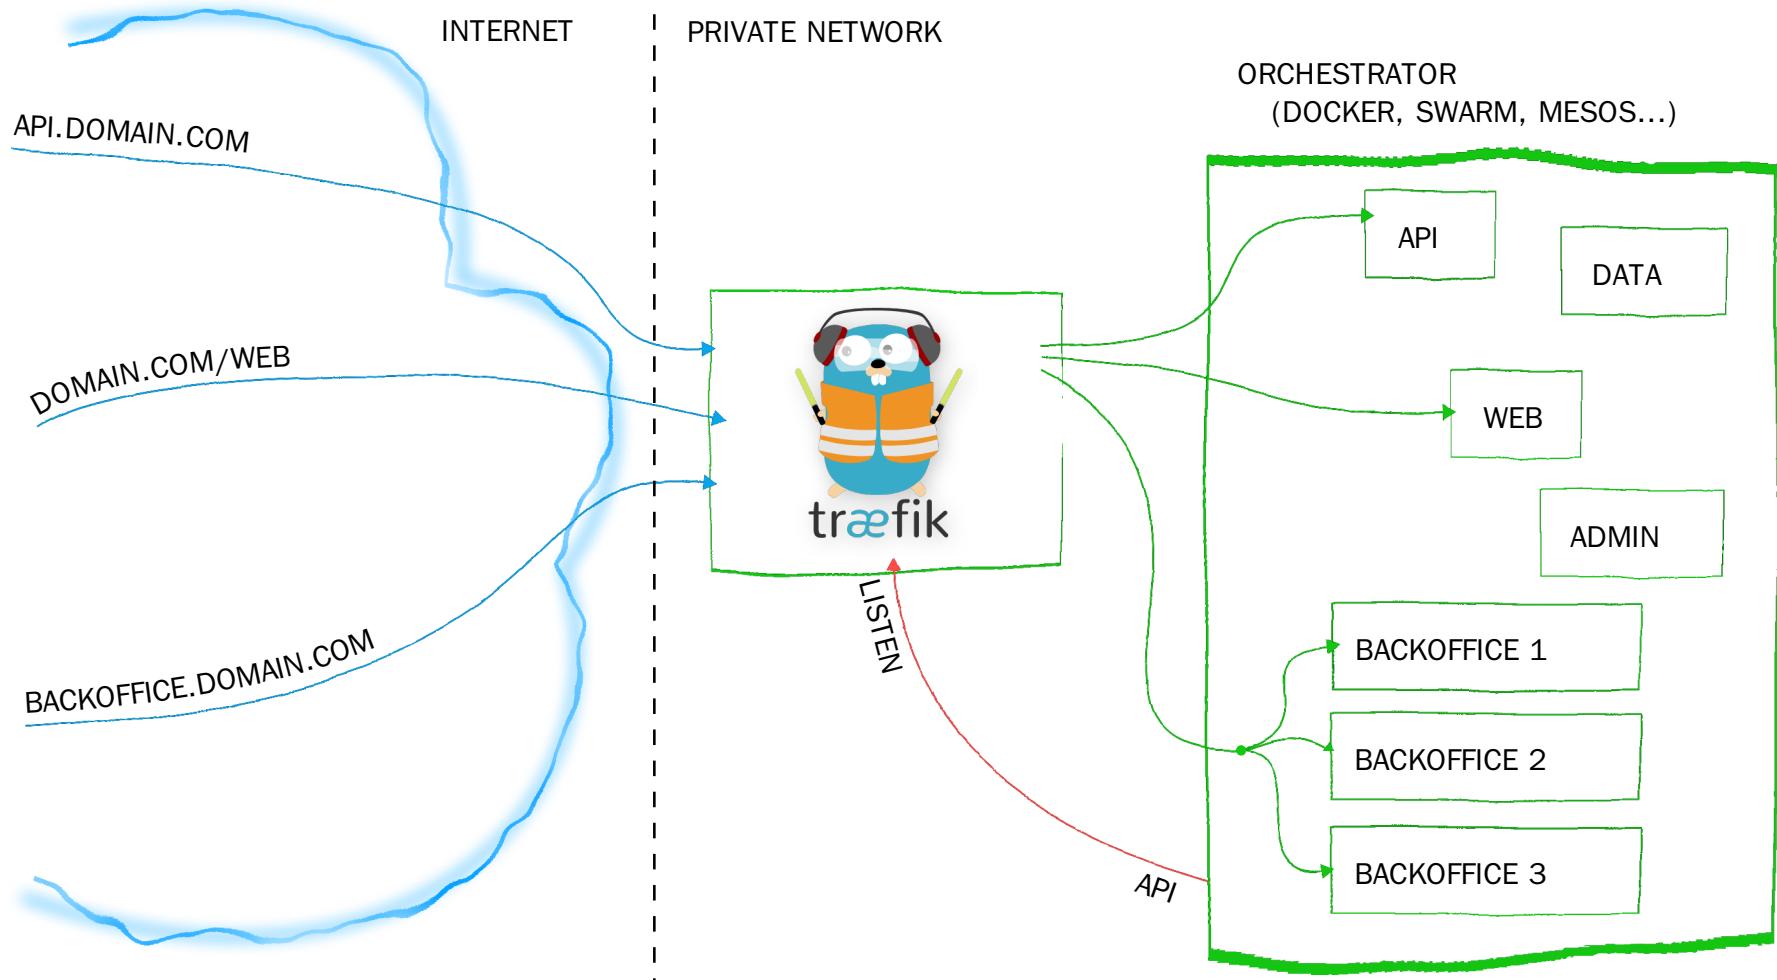


BASIC CONCEPTS

Name	Purpose	
Service	Interface	Entry point (Service Name)
Deployment	Factory	How many pods, which pods
Pod	Implementation	1+ docker running


LOAD-BALANCING

PODS

- See each other on localhost
- Live and die together
- Can expose multiple ports

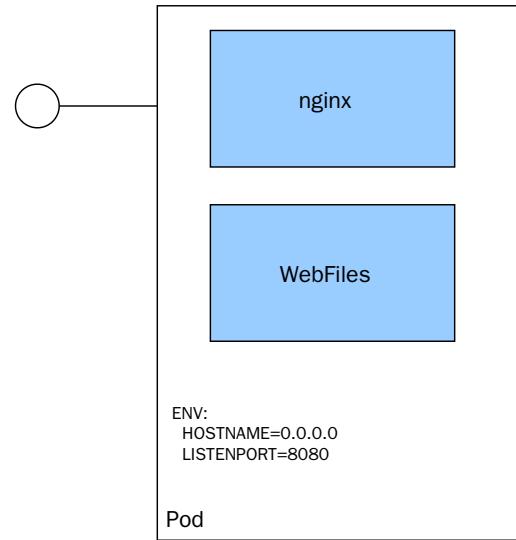

SIDE-CARS

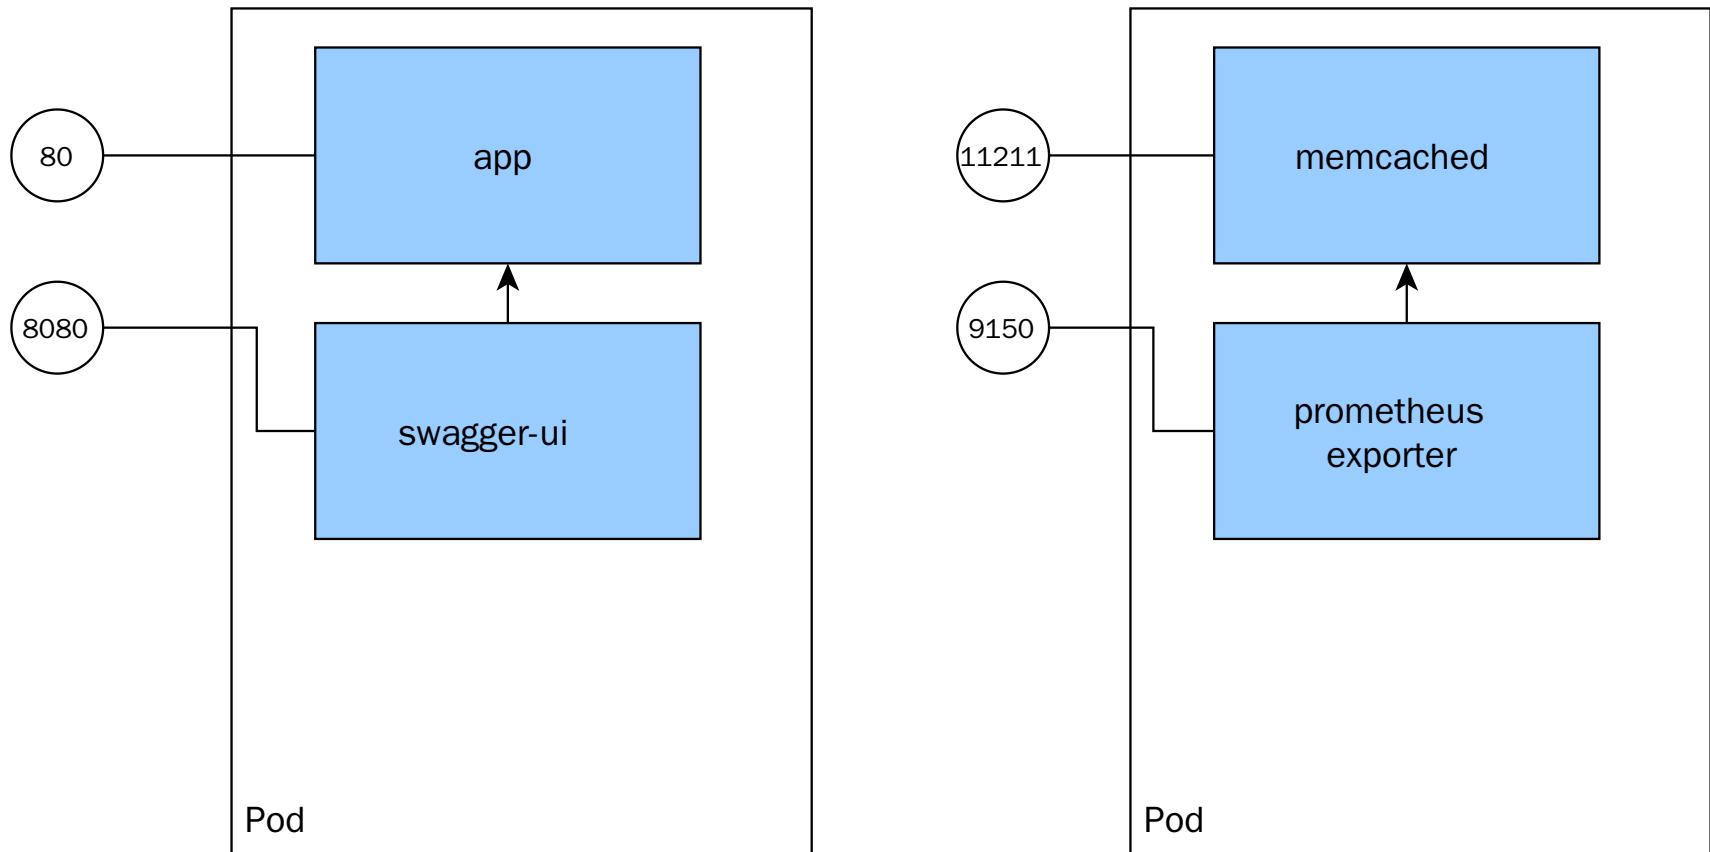

SERVICE DISCOVERY AND LABELING

- names in DNS:

curl http://users/list

- labels:

name=value


- annotations:

prometheus.io/scrape: "true"


SERVICE DISCOVERY

- loosely couple components
- auto-wiring with logging and monitoring
- drop-in installation (traefik, prometheus, ...)


EXAMPLE: ROLLING UPDATES

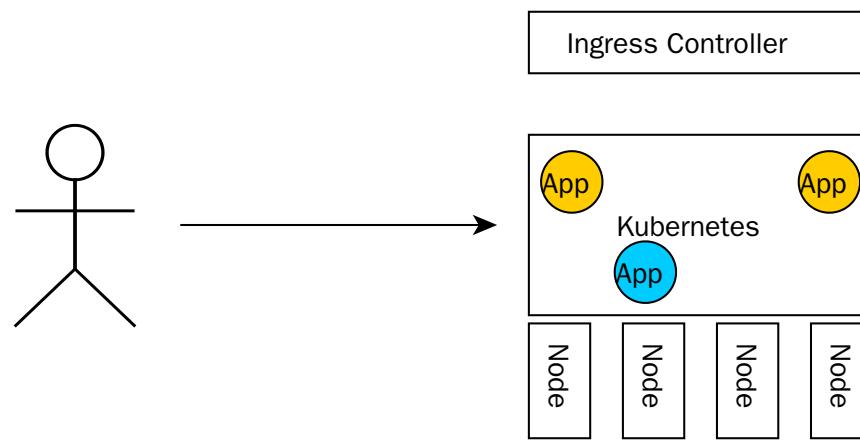


EXAMPLE: ROLLING UPDATES

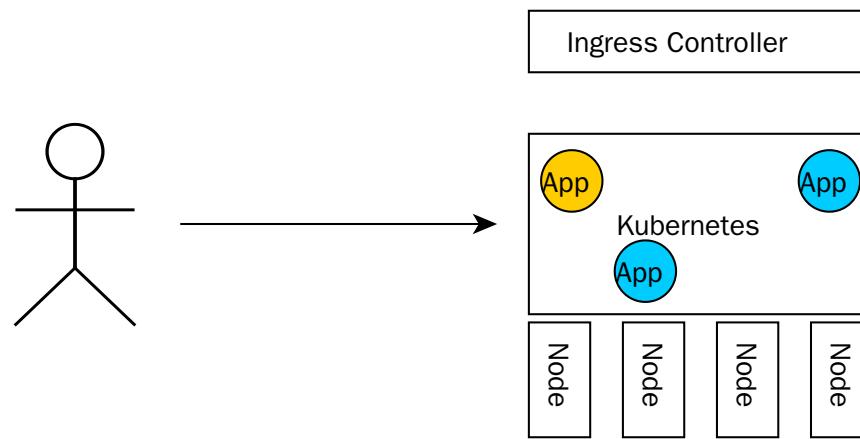


EXAMPLE: ROLLING UPDATES

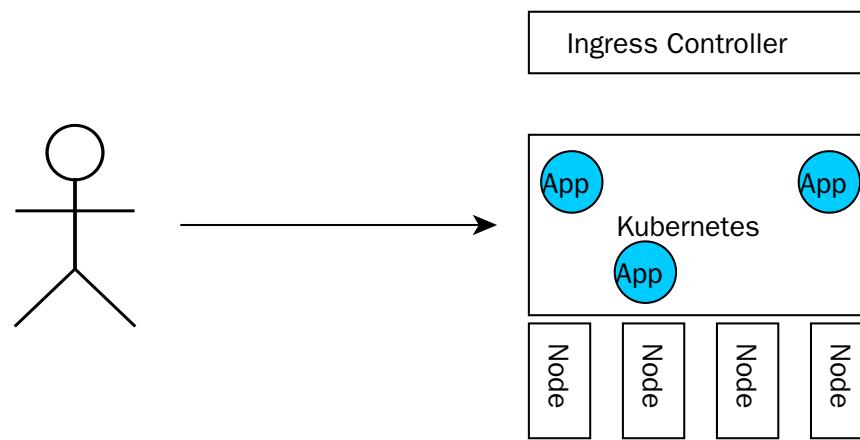


RESILIENT INFRA

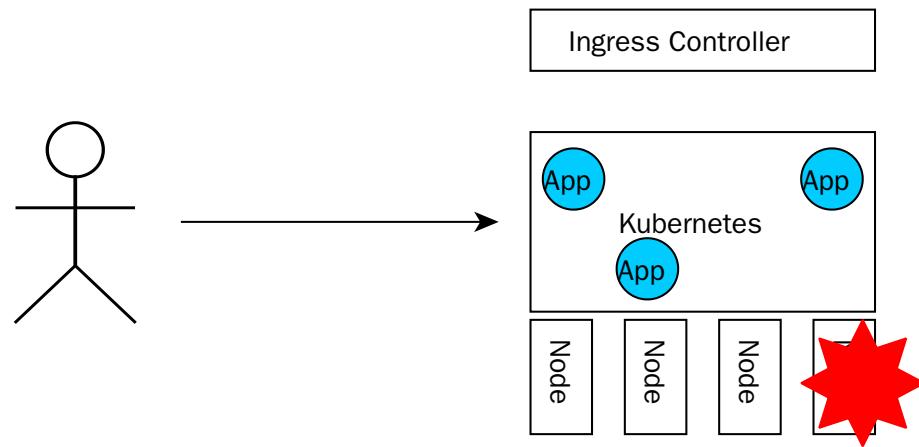

RESILIENT INFRA

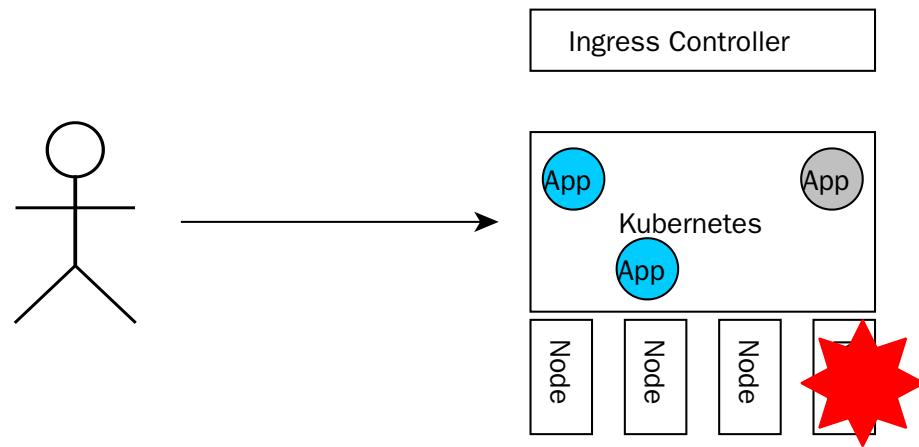

RESILIENT INFRA

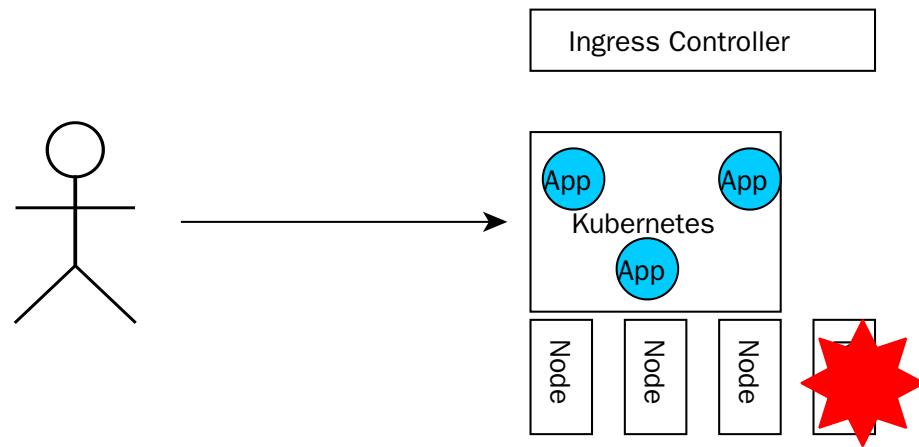

ALL HAIL THE GIT!

- Yaml
- integration:
monitoring, alarming, ingress-controller
- ...
- Devs can forget about infra... almost
- DevOps Culture Dream!
 - + all tools -> CRD

Effective Kubernetes

- Start with small iterations
- Learn as-you-go
- Keep Kubernetes Understable

Hope the k8s community keep it this way

Effective Kubernetes

- Move configuration to runtime
- Do not terrorize your devs with K8S
- No free lunch... app must be smarter

THANK YOU. QUESTIONS?

```
123 def distance_matrix(regions):  
124     """ Computes a distance matrix against a region list """  
125     tuples = [r.as_tuple() for r in regions]  
126     return cdist(tuples, tuples, region_distance)  
127  
128  
129 def clusterize(words, **kwargs):  
130     # TODO: write a cool docstring here  
131     db = DBSCAN(metric="precomputed", **kwargs)  
132     X = distance_matrix([Region.from_word(w) for w in words])  
133     labels = [int(l) for l in db.fit_predict(X)]
```



https://github.com/wojciech12/workshop_kubernetes_and_cloudnative

```
123 def distance_matrix(regions):  
124     """ Computes a distance matrix against a region list """  
125     tuples = [r.as_tuple() for r in regions]  
126     return cdist(tuples, tuples, region_distance)  
127  
128  
129 def clusterize(words, **kwargs):  
130     # TODO: write a cool docstring here  
131     db = DBSCAN(metric="precomputed", **kwargs)  
132     X = distance_matrix([Region.from_word(w) for w in words])  
133     labels = [int(l) for l in db.fit_predict(X)]
```



BACKUP SLIDES

```
123 def distance_matrix(regions):  
124     """ Computes a distance matrix against a region list """  
125     tuples = [r.as_tuple() for r in regions]  
126     return cdist(tuples, tuples, region_distance)  
127  
128  
129 def clusterize(words, **kwargs):  
130     # TODO: write a cool docstring here  
131     db = DBSCAN(metric="precomputed", **kwargs)  
132     X = distance_matrix([Region.from_word(w) for w in words])  
133     labels = [int(l) for l in db.fit_predict(X)]
```



INFRA TOOLS

- Prometheus + AlertMnager + Grafana
- Traefik
- Kafka - Yolean/kubernetes-kafka
- Vault on Etcd - banzaicloud/bank-vaults

DATA STORES

- Kafka - Yolean/kubernetes-kafka
- Etcd - coreos/etcd-operator
- DB: PSQL and Mongo

BACKUPS:

- old-school backups with ARK and Restic
- replications across clouds

1. CLEAN UP

- Single script for repo - Makefile [1]
- Resurrect the README

[1] With zsh or bash auto-completion plug-in in your terminal.

2. GET BACK ALL THE KNOWLEDGE

Extract from:

- Puppet, ... ➔ Dockerfile
- Running Instances ➔ Dockerfile, README.rst
- Nagios, ... ➔ README.rst + *checks/*

3. INTRODUCE RUN_LOCAL

- make run_local
- A nice section on how to run in README.rst
- with docker-compose

The most crucial point.

4. GET TO KUBERNETES

- make kube_create_config
- make kube_apply
- Generate the yaml files if your envs differ
secrets from gopass (password manager)

5. CONTINUOUS DEPLOYMENT

Travis:

- the same Makefile as dev use


6. KEEP IT RUNNING

Bridge the new with old:

- Use External Services in Kubernetes
- Expose k8s in the Legacy [1]


[1] hard coded IP:PORT, considered: K8S events to Consul

Bridge the new with old

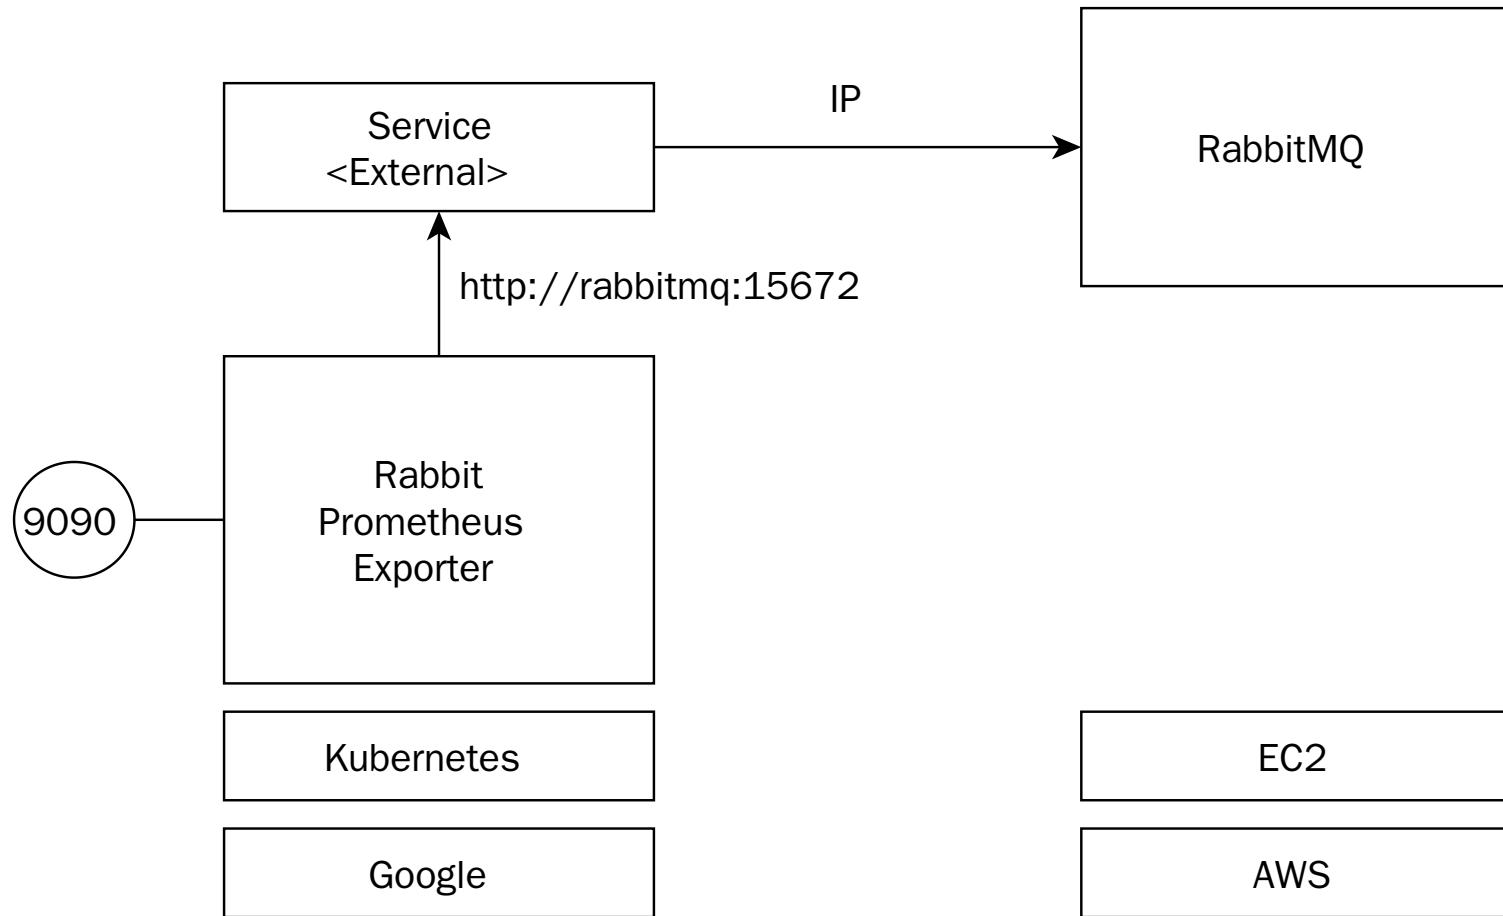

Monitor legacy with new stack

Architecture During Migration

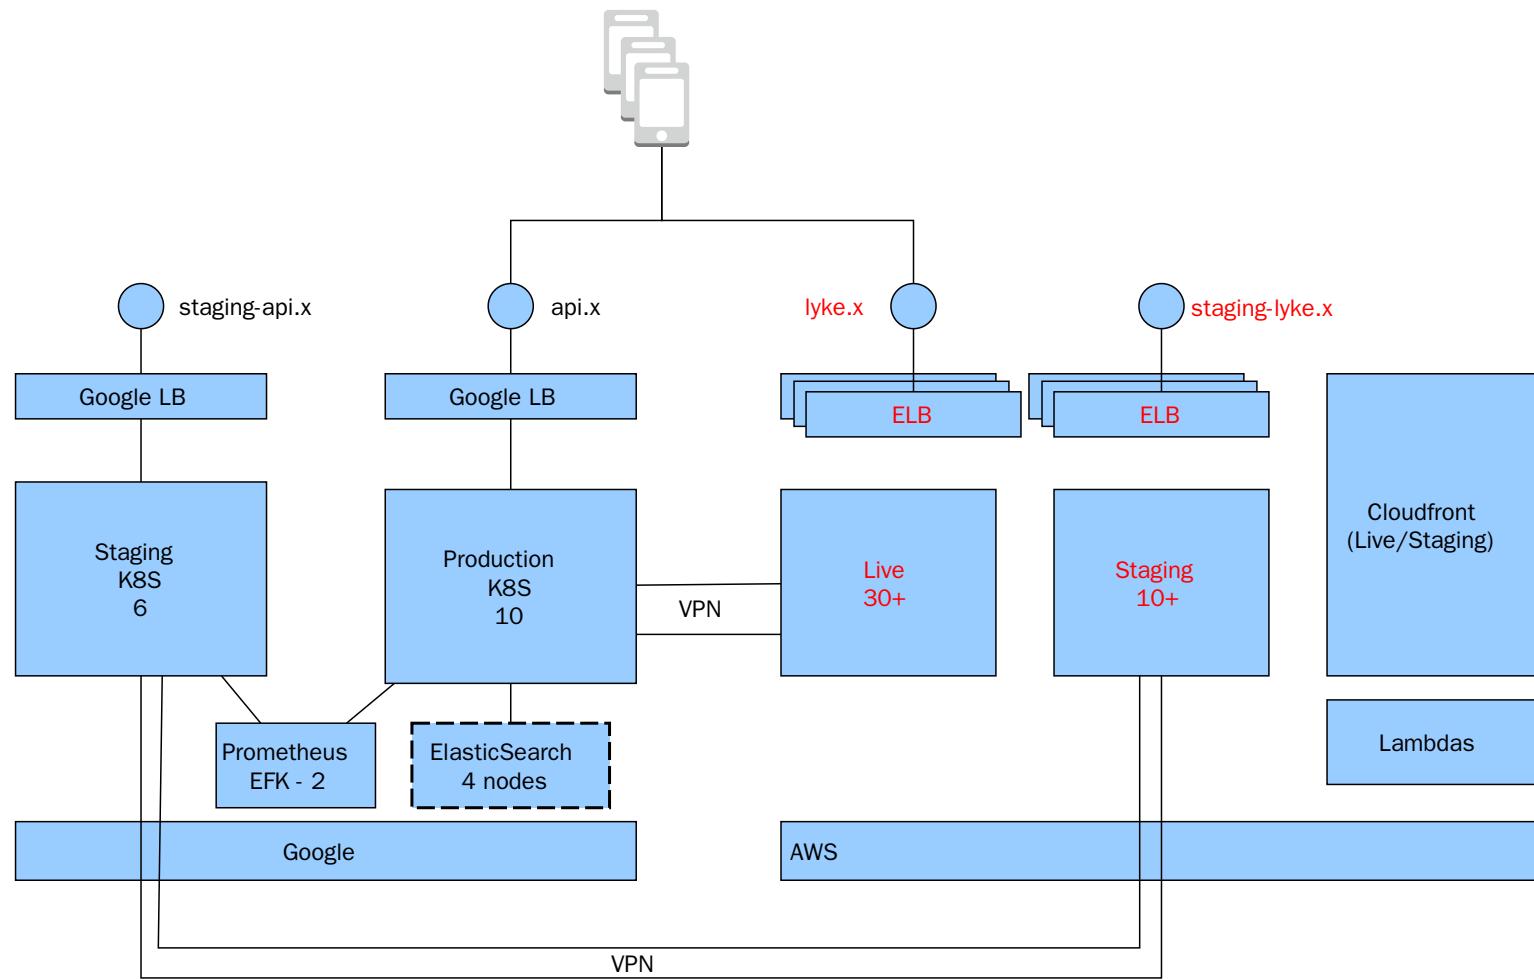

7. INTRODUCE SMOKE-TEST

```
TARGET_URL=127.0.0 make smoke_test
```

```
TARGET_URL=api.example.com/users make smoke_test
```

8. SERVICE SELF-AWARE

Add to old services:

1. *metrics/*
2. *health/*
3. *info/*

9. MOVE TO MICRO-SERVICES

Offload Legacy:

- Keep the lights on
- New functionality to micro-services

10. GET PERFORMANCE TESTING

- *wrk* for evaluating performance
- load test the real system