
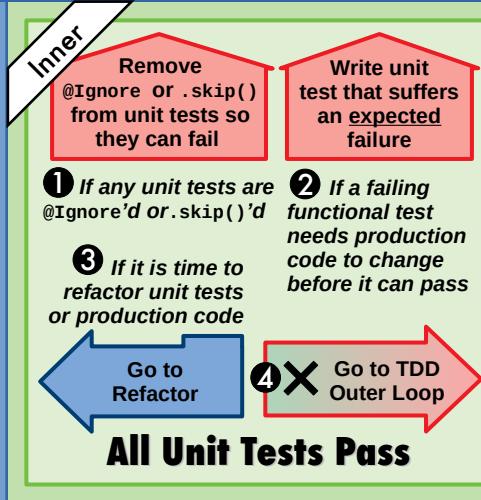
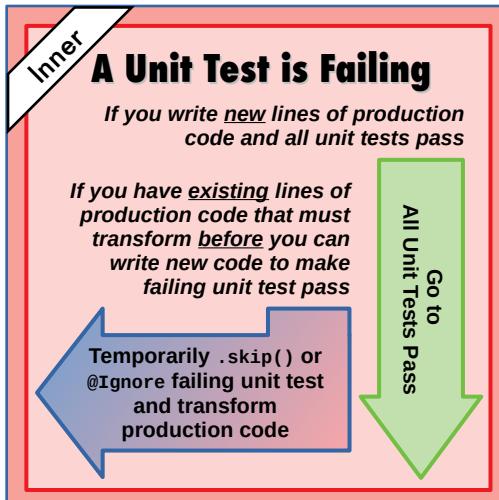


This cube walks you through a no-shortcuts, Outside-In Test-Driven Development (TDD) workflow that you will be using while training and whenever you need a rigorous process on the job.

Use the up-facing side of the cube to keep track of where you are in the workflow and what to do next.

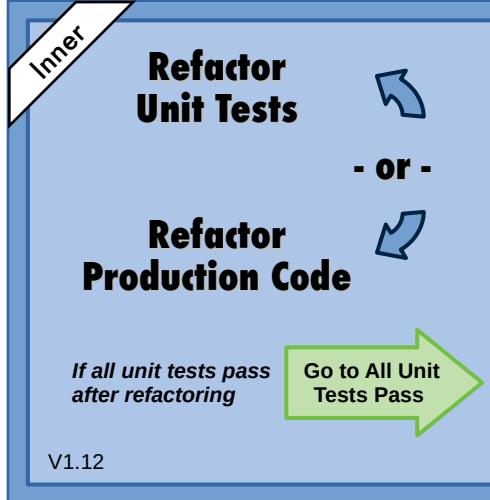




Materials needed -

- 7 pieces of clear tape cut to the length of a cube edge
- 1 piece of paper towel or cardstock

Directions -

1. Cut out the t-shaped cube faces as a single piece
2. Crease along cube face edges
3. Fold into cube shape and tape the seven adjacent edges together

To stiffen cube sides: back paper with cardstock, or before sealing cube 'lid', stuff in a loosely balled-up paper towel

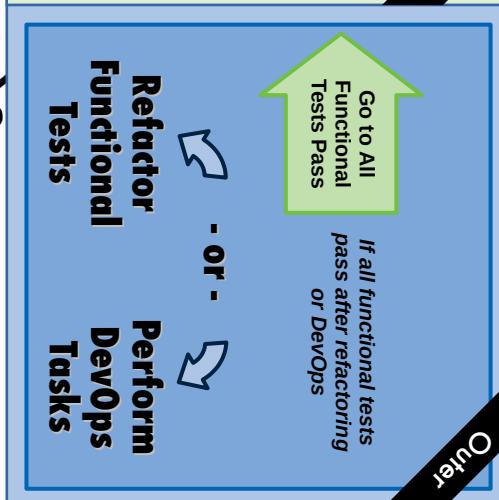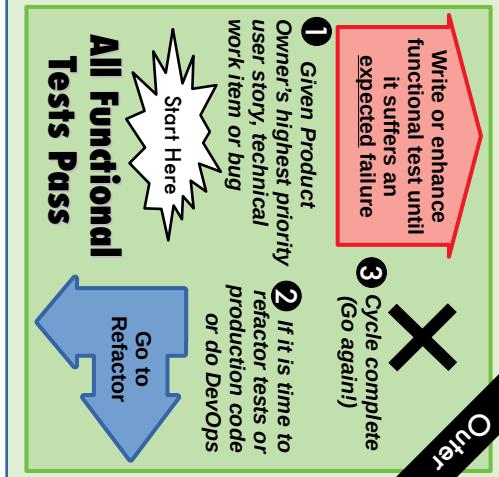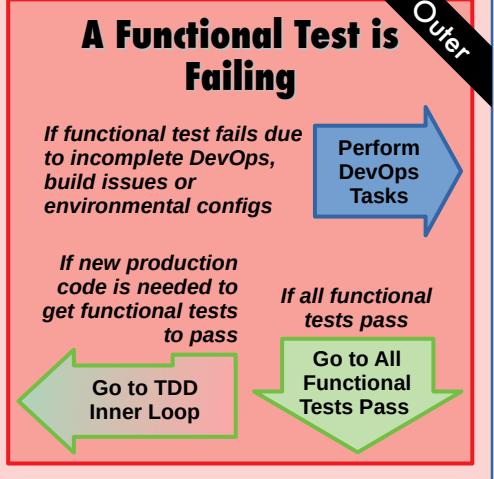

Refactoring is the process of restructuring existing computer code without changing its external behavior.

Refactoring website
goo.gl/iGbcGa
Refactoring catalog
goo.gl/VykPMY

Existing production code often needs to be restructured into a more complex form before it can play host to new production code. We call this kind of refactoring a **transformation**.

Repeated transformations of the same production code tends to predictably increase in complexity as your program develops over time. The theory of this progression is captured in the *Transformation Priority Premise*.

TPP wiki
goo.gl/HCEBoZ
TPP lecture
goo.gl/ukZiqs

The 3 laws of the TDD inner loop

1. You are not allowed to write any new production code unless it is to make a failing unit test pass
2. You are not allowed to write any more of a unit test than is sufficient to fail; compilation failures qualify as failures
3. You are not allowed to write any more production code than is sufficient to pass the one failing unit test

H.T. "Uncle Bob" Martin



TDD
Learnstitute

TDD Training Cube
v1.12