

ONLINE ACTIVITY #2
Personalized Linux, and Git Cheat Sheet

Using any available resources (official Git documentation, online tutorials, or the built-in git --help command), research the following topics and create a personalized 1-page (A4) cheat sheet:

1. Basic Linux commands (command, sample usage) (at least 10)
2. Basic Git commands (command, sample usage, description (use your own wordings), common options/flags)

git init	git restore
git status	git branch
git add	git checkout / git switch
git commit	git merge
git log	git tag
git diff	git clone

3. the three-tree architecture of Git

You are free to use any design or color scheme, just make sure it is readable.

Submission:

1. Use PDF as the file format for your cheat sheet.
2. Upload it to your GitHub repository
3. Submit the link here:
<https://drive.google.com/drive/folders/1-Y6e6E6PoLyGgB0WZ8prRCNfolpV3cj0?usp=sharing>

Reminders:

Please put a "Reference" section in the cheat sheet for the materials you cited.

I DO NOT PROHIBIT the use of AI for this activity, but please declare the extent of the use.

Sample:

"The author used [Tool Name, Version] to [specific task] during assignment preparation. The author reviewed and edited the content as needed and takes full responsibility for the final content of the work."

Or

"I have not used any AI or AI-assisted technologies to prepare this work."

ONLINE ACTIVITY #2
Personalized Linux and Git Cheat Sheet

1. Basic Linux Commands


Command	Sample Usage
ls	ls -la — lists all files and folders in the current directory, including hidden ones
cd	cd Documents — moves into the Documents folder
pwd	pwd — shows the full path of the current directory
mkdir	mkdir project — creates a new folder named "project"
rm	rm -r old_folder — deletes a file, or with -r, a folder and its contents
cp	cp file.txt backup.txt — copies a file to a new name or location
mv	mv file.txt Docs/ — moves or renames a file
touch	touch notes.txt — creates a new empty file
cat	cat notes.txt — prints the contents of a file to the screen
chmod	chmod +x script.sh — changes file permissions, e.g. makes a script executable
grep	grep "error" log.txt — searches a file for lines containing a keyword
man	man ls — opens the manual/help page for a command

2. Basic Git Commands

Command	Sample Usage	Common Flags
git init	git init	—
git status	git status	-s (short format)
git add	git add index.html	-A / . (add all)
git commit	git commit -m "fix bug"	-m (message), -a (auto-stage)
git log	git log	--oneline, --graph
git diff	git diff	--staged
git restore	git restore file.txt	--staged
git branch	git branch new-feature	-d (delete), -a (all)
git checkout / switch	git switch new-feature	-b (create & switch)
git merge	git merge new-feature	--no-ff
git tag	git tag v1.0	-a (annotated), -d (delete)
git clone	git clone <url>	--depth (shallow clone)

3. The Three-Tree Architecture of Git

Files move forward through these three trees as you stage and commit; commands like `git restore` and `git checkout` move changes back the other way.

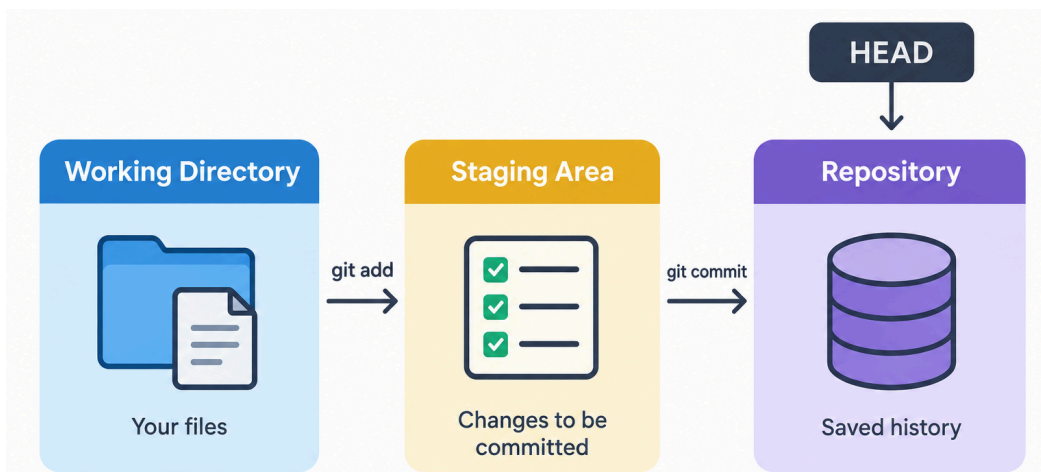

References

- Git Documentation — <https://git-scm.com/doc>
- Git Pro Book, Chapter 2 (Git Basics) — <https://git-scm.com/book/en/v2>
- Linux command-line basics — <https://linuxcommand.org>
- Built-in help: `git --help`, `man <command>`

The author used Claude (Anthropic) to help research and organize the Linux commands, Git commands, and the three-tree architecture explanation during preparation of this activity. The author reviewed and edited the content and takes full responsibility for the final content of this work.