





Masthead

Start HereHow it worksExamples



 Dave King

AdminDetails



Kent

Fenwick

+ Follow

Facebook (771 Friends)

See All Campaigns

Send a Message

Tilt Insurance

with Tilt Fam

To date

\$390

Expired January 13, 2015

Tilted at [?]

\$200

Contribute Now

ShareOptions


Private

Send


Tag Friends


ROGERS

5:51 PM



Search

Marek Zareba added 3 new photos.

43 minutes ago · 

Goodbye good friend! Over the past year, you've given me immense pleasure, unhealthy amounts of adrenaline, and even let me awe at a few sunrises(!) across the beautiful SF bay. While I was saddened to not find you in front of my apartment building this

Activity (15)

CampaignTabs


Description

Kent Fenwick started the campaign


Private


Send

Tag Friends




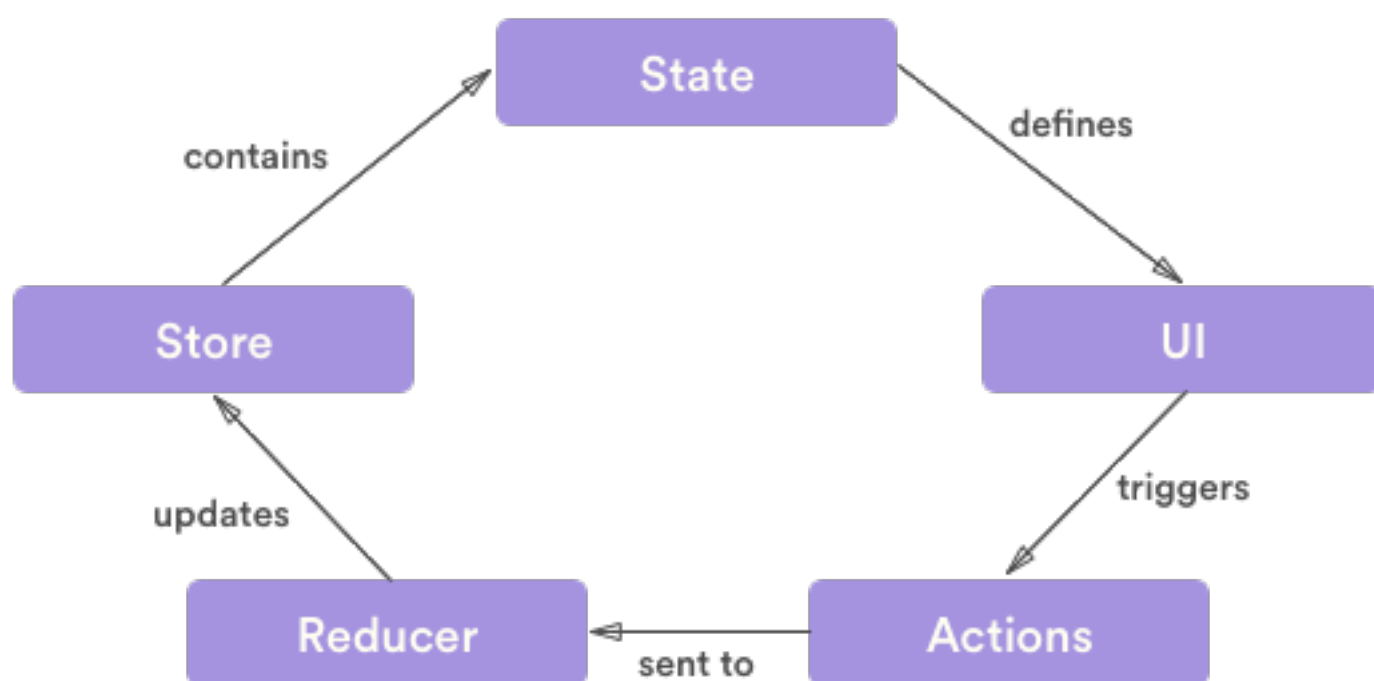
Read that post! Are you kidding me. He loved that thing. Let's at least get Marek a new bicycle :)

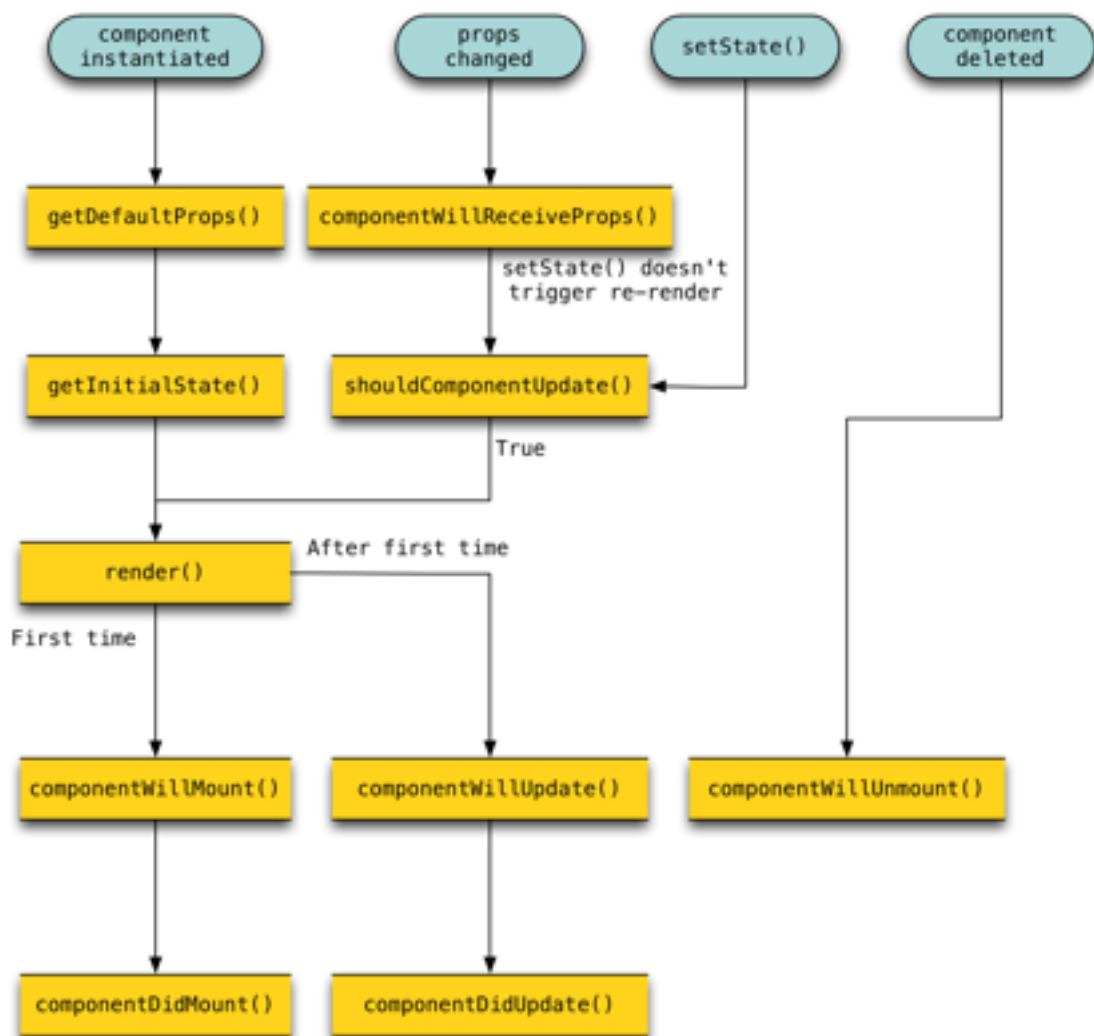

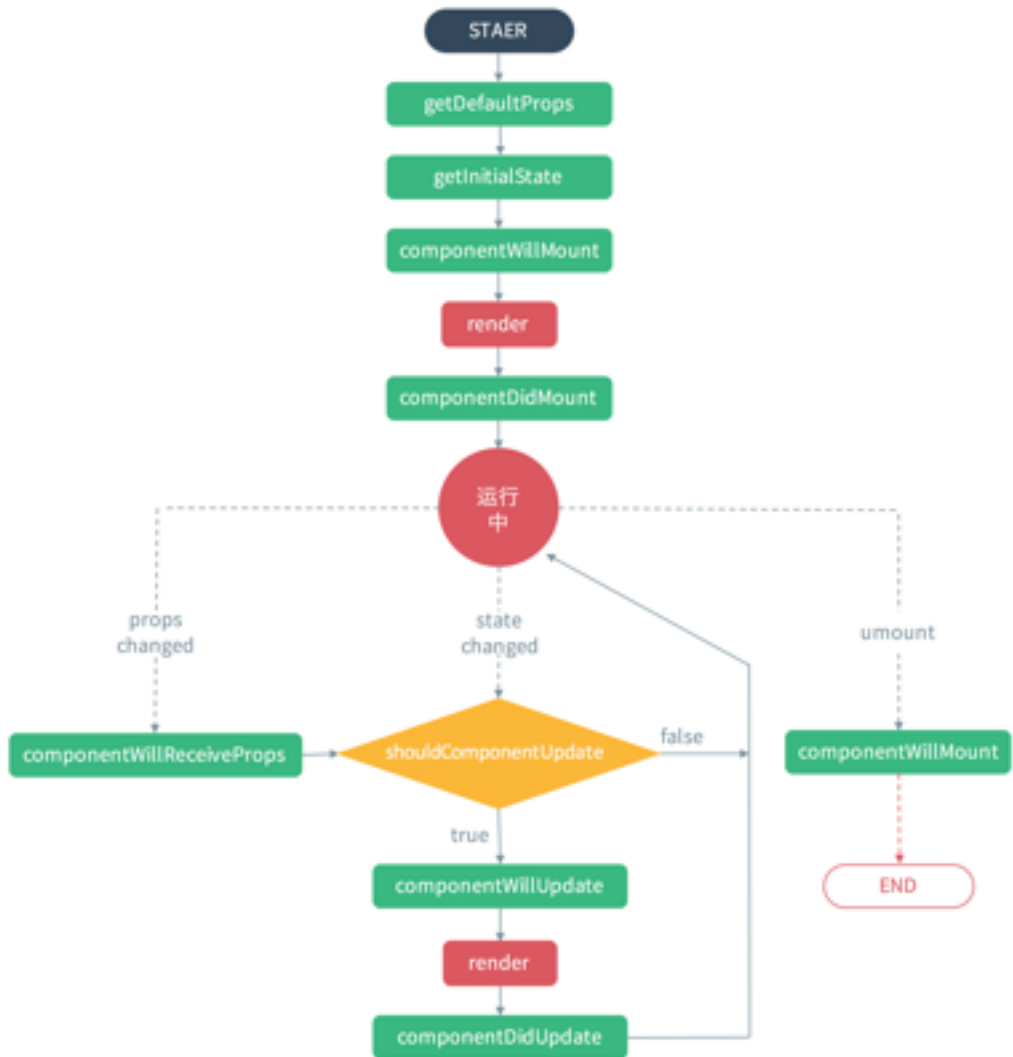


```
module: {
  loaders: [
    {
      test: /\.js?$/,
      exclude: /(node_modules)/,
      loader: 'babel-loader',
      query: {
        presets: ['react', 'es2015'],
        plugins: ['react-html-attrs'],
      }
    },
    {
      test: /\.css$/,
      loader: 'style!css-loader?modules&importLoaders=1&localIdentName=[name]__[local]__[hash:base64:5]'
    },
  ],
}
```










包名	版本	文档	描述
<code>react-router</code>	npm <code>v4.1.1</code>	API Docs <code>markdown</code>	React Router 核心组件
<code>react-router-dom</code>	npm <code>v4.1.1</code>	API Docs <code>markdown</code>	用于 DOM 绑定的 React Router
<code>react-router-native</code>	npm <code>v4.1.1</code>	API Docs <code>markdown</code>	用于 <code>React Native</code> 的 React Router
<code>react-router-redux</code>	npm <code>5.0.0alpha.2</code>	API Docs <code>readme</code>	React Router 和 Redux 的集成
<code>react-router-config</code>	npm <code>v1.0.0-beta.3</code>	API Docs <code>readme</code>	静态路由配置帮助助手

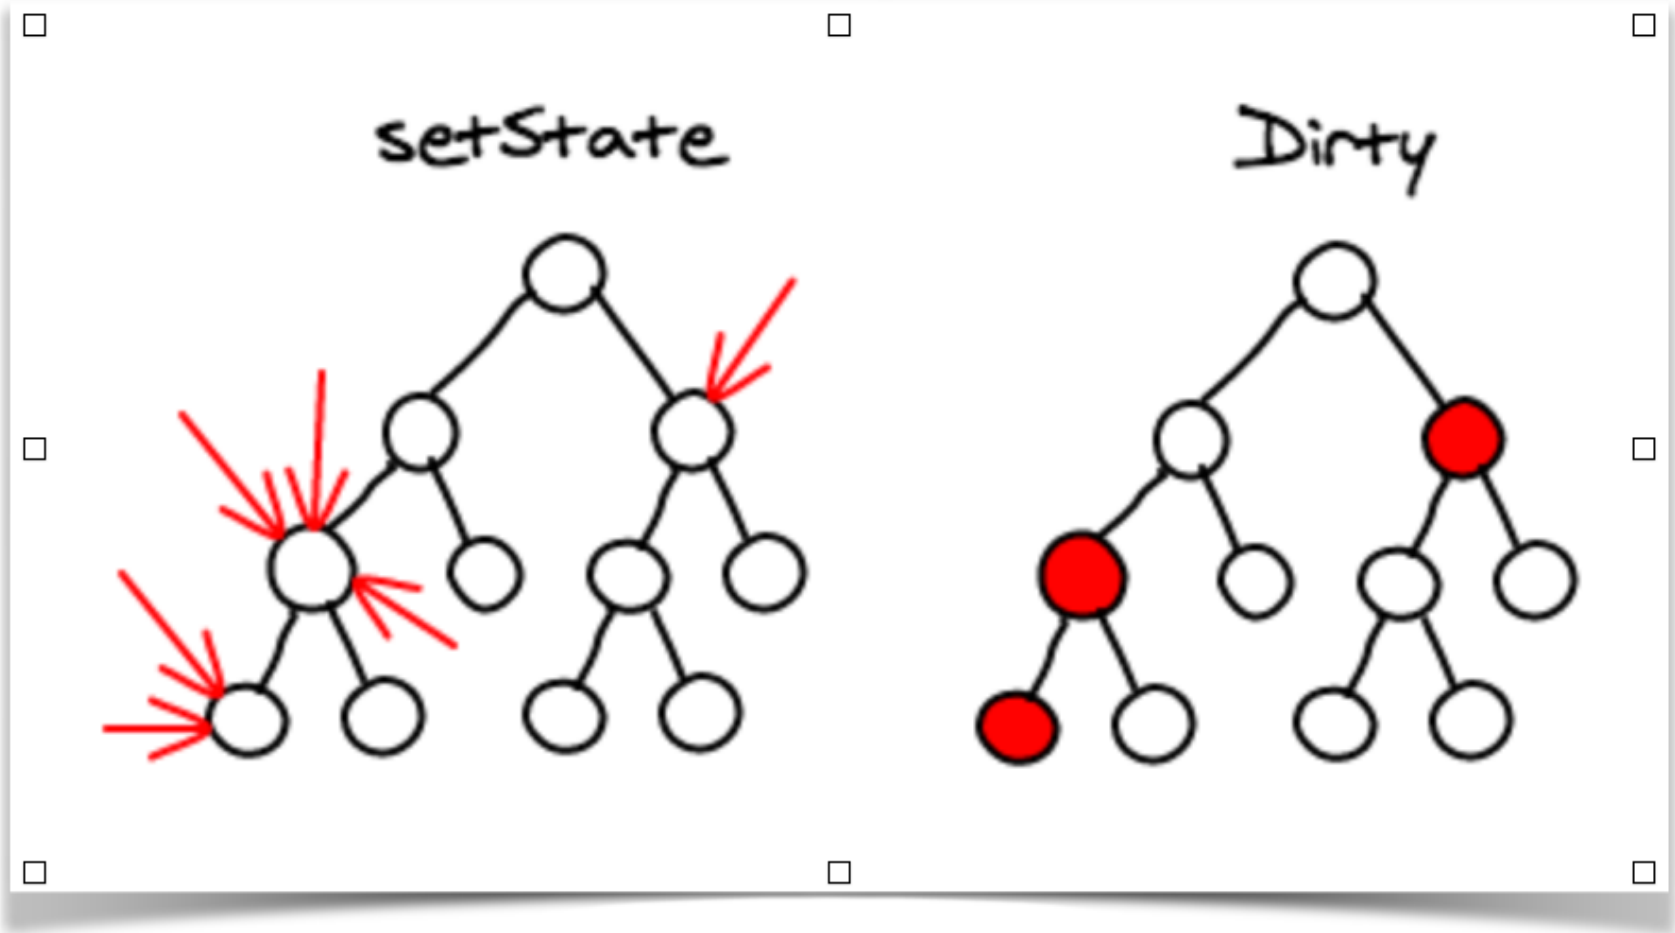


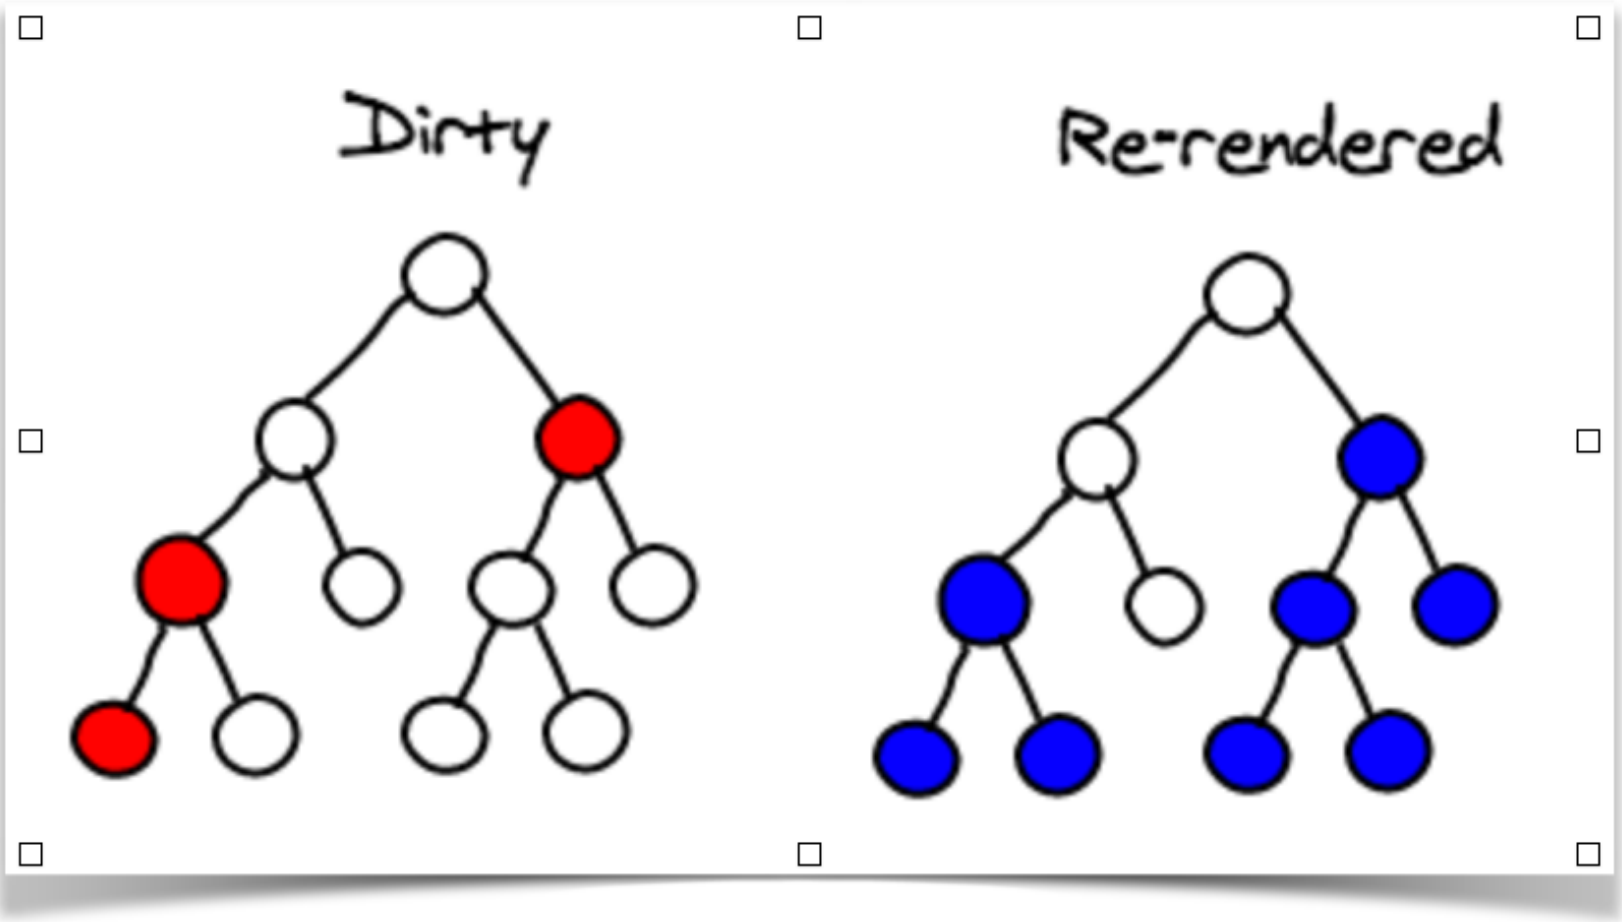

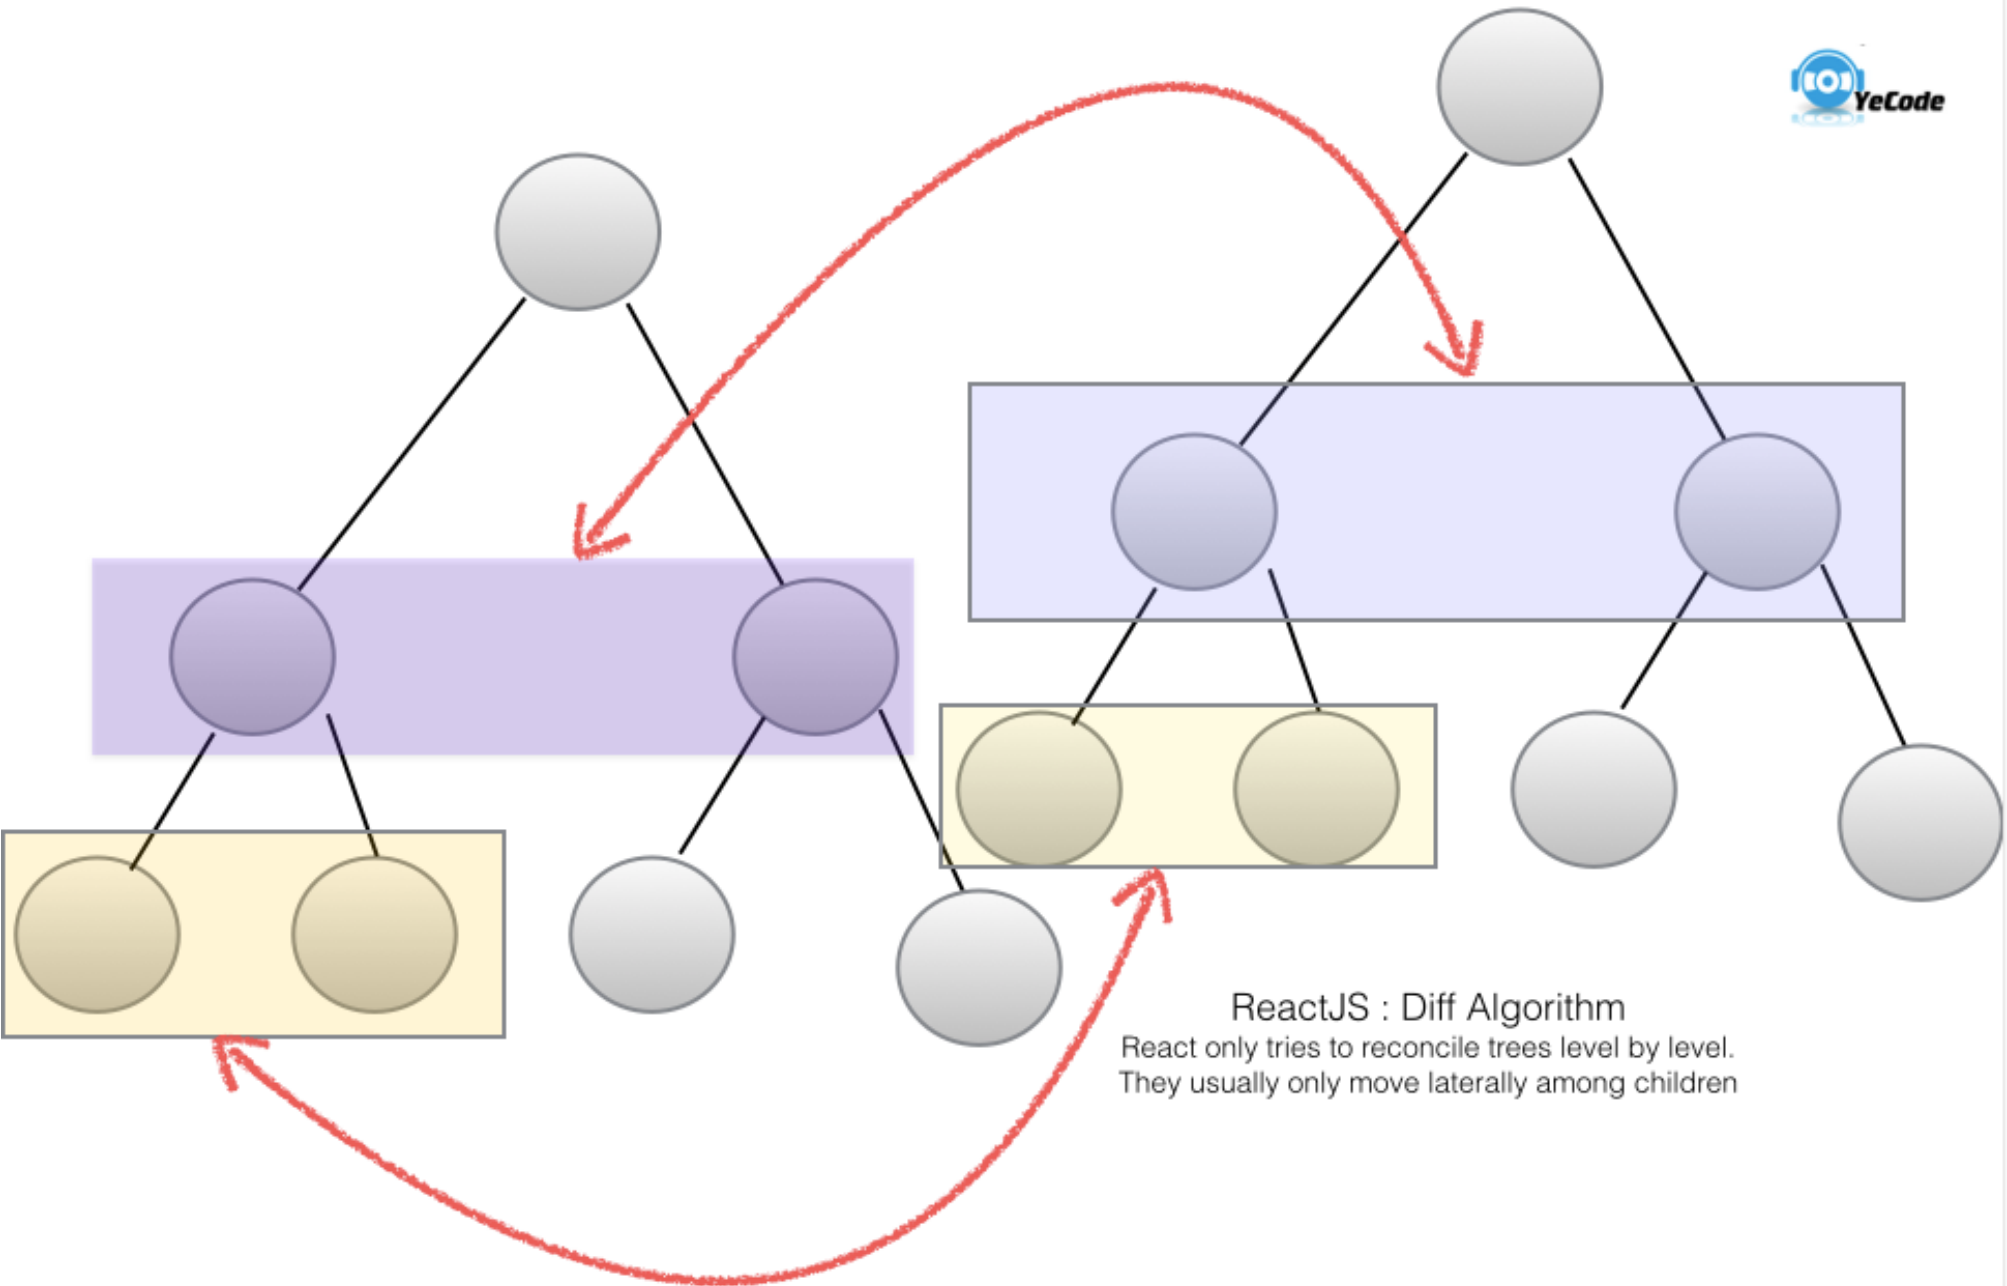

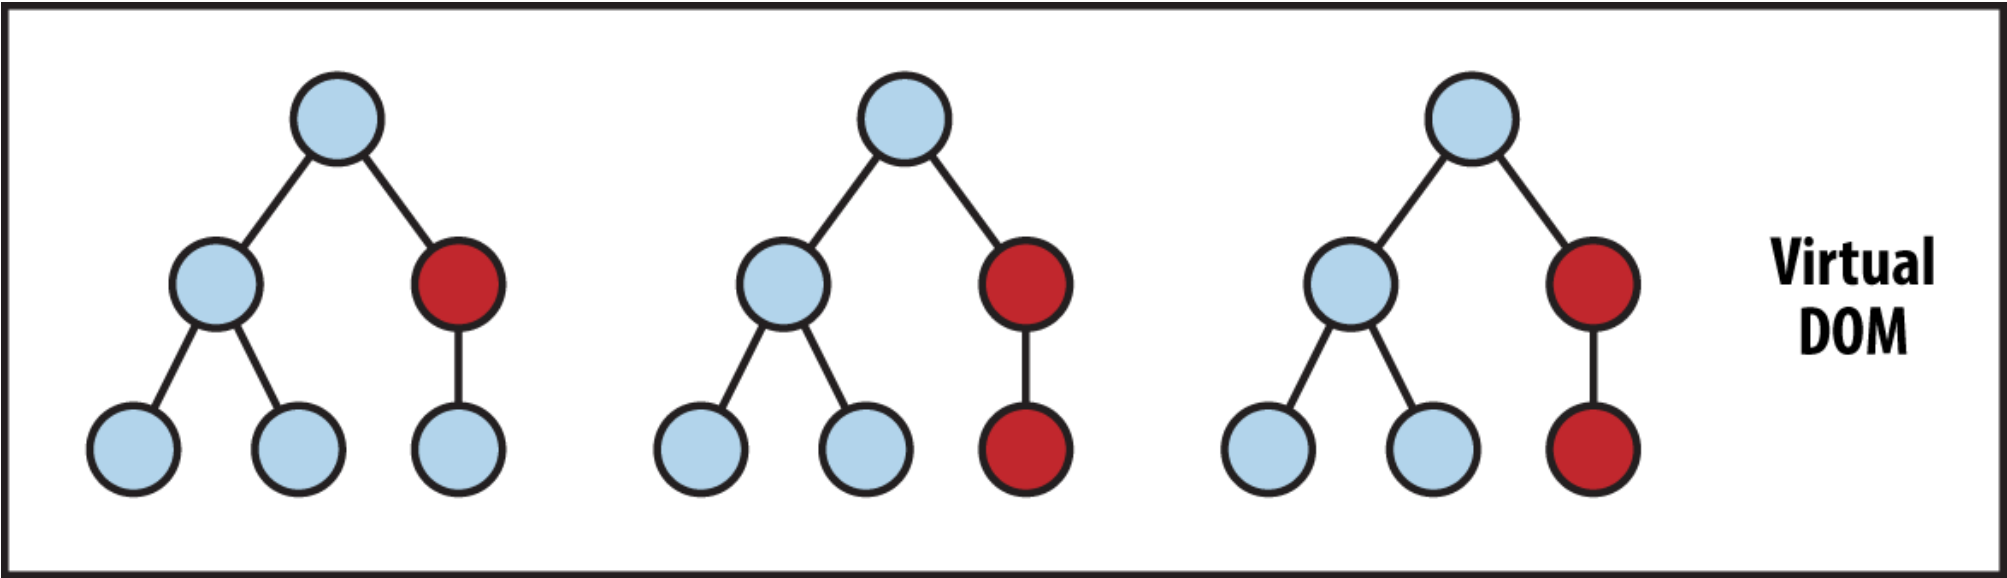


State Change     $\longrightarrow$     Compute Diff     $\longrightarrow$     Re-render

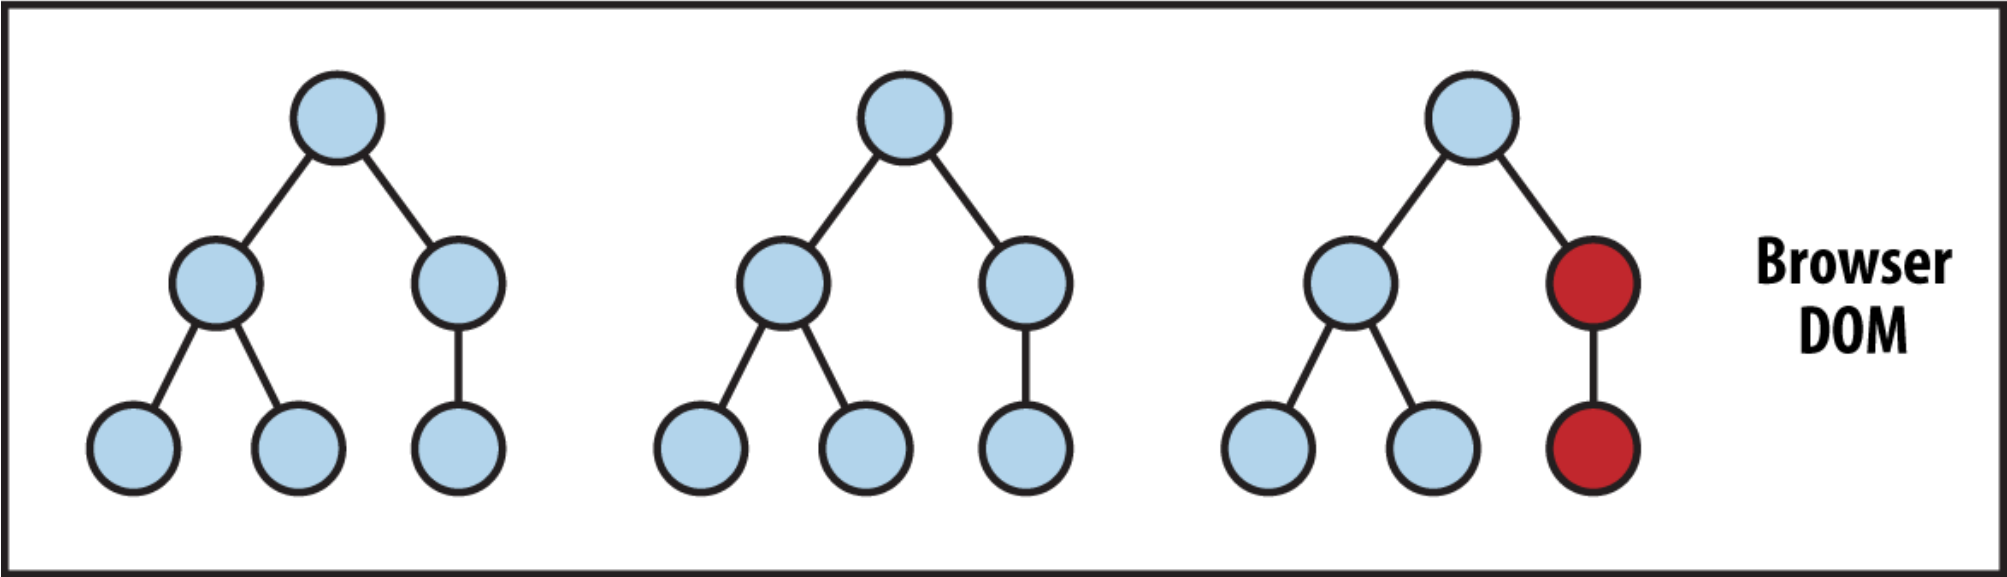


```
{
  performance: {
    hints: 'warning', // 'error' or false are valid too
    maxEntrypointSize: 100000, // in bytes
    maxAssetSize: 450000, // in bytes
  },
},
```

```
entry: {  
  app: PATHS.app,  
  vendor: ['react'],  
},
```

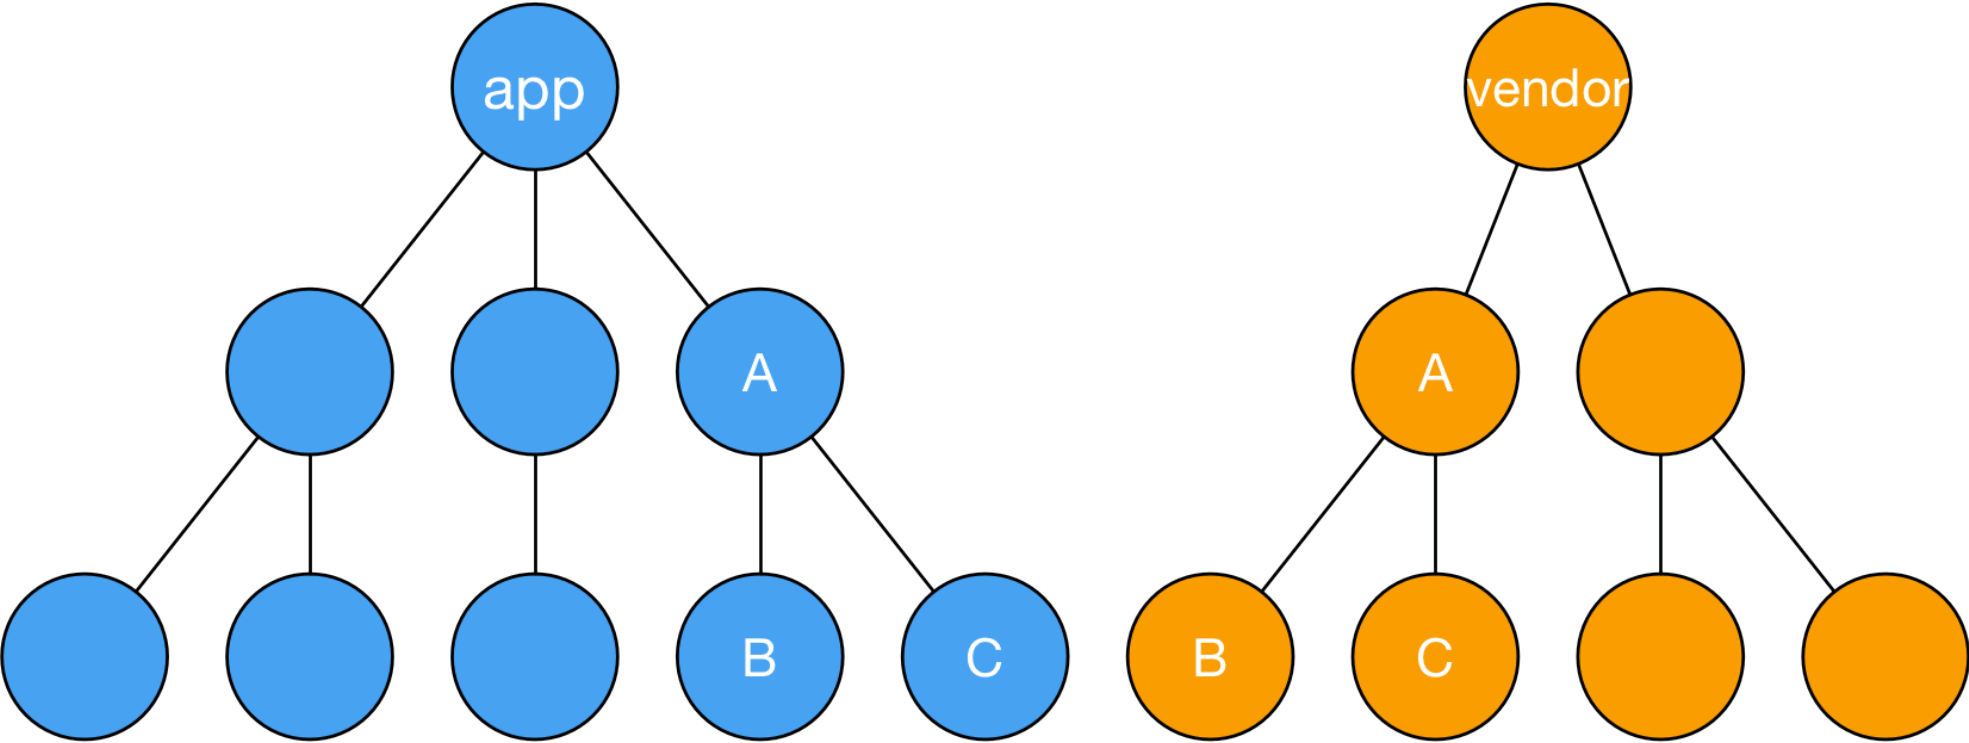



```
new webpack.optimize.CommonsChunkPlugin({  
  name: 'vendor',  
}),
```

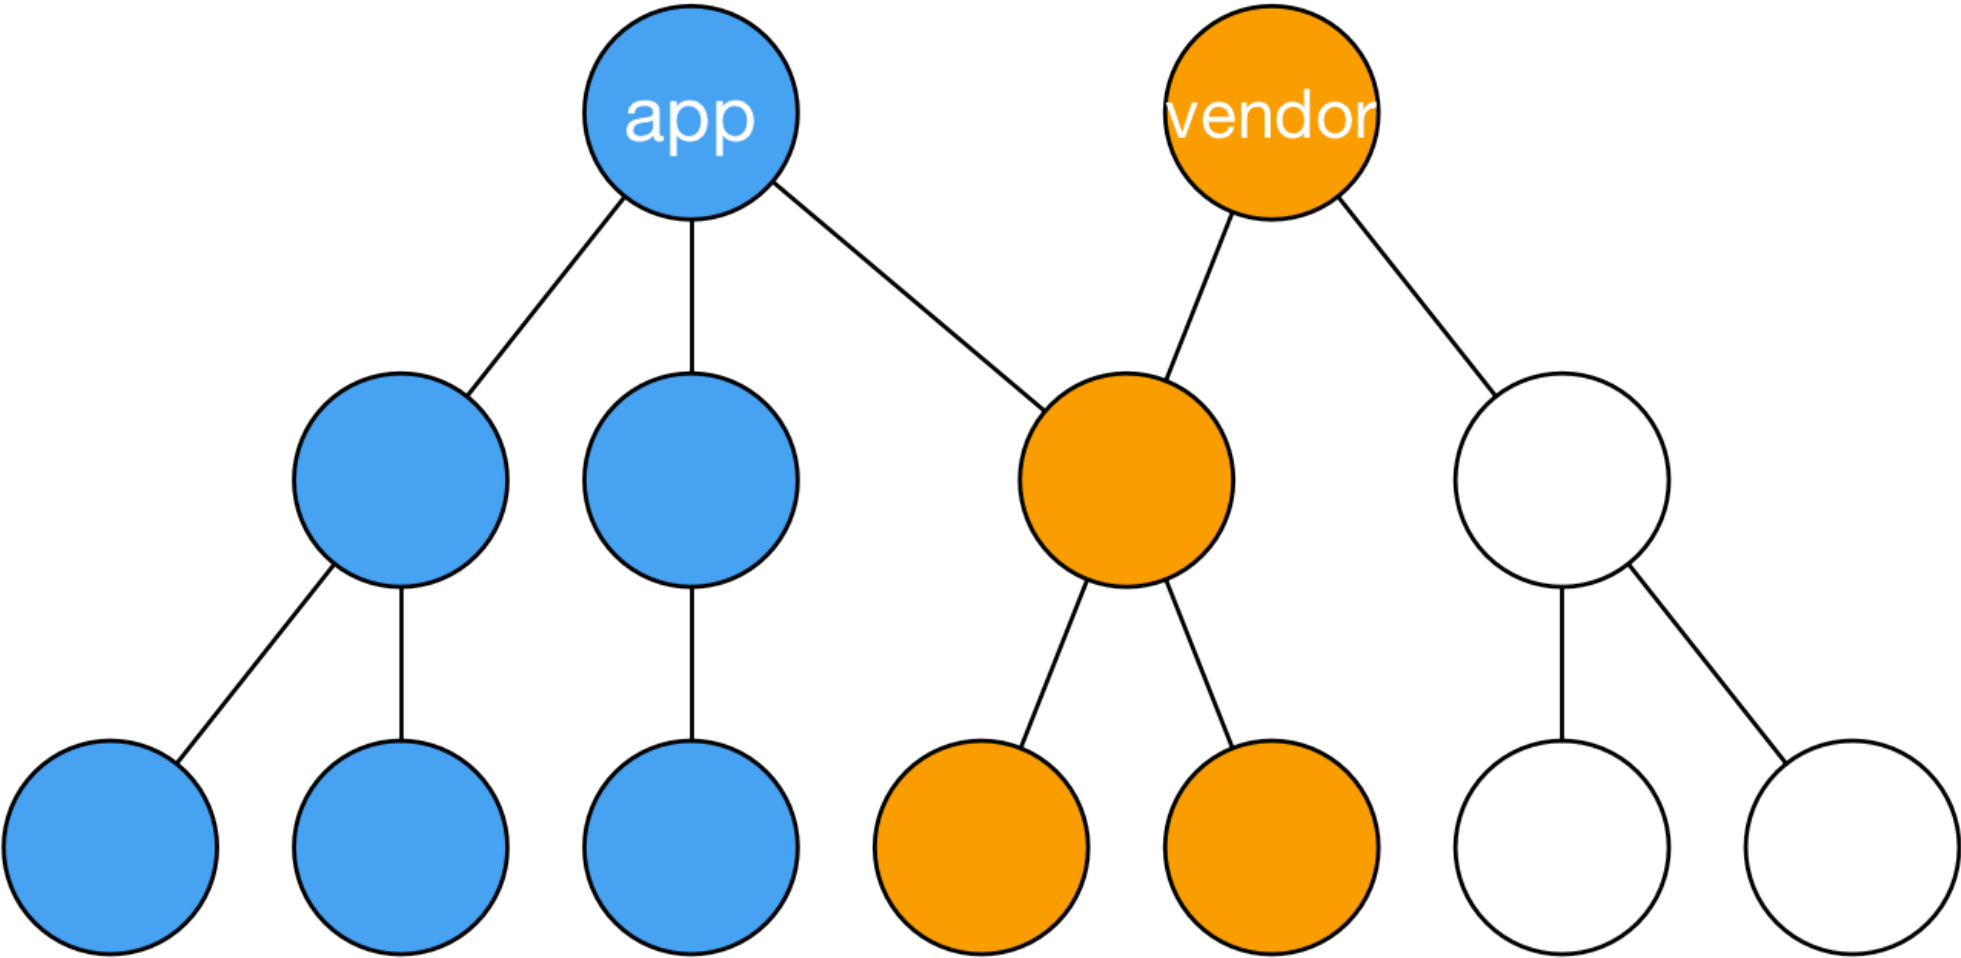

devtool	build speed	rebuild speed	production supported	quality
eval	+++	+++	no	generated code
cheap-eval-source-map	+	++	no	transformed code (lines only)
cheap-source-map	+	o	yes	transformed code (lines only)
cheap-module-eval-source-map	o	++	no	original source (lines only)
cheap-module-source-map	o	-	yes	original source (lines only)
eval-source-map	—	+	no	original source
source-map	—	—	yes	original source

- 通用顶级域:

- 无赞助: .biz .com .edu .gov .info .int .mil .name .net .org .pro .xxx
- 赞助: .aero .cat .coop .jobs .museum .travel .mobi .asia .tel
- 基本架构: .arpa .root .tel
- 审批阶段: .post
- 申请阶段: .geo .kid .mail .sco .web
- 删除 / 退休: .nato
- 预留: .example .invalid .localhost .test
- 伪域名: .bitnet .csnet .local .onion .uucp Others

- 使用中:

.ac .ad .ae .af .ag .ai .al .am .an .ao .aq .ar .as .at .au .aw .az  
.ba .bb .bd .be .bf .bg .bh .bi .bj .bm .bn .bo .br .bs .bt .bv .bw .by .bz  
.ca .cc .cd .cf .cg .ch .ci .ck .cl .cm .cn .co .cr .cu .cv .cx .cy .cz  
.de .dj .dk .dm .do .dz  
.ec .ee .eg .er .es .et .eu  
.fi .fj .fk .fm .fo .fr  
.ga .gd .ge .gf .gg .gh .gi .gl .gm .gn .gp .gq .gr .gs .gt .gu .gw .gy  
.hk .hm .hn .hr .ht .hu  
.id .ie .il .im .in .io .iq .ir .is .it  
.je .jm .jo .jp  
.ke .kg .kh .ki .km .kn .kr .kw .ky .kz  
.la .lb .lc .li .lk .lr .ls .lt .lu .lv .ly  
.ma .mc .md .me .mg .mh .mk .ml .mm .mn .mo .mp .mq .mr .ms .mt .mu .mv .mw .mx .my .mz  
.na .nc .ne .nf .ng .ni .nl .no .np .nr .nu .nz  
.om  
.pa .pe .pf .pg .ph .pk .pl .pm .pn .pr .ps .pt .pw .py  
.qa  
.re .ro .ru .rw  
.sa .sb .sc .sd .se .sg .sh .si .sk .sl .sm .sn .so .sr .st .sv .sy .sz  
.tc .td .tf .tg .th .tj .tk .tl .tm .tn .to .tr .tt .tv .tw .tz  
.ua .ug .uk .us .uy .uz  
.va .vc .ve .vg .vi .vn .vu  
.wf .ws  
.ye .yt .yu  
.za .zm .zw

- 预留 / 未分配: .cs .eh .kp

- 已分配 / 未使用: .ax .bv .gb .sj .um

- 逐渐中止: .tp .su

- 删除 / 退休: .cs .dd .zr

- 主机记录（A记录）：RFC 1035定义，A记录是用于名称解析的重要记录，它将特定的主机名映射到对应主机的IP地址上。
- 别名记录（CNAME记录）：RFC 1035定义，CNAME记录用于将某个别名指向到某个A记录上，这样就不需要再为某个新名字另外创建一条新的A记录。
- IPv6主机记录（AAAA记录）：RFC 3596定义，与A记录对应，用于将特定的主机名映射到一个主机的IPv6地址。
- 服务位置记录（SRV记录）：RFC 2782定义，用于定义提供特定服务的服务器的位置，如主机（hostname），端口（port number）等。
- NAPTR记录：RFC 3403定义，它提供了正则表达式方式去映射一个域名。NAPTR记录非常著名的一个应用是用于ENUM查询。