

Unit 110 Field Data Review

Mohawk Valley West Slope demonstration. **Tractor** unit, 62.0 ac. 31 plots, BAF 20, variable-radius cruise on a 300 ft grid, 315 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

TABLE 1. STAND SUMMARY, BAF 20 CRUISE, PER ACRE

STAND DENSITY		STAND INFO	
Basal area	203 sq ft/ac (1 SE of mean, BA 3.7 %)	Type	Sierran mixed conifer
Trees per acre	137	CWHR size / density	4 / D (cover 82 %)
QMD	16.5 in	SDI	287 (50 % of max 572)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	194 sq ft/ac 18.4 in	BA QMD	10 sq ft/ac 7.5 in
TPA	105	TPA	32
Volume	25.8 MBF/ac (5138 cu ft)	Volume	3.2 green tons/ac (142 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI, about 142 sq ft/ac	BA Sampling error (volume)	14.2 % at 95 % (CV 39 %, t = 2.04, n = 31)
Species (BA)	PP 65, WF 60, IC 28, DF 26, SP 25	Stratum standard	40 % of volume, MEETS; plots for standard 4
		Sampling error (basal area)	25 % at 95 % (CV 20 %); reference, not the standard
		Plot count	31; 20-plot local practice, not a handbook standard: ok

Cubic volume is total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium), net of defect. Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006). Green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber; applied to total-stem CVTS it overstates sawlog volume. Merchantable cubic volume is the consistent pairing. Sampling error at 95 % confidence, Student's t, on plot net cubic volume per acre, the quantity the handbook standards test (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales. The basal-area error is reference only. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables drop records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: cruise_data.xlsx, Standards and assumptions.

TABLE 2. STAND TABLE BY 4-INCH DBH CLASS, PER ACRE

DBH class, in	Trees	TPA	BA	cu ft	MBF
4-7.9	6	18.9	3.9	56	0.3
8-11.9	27	31.5	17.4	290	1.5
12-15.9	60	36.7	38.7	766	3.8
16-19.9	68	25.4	43.9	1030	5.2
20-23.9	46	11.5	29.7	732	3.7
24-27.9	30	5.4	19.4	584	2.9
28-31.9	32	4.3	20.6	646	3.2
32-35.9	15	1.6	9.7	319	1.6
36-39.9	10	0.8	6.5	243	1.2
40-43.9	5	0.3	3.2	135	0.7
44-47.9	5	0.3	3.2	145	0.7
48-51.9	3	0.1	1.9	86	0.4
52-55.9	3	0.1	1.9	85	0.4
56-59.9	2	0.1	1.3	60	0.3
60-63.9	3	0.1	1.9	103	0.5
All	315	137.0	203.2	5280	26.5

TABLE 3. STOCK TABLE BY SPECIES, PER ACRE

Species	Trees	TPA	BA	QMD	cu ft	MBF
PP	101	46.5	65.2	16.0	1774	8.9
WF	93	36.5	60.0	17.4	1570	7.9
IC	43	21.4	27.7	15.4	615	3.1
DF	40	16.1	25.8	17.1	693	3.5
SP	38	16.5	24.5	16.5	628	3.2
All	315	137.0	203.2	16.5	5280	26.5

Trees: tally trees. TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species codes: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

Unit 110 plots, 300 ft grid (orange: QA flag)

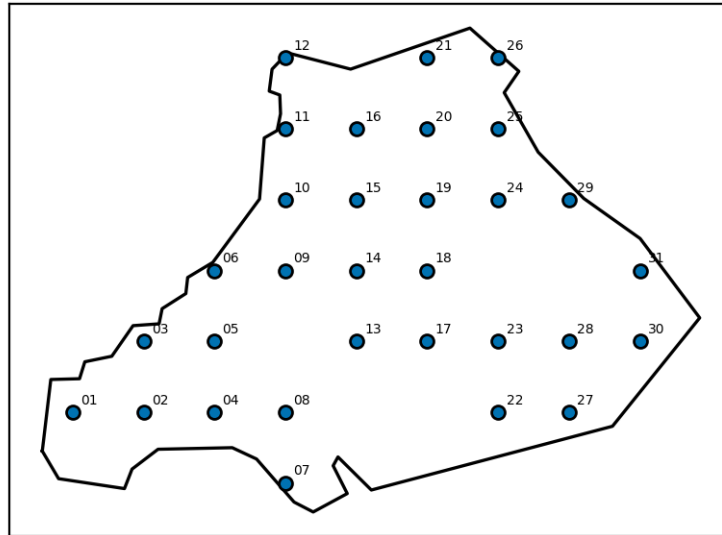


Figure 1. Plot locations with QA status.

QA findings: none; unit accepted

TABLE 4. PLOT LIST

Plot	Trees in	BA sq ft/ac	Slope %	Status
110-01	6	120	25	ok
110-02	13	260	21	ok
110-03	11	220	17	ok
110-04	8	160	19	ok
110-05	7	140	27	ok
110-06	10	200	20	ok
110-07	13	260	35	ok
110-08	13	260	30	ok
110-09	12	240	17	ok
110-10	6	120	27	ok
110-11	10	200	19	ok
110-12	7	140	23	ok
110-13	9	180	31	ok
110-14	11	220	34	ok
110-15	10	200	23	ok
110-16	11	220	32	ok
110-17	12	240	16	ok
110-18	10	200	35	ok
110-19	10	200	14	ok
110-20	12	240	27	ok
110-21	13	260	14	ok
110-22	11	220	8	ok
110-23	11	220	15	ok
110-24	10	200	27	ok
110-25	10	200	17	ok
110-26	8	160	29	ok
110-27	12	240	33	ok
110-28	10	200	21	ok
110-29	12	240	25	ok
110-30	7	140	35	ok
110-31	10	200	28	ok