

Unit 403 Field Data Review

Mohawk Valley West Slope demonstration. **Cable** unit, 34.0 ac. 20 plots, BAF 20, variable-radius cruise on a 300 ft grid, 229 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

TABLE 1. STAND SUMMARY, BAF 20 CRUISE, PER ACRE

STAND DENSITY		STAND INFO	
Basal area	229 sq ft/ac (1 SE of mean, BA 2.5 %)	Type	Sierran mixed conifer
Trees per acre	63	CWHR size / density	5 / D (cover 95 %)
QMD	25.9 in	SDI	277 (49 % of max 562)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	229 sq ft/ac 25.9 in	BA QMD	0 sq ft/ac 0.0 in
TPA	63	TPA	0
Volume	41.5 MBF/ac (8263 cu ft)	Volume	0.0 green tons/ac (0 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI, about 163 sq ft/ac	BA Sampling error (volume)	8.2 % at 95 % (CV 18 %, t = 2.09, n = 20)
Species (BA)	PP 68, WF 53, DF 40, IC 38, SP 30	Stratum standard	40 % of volume, MEETS; plots for standard 1
		Sampling error (basal area)	5.2 % at 95 % (CV 11 %); reference, not the standard
		Plot count	20; 20-plot local practice, not a handbook standard: ok

Cubic volume is total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium), net of defect. Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006). Green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber; applied to total-stem CVTS it overstates sawlog volume. Merchantable cubic volume is the consistent pairing. Sampling error at 95 % confidence, Student's t, on plot net cubic volume per acre, the quantity the handbook standards test (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales. The basal-area error is reference only. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables drop records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: cruise_data.xlsx, Standards and assumptions.

TABLE 2. STAND TABLE BY 4-INCH DBH CLASS, PER ACRE

DBH class, in	Trees	TPA	BA	cu ft	MBF
8-11.9	1	1.5	1.0	20	0.1
12-15.9	9	8.4	9.0	236	1.2
16-19.9	23	13.2	23.0	652	3.3
20-23.9	34	12.9	34.0	1052	5.3
24-27.9	33	8.9	33.0	1143	5.7
28-31.9	29	6.0	29.0	981	4.9
32-35.9	28	4.4	28.0	1048	5.3
36-39.9	25	3.2	25.0	989	5.0
40-43.9	18	1.9	18.0	775	3.9
44-47.9	12	1.1	12.0	557	2.8
48-51.9	4	0.3	4.0	176	0.9
52-55.9	4	0.3	4.0	180	0.9
56-59.9	5	0.3	5.0	253	1.3
60-63.9	4	0.2	4.0	201	1.0
All	229	62.6	229.0	8263	41.5

TABLE 3. STOCK TABLE BY SPECIES, PER ACRE

Species	Trees	TPA	BA	QMD	cu ft	MBF
PP	68	19.1	68.0	25.5	2804	14.1
WF	53	14.9	53.0	25.5	1895	9.5
DF	40	10.0	40.0	27.1	1379	6.9
IC	38	9.2	38.0	27.6	1125	5.6
SP	30	9.4	30.0	24.2	1059	5.3
All	229	62.6	229.0	25.9	8263	41.5

Trees: tally trees. TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species codes: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

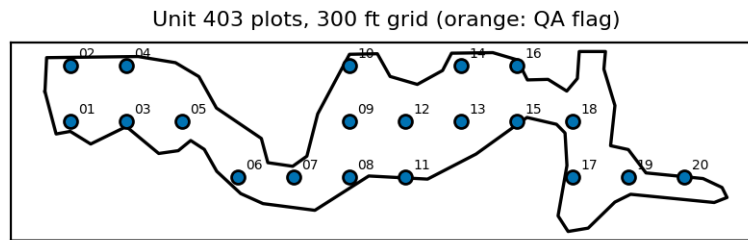


Figure 1. Plot locations with QA status.

QA findings: none; unit accepted

TABLE 4. PLOT LIST

Plot	Trees in	BA sq ft/ac	Slope %	Status
403-01	12	240	42	ok
403-02	13	260	69	ok
403-03	13	260	37	ok
403-04	13	260	48	ok
403-05	9	180	36	ok
403-06	10	200	38	ok
403-07	10	200	40	ok
403-08	10	200	43	ok
403-09	12	240	40	ok
403-10	13	260	39	ok
403-11	12	240	37	ok
403-12	12	240	36	ok
403-13	11	220	42	ok
403-14	11	220	42	ok
403-15	10	200	36	ok
403-16	12	240	37	ok
403-17	13	260	48	ok
403-18	11	220	47	ok
403-19	10	200	46	ok
403-20	12	240	35	ok