



# Azure

## Virtual Desktop Service

NetApp  
December 18, 2020

This PDF was generated from [https://docs.netapp.com/us-en/virtual-desktop-service/Deploying.Azure.WVD.Deploying\\_WVD\\_in\\_Azure.html](https://docs.netapp.com/us-en/virtual-desktop-service/Deploying.Azure.WVD.Deploying_WVD_in_Azure.html) on December 18, 2020. Always check [docs.netapp.com](https://docs.netapp.com) for the latest.

# Table of Contents

|                               |   |
|-------------------------------|---|
| Azure .....                   | 1 |
| Windows Virtual Desktop ..... | 1 |

# Azure

## Windows Virtual Desktop

### WVD Deployment Guide

#### Overview

This guide will provide the step by step instructions to create a Windows Virtual Desktop (WVD) deployment utilizing NetApp Virtual Desktop Service (VDS) in Azure.

The guide starts at: <https://cwasetup.cloudworkspace.com/>

This Proof of Concept (POC) guide is designed to help you quickly deploy and configure WVD in your own test Azure Subscription. This guide assumes a green-field deployment into a clean, non-production Azure Active Directory tenant.

Production deployments, especially into existing AD or Azure AD environments are very common however that process is not considered in this POC Guide. Complex POCs and production deployments should be initiated with the NetApp VDS Sales/Services teams and not performed in a self-service fashion.

This POC document will take you thru the entire WVD deployment and provide a brief tour of the major areas of post-deployment configuration available in the VDS platform. Once completed you'll have a fully deployed and functional WVD environment, complete with host pools, app groups and users. Optionally you'll have the option to configure automated application delivery, security groups, file share permissions, Azure Cloud Backup, intelligent cost optimization. VDS deploys a set of best practice settings via GPO. Instructions on how to optionally disable those controls are also included, in the event your POC needs to have no security controls, similar to an unmanaged local device environment.

#### WVD basics

Windows Virtual Desktop is a comprehensive desktop and app virtualization service that runs in the cloud. Here is a quick list of some of the key features and functionality:

- Platform services including gateways, brokering, licensing, and login and included as a service from Microsoft. This minimized infrastructure requiring hosting and management.
- Azure Active Directory can be leveraged as the identity provider, allowing for the layering of additional Azure security services such as conditional access.
- Users experience single sign-on experience for Microsoft services.
- User sessions connect to the session host via a proprietary reverse-connect technology. This means that no inbound ports need to be open, instead an agent creates and outbound connection to the WVD management plane which in turn connects to the end user device.
- Reverse connect even allows virtual machines to run without being exposed to the public internet enabling isolated workloads even while maintaining remote connectivity.
- WVD includes access to Windows 10 Multi Session, allowing a Windows 10 Enterprise experience with the efficiency of high density user sessions.
- FSLogix profile containerization technology is including, enhancing user session performance, storage efficiency and enhancing the Office experience in non-persistent environments.
- WVD supports full desktop and RemoteApp access. Both persistent or non-persistent, and both dedicated and multi-session experiences.

- Organizations can save on Windows licensing because WVD can leverage "Windows 10 Enterprise E3 Per User" which replaces the need for RDS CALs and significantly reduces the per-hour cost of session host VMs in Azure.

## Guide scope

This guide walks you through the deployment of WVD using NetApp VDS technology from the perspective of an Azure and VDS administrator. You bring the Azure tenant and subscription with zero pre-configuration and this guide helps you setup WVD end-to-end.

### This guide covers the following steps:

1. Confirm prerequisites of the Azure tenant, Azure subscription and Azure admin account permissions
2. Collect required discovery details
3. Build the Azure environment using the purpose-built VDS for Azure Setup wizard
4. Create the first host pool with a standard Windows 10 EVD image
5. Assigning virtual desktops to Azure AD user(s)
6. Add users to the default app group for delivering the desktop environment to users. Optionally, [create additional host pool\(s\)](#) for delivering RemoteApp services
7. Connect as an end user via client software and/or web client
8. Connect to the platform and client services as local and domain admin
9. Optionally enable VDS' multi-factor authentication for VDS admins & WVD end users
10. Optionally walk through the entire application entitlement workflow including populating the app library, app install automation, app masking by users and security groups
11. Optionally create and manage Active Directory security groups, folder permissions and application entitlement by group.
12. Optionally configure cost optimization technologies including Workload Scheduling and Live Scaling
13. Optionally create, update and Sysprep a virtual machine image for future deployments
14. Optionally configure Azure Cloud Backup
15. Optionally disable default security control group policies

## Azure prerequisites

VDS uses native Azure security context to deploy the WVD instance. Before starting the VDS Setup wizard, there are a few Azure prerequisites that need to be established.

During the deployment, service accounts and permissions are granted to VDS via authentication of an existing admin account from within the Azure tenant.

### Quick prerequisites checklist

- Azure Tenant with Azure AD instance (can be Microsoft 365 instance)
- Azure Subscription
- Available Azure Quota for Azure virtual machines
- Azure Admin Account with Global Admin and Subscription Ownership Roles



Detailed prerequisites are documented on [this PDF](#)

## Azure administrator in Azure AD

This existing Azure admin must be an Azure AD account in the target tenant. Windows Server AD accounts can be deployed with the VDS Setup but additional steps are required to setup a sync with Azure AD (out of scope for this guide)

This can be confirmed by finding the user account in the Azure Management Portal under Users > All Users.

The screenshot shows the 'Users - All users' page in the Azure Management Portal. On the left, there's a sidebar with options like 'All users', 'Deleted users', 'Password reset', 'User settings', 'Diagnose and solve problems', 'Activity', 'Sign-ins', 'Audit logs', 'Bulk operation results (Preview)', 'Troubleshooting + Support', and 'New support request'. The main area has a search bar at the top. Below it, there are filters for 'Search' (Name or email), 'Search attributes' (Name, email (begins with)), and 'Show' (All users). A table lists users with columns for Name, User name, User type, and Source. One row for 'Toby vanRoojen' is selected and highlighted with a yellow circle. The table data is as follows:

| Name           | User name                        | User type | Source                 |
|----------------|----------------------------------|-----------|------------------------|
| [Redacted]     | [Redacted]                       | Member    | Azure Active Directory |
| Toby vanRoojen | admin@[Redacted].onmicrosoft.com | Member    | Azure Active Directory |

## Global administrator role

The Azure Administrator must be assigned the Global administrator role in the Azure tenant.

### To check your role in Azure AD, follow these steps:

1. Log in to the Azure Portal at <https://portal.azure.com/>
2. Search for and select Azure Active Directory
3. In the next pane to the right, click on the Users option in the Manage section
4. Click on the name of the Administrator user that you are checking
5. Click on Directory Role. In the far-right pane the Global administrator role should be listed

The screenshot shows the 'Toby vanRoojen - Assigned roles' page in the Azure Management Portal. On the left, there's a sidebar with options like 'Diagnose and solve problems', 'Profile', 'Assigned roles', 'Groups', 'Applications', 'Licenses', 'Devices', 'Azure resources', 'Authentication methods', 'Sign-ins', 'Audit logs', 'Troubleshooting + Support', and 'New support request'. The main area has a search bar at the top. Below it, there are buttons for '+ Add assignment' and 'Remove assignment'. A table lists administrative roles with columns for Role, Description, Resource Name, Type, and Type. One role, 'Global administrator', is highlighted with a yellow circle. The table data is as follows:

| Role                 | Description   | Resource Name | Type         | Type     |
|----------------------|---|---------------|--------------|----------|
| Global administrator | Can manage all aspects of Azure AD and Microsoft services th... | Directory     | Organization | Built-in |

If this user does not have the Global administrator role, you can perform the following steps to add it (Note that the logged in account must be a Global administrator to perform these steps):

1. From the user Directory Role detail page in step 5 above, click the Add Assignment button at the top of the detail page.
2. Click on Global administrator in the list of roles. Click the Add button.

The screenshot shows the Azure portal interface for managing user roles. On the left, a sidebar lists various management categories like Diagnose and solve problems, Manage, Profile, Assigned roles, Groups, Applications, Licenses, Devices, Azure resources, Authentication methods, Activity, Sign-ins, Audit logs, Troubleshooting + Support, and New support request. The 'Assigned roles' section is currently selected. In the main pane, under 'Toby vanRoojen - Assigned roles', there is a sub-section titled 'Administrative roles' with a note: 'Administrative roles can be used to grant access to Azure AD and other Microsoft services.' A search bar and a 'Type' dropdown set to 'All' are present. Below the search bar, it says 'No directory roles assigned.' At the top right of this section, there is a blue 'Add assignment' button with a yellow circle around it. To its right is a 'Remove assignment' button and a 'Refresh' button. On the far right of the main pane, there is a 'Directory roles' section with a list of roles and their descriptions. The 'Global administrator' role is highlighted with a yellow circle. At the bottom of this list is a blue 'Add' button with a yellow circle around it.

#### Azure subscription ownership

The Azure Administrator must also be a Subscription Owner on the subscription that will contain the deployment.

#### To check that the Administrator is a Subscription Owner, follow these steps:

1. Log in to the Azure Portal at <https://portal.azure.com/>
2. Search for, and select Subscriptions
3. In the next pane to the right, click on the name of the subscription to see the subscription details
4. Click on the Access Control (IAM) menu item in the pane second from the left
5. Click on the Role Assignments tab. The Azure Administrator should be listed in the Owner section.

The screenshot shows the Microsoft Azure Access control (IAM) interface. The left sidebar includes options like Overview, Activity log, and Access control (IAM). The main area has tabs for Check access, Role assignments (which is active), Deny assignments, Classic administrators, and Roles. A search bar at the top right says 'Search resources, services, and docs (G+)'. Below the tabs, it says 'Manage access to Azure resources for users, groups, service principals and managed identities at this scope by creating role assignments. Learn more ⬇'. There are filters for Name, Type (All), Role (Owner), and Scope (All scopes). The results table shows 4 items (2 Users, 1 Groups, 1 Service Principals). One item is highlighted: 'Toby vanRoojen' (admin@onmicrosoft.com) is a User assigned as an Owner with a scope of 'This resource'. The 'Add' button is circled in yellow.

If the Azure Administrator is not listed, you can add the account as a subscription owner by following these steps:

1. Click the Add button at the top of the page and choose the Add Role Assignment option
2. A dialog will appear to the right. Choose “Owner” in the role drop down, then start typing the username of the Administrator in the Select box. When the full name of the Administrator appears, select it
3. Click the Save button at the bottom of the dialog

The screenshot shows the 'Add role assignment' dialog. It has a 'Role' dropdown set to 'Owner'. Below it is an 'Assign access to' dropdown set to 'Azure AD user, group, or service principal'. A 'Select' dropdown shows 'Search by name or email address' and lists 'AAD DC Administrators' and 'CloudWorkspace'. On the right, a 'Selected members' section shows 'Toby vanRoojen' (admin@onmicrosoft.com) with a 'Remove' link. At the bottom are 'Save' and 'Discard' buttons, with 'Save' being highlighted.

### Azure compute core quota

The CWA Setup wizard and VDS portal will create new virtual machines and the Azure subscription must have available quota to successfully execute.

To check quota follow these steps:

1. Navigate to the Subscriptions module and click “Usage + Quotas”
2. Select all providers in the “providers” drop-down, select “Microsoft.Compute” in the “Providers” drop-down
3. Select the target Region in the “Locations” drop-down
4. A list of available quotas by virtual machine family should be shown

| Quota                         | provider          | location  | Usage          |
|-------------------------------|-------------------|-----------|----------------|
| Availability Sets             | Microsoft.Compute | East US 2 | 0 % 0 of 2000  |
| Basic & Family vCPUs          | Microsoft.Compute | East US 2 | 0 % 0 of 250   |
| Premium Storage Managed Disks | Microsoft.Compute | East US 2 | 0 % 0 of 50000 |
| PremiumStorageSnapshots       | Microsoft.Compute | East US 2 | 0 % 0 of 50000 |
| Standard A0-A7 Family vCPUs   | Microsoft.Compute | East US 2 | 0 % 0 of 250   |
| Standard A8-A11 Family vCPUs  | Microsoft.Compute | East US 2 | 0 % 0 of 350   |
| Standard A1c Family vCPUs     | Microsoft.Compute | East US 2 | 0 % 0 of 350   |
| Standard B5 Family vCPUs      | Microsoft.Compute | East US 2 | 0 % 0 of 250   |
| Standard D Family vCPUs       | Microsoft.Compute | East US 2 | 0 % 0 of 350   |
| Standard DASv4 Family vCPUs   | Microsoft.Compute | East US 2 | 0 % 0 of 0     |
| Standard DAv1 Family vCPUs    | Microsoft.Compute | East US 2 | 0 % 0 of 0     |
| Standard DCv3 Family vCPUs    | Microsoft.Compute | East US 2 | 0 % 0 of 8     |
| Standard DS Family vCPUs      | Microsoft.Compute | East US 2 | 0 % 0 of 350   |
| Standard DSV2 Family vCPUs    | Microsoft.Compute | East US 2 | 0 % 0 of 250   |

If you need to increase quota, click Request Increase and follow the prompts to add additional capacity. For the initial deployment specifically request increased quote for the “Standard DSv3 Family vCPUs”

### Collect discovery details

Once working through the CWA Setup wizard there are several questions that need to be answered. NetApp VDS has provided a linked PDF that can be used to record these selections prior to deployment. Item include:


| Item                  | Description  |
|-----------------------|--|
| VDS admin credentials | Collect the existing VDS admin credentials if you already have them. Otherwise a new admin account will be created during deployment.  |
| Azure Region          | Determine the target Azure Region based on performance and availability of services. This <a href="#">Microsoft Tool</a> can estimate end user experienced based on region.  |
| Active Directory type | The VMs will need to join a domain but can't directly join Azure AD. The VDS deployment can build a new virtual machine or use an existing domain controller.  |
| File Management       | Performance is highly dependent on disk speed, particularly as related to user profile storage. The VDS setup wizard can deploy a simple file server or configure Azure NetApp Files (ANF). For nearly any production environment ANF is recommended however for a POC the file server option provides sufficient performance. Storage options can be revised post-deployment, including using existing storage resources in Azure. Consult ANF pricing for details: <a href="https://azure.microsoft.com/en-us/pricing/details/netapp/">https://azure.microsoft.com/en-us/pricing/details/netapp/</a> |

| Item                  | Description  |
|-----------------------|--|
| Virtual Network Scope | A routable /20 network range is required for the deployment. the VDS setup wizard will allow you to define this range. It is important that this range does not overlap with any existing vNets in Azure or on-premises (if the two networks will be connected via a VPN or ExpressRoute). |

## VDS setup sections

Login to <https://cwasetup.cloudworkspace.com/> with your Azure admin credentials found in the prerequisites section.

### IaaS and platform

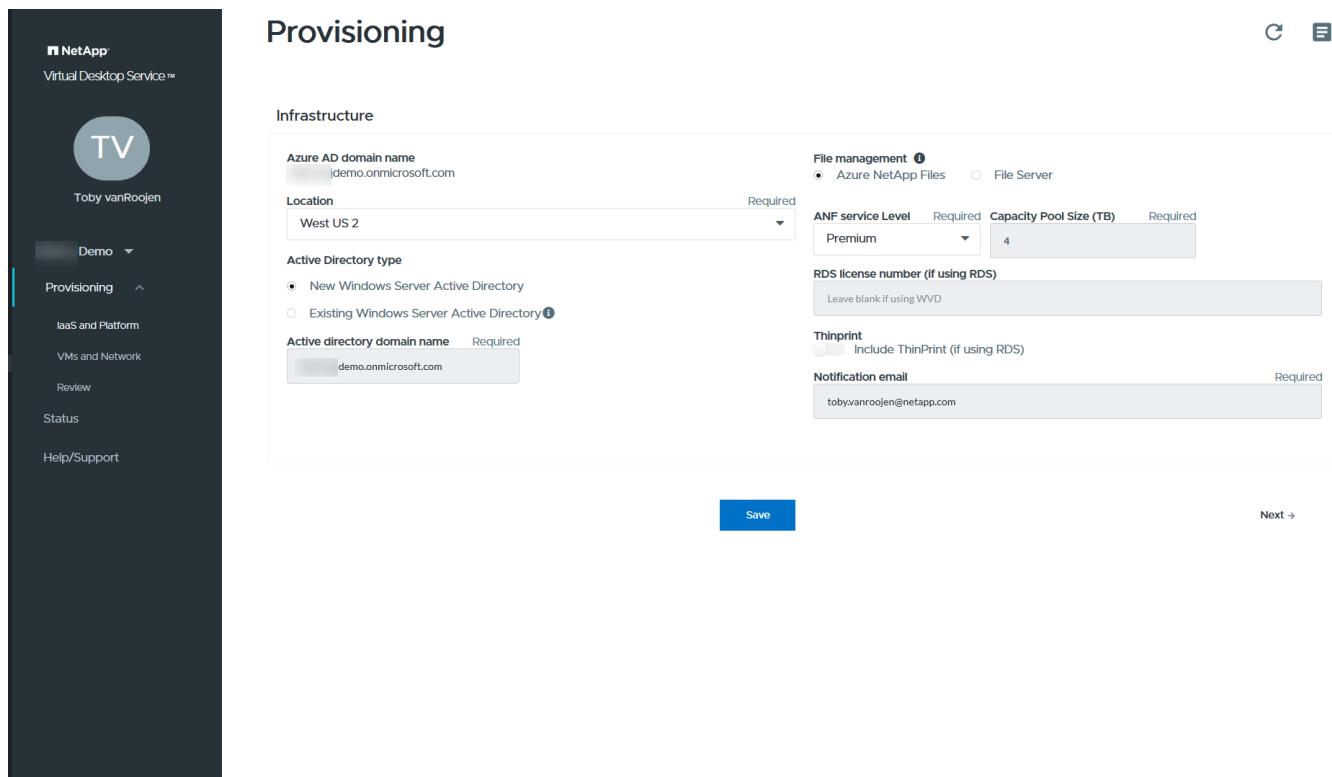

The screenshot shows the 'Provisioning' step of the NetApp Virtual Desktop Service setup. On the left is a sidebar with a user profile (Toby vanRoojen) and navigation links: Demo, Provisioning (selected), IaaS and Platform, VMs and Network, Review, Status, and Help/Support. The main area is titled 'Provisioning' and contains the 'Infrastructure' configuration page. It includes fields for 'Azure AD domain name' (jdemo.onmicrosoft.com), 'Location' (West US 2), 'Active Directory type' (New Windows Server Active Directory selected), 'Active directory domain name' (demo.onmicrosoft.com), 'File management' (Azure NetApp Files selected), 'ANF service Level' (Premium), 'Capacity Pool Size (TB)' (4), 'RDS license number (if using RDS)', 'Thinprint' (checkbox checked), 'Notification email' (tobyvanroojen@netapp.com), and 'Save' and 'Next >' buttons.

### Azure AD domain name

The Azure AD domain name is inherited by the selected tenant.

### Location

Select an appropriate **Azure Region**. This [Microsoft Tool](#) can estimate end user experienced based on region.

### Active Directory type

VDS can be provisioned with a **new virtual machine** for the Domain Controller function or setup to leverage an existing Domain Controller.

In this guide we will select New Windows Server Active Directory, which will create one or two VMs (based on choices made during this process) under the subscription.

A detailed article covering an existing AD deployment is found [here](#).

## Active Directory domain name

Enter a **domain name**. Mirroring the Azure AD Domain Name from above is recommended.

## File management

VDS can provision a simple file server virtual machine or setup and configure Azure NetApp Files. In production Microsoft recommends allocating 30gb per user and we've observed that allocating 5-15 IOPS per user is required for optimal performance.

In a POC (non-production) environment the file server is a low-cost and simple deployment option however the available performance of Azure Managed Disks can be overwhelmed by the IOPS consumption of even a small production deployment.

For example, a 4TB Standard SSD disk in azure supports up to 500 IOPS, which could only support a maximum of 100 total users at 5 IOPS/user. With ANF Premium the same sized storage setup would support 16,000 IOPS posting 32x more IOPS.

For production WVD deployments, **Azure NetApp Files is Microsoft's recommendation**.



Azure NetApp Files needs to be made available to the subscription you wish to deploy into - please contact your NetApp account rep or use this link: <https://aka.ms/azurenatappfiles>

It is also required that you register NetApp as a provider to your subscription. This can be done by doing the following:

- Navigate to Subscriptions in the Azure portal
  - Click Resource Providers
  - Filter for NetApp
  - Select the provider and click Register

## RDS license number

NetApp VDS can be used to deploy RDS and/or WVD environments. When deploying WVD, this field can **remain empty**.

## Thinprint

NetApp VDS can be used to deploy RDS and/or WVD environments. When deploying WVD, this toggle can remain **off** (toggle left).

## Notification email

VDS will send deployment notifications and ongoing health reports to the **email provided**. This can be changed later.

## VMs and network

There are a variety of services that need to run in order to support a VDS environment – these are collectively referred to as the “VDS platform”.

Depending on the configuration these can include CWMGR, one or two RDS Gateways, one or two HTML5 Gateways, an FTPS server, and one or two Active Directory VMs.

Most WVD deployments leverage the Single virtual machine option, as Microsoft manages the WVD Gateways as a PaaS service.

For smaller and simpler environments that will include RDS use cases, all of these services can be condensed into the Single virtual machine option to reducing VM costs (with limited scalability). For RDS uses cases with more than 100 users the Multiple virtual machines option is advised in order to facilitate RDS and/or HTML5 Gateway scalability

The screenshot shows the 'Provisioning' step of the NetApp VDS wizard. On the left, a sidebar shows a user profile (Toby vanRoojen) and navigation links: Demo, Provisioning (selected), IaaS and Platform, VMs and Network, Review, Status, and Help/Support. The main area is titled 'VMs and Network Configuration'. It includes fields for 'Platform VM configuration' (radio button selected for 'Single virtual machine'), 'Time zone' (set to America/Los Angeles, Vancouver (UTC-07:00)), 'Virtual network scope' (set to 10.0.0.0/20), and a table for 'Network subnet groups' with four entries: Tenant (10.0.0.0/22), Services (10.0.13.0/24), Platform (10.0.14.0/24), and Directory (10.0.15.0/24). A 'Validate' button is shown with a success message: 'Validation of network scope succeeded'. At the bottom are 'Back', 'Save' (highlighted in blue), and 'Next' buttons.

## Platform VM configuration

NetApp VDS can be used to deploy RDS and/or WVD environments. When deploying WVD the Single virtual machine selection is recommended. For RDS deployments you need to deploy and manage additional components such as Brokers and Gateways, in production these services should be run on dedicated and redundant virtual machines. For WVD, all of these services are provided by Azure as an included service and thus, the **single virtual machine** configuration is recommended.

### Single virtual machine

This is the recommended selection for deployments that will exclusively use WVD (and not RDS or a combination of the two). In a Single virtual machine deployment the following roles are all hosted on a single VM in Azure:

- CW Manager
- HTML5 Gateway
- RDS Gateway
- Remote App
- FTPS Server (Optional)
- Domain Controller role

The maximum advised user count for RDS use cases in this configuration is 100 users. Load balanced

RDS/HTML5 gateways are not an option in this configuration, limiting the redundancy and options for increasing scale in the future. Again, this limit does not apply to WVD deployments, since Microsoft manages the Gateways as a PaaS service.



If this environment is being designed for multi-tenancy, a Single virtual machine configuration is not supported - neither is WVD or AD Connect.

## Multiple virtual machines

When splitting the VDS Platform into Multiple virtual machines the following roles are hosted on dedicated VMs in Azure:

- Remote Desktop Gateway

VDS Setup can be used to deploy and configure one or two RDS Gateways. These gateways relay the RDS user session from the open internet to the session host VMs within the deployment. RDS Gateways handle an important function, protecting RDS from direct attacks from the open internet and to encrypt all RDS traffic in/out of the environment. When two Remote Desktop Gateways are selected, VDS Setup deploys 2 VMs and configures them to load balance incoming RDS user sessions.

- HTML5 Gateway

VDS Setup can be used to deploy and configure one or two HTML 5 Gateways. These gateways serve up an HTML 5 VDS access client (e.g. <https://login.cloudworkspace.com>) based on the RemoteSpark technology. Licensing for this component is typically included in the cost of VDS licensing. When two HTM5 CW Portals are selected, VDS Setup deploys 2 VMs and configures them to load balance incoming HTML5 user sessions.

Note that when using Multiple virtual machine option - even if you are only intend to support RDP connections for your RDS workloads - at least 1 HTML5 gateway is highly recommended to enable Connect to Server functionality from VDS.

- Gateway Scalability Notes

For RDS use cases, the maximum size of the environment can be scaled out with additional Gateway VMs, with each RDS or HTML5 Gateway supporting roughly 500 users. Additional Gateways can be added later with minimal NetApp professional services assistance

If this environment is being designed for multi-tenancy then the Multiple virtual machines selection is required.

## Time zone

While the end users' experience will reflect their local time zone, a default time zone needs to be selected. Select the time zone from where the **primary administration** of the environment will be performed.

## Virtual network scope

It is a best practice to isolate VMs to different subnets according to their purpose. First, define the network scope and add a /20 range.

VDS Setup detects and suggests a range that should prove successful. Per best practices, the subnet IP addresses must fall into a private IP address range.

These ranges are:

- 192.168.0.0 through 192.168.255.255
- 172.16.0.0 through 172.31.255.255
- 10.0.0.0 through 10.255.255.255

Review and adjust if needed, then click Validate to identify subnets for each of the following:

- Tenant: this is the range that session host servers and database servers will reside in
- Services: this is the range that PaaS services like Azure NetApp Files will reside in
- Platform: this is the range that Platform servers will reside in
- Directory: this is the range that AD servers will reside in

## **Review**

The final page provides an opportunity to review your choices. When you have completed that review, click the Validate button. VDS Setup will review all the entries and verify that the deployment can proceed with the information provided. This validation can take 2-10 minutes. To follow the progress, you can click the log logo (upper right) to see the validation activity.

Once validation is complete the green Provision button will appear in place of the Validate button. Click on Provision to start the provisioning process for your deployment.

## **Status**

The provisioning process takes between 2-4 hours depending on Azure workload and the choices you made. You can follow the progress in the log by clicking the Status page or wait for the email that will tell you the deployment process has completed. Deployment builds the virtual machines and Azure components required to support both VDS and a Remote Desktop or a WVD implementation. This includes a single virtual machine that can act as both a Remote Desktop session host and a file server. In a WVD implementation this virtual machine will act only as a file server.

## **Install and configure AD Connect**

Immediately after the install is successful, AD Connect needs to be installed and configured on the Domain Controller. In a single platform VM setup the CWMGR1 machine is the DC. The users in AD need to sync between Azure AD and the local domain.

### **To install and configure AD Connect, follow these steps:**

1. Connect to the domain controller as a domain admin.
  - a. Get credentials from the Azure Key Vault (See [Key Vault instructions here](#))
2. Install AD Connect, login with the domain admin (with Enterprise Admin role permissions) and the Azure AD Global Admin.

## **Activating WVD services**

Once the deployment is complete, the next step is to enable the WVD functionality. The WVD enablement process requires the Azure Administrator to perform several steps to register their Azure AD domain and subscription for access using the Azure WVD services. Similarly, Microsoft requires VDS to request the same permissions for our automation application in Azure. The steps below walk you through that process.

## Create WVD host pool

End User access to WVD virtual machines is managed by host pools , which contain the virtual machines, and app groups, which in-turn contain the users and type of user access.

### To build your first host pool

1. Click the Add button in the right hand side of the WVD host pools section header.


The screenshot shows the 'WVD Host Pools' section of the Microsoft Cloud Workspaces interface. On the left, there's a sidebar with options like Dashboard, Organizations, Deployments, Workspaces (which is selected), App Services, Service Board, Scripted Events, Admins, and Reports. The main area has tabs for Overview, Users & Groups, VM Resource, Workload Schedule, and WVD (which is selected). Below these tabs, there's a 'WVD Details' section with Tenant ID (c565ebd1-0eb5-498d-be70-54c9e5fb92b7) and HTML URL (<https://rdwebaud.microsoft.com/webclient/index.html>). To the right of this is a 'Diagnostic Activities' section with a 'View Diagnostic Activities' link. The main part of the screen is titled 'WVD Host Pools' and contains a table with one row. The table has columns for Name, Description, Type, and Session Hosts. The single row is labeled 'Hostpool1' with 'First Host Pool' in the Description column, 'Shared' in the Type column, and '2' in the Session Hosts column. At the bottom of the table is a 'Filter by Keyword' input field. In the top right corner of the table area, there is an 'Add' button with a black arrow pointing directly at it.

2. Enter a name and description for your host pool.
3. Choose a host pool type
  - a. **Pooled** means multiple users will access the same pool of virtual machines with the same applications installed.
  - b. **Personal** creates a host pool where users are assigned their own session host VM.
4. Select the Load Balancer type
  - a. **Depth First** will fill the first shared virtual machine to the max number of users before starting on the second virtual machine in the pool
  - b. **Breadth First** will distribute users to all the virtual machines in the pool in a round robin fashion
5. Select an Azure virtual machines template for creating the virtual machines in this pool. While VDS will show all templates available in the subscription, we recommend selecting the most recent Windows 10 multi-user build for the best experience. The current build is Windows-10-20h1-evd. (Optionally create a Gold Image using the Provisioning Collection functionality to build hosts from a custom virtual machine image)
6. Select the Azure machine size. For evaluation purposes, NetApp recommends the D series (standard machine type for multi-user) or E series (enhanced memory configuration for heavier duty multi-user scenarios). The machine sizes can be changed later in VDS if you want to experiment with different series and sizes
7. Select a compatible storage type for the virtual machines' Managed Disk instances from the drop down list
8. Select the number of virtual machines you want created as part of the host pool creation process. You can

add virtual machines to the pool later, but VDS will build the number of virtual machines you request and add them to the host pool once its created

9. Click the Add host pool button to start the creation process. You can track progress on the WVD page, or you can see the details of the process log on the Deployments/Deployment name page in the Tasks section
10. Once the host pool is created it will appear in the host pool list on the WVD page. Click on the name of the host pool to see its detail page, which includes a list of its virtual machines , app groups, and active users

WVD Hosts in VDS are created with a setting that disallows user sessions to connect. This is by design to allow for customization prior to accepting user connections. This setting can be changed by editing the session host's settings.

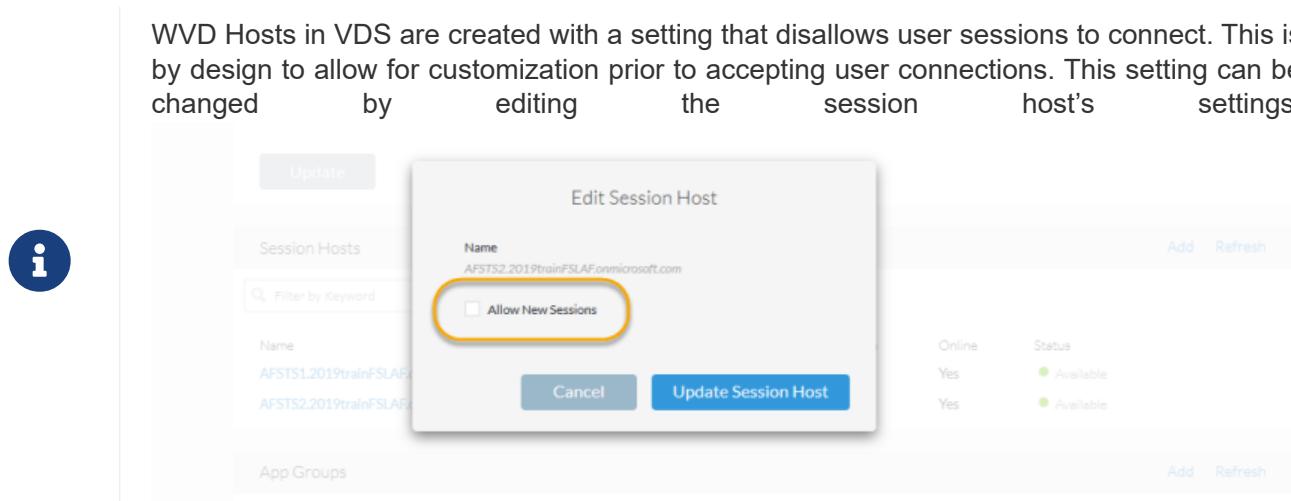

## Enable VDS desktops for users

As noted above, VDS creates all the elements required to support end user workspaces during deployment. Once the deployment has completed, the next step is to enable workspace access for each user you want introduced to the WVD environment. This step creates the profile configuration and end user data layer access that is the default for a virtual desktop. VDS reuses this configuration to link Azure AD end users to the WVD App Pools.

### To enable workspaces for end users follow these steps:

1. Log in to VDS at <https://manage.cloudworkspace.com> using the VDS primary administrator account you created during provisioning. If you don't remember your account information, please contact NetApp VDS for assistance in retrieving it
2. Click on the Workspaces menu item, then click on the name of the Workspace that was created automatically during provisioning
3. Click on the Users and Groups tab

The screenshot shows the Cloud Workspace interface with the 'Workspaces' menu item highlighted. The main content area is titled 'TrainWVD2's Workspace (rs6a)'. The 'Users & Groups' tab is selected. On the left, there's a 'Groups' section with a search bar and a table showing one group named 'risk-all-users'. On the right, there's a 'Users' section with a search bar and a table showing three users: 'Toby vanRoojen' (Pending (Pending Cloud Workspace)), 'WvD User1' (Available), and 'WvDUser1@tr...'. A yellow warning message at the top right says 'You have 1 user(s) pending Cloud Workspace approval.'

- 
4. For each user that you want to enable, scroll over the username and then click on the Gear icon
  5. Choose the “Enable Cloud Workspace” option

The screenshot shows the same Cloud Workspace interface as the previous one, but with a blue box highlighting the 'Enable Cloud Workspace' button for the user 'Toby vanRoojen'. A black arrow points from the bottom of the previous screenshot down to this button. The user table now shows 'Toby vanRoojen' with a status of 'Available'.

- 
6. It takes about 30-90 seconds for the enablement process to complete. Note that the user status will change from Pending to Available



Activating Azure AD Domain Services creates a managed domain in Azure, and each WVD virtual machine that is created will be joined to that domain. In order for traditional login to the virtual machines to work, the password hash for Azure AD users must be synced to support NTLM and Kerberos authentication. The easiest way to accomplish this task is to change the user password in Office.com or the Azure portal, which will force the password hash sync to occur. The sync cycle for Domain Service servers can take up to 20 minutes.

## Enable user sessions

By default, session hosts are unable to accept user connections. This setting is commonly called “drain mode” as it can be used in production to prevent new user sessions, allowing the host to eventually remove all user sessions. When new user sessions are allowed on a host this action is commonly referred to as placing the session host “into rotation.”

In production it makes sense to start new hosts in drain mode because there are typically configuration tasks that need to be completed before the host is ready for production workloads.

In testing and evaluation you can immediately take the hosts out of drain mode to enable user connects and to confirm functionality.

To Enable user sessions on the session host(s) follow these steps:

1. Navigate to the WVD Section of the workspace page.
2. Click on the host pool name under “WVD host pools”.

The screenshot shows the Microsoft Cloud Workspaces interface for a workspace named "2019 Training Step 3 - WVD Activated's Workspace (z58b)". The left sidebar has a "Workspaces" tab selected. The main area displays "WVD Details" with fields for Tenant ID (redacted) and HTML5 URL (<https://rdweb.wvd.microsoft.com/webclient/index.html>). Below this is the "WVD Host Pools" section, which contains a table with one row. The table has columns: Name, Description, Tenant, Type, and Session Hosts. The row shows "apps" as the Name, "Hostpool for Desktop Users" as the Description, "z58b" as the Tenant, "Shared" as the Type, and "4" as the Session Hosts. A yellow arrow points to the "Desktop Users" link in the Name column. At the bottom of the page, there is a footer with links for "© 2019" and "Privacy / Terms of Use /".

| Name                  | Description                | Tenant | Type   | Session Hosts |
|-----------------------|----------------------------|--------|--------|---------------|
| apps<br>Desktop Users | Hostpool for Desktop Users | z58b   | Shared | 4             |

3. Click on the name of the Session host(s) and check the box “Allow New Sessions”, Click “Update Session Host”. Repeat for all hosts that need to be placed into rotation.

The screenshot shows the 'WVD Host Pool Desktop Users' page. On the left, there's a sidebar with options like Dashboard, Organizations, Deployments, Workspaces (selected), App Services, Service Board, Scripted Events, Admins, and Reports. The main area has tabs for Overview and Host Pool Details. In the Host Pool Details section, it shows a host pool named 'Desktop Users' with a description 'Hostpool for Desktop Users' and a tenant 'z58b'. Below this is a modal titled 'Edit Session Host' with fields for Name (Z58BTS1.onmicrosoft.com) and Allow New Sessions (checked). Buttons for Update, Cancel, and Update Session Host are present. At the bottom, there's a table for Session Hosts with four entries: Z58BTS1.onmicrosoft.com, Z58BTS2.onmicrosoft.com, Z58BTS3.onmicrosoft.com, and Z58BTS4.onmicrosoft.com. A yellow arrow points from the 'Allow New Session' checkbox in the modal to the 'Allow New Session' column in the table.

4. The current stats of “Allow New Session” is also displayed on the main WVD page for each host line item.

#### Default app group

Note that the Desktop Application Group is created by default as part of the host pool creation process. This group provides interactive desktop access to all group members.

To add members to the group:

1. Click on the name of the App Group

The screenshot shows the 'WVD Host Pool hostpool11' page. The sidebar includes Dashboard, Organizations (selected), Deployments, Workspaces, App Services, Service Board, Scripted Events, Admins, and Reports. The main area has tabs for Overview and Host Pool Details. The Host Pool Details section shows a host pool named 'hostpool11' with a description 'First Host Pool', a host pool type 'Shared', and a max session limit per server '999999'. Below this is a table for Session Hosts with two entries: RS6ATS1.trainwv2.onmicrosoft.com and RS6ATS2.trainwv2.onmicrosoft.com, both with 'Allow New Session' set to 'Yes'. At the bottom, there's a section for App Groups with a table showing one entry: 'Desktop Application Group' with a description 'Desktop Application Group', resource 'Desktop', users '1', and remote apps '0'. A black arrow points to the 'Users' link in the App Groups table.

2. Click on the link that shows the number of Users Added

The screenshot shows the Microsoft Cloud Workspaces interface. On the left, there's a navigation sidebar with options like Dashboard, Operations, Deployments, Workspaces, App Services, Service Board, Scripted Events, Admins, and Reports. The main area is titled 'WVD Host Pool hostpool1' and shows 'Host Pool Details'. It includes fields for Name (hostpool1), Description (First Host Pool), and Host Pool Type (Shared). Below this, there's a 'Session Hosts' table with two rows: RS4A7S1Vm and RS4A7S2Vm. To the right, there's a 'Host Pool Details' section with tabs for Overview, Host Pool Details, Session Hosts, App Groups, Active Users, and Remote Apps. A modal window titled 'Edit App Group' is overlaid on the screen. It has a 'Description' field containing 'Desktop Application Group' and a 'Users' section with a message '1 users added'. There are 'Cancel' and 'Update App Group' buttons at the bottom. In the background, under 'App Groups', there's a table with one entry: 'Name: Desktop Application Group', 'Description: Desktop Application Group', 'Resource: Desktop', 'Users: 1', and 'Remote Apps: <none>'. At the bottom, there's an 'Active Users' section with a message 'No active users found.'

3. Select the users you wish to add to the app group by checking the box next to their name
4. Click the Select Users button
5. Click the Update app group button

#### Create additional WVD app group(s)

Additional app groups can be added to the host pool. These app groups will publish specific applications from the host pool virtual machines to the App Group users using RemoteApp.



WVD only allows end users to be assigned to the Desktop App Group type or RemoteApp App Group type but not both in the same host pool, so make sure you segregate your users accordingly. If users need access to a desktop and streaming apps, a 2nd host pool is required to host the app(s).

#### To create a new App Group:


1. Click the Add button in the app groups section header

The screenshot shows the 'Host Pool Details' section for 'hostpool1'. It includes fields for Name, Description, Host Pool Type (Shared), Load Balancer Type (BreadthFirst), and Max Session Limit Per Server (999999). Below this is a 'Session Hosts' table with two entries: 'RS6AT51.trainwvd2.azmicrosoft.com' and 'RS6AT52.trainwvd2.azmicrosoft.com', both marked as 'Available'. The 'App Groups' section shows a single entry, 'Desktop Application Group', with details like Description, Resource (Desktop), Users (1), and Remote Apps (none). The 'Add' button in the 'App Groups' section is highlighted with a red arrow.

2. Enter a name and description for the App Group
3. Select users to add to the group by clicking on the Add Users link. Select each user by clicking the check box next to their name, then click the Select Users button

The screenshot shows the 'Select Remote Apps' dialog box. It lists several applications with checkboxes: 7-Zip File Manager (checked), Character Map, Disk Defragmenter, Disk Cleanup, Internet Explorer (checked), and SCSI Initiator. At the bottom are 'Cancel' and 'Select Remote Apps' buttons. The 'Select Remote Apps' button is highlighted with a blue arrow.

4. Click the Add RemoteApps link to add applications to this App Group. WVD automatically generates the list of possible applications by scanning the list of applications installed on the virtual machine . Select the application by clicking on the check box next to the application name, then click the Select RemoteApps button.

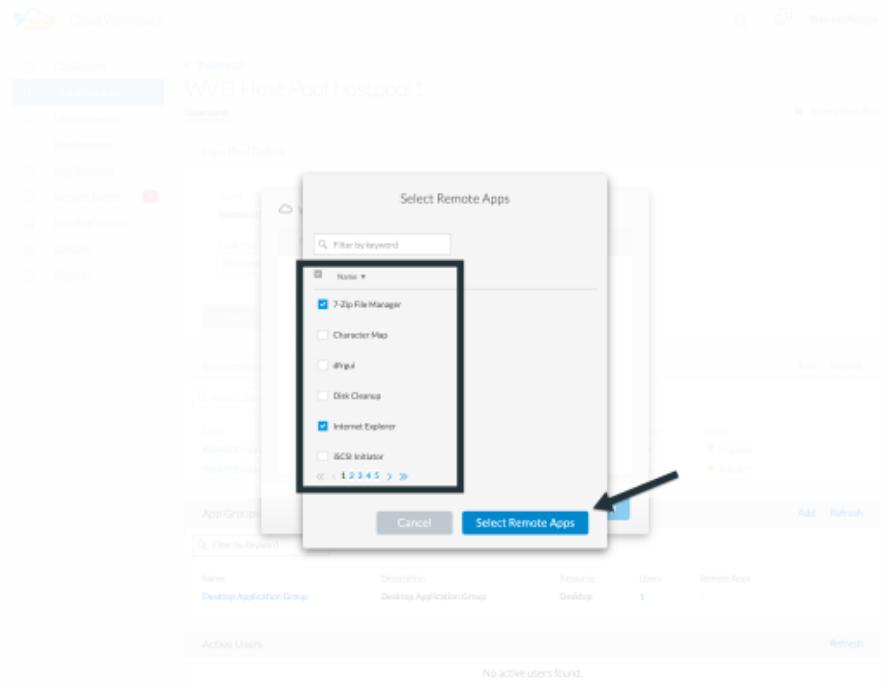

- 
5. Click the Add App Group button to create the App Group

## End user WVD access

End users can access WVD environments using the Web Client or an installed client on a variety of platforms

- Web Client: <https://docs.microsoft.com/en-us/azure/virtual-desktop/connect-web>
- Web Client Login URL: <http://aka.ms/wvdweb>
- Windows Client: <https://docs.microsoft.com/en-us/azure/virtual-desktop/connect-windows-7-and-10>
- Android Client: <https://docs.microsoft.com/en-us/azure/virtual-desktop/connect-android>
- macOS Client: <https://docs.microsoft.com/en-us/azure/virtual-desktop/connect-macos>
- iOS Client: <https://docs.microsoft.com/en-us/azure/virtual-desktop/connect-ios>
- IGEL Thin Client: <https://www.igel.com/igel-solution-family/windows-virtual-desktop/>

Log in using the end user username and password. Note that Remote App and Desktop Connections (RADC), Remote Desktop Connection (mstsc), and the CloudWorksapce Client for Windows application do not currently support the ability to log in to WVD instances.

## Monitor user logins

The host pool detail page will also display a list of active users when they log in to a WVD session.

## Admin connection options

VDS Admins are able to connect to virtual machines in the environment in a variety of ways.

### Connect to server

Throughout the portal, VDS Admins will find the “Connect to Server” option. By default, this function connects the admin to the virtual machine by dynamically generating local admin credentials and injecting them into a

web client connection. The Admin does not need to know (and is never provided with) credentials in order to connect.

This default behavior can be disabled on a per-Admin basis as described in the next section.

#### .tech/Level 3 admin accounts

In the CWA Setup process there is a “Level III” admin account created. The user name is formatted as [username.tech@domain.xyz](mailto:username.tech@domain.xyz)

These accounts, commonly called a “.tech” account, are named domain-level administrator accounts. VDS Admins can use their .tech account when connecting to a CWMGR1 (platform) server and optionally when connecting to all other virtual machines in the environment.

To disable the automatic local admin login function and force the Level III account to be used, change this setting. Navigate to VDS > Admins > Admin Name > Check “Tech Account Enabled.” With this box checked, the VDS admin will not be automatically logged into virtual machines as a local admin and rather be prompted to enter their .tech credentials.

These credentials, and other relevant credentials, are automatically stored in the *Azure Key Vault* and can be accessed from within the Azure Management Portal at <https://portal.azure.com/>.

### Optional post-deployment actions

#### Multi-factor authentication (MFA)

NetApp VDS includes SMS/Email MFA at no charge. This feature can be used to secure VDS Admin accounts and/or End User accounts.

[MFA Article](#)

#### Application entitlement workflow

VDS provides a mechanism to assign end users access to applications from a pre-defined list of applications called the Application Catalog. The Application catalog spans all managed deployments.



The automatically deployed TSD1 server must remain as-is to support application entitlement. Specifically, do not run the “convert to data” function against this virtual machine.

Application Management is detailed in this Article:  
[Management.Applications.application\\_entitlement\\_workflow.html](#)

#### Azure AD security groups

VDS includes functionality to create, populate and delete user groups which are backed by Azure AD Security Groups. These groups can be used outside of VDS just like any other Security Group. In VDS these groups can be used to assign folder permissions and application entitlement.

#### Create user groups

Creating user groups is performed on the Users & Groups tab within a workspace.

#### Assign folder permissions by group

Permissions to view and edit folders in the company share can be assigned to users or groups.

## [Management.User\\_Administration.manage\\_folders\\_and\\_permissions.html](#)

### Assign applications by group

In addition to assigning applications to users individually, applications can be provisioned to groups.


1. Navigate to the Users and Groups Detail.

The screenshot shows the 'Cloud Workspace' interface with the 'Workspaces' menu item highlighted in blue. The main content area is titled 'TrainWVD2's Workspace (rs6a)' and displays the 'Users & Groups' tab. On the left, there is a sidebar with various workspace management options like Dashboard, Organizations, Deployments, App Services, Service Board, Scripted Events, Admins, and Reports. The 'Groups' section is visible, showing a list of users (Toby vanRoojen, WVDUser1) and their status (Available, Offline). A large red arrow points from the 'Add' button at the top right of the 'Groups' section towards the 'Add' button in the 'Users' section below it.

2. Add a new group or edit an existing group.

This screenshot is similar to the previous one, showing the 'Cloud Workspace' interface with the 'Workspaces' menu item highlighted. The 'Users & Groups' tab is selected. The 'Groups' section is shown, with a list of users and their status. Two large black arrows are overlaid on the screen: one pointing upwards from the 'edit' label to the 'Add' button in the 'Groups' section, and another pointing upwards from the 'add' label to the 'Add' button in the 'Users' section.

3. Assign user(s) and application(s) to the group.

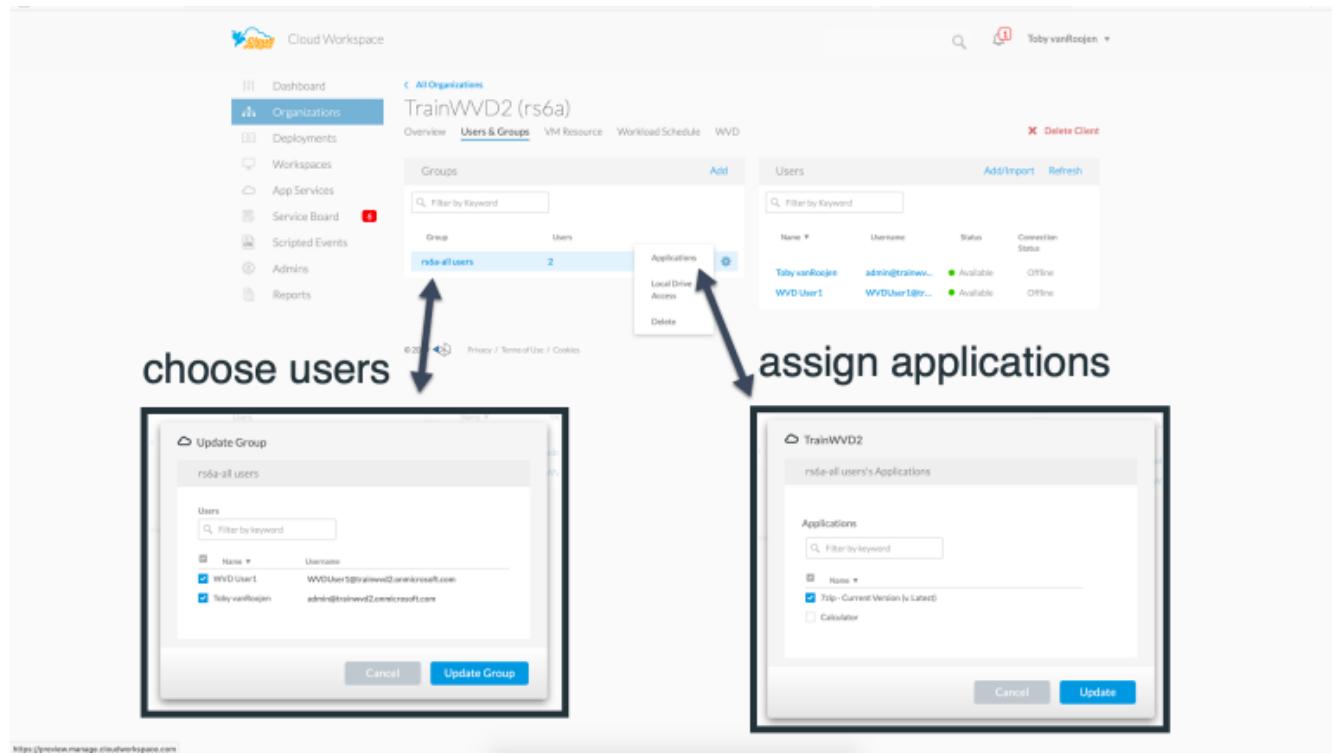

### Configure cost optimization options

Workspace management also extends to managing the Azure resources that support the WVD implementation. VDS allows you to configure both Workload Schedules and Live Scaling to turn Azure virtual machines on and off based on end user activities. These features result in matching Azure resource utilization and spending to the actual usage pattern of end users. In addition, if you have configured a proof of concept WVD implementation you can turn the whole Deployment from the VDS interface.

### Workload scheduling

Workload Scheduling is a feature that allows the Administrator to create a set schedule for the Workspace virtual machines to be on to support end user sessions. When the end of the scheduled time period is reached for a specific day of the week, VDS Stops/Deallocates the virtual machines in Azure so that hourly charges stop.

#### To enable Workload Scheduling:

1. Log in to VDS at <https://manage.cloudworkspace.com> using your VDS credentials.
2. Click on the Workspace menu item and then click on the name of the Workspace in the list.

Cloud Workspace

Dashboard    Organizations    Deployments    Workspaces    App Services    Service Board (7)    Scripted Events    Admins    Reports

Search: wvd

Workspaces

|                          | Code | Deployment | Users | Status    |
|--------------------------|------|------------|-------|-----------|
| JDR Test Wvd's Workspace | zbwn | lpm        | 0     | Available |
| TrainWVD2's Workspace    | rs6a | kjd        | 2     | Available |

© 2019 CloudJumper Privacy / Terms of Use / Cookies

Toby vanRoojen

3. Click on the Workload Schedule tab.

Cloud Workspace

Dashboard    Organizations    Deployments    Workspaces (5)    App Services    Service Board (6)    Scripted Events    Admins    Reports

All Workspaces

TrainWVD2's Workspace (rs6a)

Overview    Users & Groups    VM Resource    Workload Schedule (selected)    WVD

X Delete Client

Active Users

Resource Consumption

Last 7 Days

Total CPU    Total RAM (GB)

Deployment

trainwvd2.onmicrosoft.com (kjg)

Azure    Available

App Services

No App Services.

Company Details


|                           |  |                             |            |
|---------------------------|--|-----------------------------|------------|
| Company Name: TrainWVD2   | Company Code: rs6a                           | Primary Notification Email: | Phone:     |
| Status: Available         | Partner: CloudJumper CSP Master              | Address 1:                  | Address 2: |
| Organization Type: Client | Login Identifier: @trainwvd2.onmicrosoft.com | City: Garner                | Zip Code:  |
| Created By:               | Deployment:                                  | State:                      | Country:   |

Contact Details


4. Click the Manage link in the Workload Schedule header.

5. Choose a default state from the Status drop down: Always On (default), Always Off, or Scheduled.
6. If you choose Scheduled, the Scheduling options include:
  - a. Run at Assigned Interval every day. This option sets the schedule to be the same Start Time and End Time for all seven days of the week.

6. If you choose Scheduled, the Scheduling options include:
  - b. Run at Assigned Interval for Specified Days. This option sets the schedule to the same Start Tie and End Time only for selected days of the week. Non-selected days of the week will cause VDS to not turn the virtual machines on for those days.

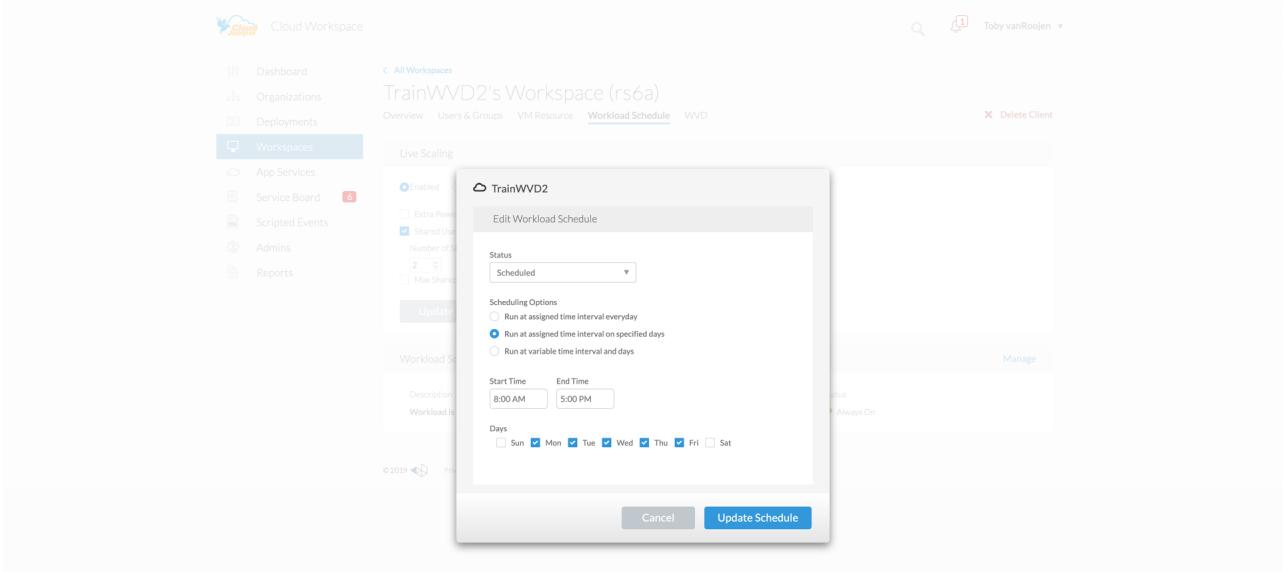

- c. Run at variable time intervals and days. This option sets the schedule to different Start Times and End Times for each day.

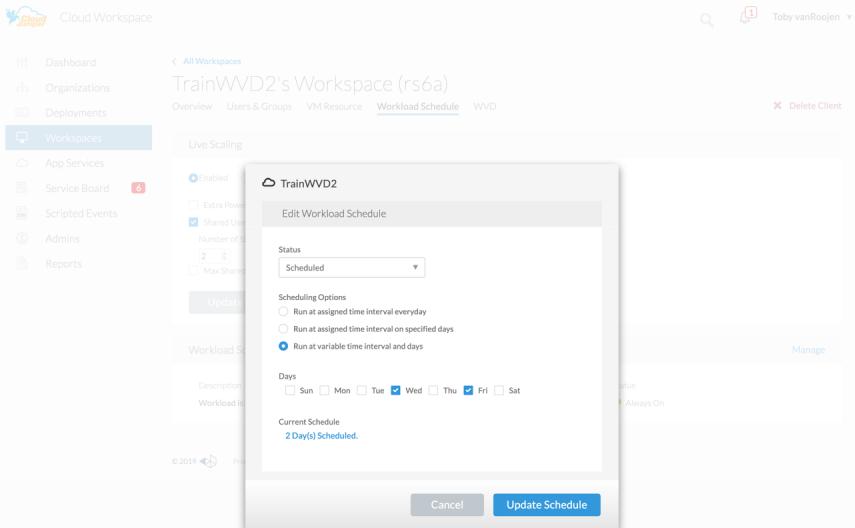

- d. Click the Update schedule button when finished setting the schedule.

The screenshot shows the Cloud Workspace interface with the 'Workspaces' menu item selected. In the center, a modal window titled 'Edit Workload Schedule' is open for the workspace 'TrainWVD2'. The modal contains fields for 'Status' (set to 'Scheduled'), 'Scheduling Options' (set to 'Run at variable time interval and days'), and a 'Days' section where Wednesday and Friday are checked. At the bottom right of the modal is a prominent blue 'Update Schedule' button, which is highlighted by a large black arrow.

## Live Scaling

Live Scaling automatically turns virtual machines in a shared host pool on and off depending on concurrent user load. As each server fills up, an additional server is turned on so that it's ready when the host pool load balancer sends user session requests. For effective use of Live Scaling, choose "Depth First" as the load balancer type.

### To enable Live Scaling:

1. Log in to VDS at <https://manage.cloudworkspace.com> using your VDS credentials.
2. Click on the Workspace menu item and then click on the name of the Workspace in the list.

The screenshot shows the Cloud Workspace interface with the 'Workspaces' menu item selected. On the left, a sidebar lists various workspace management options. In the main area, a table displays a list of workspaces. One row is highlighted with a red background, showing 'TrainWVD2's Workspace' with code 'rs6a' and deployment 'kjd'. A large black arrow points to this specific workspace entry.

| Workspaces                   | Code | Deployment | Users | Status   |
|------------------------------|------|------------|-------|--|
| JDR Test Wvd's Workspace     | zwn  | lpn        | 0     | <span style="color: green;">● Available</span> |
| <b>TrainWVD2's Workspace</b> | rs6a | kjd        | 2     | <span style="color: green;">● Available</span> |

3. Click on the Workload Schedule tab.

The screenshot shows the Cloud Workspace interface for 'TrainWVD2's Workspace (rs6a)'. The left sidebar has a 'Workspaces' section highlighted with a red arrow. The main content area has tabs at the top: Overview, Users & Groups, VM Resource, Workload Schedule, and WVD. The 'Workload Schedule' tab is selected. Below it are two line charts: 'Active Users' (orange line) and 'Resource Consumption' (blue line for Total CPU, green line for Total RAM (GB)). At the bottom, there are sections for Deployment, App Services, Company Details, and Contact Details.

4. Click the Enabled radio button in the Live Scaling section.

The screenshot shows the same workspace interface as above, but the 'Workload Schedule' tab is now selected. In the 'Live Scaling' section, there is a radio button group with 'Enabled' (unchecked) and 'Disabled' (checked). A red arrow points to the 'Enabled' button. Below it is a 'Update' button. The 'Workload Schedule' section shows a status message: 'Workload is running 24/7'.

5. Click the Max Number of Users Per Server and enter the max number. Depending on virtual machine size, this number is typically between 4 and 20.

Cloud Workspace

TrainWVD2's Workspace (rs6a)

Workload Schedule

Live Scaling

Enabled  Disabled

Extra Powered On Servers Enabled

Shared Users Per Server Enabled

Number of Shared Users Per Server: 10

Max Shared Users Per Server Enabled

Update

Workload Schedule

Description: Workload is running 24/7

Custom Scheduling: Off

Status: Always On

6. OPTIONAL – Click the Extra Powered On Servers Enabled and enter a number of additional servers that you want on for the host pool. This setting activates the specified number of servers in addition to the actively filling server to act as a buffer for large groups of users logging on in the same time window.

Cloud Workspace

TrainWVD2's Workspace (rs6a)

Workload Schedule

Live Scaling

Enabled  Disabled

Extra Powered On Servers Enabled

Shared Users Per Server Enabled

Number of Shared Users Per Server: 10

Max Shared Users Per Server Enabled

Update

Workload Schedule

Description: Workload is running 24/7

Custom Scheduling: Off

Status: Always On



Live Scaling currently applies to all Shared resource pools. In the near future each pool will have independent Live Scaling options.


## Power down the entire deployment

If you plan to only use your evaluation deployment on a sporadic, non-production basis you can turn off all the virtual machines in the deployment when you are not using them.

To turn the Deployment on or off (i.e. turn off the virtual machines in the deployment), follow these steps:

1. Log in to VDS at <https://manage.cloudworkspace.com> using your VDS credentials.


2. Click on the the Deployments menu item.

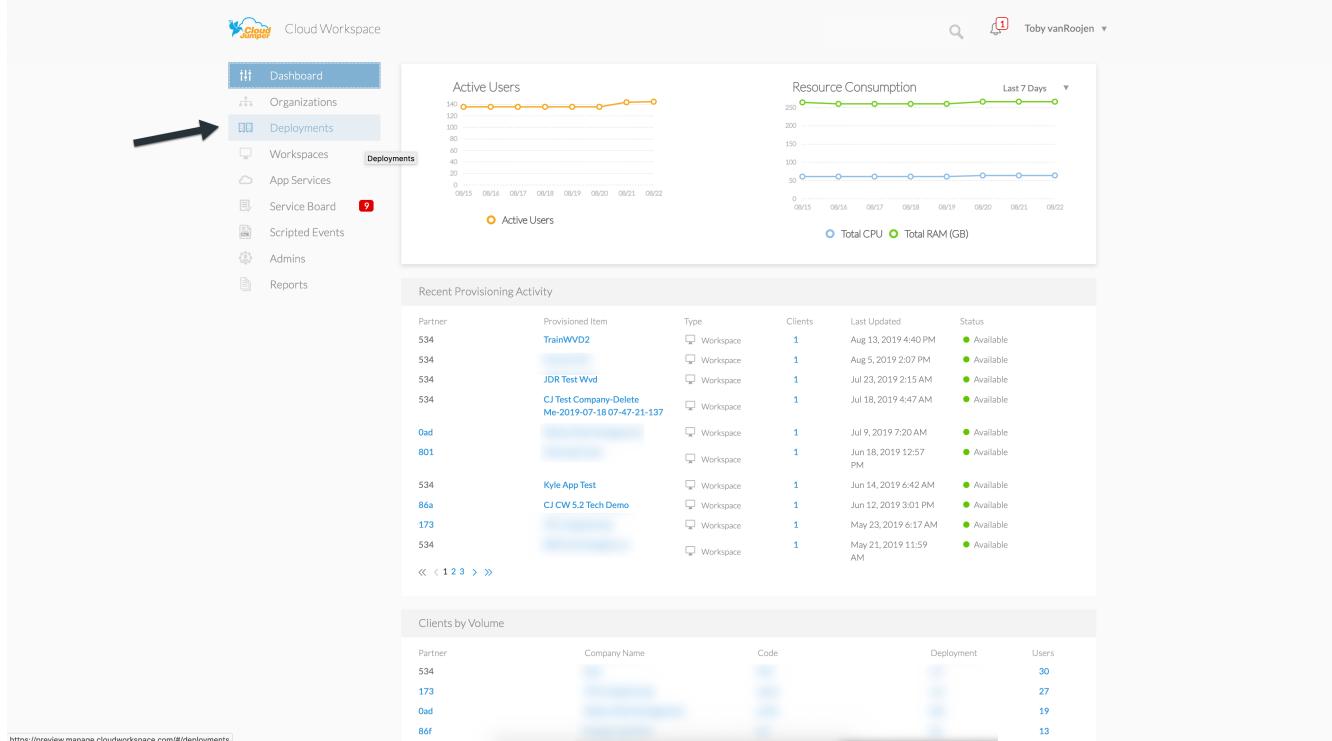

The screenshot shows the Cloud Workspace management interface. The left sidebar has a 'Deployments' menu item highlighted with a black arrow pointing to it. The main area displays two line charts: 'Active Users' (orange line) and 'Resource Consumption' (blue line for Total CPU and green line for Total RAM GB). Below the charts is a table titled 'Recent Provisioning Activity' showing various deployments with their status (Available). Further down is a section titled 'Clients by Volume' with a table showing deployment counts per partner.

<https://preview.manage.cloudworkspace.com/#/deployments>

Scroll your cursor over the line for the target Deployment to display the Configuration gear icon.

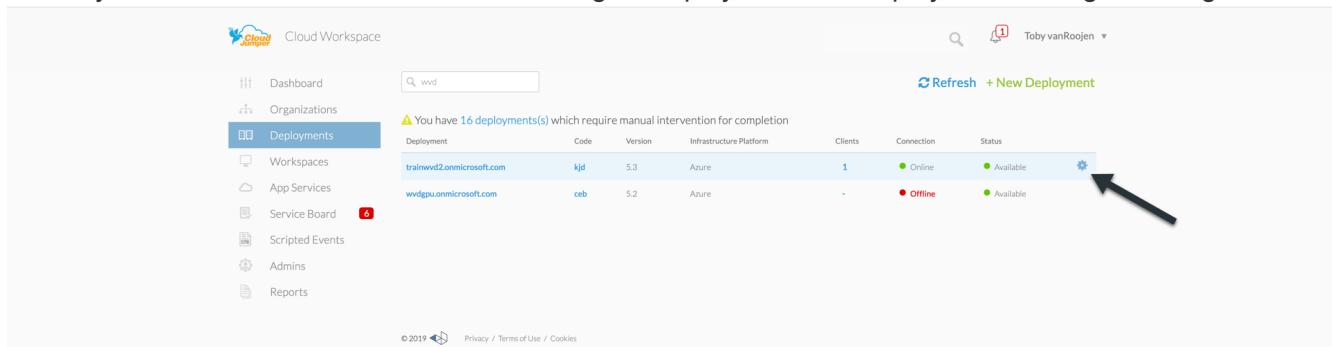

The screenshot shows the same interface as above, but with a search bar containing 'wvd'. A black arrow points to the gear icon in the 'Status' column of the 'trainwvd2.onmicrosoft.com' row, indicating where to click to power down the deployment.

3. Click on the gear, then choose Stop.

The screenshot shows the Cloud Workspace interface with the 'Deployments' tab selected. A search bar at the top contains the text 'wvd'. Below it, a warning message states: '⚠ You have 16 deployment(s) which require manual intervention for completion'. The main table lists two deployments:

| Deployment                | Code | Version | Infrastructure Platform | Clients | Connection | Status      |
|---------------------------|------|---------|-------------------------|---------|------------|-------------|
| trainwvd2.onmicrosoft.com | kjd  | 5.3     | Azure                   | 1       | ● Online   | ● Available |
| wvdgpu.onmicrosoft.com    | ceb  | 5.2     | Azure                   | -       | ● Offline  | ● Available |

A context menu is open over the first deployment row, with the 'Stop' option highlighted by a red arrow.

4. To restart or Start, follow steps 1-3 and then choose Start.

The screenshot shows the Cloud Workspace interface with the 'Deployments' tab selected. A search bar at the top contains the text 'wvd'. Below it, a warning message states: '⚠ You have 16 deployment(s) which require manual intervention for completion'. The main table lists two deployments:

| Deployment                | Code | Version | Infrastructure Platform | Clients | Connection | Status      |
|---------------------------|------|---------|-------------------------|---------|------------|-------------|
| trainwvd2.onmicrosoft.com | kjd  | 5.3     | Azure                   | 1       | ● Online   | ● Available |
| wvdgpu.onmicrosoft.com    | ceb  | 5.2     | Azure                   | -       | ● Offline  | ● Available |

A context menu is open over the second deployment row, with the 'Start' option highlighted by a red arrow.



It may take several minutes for all the virtual machines in the deployment to stop or start.

#### Create and manage VM images

VDS contains functionality for creating and managing virtual machine images for future deployments. To reach this functionality, navigate to: VDS > Deployments > Deployment Name > Provisioning Collections. The "VDI Image Collection" features are documented here: <https://flightschool.cloudjumper.com/cwms/provisioning-collections/>

## **Configure Azure cloud backup service**

VDS can natively configure and manage Azure Cloud Backup, an Azure PaaS service for backing up virtual machines. Backup Policies can be assigned to individual machines or groups of machine by type or host pool. Details are found here: [Management.System\\_Administration.configure\\_backup.html](#)

## **Select app management/policy mode**

By default, VDS implements a number of Group Policy Objects (GPO) that lock down the end user workspace. These policies prevent access to both core data layer locations (ex: c:\) and the ability to perform application installations as an end user.

This evaluation is intended to demonstrate the capabilities of Window Virtual Desktop, so you have the option to remove the GPOs so that you can implement a “basic workspace” that provides the same functionality and access as a physical workspace. To do this, follow the steps in the “Basic Workspace” option.

You can also choose to utilize the full Virtual Desktop management feature set to implement a “Controlled Workspace”. These steps include creating and managing an application catalog for end user application entitlement and using Administrator level permissions to manage access to both applications and data folders. Follow the steps in the “Controlled Workspace” section to implement this type of workspace on your WVD host pools.

## **Controlled WVD workspace (default policies)**


Using a controlled workspace is the default mode for VDS deployments. The policies are applied automatically. This mode requires VDS Administrators to install applications and then end users are granted access to the application via a shortcut on the session desktop. In a similar fashion, access to the data folders are assigned to end users by creating mapped shared folders and setting up permissions to see only those mapped drive letters instead of the standard boot and/or data drives. To manage this environment, follow the steps below to install applications and provide end user access.

## **Reverting to basic WVD workspace**


Creating a basic workspace requires disabling the default GPO policies that are created by default.

### **To do this, follow this one-time process:**

1. Log in to VDS at <https://manage.cloudworkspace.com> using your primary admin credentials.
2. Click      on      the      Deployments      menu      item      on      the      left.

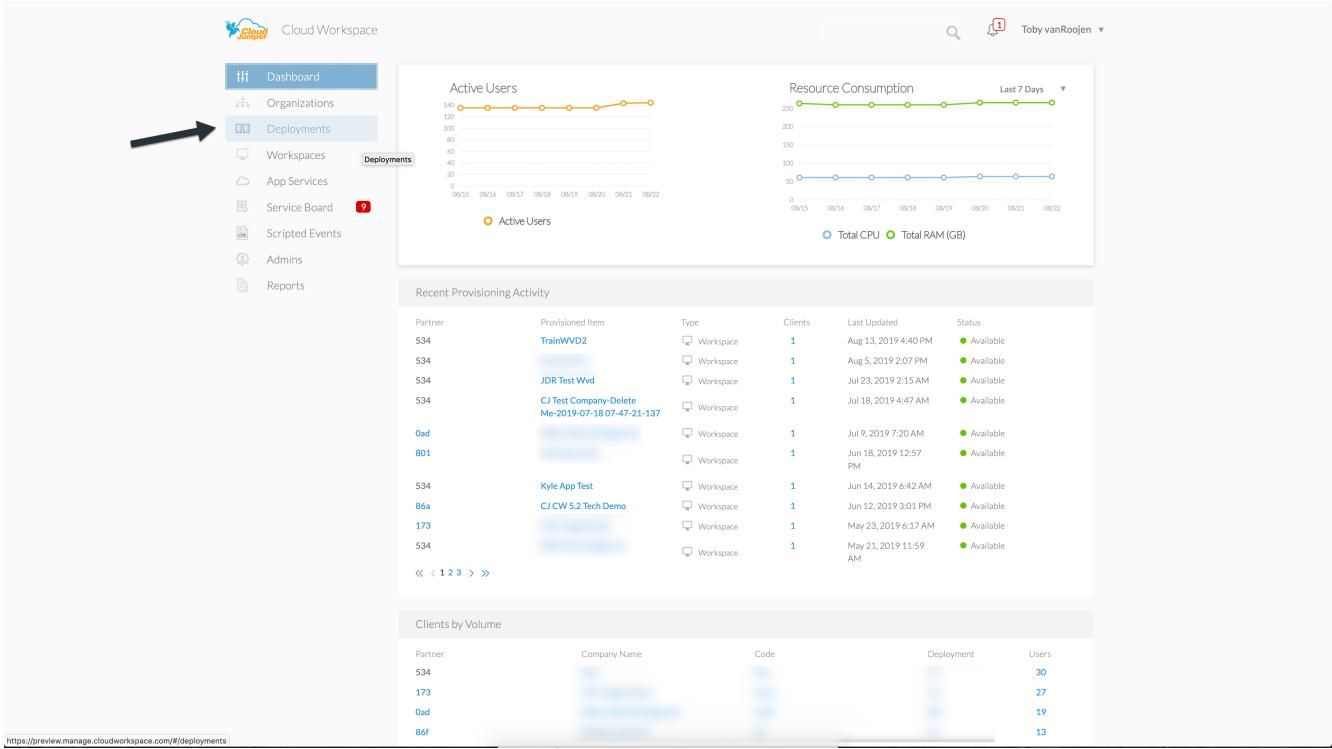

3. Click on the name of your Deployment.

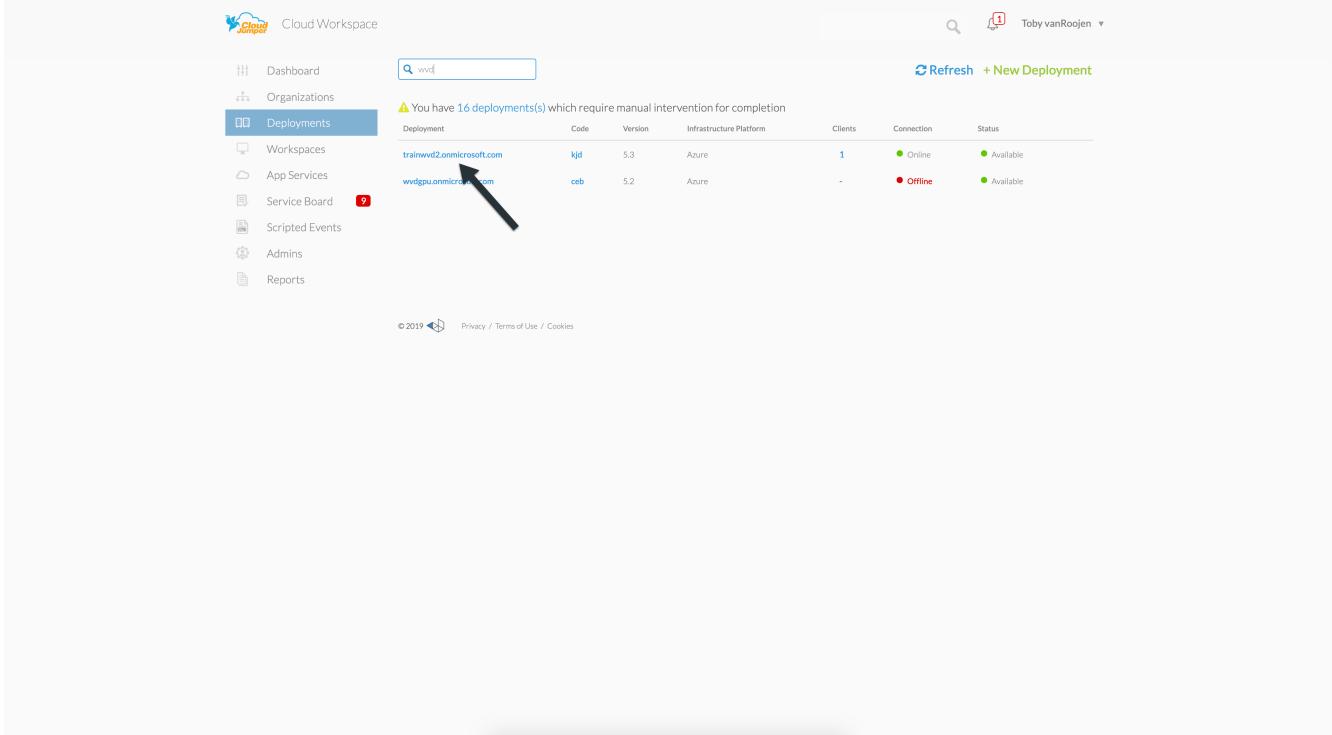

4. Under the Platform Servers section (mid page on right), scroll to the right of the line for CWMGR1 until the gear appears.

Cloud Workspace

All Deployments

trainwvd2.onmicrosoft.com (kjd)

Deployment Details

Workloads

Profile Server

Platform Servers

Platform Processes

| Name   | CPU | RAM (GB) | Status |
|--------|-----|----------|--------|
| CWMGR1 | 2   | 4        | Online |

Refresh

5. Click on the gear and choose Connect.

Cloud Workspace

All Deployments

trainwvd2.onmicrosoft.com (kjd)

Deployment Details

Workloads

Profile Server

Platform Servers

Platform Processes


| Name   | CPU | RAM (GB) | Status |
|--------|-----|----------|--------|
| CWMGR1 | 2   | 4        | Online |

Backup


Connect

Refresh


6. Enter the "Tech" credentials you created during provisioning to log on to the CWMGR1 server using HTML5 access.

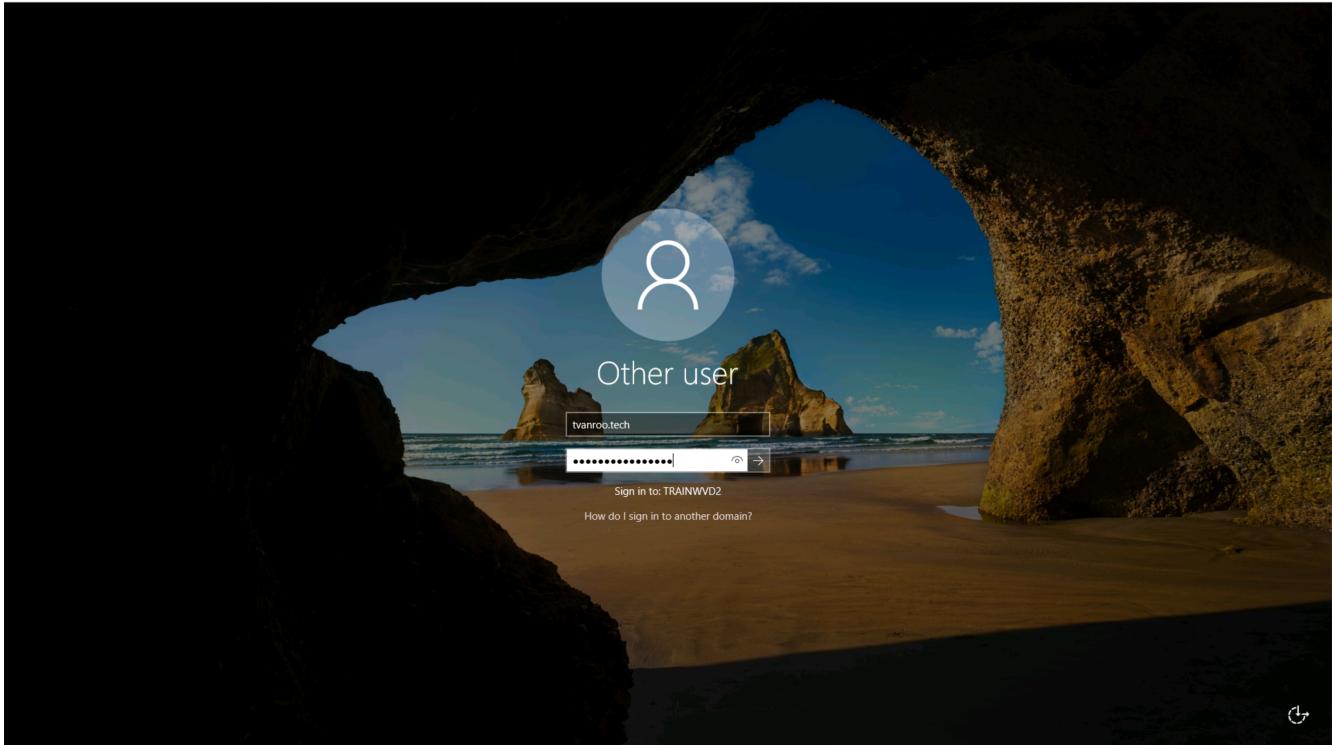


7. Click the Start (Windows) menu, choose Windows Administrative Tools.

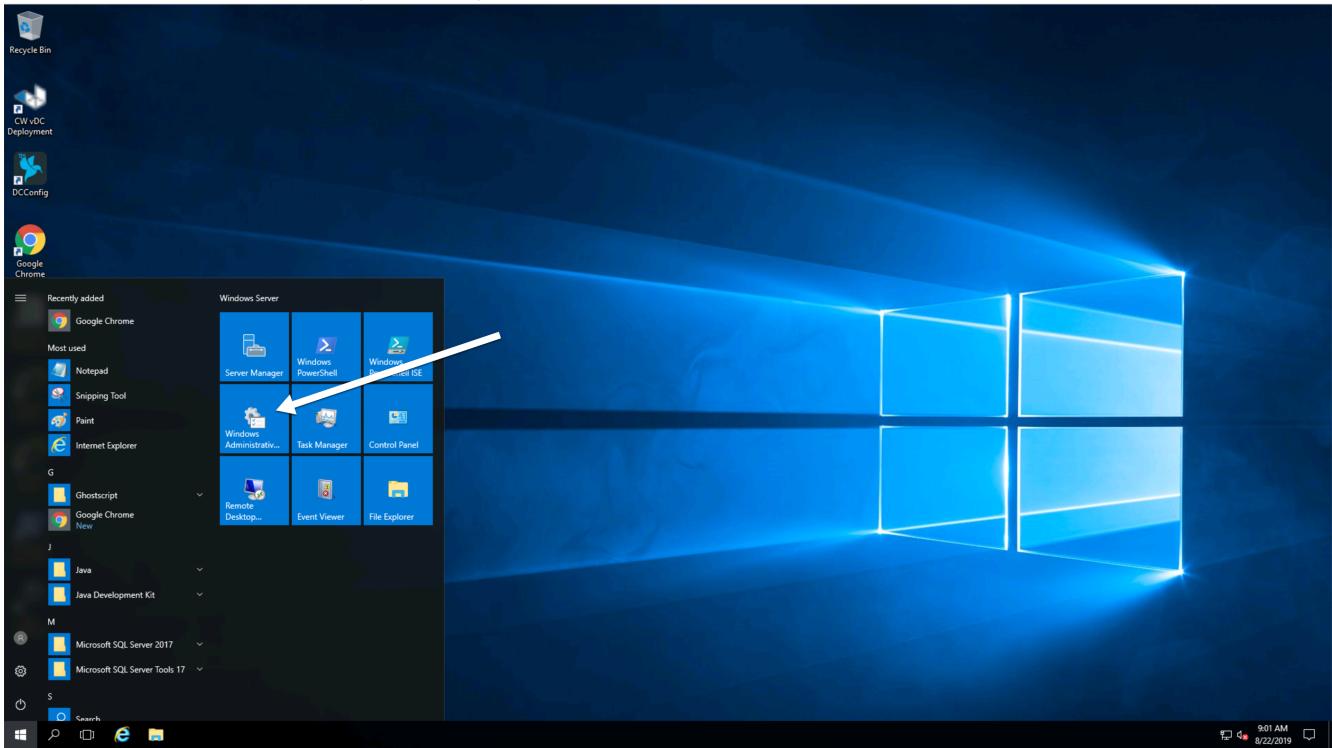


8. Click the Group Policy Management icon.

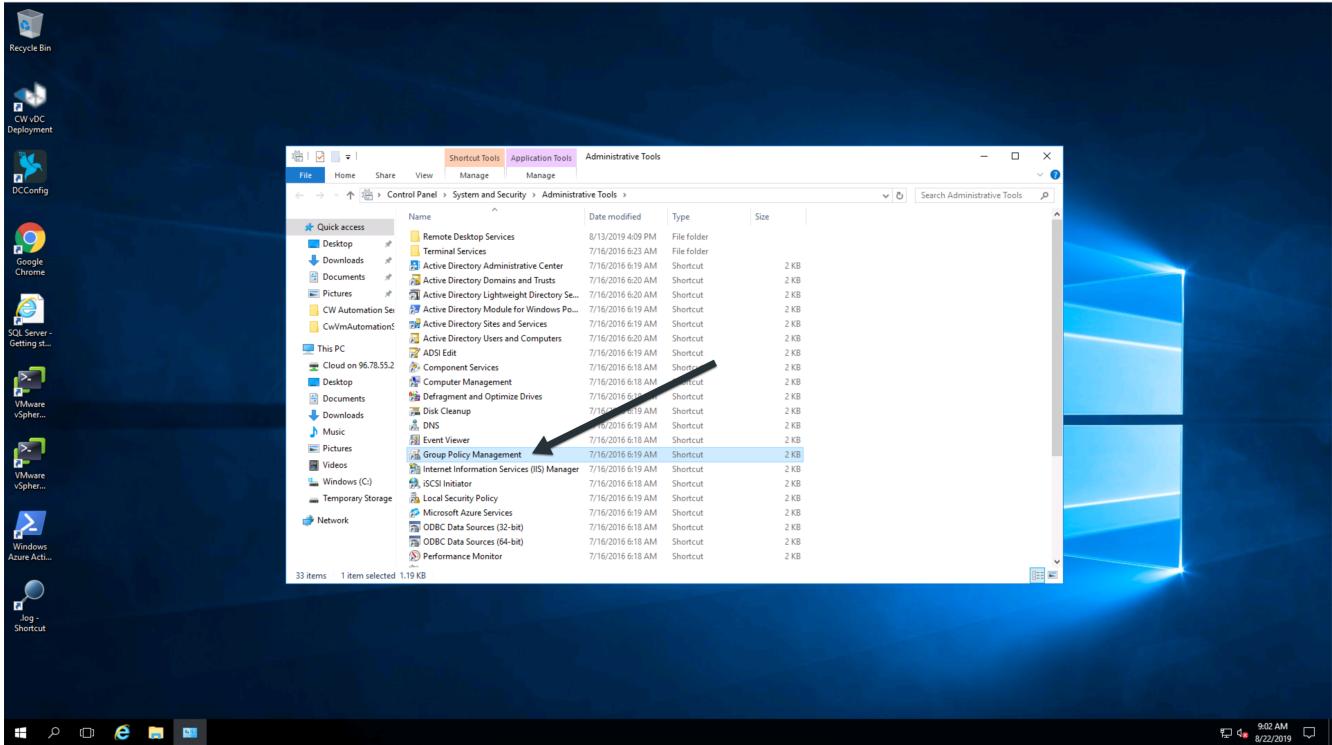


9. Click on the AADDC Users item in the list in the left pane.

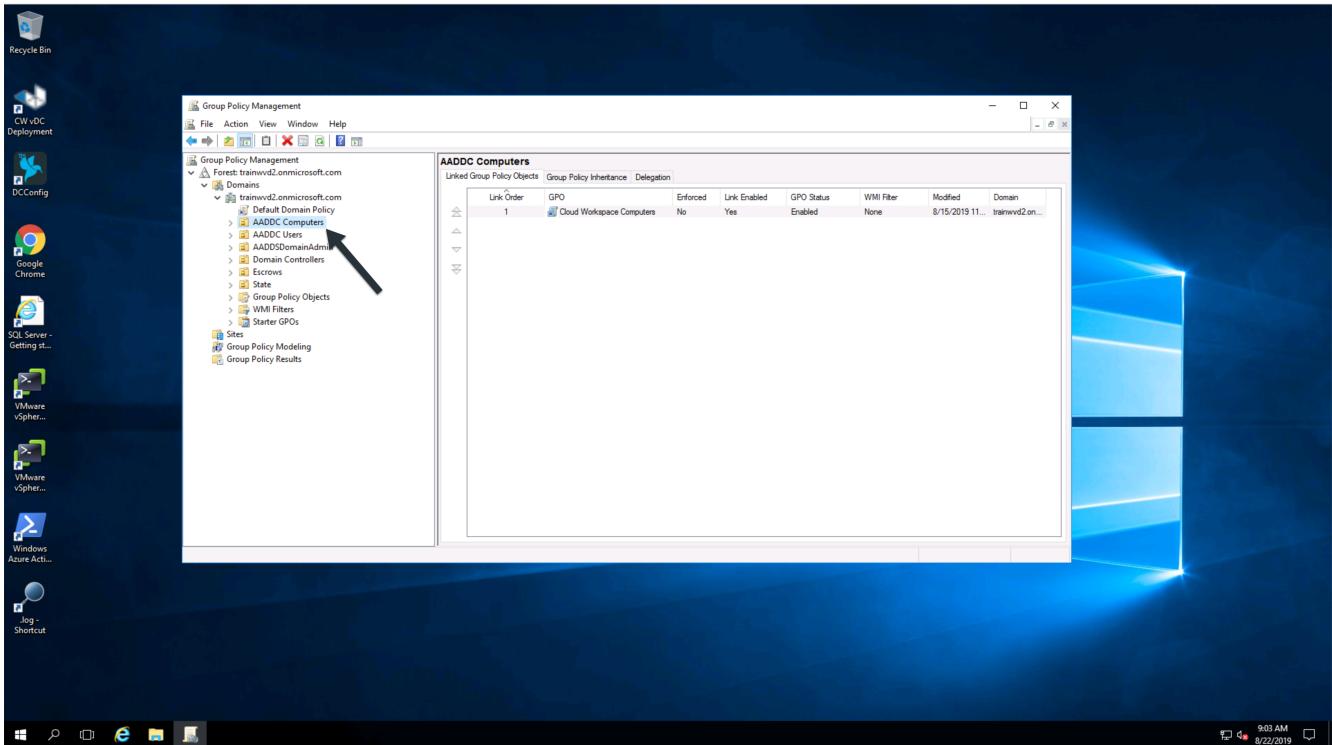


10. Right click on the "Cloud Workspace Users" policy in the list on the right pane, then deselect the "Link Enabled" option. Click OK to confirm this action.

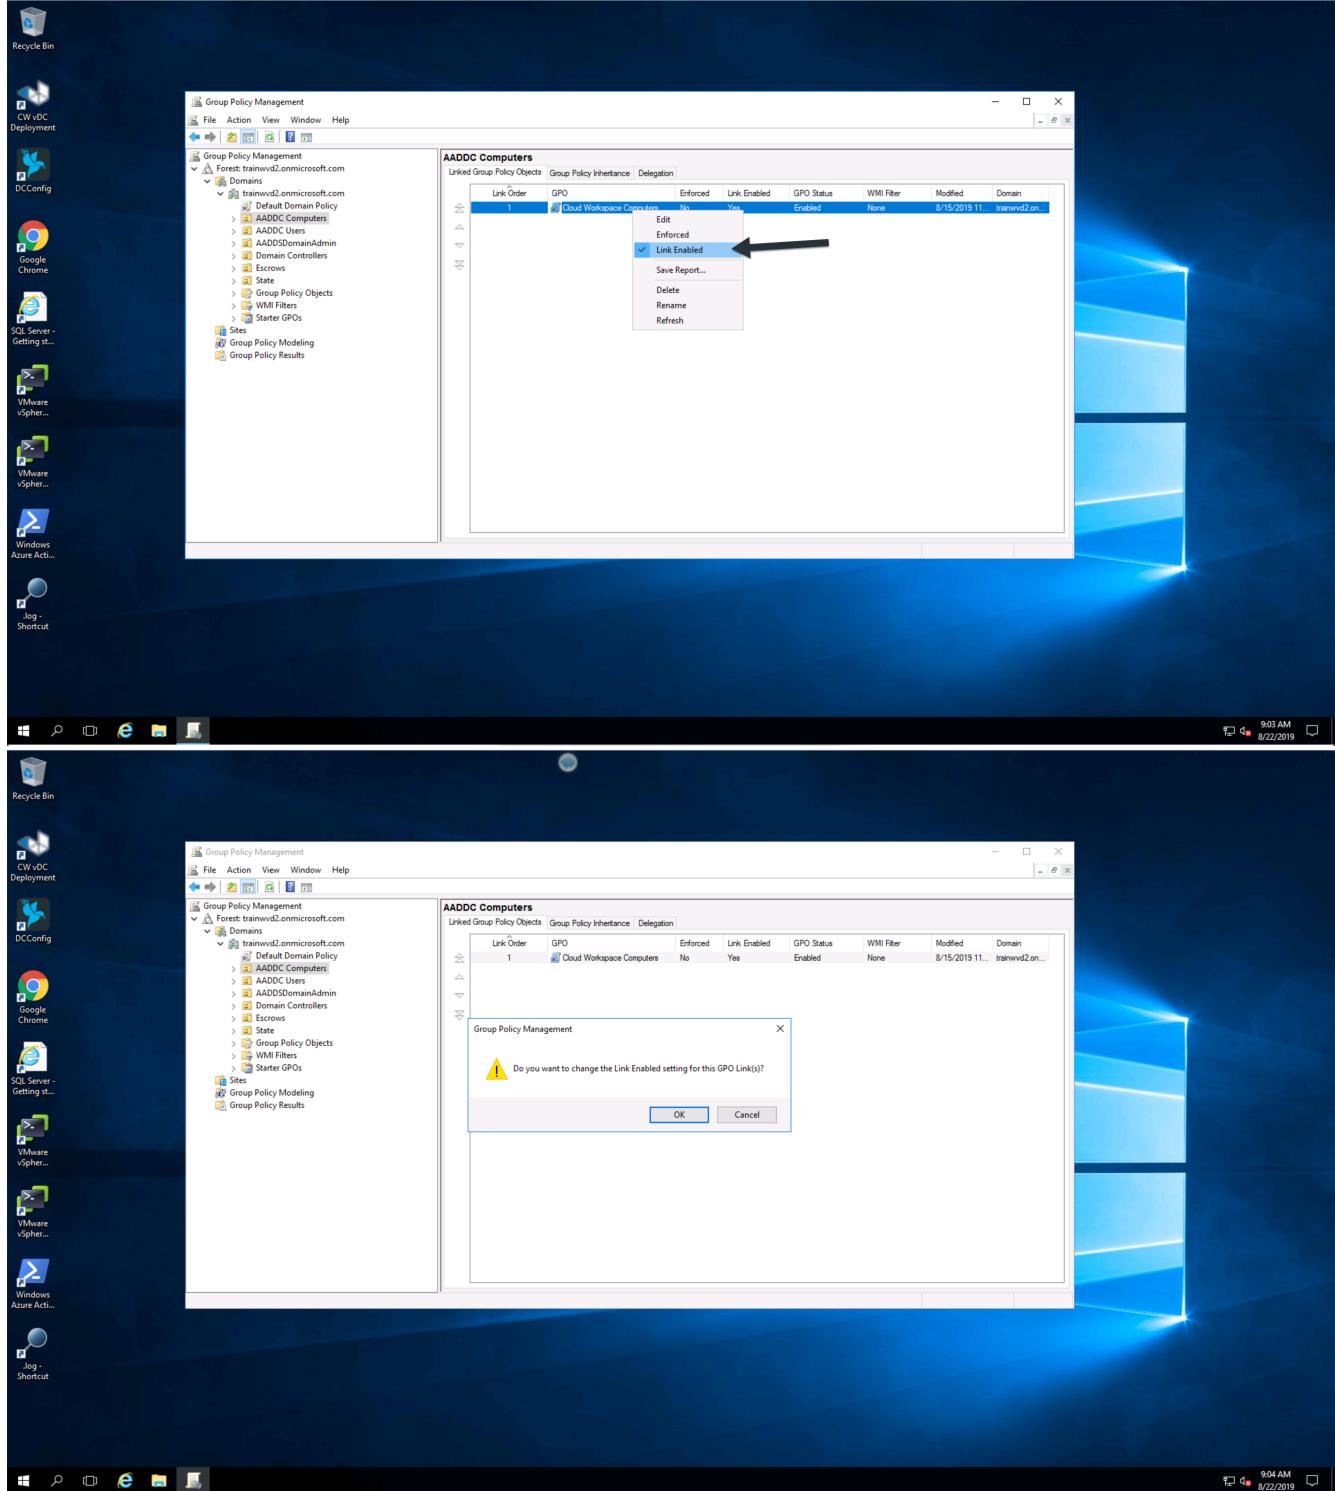


11. Select Action, Group Policy Update from the menu, then confirm that you want to force a policy update on those computers.

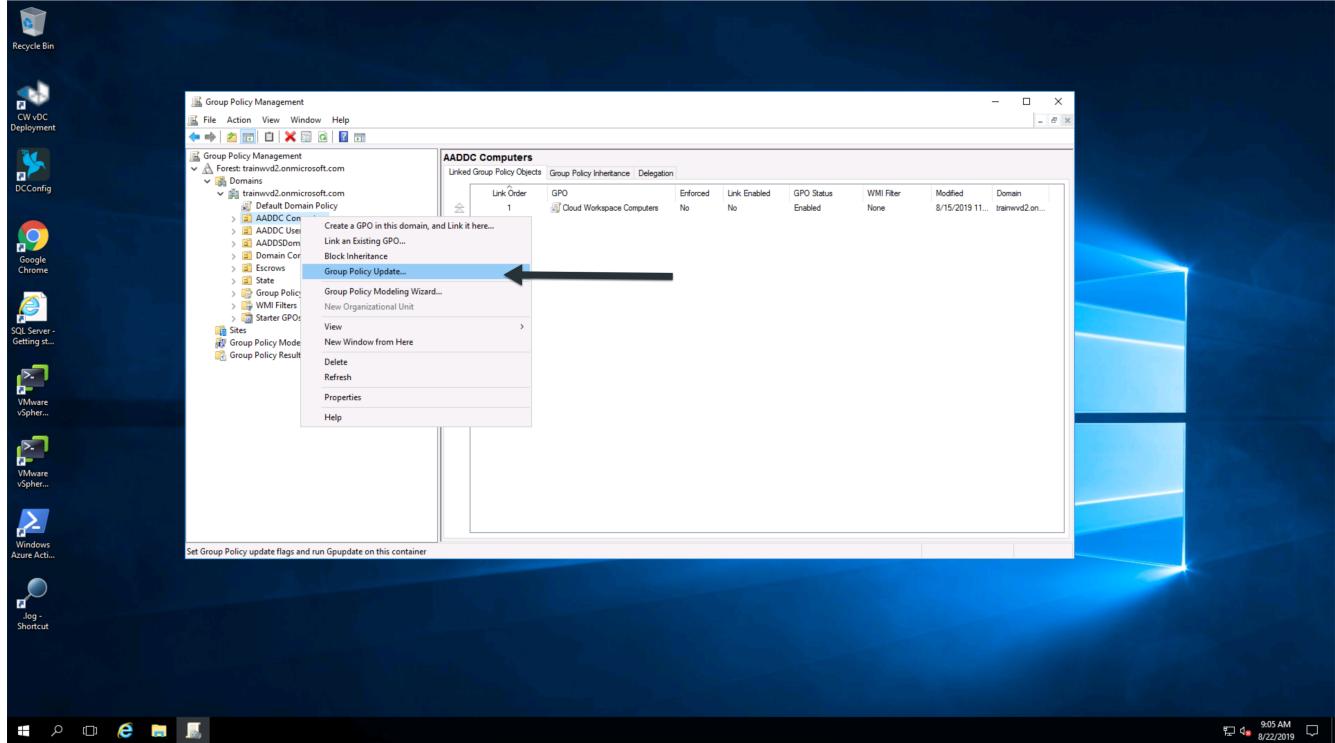

12. Repeat steps 9 and 10 but select “AADDC Users” and “Cloud Workspace Companies” as the policy to disable the Link. You do not need to force a Group Policy update after this step.

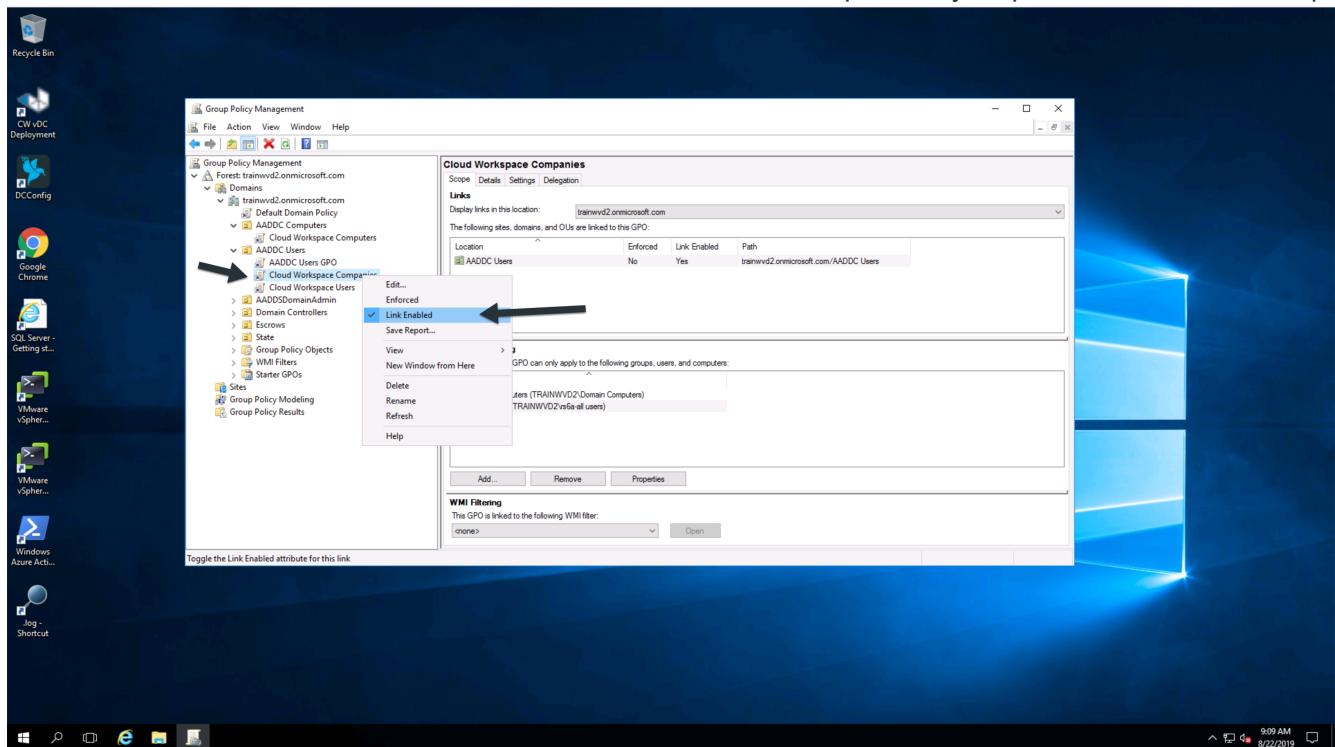

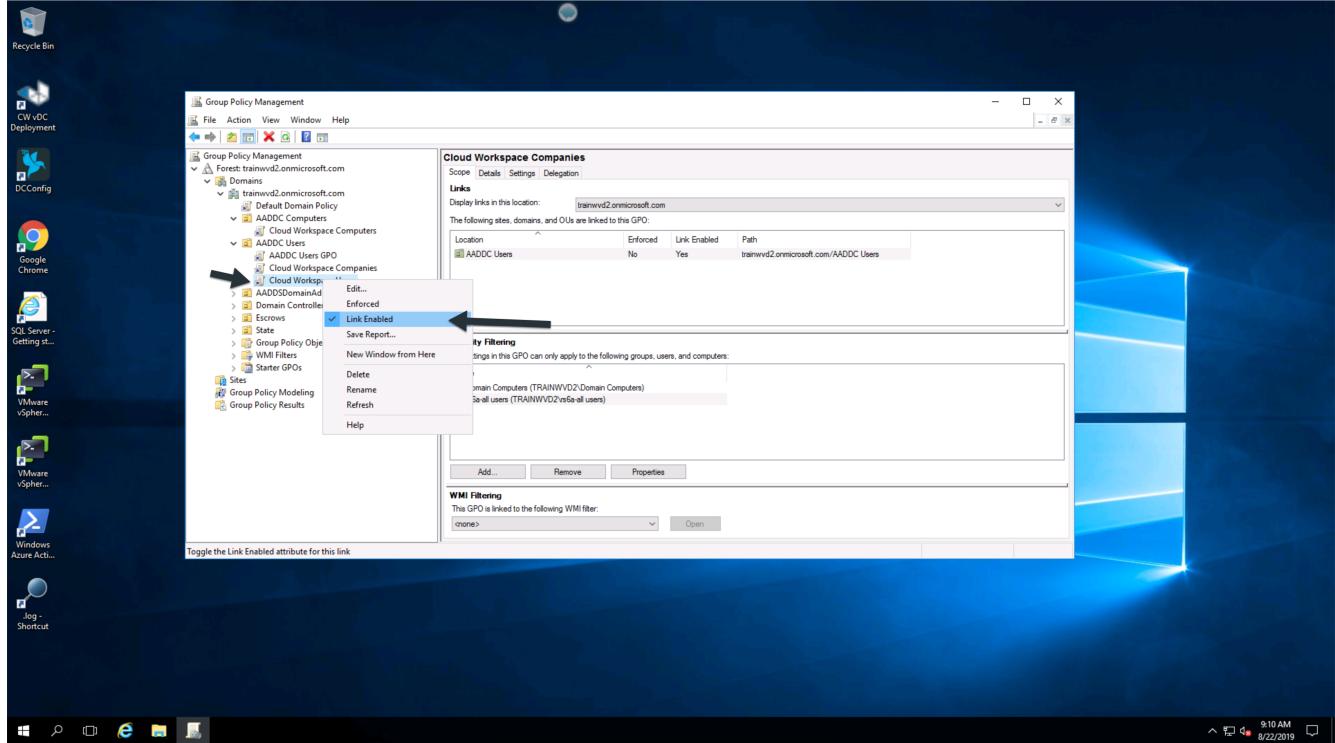

13. Close the Group Policy Management editor and Administrative Tools windows, then Log Off.



These steps will provide a basic workspace environment for end users. To confirm, log in as one of your end user accounts – the session environment should not have any of the Controlled Workspace restrictions like hidden Start menu, locked down access to the C:\ drive, and hidden Control Panel.



The .tech account that was created during deployment has full access to install applications and change security on folders independent of VDS. However, if you want end users from the Azure AD domain to have similar full access, you should add them to the Local Administrators group on each virtual machine.

# WVD Deployment Guide - Existing AD Supplemental

## Overview

VDS Setup has the ability to connect a new deployment to an existing AD structure. These instruction cover that option in detail.


This article does not stand-alone, rather it is a detailed explanation of an alternative to the New AD option covered in the [WVD Deployment Guide](#)

## Active Directory type

The next section defines to make is the Active Directory deployment type for the VDS deployment. In this guide we will select Existing Windows Server Active Directory, which will leverage an AD structure that already exists.

## Existing AD network

VDS Setup will display a list of vNets that could represent the connection between the existing AD structure and Azure AD. The vNet that you select should have the an Azure-hosted DC that you have configured in Azure. In addition, the vNet will have Custom DNS settings pointed at the Azure-hosted DC.

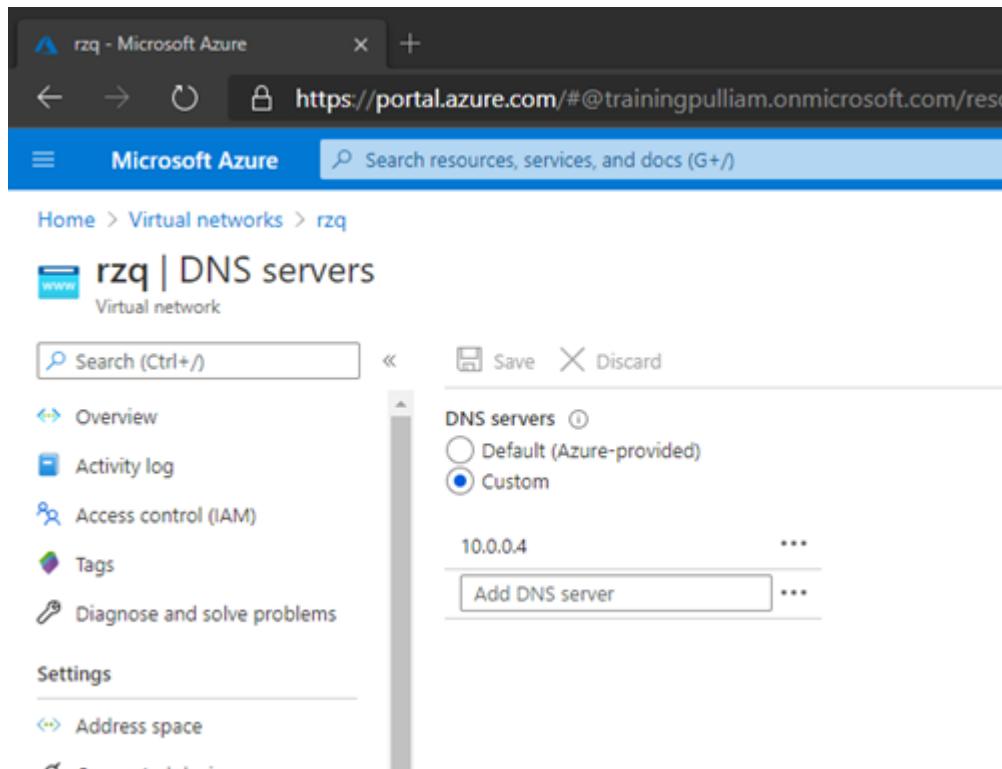

## Existing Active Directory domain name

Enter the existing domain name that will be used. Note: you do not want to use the domain that is found in the Azure Portal under the Active Directory module, as it can cause DNS issues. The primary example of this is that users will not be able to access the that website (<yourdomain>.com, for example) from inside their desktop.

## Existing AD username and password

There are three ways to provide the credentials necessary to facilitate a deployment using an existing AD structure.

## Provide Active Directory Domain Admin Username and Password

This is the easiest method – providing domain admin credential that are used to facilitate the deployment.

Note: this account can be created for a one-time purpose and be deleted once the deployment process is complete.

## Create Account Matching Required Permissions

This method involves customer administrators manually creating the permission structure here, then entering the credentials for the CloudWorkspaceSVC account here and proceeding.

## Manual Deployment Process

This option involves running the NetApp VDS Domain Preparation Tool, to build these permissions out automatically.

## NetApp VDS deployment preparation tool

### Access method

### PowerShell commands

### Requirements

1. Run on a server OS as opposed to a Workstation OS
2. Run on a server that is joined to the domain or is a domain controller
3. Have PowerShell 5.0 or greater in place on both the server running the tool (if not run on the Domain Controller) and the Domain Controller
4. Be executed by a user with Domain Admin privileges OR be executed by a user with local administrator permissions and ability to supply a Domain Administrator credential (for use with RunAs)

#### Steps Overview:

5. Log into VDS Setup and extend permissions, then select the subscription you wish to deploy into
6. Once VDS Setup has loaded, click Review in the navigation bar on the left and note the deployment code for later
7. Log into any local domain joined machine (preferably Domain Controller, but any local domain joined machine will work) and run 3 actions with NetApp VDS Deployment Preparation Tool.

#### Detailed Steps:

Launch PowerShell, as ADMINISTRATOR, from the Domain Controller (or any local domain joined machine will work)

8. Run the following commands, individually, to launch NetApp VDS Deployment Preparation Tool:

```
[System.Net.ServicePointManager]::SecurityProtocol  
=[System.Net.SecurityProtocolType]::'Ssl3','Tls','Tls11','Tls12';'
```

```
iex (new-object  
system.net.webclient).downloadstring('https://cjbootstrap3.cjautomate.ne  
t/cjbootstrapmenu.ps1')
```

### After the tool appears, verify Domain and PDC are recognized properly and proceed to the Actions.


1. Select Action ‘Download this tool and click ‘Go’.
2. Select Action ‘Install Prerequisites’:

- a. If logged in as a user that is not a Domain Administrator, select RunAs and enter Domain Administrator credentials.
  - b. Click 'Go'.
3. Select Action 'Prepare the domain':
- a. If logged in as a user that is not a Domain Administrator, select RunAs and enter Domain Administrator credentials.
  - b. Set the Svc account password.
  - c. Enter the SDDC code displayed in VDS Setup provisioning.




This SDDC code is displayed in the VDS Setup WEB GUI window

4. Click 'Go'.
5. Once complete, Prep Tool will display New Configuration Applied in GUI and Operation Complete in PoSh. Click Close:

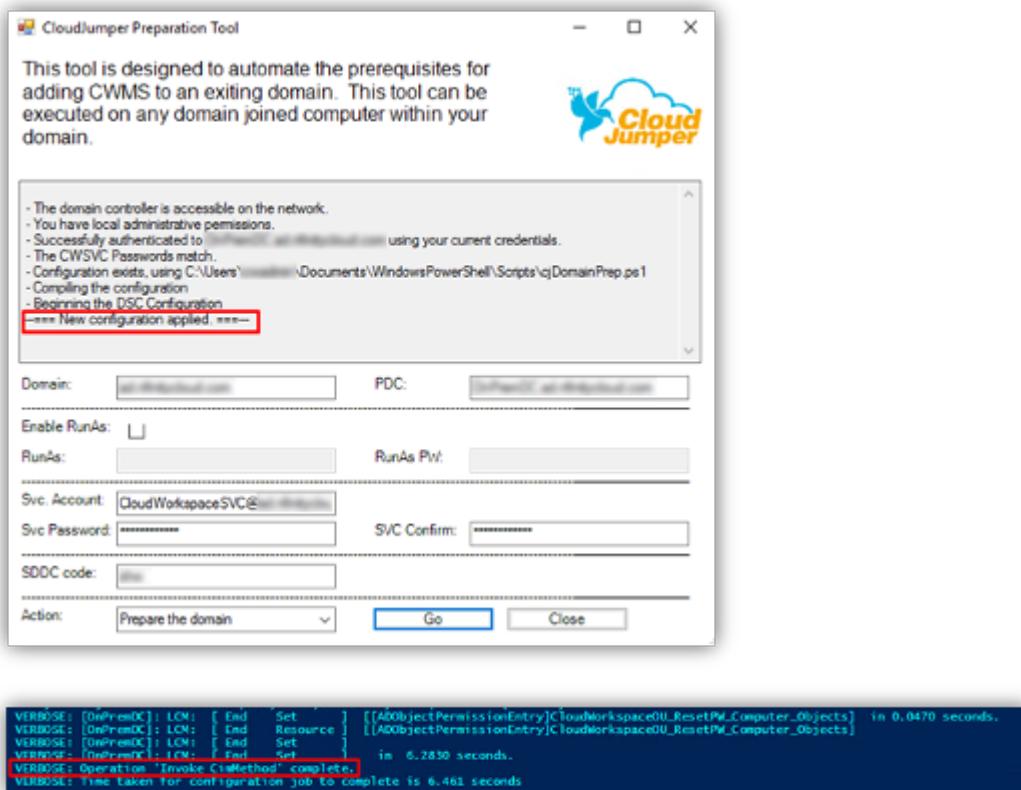

Typing A and hitting Enter

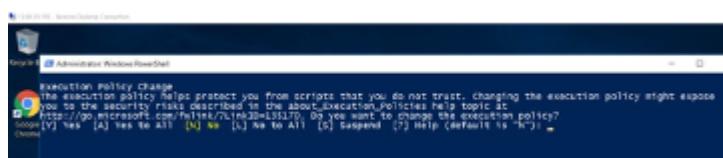

## Next steps

This article covers the unique steps to deploy into an existing AD environment. With these steps complete, you can return to the standard deployment guide [here](#).

## VDS Components and Permissions

### WVD and VDS security entities and services

Windows Virtual Desktop (WVD) requires security accounts and components in both Azure AD and the local Active Directory to perform automated actions. NetApp's Virtual Desktop Service (VDS) creates components and security settings during the deployment process that allow administrators to control the WVD environment. This document describes the relevant VDS accounts, components, and security settings in both environments.

The components and permissions of the deployment automation process are mostly distinct from the components of the final deployed environment. Therefore this article is constructed in two major sections, the deployment automation section and the deployed environment section.



### WVD deployment automation components & permissions

VDS deployment leverages multiple Azure and NetApp components and security permissions to implement both deployments and workspaces.

### VDS Deployment Services

#### Enterprise applications

VDS leverages Enterprise Applications and App Registrations in a tenant's Azure AD domain. The Enterprise Applications are the conduit for the calls against the Azure Resource Manager, Azure Graph and (if using the WVD Fall Release) WVD API endpoints from the Azure AD instance security context using the delegated roles and permissions granted to the associated Service Principal. App registrations may be created depending on initialization state of WVD services for the tenant through VDS.

To enable the creation and management of these VMs, VDS creates several supporting components in the Azure Subscription:

#### Cloud Workspace

This is the initial Enterprise Application admins grant consent to and is used during VDS Setup Wizard's deployment process.

The Cloud Workspace Enterprise Application requests a specific set of permissions during the VDS Setup Process. These permissions are:

- Access Directory as the Signed In User (Delegated)
- Read and Write Directory Data (Delegated)
- Sign In and Read User Profile (Delegated)
- Sign Users in (Delegated)

- View Users' Basic Profile (Delegated)
- Access Azure Service Management as Organization Users (Delegated)

## **Cloud Workspace API**

Handles general management calls for Azure PaaS functions. Examples of Azure PaaS functions are Azure Compute, Azure Backup, Azure Files, etc. This Service Principal requires Owner rights to the target Azure subscription during initial deployment, and Contributor rights for ongoing management (note: Use of Azure Files requires subscription Owner rights in order to set per user permissions on Azure File objects).

The Cloud Workspace API Enterprise Application requests a specific set of permissions during the VDS Setup Process. These permissions are:

- Subscription Contributor (or Subscription Owner if Azure Files is used)
- Azure AD Graph
  - Read and Write All Applications (Application)
  - Manage Apps That This App Creates or Owns (Application)
  - Read and Write Devices (Application)
  - Access the Directory as the Signed In User (Delegated)
  - Read Directory Data (Application)
  - Read Directory Data (Delegated)
  - Read and Write Directory Data (Application)
  - Read and Write Directory Data (Delegated)
  - Read and Write Domains (Application)
  - Read All Groups (Delegated)
  - Read and Write All Groups (Delegated)
  - Read All Hidden Memberships (Application)
  - Read Hidden Memberships (Delegated)
  - Sign In and Read User Profile (Delegated)
  - Read All Users' Full Profiles (Delegated)
  - Read All Users' Basic Profiles (Delegated)
- Azure Service Management
  - Access Azure Service Management as Organization Users (Delegated)

## **NetApp VDS**

NetApp VDS components are used via the VDS control plane to automate the deployment and configuration of WVD roles, services and resources.

### **Custom role**

The Automation Contributor role is created to facilitate deployments via least privileged methodologies. This role allows the CWMGR1 VM to access the Azure automation account.

## Automation account

An Automation account is created during deployment and is a required component during the provisioning process. The Automation account contains variables, credentials, modules and Desired State Configurations and references the Key Vault.

## Desired state configuration

This is the method used to build the configuration of CWMGR1. The configuration file is downloaded to the VM and applied via Local Configuration Manager on the VM. Examples of configuration elements include:

- Installing Windows features
- Installing software
- Applying software configurations
- Ensuring the proper permission sets are applied
- Applying the Let's Encrypt certificate
- Ensuring DNS records are correct
- Ensuring that CWMGR1 is joined to the domain

## Modules:

- ActiveDirectoryDsc: Desired state configuration resource for deployment and configuration of Active Directory. These resources allow you to configure new domains, child domains and high availability domain controllers, establish cross-domain trusts and manage users, groups and OUs.
- Az.Accounts: A Microsoft provided module used for managing credentials and common configuration elements for Azure modules
- Az.Automation: A Microsoft provided module for Azure Automation commandlets
- Az.Compute: A Microsoft provided module for Azure Compute commandlets
- Az.KeyVault: A Microsoft provided module for Azure Key Vault commandlets
- Az.Resources: A Microsoft provided module for Azure Resource Manager commandlets
- cChoco: Desired state configuration resource for downloading and installing packages using Chocolatey
- cjAz: this NetApp-created module provides automation tools to the Azure automation module
- cjAzACS: this NetApp-created module contains environment automation functions and PowerShell processes that execute from within the user context.
- cjAzBuild: this NetApp-created module contains build and maintenance automation and PowerShell processes that execute from the system context.
- cNtfsAccessControl: Desired state configuration resource for NTFS access control management
- ComputerManagementDsc: Desired state configuration resource that allow computer management tasks such as joining a domain and scheduling tasks as well as configuring items such as virtual memory, event logs, time zones and power settings.
- cUserRightsAssignment: Desired state configuration resource that allow management of user rights such as logon rights and privileges
- NetworkingDsc: Desired state configuration resource for networking
- xCertificate: Desired state configuration resource to simplify management of certificates on Windows Server.

- xDnsServer: Desired state configuration resource for configuration and management of Windows Server DNS Server
- xNetworking: Desired state configuration resource related to networking.
- [xRemoteDesktopAdmin](#): this module utilizes a repository that contains desired state configuration resources for configuring remote desktop settings and Windows firewall on a local or remote machine.
- xRemoteDesktopSessionHost: Desired state configuration resource (xRDSessionDeployment, xRDSessionCollection, xRDSessionCollectionConfiguration and xRDRemoteApp) enabling the creation and configuration of a Remote Desktop Session Host (RDSH) instance
- xSmbShare: Desired state configuration resource for configuration and managing an SMB share
- xSystemSecurity: Desired state configuration resource for managing UAC and IE Esc



Windows Virtual Desktop also installs Azure components, including Enterprise Applications and App Registrations for Windows Virtual Desktop and Windows Virtual Desktop Client, the WVD Tenant, WVD Host Pools, WVD App Groups, and WVD registered Virtual Machines. While VDS Automation components manage these components, WVD controls their default configuration and attribute set so refer to the WVD documentation for details.

## Hybrid AD components

To facilitate integration with existing AD either on-premises or running in the public cloud, additional components and permissions are required in the existing AD environment.

### Domain Controller

The existing domain controller can be integrated into a WVD deployment via AD Connect and/or a site-to-site VPN (or Azure ExpressRoute).

### AD Connect

To facilitate successful user authentication through the WVD PaaS-services, AD connect can be used to sync the domain controller with Azure AD.

### Security Group

VDS uses a Active Directory Security Group called CW-Infrastructure to contain the permissions required for automating the Active Directory dependent tasks such as domain join and GPO policy attachment.

### Service Account

VDS uses an Active Directory service account called CloudworkspaceSVC that is used as the identity for the VDS Windows services and the IIS application service. This account is non-interactive (does not allow RDP login) and is the primary member of the CW-Infrastructure account

### VPN or ExpressRoute

A site-to-site VPN or Azure ExpressRoute can be used to directly join Azure VMs with the existing domain. This is an optional configuration available when project requirements dictate it.

### Local AD permission delegation

NetApp provides an optional tool that can streamline the hybrid AD process. If using NetApp's optional tool, it

must:

- Run on a server OS as opposed to a Workstation OS
- Run on a server that is joined to the domain or is a domain controller
- Have PowerShell 5.0 or greater in place on both the server running the tool (if not run on the Domain Controller) and the Domain Controller
- Be executed by a user with Domain Admin privileges OR be executed by a user with local administrator permissions and ability to supply a Domain Administrator credential (for use with RunAs)

Whether created manually or applied by NetApp's tool, the permissions required are:

- CW-Infrastructure group
  - The Cloud Workspace Infrastructure (**CW-Infrastructure**) security group is granted Full Control to the Cloud Workspace OU level and all descendent objects
  - <deployment code>.cloudworkspace.app DNS Zone – CW-Infrastructure group granted CreateChild, DeleteChild, ListChildren, ReadProperty, DeleteTree, ExtendedRight, Delete, GenericWrite
  - DNS Server – CW-Infrastructure Group granted ReadProperty, GenericExecute
  - Local admin access for VMs created (CWMGR1, WVD session VMs) (done by group policy on the managed WVD systems)
- CW-CWMGRAccess group This group provides local administrative rights to CWMGR1 on all templates, the single server, new native Active Directory template utilizes the built-in groups Server Operators Remote Desktop Users, and Network Configuration Operators.

## **WVD environmental components & permissions**

Once the deployment automation process is complete the ongoing use and administration of deployments and workspaces a distinct set of components and permissions are required as defined below. Many of the components and permissions from above remain relevant but this section is focused on defining the structure of a deployed.

The components of VDS deployments and workspaces can be organized into several logical categories:

- End user clients
- VDS control plane components
- Microsoft Azure WVD-PaaS components
- VDS platform components
- VDS workspace components in Azure Tenant
- Hybrid AD Components

### **End user clients**

Users can connect to their WVD desktop and/or from a variety of endpoint types. Microsoft has published client applications for Windows, macOS, Android and iOS. Additionally, a web client is available for client-less access.

There are some Linux think-client vendors who have published endpoint client for WVD. These are listed at <https://docs.microsoft.com/en-us/azure/virtual-desktop/linux-overview>

## **VDS control plane components**

### **VDS REST API**

VDS is built on fully documented REST APIs so that all actions available in the web app are also available via the API. Documentation for the API is here: <https://api.cloudworkspace.com/5.4/swagger/ui/index#>

### **VDS web app**

VDS admins can interact with the VDS application via the VDS web app. This web portal is at: <https://manage.cloudworkspace.com>

### **Control plane database**

VDS data and settings are stored in the control plane SQL database, hosted and managed by NetApp.

## **VDS Comms**

### **Azure tenant components**

VDS deployment automation creates a single Azure Resource Group to contain the other WVD components, including VMs, network subnets, network security groups, and either Azure Files containers or Azure NetApp Files capacity pools. Note – the default is a single resource group, but VDS has tools to create resources in additional Resource Groups if desired.

## **Microsoft Azure WVD-PaaS components**

### **WVD REST API**

Microsoft WVD can be managed via API. VDS leveraged these APIs extensively to automate and manage WVD environments. Documentation is at: <https://docs.microsoft.com/en-us/rest/api/desktopvirtualization/>

### **Session broker**

The broker determines the resources authorized for the user and orchestrates the connection of the user to the gateway.

### **Azure diagnostics**

Azure Diagnostics has been specially built to support WVD deployments.

### **WVD web client**

Microsoft has provided a web client for users to connect to their WVD resources without a locally installed client.

### **Session gateway**

The locally installed RD client connects to the gateway to securely communicate into the WVD environment.

## **VDS platform components**

## CWMGR1

CMWGR1 is the VDS control VM for each Deployment. By default, it is created as a Windows 2019 Server VM in the target Azure subscription. See the Local Deployment section for the list of VDS and 3rd party components installed on CWMGR1.

WVD requires the WVD VMs be joined to an Active Directory domain. To facilitate this process and to provide the automation tools for managing the VDS environment several components are installed on the CWMGR1 VM described above and several components are added to the AD instance. The components include:

- **Windows Services** - VDS uses Windows services to perform automation and management actions from within a deployment:
    - **CW Automation Service** is a Windows Service deployed on CWMGR1 in each WVD deployment that performs many of the user-facing automation tasks in the environment. This service runs under the **CloudWorkspaceSVC** AD account.
    - **CW VM Automation Service** is a Windows Service deployed on CWMGR1 in each WVD deployment that performs the virtual machine management functions. This service runs under the **CloudWorkspaceSVC** AD account.
    - **CW Agent Service** is a Windows Service deployed to each virtual machine under VDS management, including CWMGR1. This service runs under the **LocalSystem** context on the virtual machine.
    - **CWManagerX API** is an IIS app pool-based listener installed on CWMGR1 in each WVD deployment. This handles inbound requests from the global control plane and is run under the **CloudWorkspaceSVC** AD account.
  - **SQL Server 2017 Express** – VDS creates a SQL Server Express instance on the CWMGR1 VM to manage the metadata generated by the automation components.
  - **Internet Information Services (IIS)** – IIS is enabled on CWMGR1 to host the CWManagerX and CWApps IIS application (only if RDS RemoteApp functionality is enabled). VDS requires IIS version 7.5 or greater.
  - **HTML5 Portal (Optional)** – VDS installs the Spark Gateway service to provide HTML5 access to the VMs in the Deployment and from the VDS web application. This is a Java based application and can be disabled and removed if this method of access is not desired.
  - **RD Gateway (Optional)** – VDS enables the RD Gateway role on CWMGR1 to provide RDP access to RDS Collection based Resource Pools. This role can be disabled/uninstalled if only WVD Reverse Connect access is desired.
  - **RD Web (Optional)** – VDS enables the RD Web role and creates the CWApps IIS web application. This role can be disabled if only WVD access is desired.
  - **DC Config** – a Windows application used to perform Deployment and VDS Site specific configuration and advanced configuration tasks.
  - **Test VDC Tools** – a Windows application that supports direct task execution for Virtual Machine and client level configuration changes used in the rare case where API or Web Application tasks need to be modified for troubleshooting purposes.
  - **Let's Encrypt Wildcard Certificate (Optional)** – created and managed by VDS – all VMs that require HTTPS traffic over TLS are updated with the certificate nightly. Renewal is also handled by automated task (certificates are 90 day so renewal starts shortly before). Customer can provide their own wildcard certificate if desired.
- VDS also requires several Active Directory components to support the Automation tasks. The design intent is to utilize a minimum number of AD component and permission additions while still supporting the environment for automated management. These components include:
- **Cloud Workspace Organizational Unit (OU)** – this Organization Unit will act as the primary AD container for the required child components. Permissions for the CW-Infrastructure and Client DHP Access groups

will be set at this level and its child components. See Appendix A for sub-OUs that are created in this OU.

- **Cloud Workspace Infrastructure Group (CW-Infrastructure)** is a security group created in the local AD to allow required delegated permissions to be assigned to the VDS service account (**CloudWorkspaceSVC**)
- **Client DHP Access Group (ClientDHPAccess)** is a security group created in the local AD to allow VDS to govern the location in which the company shared, user home and profile data reside.
- **CloudWorkspaceSVC** service account (member of Cloud Workspace Infrastructure Group)
- **DNS zone for <deployment code>.cloudworkspace.app domain** (this domain manages the auto-created DNS names for session host VMs ) – created by Deploy configuration.
- **NetApp-specific GPOs** linked to various child OUs of the Cloud Workspace Organizational Unit. These GPOs are:
  - **Cloud Workspace GPO (linked to Cloud Workspace OU)** – Defines access protocols and methods for members of the CW-Infrastructure Group. Also adds the group to the local Administrators Group on WVD session hosts.
  - **Cloud Workspace Firewall GPO** (linked to Dedicated Customers Servers, Remote Desktop and Staging OUs) - creates a policy that ensures and isolates connections to sessions hosts from Platform server(s).
  - **Cloud Workspace RDS** (Dedicated Customers Servers, Remote Desktop and Staging OUs) - policy set limits for session quality, reliability, disconnect timeout limits. For RDS sessions the TS licensing Server Value is defined.
  - **Cloud Workspace Companies** (NOT LINKED by default) – optional GPO to “lock down” a user session/ workspace by preventing access to administrative tools and areas. Can be linked/enabled to provide a restricted activity workspace.



Default Group Policy setting configurations can be provided on request.

## VDS workspace components

### Data layer

#### Azure NetApp Files

An Azure NetApp Files Capacity Pool and associated Volume(s) will be created if you choose Azure NetApp Files as the Data Layer option in VDS Setup. The Volume hosts the shared file storage for user profiles (via FSLogix containers), user personal folders, and the corporate data share folder.

#### Azure Files

An Azure File Share and its associated Azure Storage Account will be created if you chose Azure Files as the Data Layer option in CWS Setup. The Azure File Share hosts the shared file storage for user profiles (via FSLogix containers), user personal folders, and the corporate data share folder.

#### File server with Managed Disk

A Windows Server VM is created with a Managed Disk if you choose File Server as the Data Layer option in VDS Setup. The File Server hosts the shared file storage for user profiles (via FSLogix containers), user personal folders, and the corporate data share folder.

## Azure networking

### Azure virtual network

VDS creates an Azure Virtual Network and supporting subnets. VDS requires a separate subnet for CWMGR1, WVD host machines, and Azure domain controllers and peering between the subnets. Note that the AD controller subnet typically already exists so the VDS deployed subnets will need to be peered with the existing subnet.

### Network security groups

A network security group is created to control access to the CWMGR1 VM.

- Tenant: contains IP addresses for use by session host and data VMs
- Services: contains IP addresses for use by PaaS services (Azure NetApp Files, for example)
- Platform: contains IP addresses for use as NetApp platform VMs (CWMGR1 and any gateway servers)
- Directory: contains IP addresses for use as Active Directory VMs

### Azure AD

The VDS automation and orchestration deploys virtual machines into a targeted Active Directory instance and then joins the machines to the designated host pool. WVD virtual machines are governed at a computer level by both the AD structure (organizational units, group policy, local computer administrator permissions etc.) and membership in the WVD structure (host pools, workspace app group membership), which are governed by Azure AD entities and permissions. VDS handles this “dual control” environment by using the VDS Enterprise application/Azure Service Principal for WVD actions and the local AD service account (CloudWorkspaceSVC) for local AD and local computer actions.

The specific steps for creating a WVD virtual machine and adding it to the WVD host pool include:

- Create Virtual Machine from Azure template visible to the Azure Subscription associated with WVD (uses Azure Service Principal permissions)
- Check/Configure DNS address for new Virtual Machine using the Azure VNet designated during VDS Deployment (requires local AD permissions (everything delegated to CW-Infrastructure above) Sets the Virtual Machine name using the standard VDS naming scheme **{companycode}TS{sequencenumber}**. Example: XYZTS3. (Requires local AD permissions (placed into OU structure we have created on-prem (remote desktop/companycode/shared) (same permission/group description as above))
- Places virtual machine in designated Active Directory Organizational Unit (AD) (requires the delegated permissions to the OU structure (designated during manual process above))
- Update internal AD DNS directory with the new machine name/ IP address (requires local AD permissions)
- Join new virtual machine to local AD domain (requires local AD permissions)
- Update VDS local database with new server information (does not require additional permissions)
- Join VM to designated WVD Host Pool (requires WVD Service Principal permissions)
- Install Chocolatey components to the new Virtual Machine (requires local computer administrative privilege for the **CloudWorkspaceSVC** account)
- Install FSLogix components for the WVD instance (Requires local computer administrative permissions on the WVD OU in the local AD)
- Update AD Windows Firewall GPO to allow traffic to the new VM (Requires AD GPO create/modify for policies associated with the WVD OU and its associated virtual machines. Requires AD GPO policy

create/modify on the WVD OU in the local AD. Can be turned off post-install if not managing VMs via VDS.)

- Set “Allow New Connections” flag on the new virtual machine (requires Azure Service Principal permissions)

## Joining VMs to Azure AD

Virtual machines in the Azure tenant need to be joined to the domain however VMs cannot join directly to Azure AD. Therefore, VDS deploys the domain controller role in the VDS platform and then we sync that DC with Azure AD using AD Connect. Alternative configuration options include using Azure AD Domain Services (AADDS), syncing to a hybrid DC (a VM on-premises or elsewhere) using AD Connect, or directly joining the VMs to a hybrid DC through a site-to-site VPN or Azure ExpressRoute.

## WVD Host pools

Host pools are a collection of one or more identical virtual machines (VMs) within Windows Virtual Desktop environments. Each host pool can contain an app group that users can interact with as they would on a physical desktop.

## Session hosts

Within any host pool is one or more identical virtual machines. These user sessions connecting to this host pool are load balanced by the WVD load balancer service.

## App groups

By default, the *Desktop users* app group is created at deployment. All users within this app group are presented with a full Windows desktop experience. Additionally app groups can be created to serve streaming-app services.

## Log analytics workspace

A Log Analytics workspace is created to store logs from the deployment and DSC processes and from other services. This can be deleted after deployment, but this isn't recommended as it enables other functionality. Logs are retained for 30 days by default, incurring no charges for retention.

## Availability sets

An Availability Set is set up as a part of the deployment process to enable separation of shared VMs (shared WVD host pools, RDS resource pools) across fault domains. This can be deleted after deployment if desired but would disable the option to provide additional fault tolerance for shared VMs.

## Azure recovery vault

A Recovery Service Vault is created by VDS Automation during deployment. This is currently activated by default, as Azure Backup is applied to CWMGR1 during the deployment process. This can be deactivated and removed if desired but will be recreated if Azure Backup is enabled in the environment.

## Azure key vault

An Azure Key Vault is created during the deployment process and is used to store certificates, API keys and credentials that are used by Azure Automation Accounts during deployment.

## **Appendix A – Default Cloud Workspace organizational unit structure**

- Cloud Workspace
  - Cloud Workspace Companies
  - Cloud Workspace Servers
    - Dedicated Customer Servers
    - Infrastructure
- CWMGR Servers
- Gateway Servers
- FTP Servers
- Template VMs
  - Remote Desktop
  - Staging
    - Cloud Workspace Service Accounts
  - Client Service Accounts
  - Infrastructure Service Accounts
    - Cloud Workspace Tech Users
  - Groups
  - Tech 3 Technicians

## **WVD and VDS Prerequisites**

### **WVD and VDS requirements and notes**

This document describes the required elements for deploying Windows Virtual Desktop (WVD) using NetApp Virtual Desktop Service (VDS). The “Quick Checklist” provides a brief list of required components and pre-deployment steps to take to ensure an efficient deployment. The rest of the guide provides greater detail for each element, depending on the configuration choices that are made.

### **Quick checklist**

#### **Azure requirements**

- Azure Tenant with Azure AD instance (can be Microsoft 365 instance)
- Azure Subscription
- Available Azure Quota for Azure virtual machines
- Azure Admin Account with Global Admin and Subscription Ownership Roles
- Domain admin account with 'Enterprise Admin' role for AD Connect setup

#### **Pre-deployment information**

- Determine total number of users
- Determine Azure Region
- Determine Active Directory Type

- Determine Storage Type
- Identify session host VM image or requirements
- Assess existing Azure and on-premises networking configuration

## VDS deployment detailed requirements

### End user connection requirements

The following Remote Desktop clients support Windows Virtual Desktop:

- Windows Desktop
- Web
- macOS
- iOS
- IGEL Think Client (Linux)
- Android (Preview)



Windows Virtual Desktop does not support the RemoteApp and Desktop Connections (RADC) client or the Remote Desktop Connection (MSTSC) client.



Windows Virtual Desktop does not currently support the Remote Desktop client from the Windows Store. Support for this client will be added in a future release.

The Remote Desktop clients must have access to the following URLs:

| Address  | Outbound TCP Port | Purpose                             | Client(s) |
|--|-------------------|-------------------------------------|-----------|
| *.wvd.microsoft.com                                  | 443               | Service traffic                     | All       |
| *.servicebus.windows.net<br>443 Troubleshooting data | All               | go.microsoft.com                    | 443       |
| Microsoft FWLinks                                    | All               | aka.ms                              | 443       |
| Microsoft URL shortener                              | All               | docs.microsoft.com                  | 443       |
| Documentation  | All               | privacy.microsoft.com               | 443       |
| Privacy statement                                    | All               | query.prod.cms.rt.microso<br>ft.com | 443       |



Opening these URLs is essential for a reliable client experience. Blocking access to these URLs is unsupported and will affect service functionality. These URLs only correspond to the client sites and resources, and do not include URLs for other services like Azure Active Directory.

### VDS setup wizard starting point

The VDS setup wizard can handle much of the prerequisite setup required for a successful WVD deployment. The setup wizard (<https://cwasetup.cloudworkspace.com>) either creates or uses the following components.

## Azure tenant

**Required:** An Azure tenant and Azure Active Directory

WVD activation in Azure is a tenant-wide setting. VDS supports running one WVD instance per tenant.

## Azure subscription

**Required:** An Azure subscription (note the subscription ID that you want to use)

All the deployed Azure resources should be setup in one dedicated subscription. This makes cost tracking for WVD much easier and simplifies the deployment process.

**NOTE:** Azure free trials are not supported as they do not have enough credits to deploy a functional WVD deployment.

## Azure core quota

Enough quota for the VM families you will use - specifically at least 10 cores of the Ds v3 family for the initial platform deployment (as few as 2 cores can be used, but 10 covers every initial deployment possibility).

## Azure admin account

**Required:** An Azure global administrator account.

The VDS setup wizard requests that the Azure admin grant delegated permissions to the VDS service principal and install the VDS Azure Enterprise application. The admin must have the following Azure roles assigned:

- Global Administrator on the tenant
- Owner role on the subscription

## VM image

**Required:** An Azure image that supports multi-session Windows 10.

The Azure Marketplace provides the most recent versions of their base Windows 10 image and all Azure subscriptions have access to those automatically. If you want to use a different image or a custom image, want the VDS team to provide advice about creating or modifying other images or have general questions about Azure images let us know and we can schedule a conversation.

## Active Directory

WVD requires that the user identity be a part of Azure AD and that the VMs are joined to an Active Directory domain that is synced with that same Azure AD instance. VMs cannot be attached directly to the Azure AD instance so a domain controller needs to be configured and in-sync with Azure AD.

**These supported options include:**

- The automated build of an Active Directory instance within the subscription. The AD instance is typically created by VDS on the VDS control VM (CWMGR1) for Windows Virtual Desktop deployments that use this option. AD Connect must be setup and configured to sync with Azure AD as part of the setup process.

Active Directory type

- Azure AD Domain Services
- New Windows Server Active Directory
- Existing Windows Server Active Directory ?

Active directory domain name Required

Enter domain

- Integration into an existing Active Directory domain that is accessible from the Azure subscription (typically via Azure VPN or Express Route) and has its user list synced with Azure AD using AD Connect or a 3rd party product.

Active Directory type

- Azure AD Domain Services
- New Windows Server Active Directory
- Existing Windows Server Active Directory ?

Existing AD network Required

Select a Network...

Existing AD domain Required

Enter domain

Existing AD username Required

Enter username

Existing AD password Required

Enter password

## Storage layer

In WVD the storage strategy is designed so that no persistent user/company data resides on the WVD session VMs. Persistent data for user profiles, user files and folders, and corporate/application data are hosted on one or more data volume(s) hosted on an independent data layer.

FSLogix is a profile containerization technology that solves many user profile issues (like data sprawl and slow logins) by mounting a user profile container (VHD or VHDX format) to the session host at session initialization.

Due to this architecture a data storage function is required. This function must be able to handle the data transfer required each morning/afternoon when a significant portion of the users login/logout at the same time. Even moderately sized environments can have significant data transfer requirements. The disk performance of the data storage layer is one of the primary end user performance variables and special care must be taken to appropriately size the performance of this storage, not just the amount of storage. Generally, the storage layer should be sized to support 5-15 IOPS per user.

### The VDS Setup wizard supports the following configurations:

- Setup and configuration of Azure NetApp Files (ANF) (Recommended). *ANF standard service level supports up to 150 users, while environments of 150-500 users ANF Premium is recommended. For 500+ users ANF Ultra is recommended.*

File management ?

- Azure NetApp Files
- Azure Files
- File Server


ANF service Level Required

Premium

Capacity Pool Size Required

4

- Setup and configuration of a File Server VM



## Networking

**Required:** An inventory of all existing network subnets including any subnets visible to the Azure subscription via an Azure Express Route or VPN. The deployment needs to avoid overlapping subnets.

The VDS setup wizard allows you to define the network scope in case there is a range that is required, or must be avoided, as part of the planned integration with existing networks.

Determine an IP range to user during your deployment. Per Azure best practices, only IP addresses in a private range are supported.

**Supported choices include the following but default to a /20 range:**

- 192.168.0.0 through 192.168.255.255
- 172.16.0.0 through 172.31.255.255
- 10.0.0.0 through 10.255.255.255

## CWMGR1

Some of the unique capabilities of VDS such as the cost saving Workload Scheduling and Live Scaling functionality require an administrative presence within the tenant and subscription. Therefore, an administrative VM called CWMGR1 is deployed as part of the VDS setup wizard automation. In addition to VDS automation tasks this VM also holds VDS configuration in a SQL express database, local log files and an advanced configuration utility called DCConfig.

**Depending on the selections made in the VDS setup wizard, this VM can be used to host additional functionality including:**

- An RDS gateway (only used in RDS deployments)
- An HTML 5 gateway (only used in RDS deployments)
- An RDS license server (only used in RDS deployments)
- A Domain Controller (if chosen)

## Decision tree in the Deployment Wizard

As part of the initial deployment a series of questions are answered to customize the settings for the new environment. Below is an outline of the major decisions to be made.

## Azure region

Decide which Azure region or regions will host your WVD Virtual Machines. Note that Azure NetApp Files and certain VM families (GPU enabled VMs, for example) have a defined Azure region support list while WVD is available in most regions.

- This link can be used to identify [Azure product availability by region](#)

## **Active Directory type**

Decide which Active Directory type you want to use:

- Existing on-prem Active Directory
- Refer to the [WVD VDS Components and Permissions](#) document for an explanation of the required permissions and components in both Azure and the local Active Directory environment
- New Azure subscription based Active Directory instance
- Azure Active Directory Domain Services

## **Data Storage**

Decide where the data for user profiles, individual files, and corporate shares will be placed. Choices include:

- Azure NetApp Files
- Azure Files
- Traditional File Server (Azure VM with Managed Disk)

## **NetApp VDS Deployment Requirements for Existing Components**

### **NetApp VDS Deployment with Existing Active Directory Domain Controllers**

This configuration type extends an existing Active Directory domain to support the WVD instance. In this case VDS deploys a limited set of components into the domain to support automated provisioning and management tasks for the WVD components.

#### **This configuration requires:**

- An existing Active Directory domain controller that can be accessed by VMs on the Azure VNet, typically via either Azure VPN or Express Route OR a domain controller that has been created in Azure.
- Addition of VDS components and permissions required for VDS management of WVD host pools and data volumes as they are joined to the domain. The [WVD VDS Components and Permissions](#) guide defines the required components and permissions and the deployment process requires a Domain user with domain privileges to execute the script that will create the needed elements.
- Note that the VDS deployment creates a VNet by default for VDS created VMs. The VNet can be either peered with existing Azure network VNets or the CWMGR1 VM can be moved to an existing VNet with the required subnets pre-defined.

### **Credentials and domain preparation tool**

Administrators must provide a Domain Administrator credential at some point in the deployment process. A temporary Domain Administrator credential can be created, used and deleted later (once the deployment process completes).

Alternatively, customers who require assistance in building out the pre-requisites can leverage the Domain Preparation Tool.

### **NetApp VDS deployment with existing file system**

VDS creates Windows shares that allow user profile, personal folders, and corporate data to be accessed from WVD session VMs. VDS will deploy either the File Server or Azure NetApp File options by default, but if you have an existing file storage component VDS can point the shares to that component once the VDS deployment is complete.

## The requirements for using and existing storage component:

- The component must support SMB v3
- The component must be joined to the same Active Directory domain as the WVD session hosts
- The component must be able to expose a UNC path for use in the VDS configuration – one path can be used for all three shares or separate paths may be specified for each. Note that VDS will set user level permissions on these shares so refer to the VDS WVD Components and Permissions document to ensure the appropriate permissions have been granted to the VDS Automation Services.

## NetApp VDS deployment with existing Azure AD Domain Services

This configuration requires a process to identify the attributes of the existing Azure Active Directory Domain services instance. Contact your account manager to request a deployment of this type.

### NetApp VDS Deployment with Existing WVD deployment

This configuration type assumes that the necessary Azure VNet, Active Directory, and WVD components already exist. The VDS deployment is performed in the same manner as the “NetApp VDS Deployment with Existing AD” configuration, but adds the following requirements:

- RD Owner role to the WVD Tenant needs to be granted to the VDS Enterprise Applications in the Azure
- WVD Host Pool and WVD Host Pool VMs need to be imported into VDS using the VDS Import function in the VDS Web App. This process collects the WVD host pool and session VM metadata and stores in it VDS so that these elements can be managed by VDS
- WVD User data needs to be imported into the VDS User section using the CRA tool. This process inserts metadata about each user into the VDS control plane so their WVD App Group membership and session information can be managed by VDS

## APPENDIX A: VDS control plane URLs and IP addresses

VDS components in the Azure subscription communicate with the VDS global control plane components such as the the VDS Web Application and the VDS API endpoints. For access, the following base URI addresses need to be whitelisted for bi-directional access on port 443:

[api.cloudworkspace.com](http://api.cloudworkspace.com)  
[autoprodb.database.windows.net](http://autoprodb.database.windows.net)  
[vdctoolsapi.trafficmanager.net](http://vdctoolsapi.trafficmanager.net)  
[cjbootstrap3.cjautomate.net](http://cjbootstrap3.cjautomate.net)

If your access control device can only white list by IP address, the following list of IP addresses should be whitelisted. Note that VDS uses the Azure Traffic Manager service, so this list may change over time:

13.67.190.243  
13.67.215.62  
13.89.50.122  
13.67.227.115  
13.67.227.230  
13.67.227.227  
23.99.136.91  
40.122.119.157  
40.78.132.166  
40.78.129.17  
40.122.52.167  
40.70.147.2  
40.86.99.202

13.68.19.178  
13.68.114.184  
137.116.69.208  
13.68.18.80  
13.68.114.115  
13.68.114.136  
40.70.63.81  
52.171.218.239  
52.171.223.92  
52.171.217.31  
52.171.216.93  
52.171.220.134  
92.242.140.21

## APPENDIX B: Microsoft WVD requirements

This Microsoft WVD Requirements section is a summary of WVD requirements from Microsoft. Complete and current WVD requirements can be found here:

<https://docs.microsoft.com/en-us/azure/virtual-desktop/overview#requirements>

### Windows Virtual Desktop session host licensing

Windows Virtual Desktop supports the following operating systems, so make sure you have the appropriate licenses for your users based on the desktop and apps you plan to deploy:

| OS   | Required license  |
|--|---|
| Windows 10 Enterprise multi-session or Windows 10 Enterprise | Microsoft 365 E3, E5, A3, A5, F3, Business Premium Windows E3, E5, A3, A5 |
| Windows 7 Enterprise   | Microsoft 365 E3, E5, A3, A5, F3, Business Premium Windows E3, E5, A3, A5 |
| Windows Server 2012 R2, 2016, 2019                           | RDS Client Access License (CAL) with Software Assurance                   |

### URL Access for WVD machines

The Azure virtual machines you create for Windows Virtual Desktop must have access to the following URLs:

| Address                                   | Outbound TCP Port | Purpose                     | Service Tag           |
|---|-------------------|-----------------------------|-----------------------|
| *.wvd.microsoft.com                       | 443               | Service traffic             | WindowsVirtualDesktop |
| mrsglobalsteus2prod.blob.core.windows.net | 443               | Agent and SXS stack updates | AzureCloud            |
| *.core.windows.net                        | 443               | Agent traffic               | AzureCloud            |
| *.servicebus.windows.net                  | 443               | Agent traffic               | AzureCloud            |
| prod.warmpath.msftcloudes.com             | 443               | Agent traffic               | AzureCloud            |
| catalogartifact.azureedge.net             | 443               | Azure Marketplace           | AzureCloud            |

| <b>Address</b>                             | <b>Outbound TCP Port</b> | <b>Purpose</b>       | <b>Service Tag</b> |
|--|--------------------------|----------------------|--------------------|
| kms.core.windows.net                       | 1688                     | Windows activation   | Internet           |
| wvdportalstorageblob.blob.core.windows.net | 443                      | Azure portal support | AzureCloud         |

The following table lists optional URLs that your Azure virtual machines can have access to:

| <b>Address</b>                 | <b>Outbound TCP Port</b> | <b>Purpose</b>                                 | <b>Service Tag</b> |
|--------------------------------|--------------------------|--|--------------------|
| *.microsoftonline.com          | 443                      | Authentication to MS Online Services           | None               |
| *.events.data.microsoft.com    | 443                      | Telemetry Service                              | None               |
| www.msftconnecttest.com        | 443                      | Detects if the OS is connected to the internet | None               |
| *.prod.do.dsp.mp.microsoft.com | 443                      | Windows Update                                 | None               |
| login.windows.net              | 443                      | Login to MS Online Services, Office 365        | None               |
| *.sfx.ms                       | 443                      | Updates for OneDrive client software           | None               |
| *.digicert.com                 | 443                      | Certificate revocation check                   | None               |

#### Optimal performance factors

For optimal performance, make sure your network meets the following requirements:

- Round-trip (RTT) latency from the client's network to the Azure region where host pools have been deployed should be less than 150ms.
- Network traffic may flow outside country/region borders when VMs that host desktops and apps connect to the management service.
- To optimize for network performance, we recommend that the session host's VMs are collocated in the same Azure region as the management service.

#### Supported virtual machine OS images

Windows Virtual Desktop supports the following x64 operating system images:

- Windows 10 Enterprise multi-session, version 1809 or later
- Windows 10 Enterprise, version 1809 or later
- Windows 7 Enterprise
- Windows Server 2019
- Windows Server 2016
- Windows Server 2012 R2

Windows Virtual Desktop does not support x86 (32-bit), Windows 10 Enterprise N, or Windows 10 Enterprise KN operating system images. Windows 7 also does not support any VHD or VHDX-based profile solutions hosted on managed Azure Storage due to a sector size limitation.

Available automation and deployment options depend on which OS and version you choose, as shown in the following table:

| Operating System                       | Azure Image Gallery | Manual VM Deployment | ARM Template Integration | Provision Host Pools on Azure Marketplace |
|--|---------------------|----------------------|--------------------------|---|
| Windows 10 multi-session, version 1903 | Yes                 | Yes                  | Yes                      | Yes                                       |
| Windows 10 multi-session, version 1809 | Yes                 | Yes                  | No                       | No  |
| Windows 10 Enterprise, version 1903    | Yes                 | Yes                  | Yes                      | Yes                                       |
| Windows 10 Enterprise, version 1809    | Yes                 | Yes                  | No                       | No  |
| Windows 7 Enterprise                   | Yes                 | Yes                  | No                       | No  |
| Windows Server 2019                    | Yes                 | Yes                  | No                       | No  |
| Windows Server 2016                    | Yes                 | Yes                  | Yes                      | Yes                                       |
| Windows Server 2012 R2                 | Yes                 | Yes                  | No                       | No  |

## **Copyright Information**

Copyright © 2020 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

## **Trademark Information**

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.