

# remote empty repo 생성




# git init & git push



# git local branch 생성

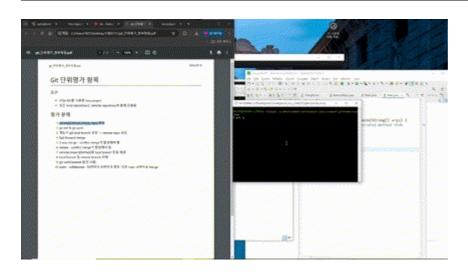


#### fast-forward merge

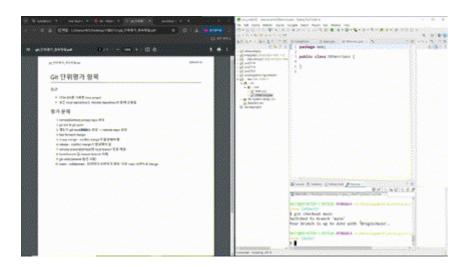

#### 3 way merge

```
· (- -) (- · -) · [7]
 X AS ET B
                     StringToLen...
                                    Main.java
                                                Otherclass.java
                                                               Main java 
                       1 package one;
ncedquiz
yrepo [emptyrepo main +3]
                         public class Main {
avaProject [GitjavaProject main]
                       4
                       50
                              public static void main(String[] args) {
719
                       6
                                   // TODO Auto-generated method stub
rogrammingunitexam
                         new[Interactive rebase main 16
                       8
                                   System.out.println("Hello world!");
                       9
                                   System.out.println("Hi world");
E System Library [jre]
ADME.md
                    910
                         -----
teproject
                                   System.out.println("hi worldaa!");
                     11
                     12
                                   System.out.println("Hello world1");
                         >>>>>> e0bb5a4 (edit)
                     14
                     %15
                      16
                      17
                      18
```

### confilct merge

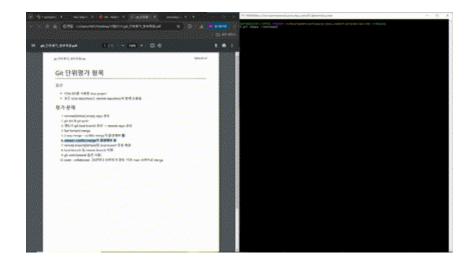

## localremote branch[GitHub]와 local branch 충돌 해결

```
git push --set-upstream origin other1

Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)

Temote:

Temote: Create a pull request for 'other1' on GitHub by visiting:


Temote: https://github.com/woosukju/new/pull/new/other1

Temote:

To https://github.com/woosukju/new.git

To https://github.com/woosukju/new.git
```

#### local branch 삭제

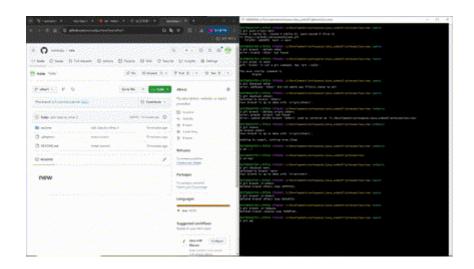

git 마지막 commit 메세지 수정

