

# **DITA Open Toolkit 3.7**



# Contents

<b>Part I: Installing DITA-OT.....</b>	<b>11</b>
<b>Chapter 1: Prerequisite software.....</b>	<b>13</b>
<b>Chapter 2: Checking the version.....</b>	<b>15</b>
<b>Chapter 3: Building output.....</b>	<b>17</b>
<b>Chapter 4: Installing via Homebrew.....</b>	<b>19</b>
<b>Part II: Building output.....</b>	<b>21</b>
<b>Chapter 5: Using the dita command.....</b>	<b>23</b>
Using a properties file.....	26
Migrating Ant builds.....	27
Using a project file.....	29
XML project files.....	31
JSON project files.....	33
YAML project files.....	35
<b>Chapter 6: Using Docker images.....</b>	<b>37</b>
Custom images.....	38
<b>Chapter 7: Using GitHub Actions.....</b>	<b>41</b>
<b>Chapter 8: Using Ant.....</b>	<b>45</b>
Ant.....	45
Building output using Ant.....	46
Creating an Ant build script.....	46
<b>Chapter 9: Using the Java API.....</b>	<b>49</b>
<b>Part III: Authoring formats.....</b>	<b>51</b>
<b>Chapter 10: Standard DITA XML.....</b>	<b>53</b>

<b>Chapter 11: Markdown content.....</b>	<b>55</b>
<b>Chapter 12: Lightweight DITA.....</b>	<b>57</b>
<b>Chapter 13: Markdown DITA syntax.....</b>	<b>59</b>
<b>Part IV: Output formats.....</b>	<b>65</b>
<b>Chapter 14: PDF.....</b>	<b>67</b>
<b>Chapter 15: HTML5.....</b>	<b>69</b>
<b>Chapter 16: Eclipse help.....</b>	<b>71</b>
<b>Chapter 17: HTML Help.....</b>	<b>73</b>
<b>Chapter 18: Markdown.....</b>	<b>75</b>
<b>Chapter 19: Normalized DITA.....</b>	<b>77</b>
<b>Chapter 20: XHTML.....</b>	<b>79</b>
<b>Part V: Parameters.....</b>	<b>81</b>
<b>Chapter 21: DITA command arguments.....</b>	<b>83</b>
<b>Chapter 22: DITA-OT parameters.....</b>	<b>89</b>
Common.....	89
PDF.....	94
HTML-based output.....	96
HTML5.....	99
XHTML.....	101
HTML Help.....	102
Eclipse Help.....	102
Other.....	103
<b>Chapter 23: Configuration properties.....</b>	<b>105</b>
local.properties.....	105
plugin.properties.....	106

configuration.properties.....	106
Internal Ant properties.....	107
<b>Part VI: Customizing HTML.....</b>	<b>109</b>
<b>Chapter 24: Setting HTML parameters.....</b>	<b>111</b>
Adding navigation.....	111
Adding custom CSS.....	112
Headers and footers.....	113
Handling content outside the map directory.....	114
<b>Chapter 25: Using a properties file.....</b>	<b>117</b>
<b>Part VII: Customizing PDF.....</b>	<b>119</b>
<b>Chapter 26: Customization approaches.....</b>	<b>121</b>
<b>Chapter 27: Generating revision bars.....</b>	<b>123</b>
<b>Part VIII: Adding plug-ins.....</b>	<b>125</b>
<b>Chapter 28: Installing plug-ins.....</b>	<b>127</b>
<b>Chapter 29: Removing plug-ins.....</b>	<b>129</b>
<b>Chapter 30: Plug-in registry.....</b>	<b>131</b>
<b>Chapter 31: Rebuilding documentation.....</b>	<b>135</b>
<b>Part IX: Creating plug-ins.....</b>	<b>137</b>
<b>Chapter 32: Plug-in benefits.....</b>	<b>139</b>
<b>Chapter 33: Plug-in descriptor file.....</b>	<b>141</b>
<b>Chapter 34: Coding conventions.....</b>	<b>147</b>
<b>Chapter 35: Plug-in dependencies.....</b>	<b>151</b>
Referencing files from other plug-ins.....	151

<b>Chapter 36: Plug-in use cases.....</b>	<b>153</b>
Setting parameters.....	153
Adding a new Ant target.....	153
Adding a pre-processing step.....	154
Adding a new output format.....	155
Adding new parameters.....	157
Overriding XSLT steps.....	158
Adding a Java library.....	159
Adding new messages.....	160
New extension points.....	162
Extending an XML catalog file.....	164
Rewriting file names.....	165
Saxon customizations.....	165
Saxon extensions.....	166
Custom collation URI resolvers.....	167
 <b>Chapter 37: Custom HTML plug-ins.....</b>	 <b>169</b>
Bundling custom CSS.....	169
Embedding web fonts.....	171
Inserting JavaScript.....	173
 <b>Chapter 38: Custom PDF plug-ins.....</b>	 <b>177</b>
Types of PDF plug-ins.....	177
PDF plug-in structure.....	178
Custom artwork.....	179
Index configuration.....	179
Variable overrides.....	180
Custom attributes.....	180
Internationalization.....	180
Custom stylesheets.....	181
Simple PDF plug-in.....	181
PDF plug-in resources.....	183
 <b>Chapter 39: Globalizing DITA content.....</b>	 <b>185</b>
Globalization support.....	185
Supported languages.....	185
Customizing generated text.....	187
Adding new strings.....	189
Overriding strings.....	190
Adding new languages.....	191
 <b>Chapter 40: Migrating customizations.....</b>	 <b>193</b>
To 3.7.....	193
To 3.6.....	195
To 3.5.....	197
To 3.4.....	199
To 3.3.....	200
To 3.2.....	202
To 3.1.....	202
To 3.0.....	203

To 2.5.....	204
To 2.4.....	205
To 2.3.....	206
To 2.2.....	208
To 2.1.....	209
To 2.0.....	210
To 1.8.....	211
To 1.7.....	212
Flagging updates.....	214
To 1.6.....	217
To 1.5.4.....	219
 <b>Part X: Troubleshooting.....</b>	 <b>223</b>
 <b>Chapter 41: Logging.....</b>	 <b>225</b>
 <b>Chapter 42: Enabling debug mode.....</b>	 <b>227</b>
 <b>Chapter 43: DITA-OT error messages.....</b>	 <b>229</b>
 <b>Chapter 44: Other error messages.....</b>	 <b>253</b>
 <b>Chapter 45: Command line help.....</b>	 <b>255</b>
 <b>Chapter 46: Increasing Java memory.....</b>	 <b>257</b>
 <b>Chapter 47: Speeding up builds.....</b>	 <b>259</b>
 <b>Part XI: Reference.....</b>	 <b>261</b>
 <b>Chapter 48: DITA-OT architecture.....</b>	 <b>263</b>
Processing structure.....	263
Map-first preprocessing.....	264
Processing modules.....	265
Processing order.....	266
Store API.....	267
Pre-processing modules.....	268
Generate lists (gen-list).....	268
Debug and filter (debug-filter).....	269
Resolve map references (mapref).....	269
Branch filtering (branch-filter).....	270
Resolve key references (keyref).....	270
Copy topics (copy-to).....	270
Conref push (conrefpush).....	270
Resolve content references (conref).....	270

Filter conditional content (profile).....	271
Resolve topic fragments and code references (topic-fragment).....	271
Chunk topics (chunk).....	271
Move metadata (move-meta-entries) and pull content into maps (mappull).....	271
Map based linking (maplink).....	272
Pull content into topics (topicpull).....	272
Flagging (flag-module).....	272
Map cleanup (clean-map).....	276
Copy related files (copy-files).....	276
HTML-based processing modules.....	276
Common HTML-based processing.....	276
XHTML processing.....	276
HTML5 processing.....	276
Eclipse help processing.....	276
HTML Help processing.....	277
PDF processing modules.....	277
History of the PDF transformation.....	278
 <b>Chapter 49: DITA specification support.....</b>	<b>281</b>
DITA 1.2 support.....	281
DITA 1.3 support.....	281
DITA 2.0 preview.....	282
Implementation-dependent features.....	284
Codeblock extensions.....	286
DITA features in docs.....	288
 <b>Chapter 50: Extension points.....</b>	<b>291</b>
All extension points.....	291
General extension points.....	296
Pre-processing extension points.....	297
XSLT-import extension points.....	298
XSLT-parameter extension points.....	300
Version and support information.....	301
Plug-in extension points.....	302
Common processing.....	302
Eclipse Help.....	304
HTML5.....	305
HTML Help.....	305
PDF.....	305
HTML-based output.....	305
 <b>Chapter 51: License.....</b>	<b>307</b>
Third-party software.....	307
 <b>Chapter 52: Glossary.....</b>	<b>309</b>
 <b>Appendix A: Resources.....</b>	<b>311</b>
Web-based resources.....	311
Books.....	311



<b>Appendix B: Release Notes.....</b>	<b>313</b>
Requirements.....	313
DITA-OT 3.7.3.....	313
DITA-OT 3.7.2 released May 17, 2022.....	314
DITA-OT 3.7.1 released March 23, 2022.....	314
DITA-OT 3.7 released January 17, 2022.....	315
<b>Index.....</b>	<b>323</b>



---

# Part I

---

## Installing DITA Open Toolkit

---

The DITA-OT distribution package can be installed on Linux, macOS, and Windows. It contains everything that you need to run the toolkit except for Java.

### Before you begin

- Ensure that you have a Java Runtime Environment (JRE) or Java Development Kit (JDK).

DITA-OT is designed to run on Java version 8u101 or later and built and tested with the Open Java Development Kit (OpenJDK). Compatible Java distributions are available from multiple sources:

- You can download the Oracle JRE or JDK from [oracle.com/java](https://oracle.com/java) under commercial license.
- Eclipse Temurin is the free OpenJDK distribution available from [adoptium.net](https://adoptium.net).
- Free OpenJDK distributions are also provided by [Amazon Corretto](#), [Azul Zulu](#), and [Red Hat](#).
- If you want to generate HTML Help, ensure that you have HTML Help Workshop installed.

You can download the Help Workshop from [msdn.microsoft.com](https://msdn.microsoft.com).

### Procedure

1. Download the `dita-ot-3.7.3.zip` package from the project website at [dita-ot.org/download](https://dita-ot.org/download).
2. Extract the contents of the package to the directory where you want to install DITA-OT.
3. Add the absolute path for the `bin` folder of the DITA-OT installation directory to the [PATH environment variable](#).

**Tip:** This defines the necessary environment variable that allows the `dita` command to be run from any location on the file system without typing the path to the command.



---

# Chapter 1

---

## Prerequisite software

---

The software that DITA-OT requires depends on the output formats you want to use.

### Software required for core DITA-OT processing

DITA-OT requires the following software applications:

#### Java Runtime Environment (JRE) or Java Development Kit (JDK)

DITA-OT is designed to run on Java version 8u101 or later and built and tested with the Open Java Development Kit (OpenJDK). Compatible Java distributions are available from multiple sources:

- You can download the Oracle JRE or JDK from [oracle.com/java](http://oracle.com/java) under commercial license.
- Eclipse Temurin is the free OpenJDK distribution available from [adoptium.net](http://adoptium.net).
- Free OpenJDK distributions are also provided by [Amazon Corretto](http://Amazon Corretto), [Azul Zulu](http://Azul Zulu), and [Red Hat](http://Red Hat).

**Note:** This is the *only* prerequisite that you need to install. All other required software is provided in the distribution package, including [Apache Ant](http://Apache Ant)™ 1.10.12, [Saxon](http://Saxon) 10.6, and [ICU for Java](http://ICU for Java) 70.1.

### Software required for specific transformations

Depending on the type of output that you want to generate, you might need the following applications:

#### Microsoft Help Workshop

Required for generating HTML help. You can download the Help Workshop from [msdn.microsoft.com](http://msdn.microsoft.com).

#### XSL-FO processor

Required for generating PDF output. Apache™ FOP (*Formatting Objects Processor*) 2.5 is included in the distribution package. You can download other versions from [xmlgraphics.apache.org/fop](http://xmlgraphics.apache.org/fop). You can also use commercial FO processors such as Antenna House Formatter or RenderX XEP.



---

# Chapter 2

---

## Checking the DITA-OT version number

---

You can determine the DITA Open Toolkit version number from a command prompt.

### Procedure

1. Open a command prompt or terminal session.
2. Issue the following command:

```
dita --version
```

### Results

The DITA-OT version number appears on the console:

```
DITA-OT version 3.7.3
```





---

# Chapter

# 3

---

## Building output using the dita command

---

You can generate output using the `dita` command-line tool. Build parameters can be specified on the command line or with `.properties` files.

### About this task

The DITA-OT client is a command-line tool with no graphical user interface. To verify that your installation works correctly, you can build output using the sample files included in the distribution package.

### Procedure

1. Open a terminal window by typing the following in the search bar:

Option	Description
Linux or macOS	Type Terminal.
Windows	Type Command Prompt.

2. At the command-line prompt, enter the following command:

```
dita --input=input-file --format=format
```

where:

- *input-file* is the DITA map or DITA file that you want to process.
- *format* is the output format (transformation type). This argument corresponds to the common parameter [transtypeparametertranstype](#) on page 93. Use the same values as for the transtype build parameter, for example `html5` or `pdf`.

If processing is successful, nothing is printed in the terminal window. The built output is written to the specified output directory (by default, in the `out` subdirectory of the current directory).

### Example

Run from `dita-ot-dir/docsrc/samples`, the following command generates HTML5 output for the `sequence.ditamap` file:

```
dita --input=sequence.ditamap --format=html5
```

### What to do next

Most builds require you to specify more options than are described in this topic.



---

# Chapter

# 4

---

## Installing DITA-OT via Homebrew

---

An alternative installation method can be used to install DITA-OT via [Homebrew](#), one of the most popular open-source package managers on macOS and Linux.

### Before you begin

The steps below assume you have already installed [Homebrew](#) according to the instructions at [brew.sh](#).

**Tip:** Verify that your [PATH environment variable](#) begins with the `bin` subfolder of the Homebrew installation directory <sup>1</sup> to ensure that Homebrew-installed software takes precedence over any programs of the same name elsewhere on the system.

### Procedure

1. Update Homebrew to make sure the latest package formulas are available on your system:

```
$ brew update
Already up-to-date.
```

Homebrew responds with a list of any new or updated formulae.

2. Optional: Check the version of DITA-OT that is available from Homebrew:

```
$ brew info dita-ot
dita-ot: stable 3.7.3
DITA Open Toolkit is an implementation of the OASIS DITA specification
https://www.dita-ot.org/
/usr/local/Cellar/dita-ot/3.7.3 (number of files, package size) *
  Built from source on YYYY-MM-DD at hh:mm:ss
From: https://github.com/Homebrew/homebrew-core/blob/master/Formula/dita-ot.rb
==> Requirements
Required: java >= 1.8 #
```

The version of the DITA-OT formula is shown, along with basic information on the package.

3. Install the `dita-ot` package:

```
$ brew install dita-ot
Downloading...
```

Homebrew will automatically download the latest version of the toolkit, install it in a subfolder of the local package Cellar and symlink the `dita` command to the `bin` subfolder of the Homebrew installation directory.

---

<sup>1</sup> Homebrew's default installation location depends on the operating system architecture:

- `/usr/local` on macOS Intel
- `/opt/homebrew` on macOS ARM
- `/home/linuxbrew/.linuxbrew` on Linux

4. Optional: Verify the installation:

```
$ which dita
/usr/local/bin/dita
```

The response confirms that the system will use the Homebrew-installed version of DITA-OT.

5. Optional: Check the DITA-OT version number:

```
$ dita --version
DITA-OT version 3.7.3
```

The DITA-OT version number appears on the console.

## Results

You can now run the `dita` command to transform DITA content.

---

# Part II

---

## Building output

---

You can use the `dita` command-line tool, Ant, or the Java API to transform DITA content to the various output formats that DITA Open Toolkit supports.



---

# Chapter

# 5

---

## Building output using the dita command

---

You can generate output using the `dita` command-line tool. Build parameters can be specified on the command line or with `.properties` files.

### Procedure

At the command-line prompt, enter the following command:

```
dita --input=input-file --format=format [options]
```

where:

- *input-file* is the DITA map or DITA file that you want to process.
- *format* is the output format (transformation type). This argument corresponds to the common parameter [transtypeparametertranstype](#) on page 93. Use the same values as for the transtype build parameter, for example `html5` or `pdf`.

You can create plug-ins to add new output formats; by default, the following values are available:

- `dita`
- `eclipsehelp`
- `html5`
- `htmlhelp`
- `markdown`, `markdown_gitbook`, and `markdown_github`
- `pdf`
- `xhtml`

**Tip:** See [DITA-OT transformations \(output formats\)](#) on page 65 for sample command line syntax and more information on each transformation.

- *[options]* include the following optional build parameters:

#### **--debug**

#### **-d**

Debug logging prints considerably more additional information. The debug log includes all information from the verbose log, plus details on Java classes, additional Ant properties and overrides, preprocessing filters, parameters, and stages, and the complete build sequence. Debug logging requires additional resources and can slow down the build process, so it should only be enabled when further details are required to diagnose problems.

#### **--output=dir**

#### **-o dir**

Specifies the path of the output directory; the path can be absolute or relative to the current directory.

This option corresponds to the common parameter [output.diroutput.dirparametersoutput.dir](#) on page 92.

By default, the output is written to the `out` subdirectory of the current directory.

### **`--filter=files`**

Specifies filter file(s) used to include, exclude, or flag content. Relative paths are resolved against the current directory and internally converted to absolute paths.

#### **Note:**

To specify multiple filter files, use the system path separator character to delimit individual file paths (semicolon ‘;’ on Windows, and colon ‘:’ on macOS and Linux) and wrap the value in quotes:

```
--filter="filter1.ditaval;filter2.ditaval;filter3.ditaval"
```

As of DITA-OT 3.6, the `--filter` option can also be passed multiple times:

```
--filter=filter1.ditaval --filter=filter2.ditaval --  
filter=filter3.ditaval
```

DITAVAL files are evaluated in the order specified, so conditions specified in the first file take precedence over matching conditions specified in later files, just as conditions at the start of a DITAVAL document take precedence over matching conditions later in the same document.

### **`--force`**

Force-install an existing plug-in.

Passed as an additional option to the installation subcommand: `dita install plug-in-zip --force`

### **`--help`**

### **`-h`**

Print a list of available arguments, options, and subcommands.

### **`--logfile=file`**

### **`-l file`**

Write logging messages to a file.

### **`--parameter=value`**

### **`-Dparameter=value`**

Specify a value for a DITA-OT or Ant build parameter.

The GNU-style `--parameter=value` form is only available for parameters that are configured in the plug-in configuration file; the Java-style `-D` form can also be used to specify additional non-configured parameters or set system properties.

Parameters not implemented by the specified transformation type or referenced in a `.properties` file are ignored.

**Tip:** If you are building in different environments where the location of the input files is not consistent, set `args.input.dir` with the `dita` command and reference its value with `${args.input.dir}` in your `.properties` file.

### **`--propertyfile=file`**

Use build parameters defined in the referenced `.properties` file.

Build parameters specified on the command line override those set in the `.properties` file.

### **`--repeat=N`**

Repeat the transformation *N* number of times.



This option can be used by plug-in developers to measure performance. To run a conversion five times, for example, use `--repeat=5`. The duration of each execution will appear in the console when the final transformation is complete.

```
$ dita --input=docsrc/samples/sequence.ditamap --format=html5 \
--repeat=5
1 11281ms
2 4132ms
3 3690ms
4 4337ms
5 3634ms
```

**`--resource=`*file***

**`-r` *file***

Specifies resource files.

This argument corresponds to the common parameter [args.resourcesargs.resourcesparametersargs.resources](#) on page 90.

Resource files can be used to convert partial documentation sets by processing input with additional information.

For example, to process a single topic file with a map that contains key definitions, use a command like this:

```
dita --input=topic.dita --resource=keys.ditamap --format=html5
```

To convert a chapter map to HTML5 and insert related links from relationship tables in a separate map, use:

```
dita --input=chapter.ditamap --resource=reltables.ditamap --
format=html5
```

**`--temp=`*dir***

**`-t` *dir***

Specifies the location of the temporary directory.

This option corresponds to the common parameter [dita.temp.dirdita.temp.dirparametersdita.temp.dir](#) on page 91.

The temporary directory is where DITA-OT writes intermediate files that are generated during the transformation process.

**`--verbose`**

**`-v`**

Verbose logging prints additional information to the console, including directory settings, effective values for Ant properties, input/output files, and informational messages to assist in troubleshooting.

If processing is successful, nothing is printed in the terminal window. The built output is written to the specified output directory (by default, in the `out` subdirectory of the current directory).

## Example

For example, from `dita-ot-dir/docsrc/samples`, run:

```
dita --input=sequence.ditamap --format=html5 \
--output=output/sequence \
--args.input.dir=/absolute/path/to/dita-ot-dir/docsrc/samples \
--propertyfile=properties/sequence-html5.properties
```

This builds `sequence.ditamap` to HTML5 output in `output/sequence` using the following additional parameters specified in the `properties/sequence-html5.properties` file:

```

1 # Directory that contains the custom .css file:
2 args.cssroot = ${args.input.dir}/css/
3
4 # Custom .css file used to style output:
5 args.css = style.css
6
7 # Copy the custom .css file to the output directory:
8 args.copycss = yes
9
10 # Location of the copied .css file relative to the output:
11 args.csspath = branding
12
13 # Generate a full navigation TOC in topic pages:
14 nav-toc = full

```

## What to do next

Usually, you will want to specify a set of reusable build parameters in a `.properties` file.

## Setting build parameters with `.properties` files

---

Usually, DITA builds require setting a number of parameters that do not change frequently. You can reference a set of build parameters defined in a `.properties` file when building output with the `dita` command. If needed, you can override any parameter by specifying it explicitly as an argument to the `dita` command.

### About `.properties` files

A `.properties` file is a text file that enumerates one or more name-value pairs, one per line, in the format `name = value`. The `.properties` filename extension is customarily used, but is not required.

- Lines beginning with the `#` character are comments.
- Properties specified as arguments of the `dita` command override those set in `.properties` files.

**Restriction:** For this reason, `args.input` and `transtype` can't be set in the `.properties` file.

- If you specify the same property more than once, the last instance is used.
- Properties not used by the selected transformation type are ignored.
- Properties can reference other property values defined elsewhere in the `.properties` file or passed by the `dita` command. Use the Ant `${property.name}` syntax.
- You can set properties not only for the default DITA-OT transformation types, but also for custom plugins.

### Procedure

1. Create your `.properties` file.

**Tip:** Copy `dita-ot-dir/docsrc/samples/properties/template.properties`; this template describes each of the properties you can set.

For example:

```

1 # Directory that contains the custom .css file:
2 args.cssroot = ${args.input.dir}/css/
3
4 # Custom .css file used to style output:
5 args.css = style.css
6

```

```

7 # Copy the custom .css file to the output directory:
8 args.copycss = yes
9
10 # Location of the copied .css file relative to the output:
11 args.csspath = branding
12
13 # Generate a full navigation TOC in topic pages:
14 nav-toc = full

```

2. Reference your `.properties` file with the `dita` command when building your output.

```
dita --input=my.ditamap --format=html5 --propertyfile=my.properties
```

3. If needed, pass additional arguments to the `dita` command to override specific build parameters.

For example, to build output once with `<draft>` and `<required-cleanup>` content:

```
dita --input=my.ditamap --format=html5 --propertyfile=my.properties \
--args.draft=yes
```

**Tip:** If you are building in different environments where the location of the input files is not consistent, set `args.input.dir` with the `dita` command and reference its value with `${args.input.dir}` in your `.properties` file.

## Migrating Ant builds to use the dita command

Although DITA Open Toolkit still supports Ant builds, switching to the `dita` command offers a simpler command interface, sets all required environment variables and allows you to run DITA-OT without setting up anything beforehand.

### About this task

Building output with the `dita` command is often easier than using Ant. In particular, you can use `.properties` files to specify sets of DITA-OT parameters for each build.

You can include the `dita` command in shell scripts to perform multiple builds.

**Tip:** Add the absolute path for the `bin` folder of the DITA-OT installation directory to the [PATH environment variable](#) to run the `dita` command from any location on the file system without typing the path.

### Procedure

1. In your Ant build file, identify the properties set in each build target.

**Note:** Some build parameters might be specified as properties of the project as a whole. You can refer to a build log to see a list of all properties that were set for the build.

2. Create a `.properties` file for each build and specify the needed build parameters, one per line, in the format `name = value`.
3. Use the `dita` command to perform each build, referencing your `.properties` with the `--propertyfile=file` option.

### Example: Ant build

Prior to DITA-OT 2.0, an Ant build like this was typically used to define the properties for each target.

Sample build file: `dita-ot-dir/docsrc/samples/ant_sample/build-chm-pdf.xml`

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <project name="build-chm-pdf" default="all" basedir=".">
3   <property name="dita.dir" location="${basedir}/../../../../.."/>

```

```

4  <target name="all" description="build CHM and PDF" depends="chm,pdf"/>
5  <target name="chm" description="build CHM">
6    <ant antfile="${dita.dir}/build.xml">
7      <property name="args.input" location="../sequence.ditamap"/>
8      <property name="transtype" value="htmlhelp"/>
9      <property name="output.dir" location="../out/chm"/>
10     <property name="args.gen.task.lbl" value="YES"/>
11   </ant>
12 </target>
13 <target name="pdf" description="build PDF">
14   <ant antfile="${dita.dir}/build.xml">
15     <property name="args.input" location="../taskbook.ditamap"/>
16     <property name="transtype" value="pdf"/>
17     <property name="output.dir" location="../out/pdf"/>
18     <property name="args.gen.task.lbl" value="YES"/>
19     <property name="args.rellinks" value="nofamily"/>
20   </ant>
21 </target>
22 </project>

```

### Example: .properties files with dita command

The following .properties files and dita commands are equivalent to the example Ant build.

Sample .properties file: *dita-ot-dir/docsrc/samples/properties/chm.properties*

```

1 output.dir = out/chm
2 args.gen.task.lbl = YES

```

Sample .properties file: *dita-ot-dir/docsrc/samples/properties/pdf.properties*

```

1 output.dir = out/pdf
2 args.gen.task.lbl = YES
3 args.rellinks = nofamily

```

Run from *dita-ot-dir/docsrc/samples*:

```

dita --input=sequence.ditamap --format=htmlhelp \
    --propertyfile=properties/chm.properties
dita --input=taskbook.ditamap --format=pdf \
    --propertyfile=properties/pdf.properties

```

### Example: Call the dita command from an Ant build

In some cases, you might still want to use an Ant build to implement some pre- or post-processing steps, but also want the convenience of using the dita command with .properties files to define the parameters for each build. This can be accomplished with Ant's `<exec>` task.

This example uses a `<dita-cmd>` Ant macro defined in the *dita-ot-dir/docsrc/samples/ant\_sample/dita-cmd.xml* file:

```

1 <macrodef name="dita-cmd">
2   <attribute name="input"/>
3   <attribute name="format"/>
4   <attribute name="propertyfile"/>
5   <sequential>
6     <!-- For Unix run the DITA executable-->
7     <exec taskname="dita-cmd" executable="${dita.dir}/bin/
dita" osfamily="unix" failonerror="true">
8       <arg value="--input"/>
9       <arg value="@{input}"/>
10      <arg value="--format"/>
11      <arg value="@{format}"/>

```

```

12 .....<arg value="--propertyfile"/>
13 .....<arg value="@{propertyfile}"/>
14 ....</exec>
15 ....<!-- For Windows run DITA from a DOS command -->
16 ....<exec taskname="dita-cmd" dir="${dita.dir}/
bin" executable="cmd" osfamily="windows" failonerror="true">
17 .....<arg value="/C"/>
18 .....<arg value="dita --input @{input} --format @{format} --
propertyfile=@{propertyfile}"/>
19 ....</exec>
20 ..</sequential>
21 </macrodef>

```

You can use this macro in your Ant build to call the dita command and pass the input, format and propertyfile parameters as follows:

```

<dita-cmd input="sample.ditamap" format="pdf"
propertyfile="sample.properties"/>

```

This approach allows you to use Ant builds to perform additional tasks at build time while allowing the dita command to set the classpath and ensure that all necessary JAR libraries are available.

**Note:** The attributes defined in the Ant macro are required and must be supplied each time the task is run. To set optional parameters in one build (but not another), use different .properties files for each build.

Sample build file: *dita-ot-dir/docsrc/samples/ant\_sample/build-chm-pdf-hybrid.xml*

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <project name="build-chm-pdf-hybrid" default="all" basedir=".">
3 ..<description>An Ant build that calls the dita command</description>
4 ..<include file="dita-cmd.xml"/><!-- defines the <dita-cmd> macro -->
5 ..<target name="all" depends="pre,main,post"/>
6 ..<target name="pre">
7 ....<description>Preprocessing steps</description>
8 ..</target>
9 ..<target name="main">
10 ....<description>Build the CHM and PDF with the dita command</description>
11 ....<property name="absolute.path.base" location="../"/>
12 ....<dita-cmd
13 .....input="${absolute.path.base}/sequence.ditamap"
14 .....format="htmlhelp"
15 .....propertyfile="${absolute.path.base}/properties/chm.properties"
16 ....>
17 ....<dita-cmd
18 .....input="${absolute.path.base}/taskbook.ditamap"
19 .....format="pdf"
20 .....propertyfile="${absolute.path.base}/properties/pdf.properties"
21 ....>
22 ..</target>
23 ..<target name="post">
24 ....<description>Postprocessing steps</description>
25 ..</target>
26 </project>

```

## Publishing with project files

DITA-OT 3.4 introduces new project files to define publication projects with multiple deliverables. Projects specify a context, output folder, and publication for each deliverable. A re-usable context groups source files and filters, and a publication defines an output format with transformation parameters. You can pass a project file to the dita command to publish multiple deliverables at once.

## About project files

Project files may be defined in one of three formats: XML, [JSON](#), or [YAML](#). The XML format can be validated with a RELAX NG schema provided in the `resources` folder of the DITA-OT installation (`project.rnc`).

**Note:** The XML project file format is the normative version provided for interoperability with existing XML-based toolchains. The JSON and YAML versions are alternative compact formats that are easier to read and write, but otherwise equivalent to the XML syntax.

Whereas `.properties` files can only be used to set parameters, project files go further, allowing you to define multiple deliverables with separate input files and output folders and formats for each publication. A project file can also refer to other project files, so you can re-use common configuration structures across projects.

Another advantage of project files over `.properties` files is that they allow you to specify paths relative to the project file, even for parameters that require absolute paths, such as:

- `args.cssroot`
- `args.ftr`
- `args.hdf`
- `args.hdr`

Though the exact syntax differs slightly, the basic structure of project files is similar in all supported formats.

- You can link to other project files with `include(s)`
- Projects can define multiple deliverables, which consist of:
  - a publication context that may include:
    - an `id` used to refer to this context from other projects
    - a series of input files (DITA maps)
    - a profile with a series of DITaval files used to filter the content
  - an output location (relative to the CLI `--output` directory)
  - a publication that defines:
    - an output format via `transtype`, and
    - a series of parameters to set for this transformation type, specified via `name` and either `href`, `path`, or `value`

### Tip:

- Use `href` for web addresses and other resources that should resolve to an absolute URI.
- Use `path` for parameters that require an absolute value, like `args.cssroot`. Paths may be defined relative to the project file, but are always expanded to an absolute system path.
- Use `value` to define strings and relative values for properties like `args.csspath`, which is used to describe a relative path in the output folder.

## Procedure

1. Create a project file to define the deliverables in your publication project.

For example:

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
project.rnc" type="application/relax-ng-compact-syntax"?>
3 <project xmlns="https://www.dita-ot.org/project">
4   <deliverable id="pdf">
5     <context name="User Guide">
6       <input href="../../userguide-book.ditamap"/>
7     </context>
8     <output href="."/>
9     <publication transtype="pdf2">
10      <param name="args.chapter.layout" value="BASIC"/>

```

```

11 .....<param name="args.gen.task.lbl" value="YES"/>
12 .....<param name="include.rellinks" value="friend"/>
13 .....<param name="outputFile.base" value="userguide"/>
14 .....<param name="processing-mode" value="strict"/>
15 ....</publication>
16 ..</deliverable>
17 </project>

```

**Figure 1: Sample project file for PDF output:** *dita-ot-dir/docsrc/samples/project-files/pdf.xml*

2. Pass your project file to the dita command to build output.

```
dita --project=pdf.xml
```

3. Optional: If needed, pass additional arguments to the dita command to override specific build parameters.

For example, to build output once with `<draft>` and `<required-cleanup>` content:

```
dita --project=pdf.xml --args.draft=yes
```

4. Optional: If your project contains multiple deliverables, you can pass the `--deliverable` option to generate output for a single deliverable ID.

```
dita --project=all.xml --deliverable=htmlhelp
```

## Sample XML project files

DITA-OT includes sample XML project files that can be used to define a publication project. The XML format can be validated with a RELAX NG schema provided in the `resources` folder of the DITA-OT installation (`project.rnc`).

Project files can be designed in a modular fashion to create reusable configuration structures that allow you to define settings in one file and refer to them in other projects to publish multiple deliverables at once.

For example, *dita-ot-dir/docsrc/samples/project-files/html.xml* defines a single HTML deliverable.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <?xml-model href="https://www.dita-ot.org/rng/
project.rnc" type="application/relax-ng-compact-syntax"?>
3  <project xmlns="https://www.dita-ot.org/project">
4    ..<include href="common.xml"/>
5    ..<deliverable name="HTML5" id="html">
6      ....<context idref="html"/>
7      ....<output href="."/>
8      ....<publication transtype="html5">
9        .....<param name="args.copycss" value="yes"/>
10       .....<param name="args.css" value="dita-ot-doc.css"/>
11       .....<param name="args.csspath" value="css"/>
12       .....<param name="args.cssroot" path="../../resources"/>
13       .....<param name="args.gen.task.lbl" value="YES"/>
14       .....<param name="args.hdr" href="../../resources/header.xml"/>
15       .....<param name="html5.toc.generate" value="no"/>
16       .....<param name="nav-toc" value="partial"/>
17       .....<param name="processing-mode" value="strict"/>
18     ....</publication>
19   ..</deliverable>
20 </project>

```

**Figure 2: Sample project file for HTML output**

This file can be used to generate the HTML version of the DITA-OT documentation by running the following command from the docsrc folder of the DITA-OT installation directory:

```
dita --project=samples/project-files/html.xml
```

The project file for HTML output imports the common html context from a shared project context defined in the `dita-ot-dir/docsrc/samples/project-files/common.xml` file, which includes the input map file and the DITAVAL file used to filter the output.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
project.rnc" type="application/relax-ng-compact-syntax"?>
3 <project xmlns="https://www.dita-ot.org/project">
4   <context id="html" name="HTML">
5     <input href="../../userguide.ditamap"/>
6     <profile>
7       <ditaval href="../../resources/html.ditaval"/>
8     </profile>
9   </context>
10 </project>

```

**Figure 3: Sample shared context for HTML-based output**

The same common html context is also referenced in the project file for HTMLHelp output, as illustrated in `dita-ot-dir/docsrc/samples/project-files/htmlhelp.xml`.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
project.rnc" type="application/relax-ng-compact-syntax"?>
3 <project xmlns="https://www.dita-ot.org/project">
4   <deliverable name="HTMLHelp" id="htmlhelp">
5     <context idref="html"/>
6     <output href="htmlhelp"/>
7     <publication transtype="htmlhelp">
8       <param name="args.copycss" value="yes"/>
9       <param name="args.css" value="dita-ot-doc.css"/>
10      <param name="args.csspath" value="css"/>
11      <param name="args.cssroot" path="../../resources"/>
12      <param name="args.gen.task.lbl" value="YES"/>
13      <param name="processing-mode" value="strict"/>
14    </publication>
15  </deliverable>
16 </project>

```

**Figure 4: Sample project file for HTMLHelp output**

The `dita-ot-dir/docsrc/samples/project-files/pdf.xml` file defines a single PDF deliverable.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
project.rnc" type="application/relax-ng-compact-syntax"?>
3 <project xmlns="https://www.dita-ot.org/project">
4   <deliverable id="pdf">
5     <context name="User Guide">
6       <input href="../../userguide-book.ditamap"/>
7     </context>
8     <output href="."/>
9     <publication transtype="pdf2">
10      <param name="args.chapter.layout" value="BASIC"/>
11      <param name="args.gen.task.lbl" value="YES"/>
12      <param name="include.rellinks" value="friend"/>

```



```

13 .....<param name="outputFile.base" value="userguide"/>
14 .....<param name="processing-mode" value="strict"/>
15 ....</publication>
16 ..</deliverable>
17 </project>

```

**Figure 5: Sample project file for PDF output**

This file can be used to generate the PDF version of the DITA-OT documentation by running the following command from the docsrc folder of the DITA-OT installation directory:

```
dita --project=samples/project-files/pdf.xml
```

The *dita-ot-dir/docsrc/samples/project-files/distribution-docs.xml* file includes both the HTML and PDF projects as follows:

```

<project xmlns="https://www.dita-ot.org/project">
.. <include href="html.xml"/>
.. <include href="pdf.xml"/>
</project>

```

To build both the HTML and PDF versions of the documentation as included in the distribution package, run the following command from the docsrc folder of the DITA-OT installation directory:

```
dita --project=samples/project-files/distribution-docs.xml
```

The *dita-ot-dir/docsrc/samples/project-files/all.xml* file includes all three project deliverables as follows:

```

<project xmlns="https://www.dita-ot.org/project">
.. <include href="html.xml"/>
.. <include href="htmlhelp.xml"/>
.. <include href="pdf.xml"/>
</project>

```

## Sample JSON project files

DITA-OT includes sample project files in [JSON](#) format that can be used to define a publication project. Like the XML project samples, the sample JSON files illustrate how deliverables can be described for use in publication projects. The JSON samples are functionally equivalent to their XML and YAML counterparts, with minor adaptations to JSON file syntax.

Project files can be designed in a modular fashion to create reusable configuration structures that allow you to define settings in one file and refer to them in other projects to publish multiple deliverables at once.

For example, *dita-ot-dir/docsrc/samples/project-files/html.json* defines a single HTML deliverable.

```

1 {
2   .. "includes": [ "common.json" ],
3   .. "deliverables": [
4     {
5       .. "name": "HTML5",
6       .. "context": { "idref": "html" },
7       .. "output": ".",
8       .. "publication": {
9         .. "transtype": "html5",
10        .. "params": [
11          {
12            .. "name": "args.copycss",
13            .. "value": "yes"

```

```

14 .....},
15 .....{
16 .....  "name": "args.css",
17 .....  "value": "dita-ot-doc.css"
18 .....},
19 .....{
20 .....  "name": "args.csspath",
21 .....  "value": "css"
22 .....},
23 .....{
24 .....  "name": "args.cssroot",
25 .....  "path": "../resources"
26 .....},
27 .....{
28 .....  "name": "args.gen.task.lbl",
29 .....  "value": "YES"
30 .....},
31 .....{
32 .....  "name": "args.hdr",
33 .....  "href": "../resources/header.xml"
34 .....},
35 .....{
36 .....  "name": "html5.toc.generate",
37 .....  "value": "no"
38 .....},
39 .....{
40 .....  "name": "nav-toc",
41 .....  "value": "partial"
42 .....},
43 .....{
44 .....  "name": "processing-mode",
45 .....  "value": "strict"
46 .....}
47 .....]
48 .....}
49 .....}
50 .....]
51 .....}

```

**Figure 6: Sample project file for HTML output**

This file can be used to generate the HTML version of the DITA-OT documentation by running the following command from the docsrc folder of the DITA-OT installation directory:

```
dita --project=samples/project-files/html.json
```

The project file for HTML output imports the common html context from a shared project context defined in the `dita-ot-dir/docsrc/samples/project-files/common.json` file, which includes the input map file and the DITAVAL file used to filter the output.

```

1 {
2   "contexts": [
3     {
4       "id": "html",
5       "input": "../userguide.ditamap",
6       "profiles": {
7         "ditavals": ["../resources/html.ditaval"]
8       }
9     }
10  ]

```

```
11 }
```

**Figure 7: Sample shared context for HTML-based output**

## Sample YAML project files

DITA-OT includes sample project files in [YAML](#) format that can be used to define a publication project. Like the XML project samples, the sample YAML files illustrate how deliverables can be described for use in publication projects. The YAML samples are functionally equivalent to their XML and JSON counterparts, with minor adaptations to YAML file syntax.

Project files can be designed in a modular fashion to create reusable configuration structures that allow you to define settings in one file and refer to them in other projects to publish multiple deliverables at once.

For example, *dita-ot-dir/docsrc/samples/project-files/html.yaml* defines a single HTML deliverable.

```
1 ---
2 includes:
3   - 'common.yaml'
4 deliverables:
5   - name: 'HTML5'
6     context:
7       idref: 'html'
8     output: '.'
9     publication:
10      transtype: 'html5'
11      params:
12        - name: 'args.copycss'
13          value: 'yes'
14        - name: 'args.css'
15          value: 'dita-ot-doc.css'
16        - name: 'args.csspath'
17          value: 'css'
18        - name: 'args.cssroot'
19          path: '../resources'
20        - name: 'args.gen.task.lbl'
21          value: 'YES'
22        - name: 'args.hdr'
23          href: '../resources/header.xml'
24        - name: 'html5.toc.generate'
25          value: 'no'
26        - name: 'nav-toc'
27          value: 'partial'
28        - name: 'processing-mode'
29          value: 'strict'
```

**Figure 8: Sample project file for HTML output**

This file can be used to generate the HTML version of the DITA-OT documentation by running the following command from the docsrc folder of the DITA-OT installation directory:

```
dita --project=samples/project-files/html.yaml
```

The project file for HTML output imports the common html context from a shared project context defined in the *dita-ot-dir/docsrc/samples/project-files/common.yaml* file, which includes the input map file and the DITAVAL file used to filter the output.

```
1 ---
2 contexts:
3   - id: 'html'
4     input: '../userguide.ditamap'
```

```
5  ....profiles:
6  .....ditavals:
7  .....- '..../resources/html.ditaval'
```

**Figure 9: Sample shared context for HTML-based output**

---

# Chapter

# 6

---

## Running the `dita` command from a Docker image

---

[Docker](#) is a platform used to build, share, and run portable application containers. As of version 3.4, the DITA-OT project provides an official Docker container image that includes everything you need to run the toolkit and publish DITA content from a containerized environment.

### About application containers

Using containers to deploy applications isolates software from its environment to ensure that it works consistently despite any differences in the host operating system, for example.

Docker containers are designed as stateless machines that can be quickly created and destroyed, started and stopped. Each Docker image provides its own private filesystem that includes only the code required to run the application itself—it is not intended for persistent data storage.

When a container is stopped, any changes made within the container are lost, so source files and generated output should be stored outside the container. These resources are attached to the container by mounting directories from the host machine.

### Before you begin

To run the DITA-OT image, you will need to install Docker and be able to access the GitHub Container Registry.

- To download Docker Desktop, you may be prompted to sign in with your Docker ID (or sign up to create one).

### Procedure

1. Install Docker for your operating system.

- [Install Docker Desktop on Windows](#)
- [Install Docker Desktop on Mac](#)
- On macOS, you can also install Docker Desktop via [Homebrew](#):

```
$ brew install homebrew/cask/docker
Downloading...
```

- When you first run the Docker Desktop application, you may be prompted to grant privileged access to allow Docker to install its networking components and links to the Docker apps. Grant this access and accept the service agreement to proceed.
- On Linux, install Docker Community Edition (CE) via your operating system's package manager, for example:

```
$ sudo apt-get install docker-ce
```

2. To build output, map a host directory to a container volume and specify options for the `dita` command.

```
$ docker run -it \  
-v /Users/username/source:/src ghcr.io/dita-ot/dita-ot:3.7.3 \  
-i /src/input.ditamap \  
-o /src/out \  

```

```
-f html5 -v
```

This command sequence specifies the following options:

- -v mounts the source subfolder of your home directory and binds it to the /src volume in the container
- -i specifies the input.ditamap file in your source folder as the input map file
- -o writes the output to source/out
- -f sets the output format to HTML5, and
- -v displays build progress messages with verbose logging

On Windows, if your Users directory is on the C:\ drive, use /c/Users/... to map the host directory:

```
> C:\Users\username> docker run -it ^
-v /c/Users/username/source:/src ghcr.io/dita-ot/dita-ot:3.7.3 ^
-i /src/input.ditamap ^
-o /src/out ^
-f html5 -v
```

**Note:** The DITA-OT container image uses the ENTRYPOINT instruction to run the dita command from the /opt/app/bin/ directory of the container automatically, so you there's no need to include the dita command itself, only the arguments and options you need to publish your content.

## Installing plug-ins in a Docker image

To install custom plug-ins or make other changes based on the DITA-OT parent image, you can create your own Dockerfile and specify the official DITA-OT image as the basis for your image.

### About this task

Each subsequent declaration in the Dockerfile modifies this parent image, so you can start with the official image, and add custom plug-ins or other commands as required to create a custom Docker image that includes everything you need to publish your content.

### Procedure

1. Create a new Dockerfile and specify the official DITA-OT image in the FROM directive.

```
# Use the latest DITA-OT image # as parent:
FROM ghcr.io/dita-ot/dita-ot:3.7.3
```

2. Optional: You can extend your image with a RUN declaration that runs the dita command from the container to install a custom plug-in, and specify the filename or URL of the plug-in's distribution ZIP file.

```
# Install a custom plug-in from a remote location:
RUN dita --install https://github.com/infotexture/dita-bootstrap/archive/
master.zip
```

3. Optional: You can also install custom plug-ins from the main DITA-OT plug-in registry at [dita-ot.org/plugins](https://dita-ot.org/plugins), or from your company plug-in registry.

```
# Install from the registry at dita-ot.org/plugins:
RUN dita --install org.dita-community.pdf-page-break
```

### Example

The docsrc/samples folder in the DITA-OT installation directory contains a complete example:

```
1 # Use the latest DITA-OT image # as parent:
2 FROM ghcr.io/dita-ot/dita-ot:3.7.3
```

```

3
4 # Install a custom plug-in from a remote location:
5 RUN dita --install https://github.com/infotexture/dita-bootstrap/archive/
master.zip
6
7 # Install from the registry at dita-ot.org/plugins:
8 RUN dita --install org.dita-community.pdf-page-break

```

**Figure 10: Sample Dockerfile with custom plug-ins: *dita-ot-dir/docsrc/samples/docker/Dockerfile***

### Building a new image

You can build a Docker image from this example by running the following command from the *dita-ot-dir/docsrc/samples* directory:

```

$ docker image build -t sample-docker-image:1.0 docker/
[+] Building 81.5s (4/6)

=> [internal] load build definition from Dockerfile

                                0.0s
=> => transferring dockerfile: 367B

                                0.0s
=> [internal] load .dockerignore

                                0.0s
=> => transferring context: 2B

                                0.0s
=> [internal] load metadata for ghcr.io/dita-ot/dita-ot:3.7.3
=> [1/3] FROM ghcr.io/dita-ot/dita-ot:3.7.3@sha256:<hash>
=> => resolve ghcr.io/dita-ot/dita-ot:3.7.3@sha256:<hash>
Step 2/3 : RUN dita --install https://github.com/infotexture/dita-bootstrap/
archive/master.zip
---> Running in d510f874cae0
Added net.infotexture.dita-bootstrap
Removing intermediate container d510f874cae0
---> 63deb8e15b5b
Step 3/3 : RUN dita --install org.dita-community.pdf-page-break
---> Running in b4ef2fcad916
Added org.dita-community.pdf-page-break
Removing intermediate container b4ef2fcad916
---> 402885636b7f
Successfully built 402885636b7f
Successfully tagged sample-docker-image:1.0

```

Docker steps through each instruction in the Dockerfile to build the sample image. In this case, the *dita* command provides feedback on each installed plug-in.

### Running the new container

You can then start a container based on your new image:

```

$ docker container run -it \
-v /path/to/dita-ot-dir/docsrc:/src sample-docker-image:1.0 \
-i /src/userguide.ditamap \
-o /src/out/dita-bootstrap \
-f html5-bootstrap -v

```

This command sequence specifies the following options:

- `-v` mounts the `docsrc` subfolder of the DITA-OT directory on your host machine and binds it to the `/src` volume in the container
- `-i` specifies `dita-ot-dir/docsrc/userguide.ditamap` as the input map file
- `-o` writes the output to `dita-ot-dir/docsrc/out/dita-bootstrap`
- `-f` sets the output format to the Bootstrap template, and
- `-v` displays build progress messages with verbose logging

When the build is finished, you should find a copy of the DITA-OT documentation under `dita-ot-dir/docsrc/out/dita-bootstrap`, styled with the basic Bootstrap template from the custom plug-in.



---

# Chapter 7

---

## Running the `dita` command from a GitHub Action

---

[GitHub Actions](#) are a CI/CD workflow mechanism attached to GitHub. Each action is an individual unit of functionality that can be combined with other GitHub Actions to create workflows, which are triggered in response to certain GitHub events. As of version 3.6.1, the DITA-OT project provides an official [dita-ot-action](#) that can be used as a step within a GitHub workflow to publish documentation as part of your CI/CD pipeline.

### About GitHub Actions

GitHub Actions can automate tasks such as document generation as part of your software development life cycle. GitHub Actions are event-driven, allowing a series of tasks to run one after another when a specified event has occurred.

Each step is an individual atomic task that can run commands in a job. A step can be either an action or a shell command. Each step in a job executes on the same runner, allowing the actions in that job to share data with each other, therefore files generated through the `dita-ot-build` action can be archived or published by later actions within the same job.

### Procedure

1. In your GitHub repository, create the `.github/workflows/` directory to store your workflow files.
2. In the `.github/workflows/` directory, create a new file called `dita-ot-build-actions.yml` and add the following code.

```
name: CI
'on':
  - push:
    - branches:
      - master
jobs:
  - build-dita:
    - name: Build DITA
    - runs-on: ubuntu-latest
    - steps:
      - name: Git checkout
      - uses: actions/checkout@v2
```

This setup ensures the action runs whenever code is updated on the `master` branch and checks out the codebase.

3. In the same file, add the following code.

```
      - name: Build PDF
      - uses: dita-ot/dita-ot-action@master
      - with:
        - input: document.ditamap
        - transtype: pdf
        - output-path: out
```

This action specifies the following:

- name defines the name of the action to be displayed within the GitHub repository
- uses specifies the name and version of the GitHub Action to run. Use dita-ot/dita-ot-action@master to run the latest version.
- input specifies the name and location of the input map file within the GitHub repository (relative to the repository root)
- transtype sets the output format to PDF, and
- output-path writes the output to the out folder within the running action

## Example

The docsrc/samples folder in the DITA-OT installation directory contains several complete examples. The following GitHub Action generates styled HTML and PDF outputs.

```

1 name: CI
2 'on':
3   push:
4     branches:
5       - master
6 jobs:
7   build-dita:
8     name: Build DITA
9     runs-on: ubuntu-latest
10    steps:
11      - name: Git checkout
12        uses: actions/checkout@v2
13      - name: Build HTML5 + Bootstrap
14        uses: dita-ot/dita-ot-action@master
15        with:
16          plugins: |
17            net.infotexture.dita-bootstrap
18          input: document.ditamap
19          transtype: html5-bootstrap
20          output-path: out
21
22      - name: Build PDF
23        uses: dita-ot/dita-ot-action@master
24        with:
25          install: |
26            # Run some arbitrary installation commands
27            apt-get update -q
28            apt-get install -qy --no-install-recommends nodejs
29            nodejs -v
30
31          # Install plugins
32            dita install fox.jason.extend.css
33            dita install org.doctales.xmltask
34            dita install fox.jason.prismjs
35          build: |
36            # Use the dita command line
37            dita -i document.ditamap -o out -f pdf --
filter=filter1.ditaval
38
39      - name: Upload DITA Output to a ZIP file
40        uses: actions/upload-artifact@v2
41        with:
42          name: dita-artifact
43          path: 'out'
44
45      - name: Deploy DITA Output to GitHub Pages
46        uses: JamesIves/github-pages-deploy-action@3.7.1
47        with:
48          GITHUB_TOKEN: ${ secrets.GITHUB_TOKEN }
```

```
49 .....BRANCH: gh-pages # The branch the action should deploy to.  
50 .....FOLDER: out # The folder the action should deploy.
```

**Figure 11: Sample GitHub Action: `dita-ot-dir/docsrc/samples/github-actions/dita-ot-pipeline.yaml`**

The *Build HTML5 + Bootstrap* step reuses the input, transtype and output-path settings. In addition, additional DITA-OT plug-ins can be loaded using the `plugins` parameter, with each plug-in separated by a comma or new line separator.

The *Build PDF* step uses an alternative syntax where the `install` and `build` parameters are used to run arbitrary commands from the command line.

### What to do next

See the `docsrc/samples/github-actions` folder in the DITA-OT installation directory for additional examples of GitHub Actions for different scenarios.



---

# Chapter

# 8

---

## Building output using Ant

---

You can use Ant to invoke DITA Open Toolkit and generate output. You can use the complete set of parameters that the toolkit supports.

### Related tasks

[Migrating Ant builds to use the dita command](#) on page 27

Although DITA Open Toolkit still supports Ant builds, switching to the `dita` command offers a simpler command interface, sets all required environment variables and allows you to run DITA-OT without setting up anything beforehand.

## Ant

---

Ant is a Java-based, open-source tool that is provided by the Apache Foundation. It can be used to declare a sequence of build actions. It is well suited for both development and document builds. The toolkit ships with a copy of Ant.

DITA-OT uses Ant to manage the XSLT scripts that are used to perform the various transformation; it also uses Ant to manage intermediate steps that are written in Java.

The most important Ant script is the `build.xml` file. This script defines and combines common pre-processing and output transformation routines; it also defines the DITA-OT extension points.

### Related tasks

[Migrating Ant builds to use the dita command](#) on page 27

Although DITA Open Toolkit still supports Ant builds, switching to the `dita` command offers a simpler command interface, sets all required environment variables and allows you to run DITA-OT without setting up anything beforehand.

[Building output using Ant](#) on page 46

You can build output by using an Ant build script to provide the DITA-OT parameters.

[Creating an Ant build script](#) on page 46

Instead of typing the DITA-OT parameters at the command prompt, you might want to create an Ant build script that contains all of the parameters.

### Related reference

[DITA-OT parameters](#) on page 89

Certain parameters apply to all DITA-OT transformations. Other parameters are common to the HTML-based transformations. Some parameters apply only to specific transformation types. These parameters can be passed as options to the `dita` command using the `--parameter=value` syntax or included in build scripts as Ant properties.

[Apache Ant documentation](#)

## Building output using Ant

---

You can build output by using an Ant build script to provide the DITA-OT parameters.

### Procedure

1. Open a command prompt or terminal session.
2. Issue the following command:

Option	Description
<b>Linux or macOS</b>	<code>bin/ant -f build-script target</code>
<b>Windows</b>	<code>bin\ant -f build-script target</code>

where:

- *build-script* is name of the Ant build script.
- *target* is an optional switch that specifies the name of the Ant target that you want to run.

If you do not specify a target, the value of the `@default` attribute for the Ant project is used.

### Related concepts

[Ant](#) on page 45

Ant is a Java-based, open-source tool that is provided by the Apache Foundation. It can be used to declare a sequence of build actions. It is well suited for both development and document builds. The toolkit ships with a copy of Ant.

### Related tasks

[Migrating Ant builds to use the dita command](#) on page 27

Although DITA Open Toolkit still supports Ant builds, switching to the `dita` command offers a simpler command interface, sets all required environment variables and allows you to run DITA-OT without setting up anything beforehand.

### Related reference

[DITA-OT parameters](#) on page 89

Certain parameters apply to all DITA-OT transformations. Other parameters are common to the HTML-based transformations. Some parameters apply only to specific transformation types. These parameters can be passed as options to the `dita` command using the `--parameter=value` syntax or included in build scripts as Ant properties.

[Apache Ant documentation](#)

## Creating an Ant build script

---

Instead of typing the DITA-OT parameters at the command prompt, you might want to create an Ant build script that contains all of the parameters.

### Procedure

1. Create an XML file that contains the following content:

```

1 <?xml version="1.0" encoding="UTF-8" ?>
2 <project name="%project-name%" default="%default-target%" basedir=".">
3
4   <property name="dita.dir" location="%path-to-DITA-OT%" />
5
6   <target name="%target-name%">
7     <ant antfile="${dita.dir}/build.xml">
8       <property name="args.input" value="%DITA-input%" />
9       <property name="transtype" value="html5" />
10    </ant>

```

```

11  ..</target>
12
13  </project>

```

You will replace the placeholder content (indicated by the % signs) with content applicable to your environment.

## 2. Specify project information:

- Optional: Set the value of the @name attribute to the name of your project.
- Set the value of the @default attribute to the name of a target in the build script.

If the build script is invoked without specifying a target, this target will be run.

## 3. Set the value of the dita.dir property to the location of the DITA-OT installation.

This can be a fully qualified path, or you can specify it relative to the location of the Ant build script that you are writing.

## 4. Create the Ant target:

- Set the value of the @name attribute.
- Specify the value for the args.input property.
- Specify the value of the transtype property.

## 5. Save the build script.

### Example

The following Ant build script generates CHM and PDF output for the sample DITA maps.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <project name="build-chm-pdf" default="all" basedir=".">
3    <property name="dita.dir" location="${basedir}/../../.." />
4    <target name="all" description="build CHM and PDF" depends="chm,pdf" />
5    <target name="chm" description="build CHM">
6      <ant antfile="${dita.dir}/build.xml">
7        <property name="args.input" location="../sequence.ditamap" />
8        <property name="transtype" value="htmlhelp" />
9        <property name="output.dir" location="../out/chm" />
10       <property name="args.gen.task.lbl" value="YES" />
11     </ant>
12  </target>
13  <target name="pdf" description="build PDF">
14    <ant antfile="${dita.dir}/build.xml">
15      <property name="args.input" location="../taskbook.ditamap" />
16      <property name="transtype" value="pdf" />
17      <property name="output.dir" location="../out/pdf" />
18      <property name="args.gen.task.lbl" value="YES" />
19      <property name="args.rellinks" value="nofamily" />
20    </ant>
21  </target>
22 </project>

```

In addition to the mandatory parameters (args.input and transtype), the chm and pdf targets each specify some optional parameters:

- The args.gen.task.lbl property is set to YES, which ensures that headings are automatically generated for the sections of task topics.
- The output.dir property specifies where DITA-OT writes the output of the transformations.

The pdf target also specifies that related links should be generated in the PDF, but only those links that are created by relationship tables and <link> elements.

Finally, the all target simply specifies that both the chm and pdf target should be run.

## What to do next

Another resource for learning about Ant scripts are the files in the `dita-ot-dir/docsrc/samples/ant_sample/` directory. This directory contains sample Ant build files for common output formats, as well as templates that you can use to create your own Ant scripts.

## Related concepts

[Ant](#) on page 45

Ant is a Java-based, open-source tool that is provided by the Apache Foundation. It can be used to declare a sequence of build actions. It is well suited for both development and document builds. The toolkit ships with a copy of Ant.

## Related tasks

[Migrating Ant builds to use the dita command](#) on page 27

Although DITA Open Toolkit still supports Ant builds, switching to the `dita` command offers a simpler command interface, sets all required environment variables and allows you to run DITA-OT without setting up anything beforehand.

## Related reference

[DITA-OT parameters](#) on page 89

Certain parameters apply to all DITA-OT transformations. Other parameters are common to the HTML-based transformations. Some parameters apply only to specific transformation types. These parameters can be passed as options to the `dita` command using the `--parameter=value` syntax or included in build scripts as Ant properties.

[Apache Ant documentation](#)



---

# Chapter 9

---

## Using the Java API

---

DITA Open Toolkit includes a Java Application Programming Interface to allow developers to embed the toolkit more easily into other Java programs.

When using the API, programmers don't need to know or care that DITA-OT uses Ant, they can just use Java.

**Note:** When running DITA-OT via the `dita` command, an `ant` shell script handles the classpath setup, but when using the API the classpath should be set up as part of the normal classpath configuration for the Java application.

### Example usage

```
1 // Create a reusable processor factory with DITA-OT base directory
2 ProcessorFactory pf = ProcessorFactory.newInstance(ditaDir);
3 // and set the temporary directory
4 pf.setBaseTempDir(tempDir);
5
6 // Create a processor using the factory and configure the processor
7 Processor p = pf.newProcessor("html5")
8   .setInput(mapFile)
9   .setOutputDir(outDir)
10  .setProperty("nav-toc", "partial");
11
12 // Run conversion
13 p.run();
```

By default, running DITA-OT via the API will write a debug log to the temporary directory. A custom SLF4J logger can also be used to access the log via the Simple Logging Facade for Java.

The processor cleans the temporary directory by default, but this can be disabled to simplify debugging in cases where the processor failed.

**Tip:** See the *DITA-OT Java API documentation* in the `doc/api/` folder of the DITA-OT distribution package for information on the packages, classes, interfaces and methods provided by the Java API.

### Downloading DITA-OT from Maven Central

As of version 2.5, the DITA Open Toolkit base library (`dost.jar`) is available via the Maven 2 Central Repository. You can use this mechanism to download the main JAR file and include it in the build for other Java projects.

To locate the latest version, [search for the org.dita-ot group ID](#).

**Important:** The `dost.jar` file provides only the DITA Open Toolkit base library. It does **not** contain the full DITA-OT distribution and cannot be used to run DITA-OT by itself. You will need to ensure that your build installs the other files and directories required for the toolkit along with the dependencies for your project.



---

# Part III

---

## Authoring formats

---

In addition to standard DITA XML, DITA-OT supports several alternative input formats, including Markdown and the proposed XDITA, MDITA and HDITA authoring formats currently in development for Lightweight DITA.



---

# Chapter

# 10

---

## Standard DITA XML

---

DITA Open Toolkit supports all released versions of the OASIS DITA specification, including 1.0, 1.1, 1.2, and 1.3. As of release 3.7, DITA-OT also provides an initial preview of features for the latest draft of the upcoming DITA 2.0 standard.

The DITA specification “defines a set of document types for authoring and organizing topic-oriented information, as well as a set of mechanisms for combining, extending, and constraining document types.” The [DITA 1.3 specification](#) is the authoritative source of information on authoring DITA content in XML.

**Tip:** For details on how DITA Open Toolkit processes DITA XML content, see [DITA specification support](#) on page 281.



---

# Chapter 11

---

## Markdown content

---

[Markdown](#) is a lightweight markup language that allows you to write using an easy-to-read plain text format and convert to structurally valid markup as necessary.

In the words of its creators:

“The overriding design goal for Markdown’s formatting syntax is to make it as readable as possible. The idea is that a Markdown-formatted document should be publishable as-is, as plain text, without looking like it’s been marked up with tags or formatting instructions.”

DITA Open Toolkit now allows you to use Markdown files directly in topic references and export DITA content as Markdown.

These features enable lightweight authoring scenarios that allow subject matter experts to contribute to DITA publications without writing in XML, and support publishing workflows that include DITA content in Markdown-based publishing systems.

### Adding Markdown topics

To add a Markdown topic to a DITA publication, create a topic reference in your map and set the `@format` attribute to `markdown` so the toolkit will recognize the source file as Markdown and convert it to DITA:

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <!DOCTYPE map PUBLIC "-//OASIS//DTD DITA Map//EN" "map.dtd">
3 <map>
4   <topicref href="markdown-dita-topic.md" format="markdown"/>
5 </map>
```

The markdown format uses a relatively lenient document parsing approach to support a wide range of content and Markdown syntax constructs.

**Note:** The Markdown support is based on [CommonMark](#), a strongly defined, highly compatible specification of Markdown.

When you add Markdown topics to a DITA publication as described above, the content is temporarily converted to DITA in the background when generating other output formats like HTML or PDF, but the Markdown source files remain unchanged.

**Tip:** This approach is recommended in cases where simple content is authored collaboratively over multiple versions, as Markdown topics can be edited by a wide range of authors and combined as necessary with more complex content maintained in DITA XML.

### Converting Markdown to DITA

In cases where the Markdown input is a one-off contribution, members of the DITA authoring team can use the Markdown file as raw material that is easily converted to DITA and enriched with conditional processing attributes, conkeyrefs or other more complex semantics that have no equivalent in limited formats like Markdown.

If you prefer to maintain this content in DITA in the future, you can generate DITA output by passing the `--format=dita` option on the command line.

This converts all input files (both DITA XML and Markdown) to [Normalized DITA](#). You can then copy the generated DITA files from the output folder to your project and replace references to the Markdown topics with their DITA equivalents.



---

# Chapter 12

---

## Preview support for Lightweight DITA

---

DITA-OT provides preview support for the authoring formats proposed for [Lightweight DITA](#), or “*LwDITA*”. The XDITA, MDITA and HDITA formats are alternative representations of DITA content in XML, Markdown and HTML5.



**Attention:** Since [Lightweight DITA](#) has not yet been released as a formal specification, the implementation for XDITA, MDITA and HDITA authoring formats is subject to change. Future versions of DITA Open Toolkit will be updated as LwDITA evolves.

### XDITA

XDITA is the LwDITA authoring format that uses XML to structure information. XDITA is a subset of DITA, with new multimedia element types added to support interoperability with HTML5. XDITA is designed for users who want to write DITA content but who do not want (or need) the full power of DITA.

The XDITA parser included in the `org.lwdita` plug-in provides preliminary support for XDITA maps and XDITA topics.

To apply XDITA-specific processing to topics in an XDITA map or a full DITA 1.3 map, set the `@format` attribute on a `<topicref>` to `xdita`:

```
1 <map>
2   <topicref href="xdita-topic.xml" format="xdita"/>
3 </map>
```

**Tip:** For examples of cross-format content sharing between topics in XDITA, HDITA, extended-profile MDITA, and DITA 1.3, see the LwDITA sample files in the DITA-OT installation directory under `plugins/org.oasis-open.xdita.v0_2_2/samples`.

### MDITA

MDITA is the LwDITA authoring format based on Markdown. It is designed for users who want to write structured content with the minimum of overhead, but who also want to take advantage of the reuse mechanisms associated with the DITA standard and the multi-channel publishing afforded by standard DITA tooling.

Recent proposals for LwDITA include two profiles for authoring MDITA topics:

- The “*Core profile*” is based on [GitHub-Flavored Markdown](#) and includes elements that are common to many other Markdown implementations.
- The “*Extended profile*” borrows additional features from other flavors of Markdown to represent a broader range of DITA content with existing plain-text syntax conventions.

The Markdown DITA parser included in the `org.lwdita` plug-in provides preliminary support for these profiles and additional Markdown constructs as described in the syntax reference.

To apply LwDITA-specific processing to Markdown topics, set the `@format` attribute to `mdita`:

```
1 <map>
2   <topicref href="mdita-topic.md" format="mdita"/>
```

```
3 </map>
```

In this case, the first paragraph in the topic will be treated as a short description, for example, and additional metadata can be specified for the topic via a YAML front matter block.

**Note:** Setting the `@format` attribute to `mdita` triggers stricter parsing than the more lenient document parsing approach that is applied to `markdown` documents.



**Attention:** The MDITA map format is not yet supported. To include Markdown content in publications, use an XDITA map or a DITA 1.3 map.

## HDITA

HDITA is the LwDITA authoring format based on HTML5, which is intended to support structured content authoring with tools designed for HTML authoring. HDITA also uses custom data attributes to provide interoperability with DITA.

The HDITA parser included in the `org.lwdita` plug-in provides preliminary support for these constructs.

To apply LwDITA-specific processing to HTML topics, set the `@format` attribute to `hdita`:

```
1 <map>
2   <topicref href="hdita-topic.html" format="hdita"/>
3 </map>
```



**Attention:** The HDITA map format is not yet supported. To include HDITA content, use an XDITA map or a DITA 1.3 map.

## Converting lightweight formats to DITA XML

When you add LwDITA topics to a DITA publication, the content is temporarily converted to DITA in the background when generating other output formats like HTML or PDF, but the source files remain unchanged.

If you prefer to maintain this content in DITA in the future, you can generate DITA output by passing the `--format=dita` option on the command line.

This converts all input files (both LwDITA formats and DITA XML) to [Normalized DITA](#). You can then copy the generated DITA files from the output folder to your project and replace references to the lightweight topics with their DITA equivalents.

---

# Chapter

# 13

---

## Markdown DITA syntax reference

---

Markdown DITA uses [CommonMark](#) as the underlying markup language.

Markdown DITA files must be UTF-8 encoded.

### Titles and document structure

Each header level will generate a topic and associated title:

```
1 # Topic title
2
3 ## Nested topic title
```

```
1 <topic id="topic_title">
2 ..<title>Topic title</title>
3 ..<topic id="nested_topic_title">
4 ....<title>Nested topic title</title>
5 ..</topic>
6 </topic>
```

Pandoc [header\\_attributes](#) can be used to define id or outputclass attributes:

```
1 # Topic title {#carrot .juice}
```

```
1 <topic id="carrot" outputclass="juice">
2 ..<title>Topic title</title>
```

If topic ID is not defined using header\_attributes, the ID is generated from title contents.

Pandoc [pandoc\\_title\\_block](#) extension can be used to group multiple level 1 headers under a common title:

```
1 % Common title
2
3 # Topic title
4
5 # Second title
```

```
1 <topic id="common_title">
2 ..<title>Common title</title>
3 ..<topic id="topic_title">
4 ....<title>Topic title</title>
5 ..</topic>
6 ..<topic id="second_title">
7 ....<title>Second title</title>
8 ..</topic>
9 </topic>
```

## Topic content

In LwDITA compatible documents (MDITA) the first paragraph is treated as a `shortdesc` element. In generic Markdown documents all paragraphs appear inside the `body` element.

## Specialization types

The following class values in [header\\_attributes](#) have a special meaning on level 1 headers:

- `concept`
- `task`
- `reference`

They can be used to change the Markdown DITA topic type to one of the built-in structural specialization types.

```
1 # Task { .task }
2
3 Context
4
5 1. . . Command
6
7 . . . . Info.
```

```
1 <task id="task">
2   . . <title>Task </title>
3   . . <taskbody>
4     . . . . <context>
5       . . . . . <p>Context</p>
6     . . . . </context>
7     . . . . <steps>
8       . . . . . <step>
9         . . . . . . . <cmd>Command</cmd>
10        . . . . . . . <info>
11          . . . . . . . . <p>Info.</p>
12        . . . . . . . </info>
13      . . . . . </step>
14    . . . . </steps>
15  . . </taskbody>
16 </task>
```

## Sections

The following class values in [header\\_attributes](#) have a special meaning on header levels other than 1:

- `section`
- `example`

They are used to generate [section](#) and [example](#) elements:

```
1 # Topic title
2
3 ## Section title { .section }
4
5 ## Example title { .example }
```

```
1 <topic id="topic_title">
2   . . <title>Topic title</title>
3   . . <body>
4     . . . . <section>
5       . . . . . <title>Section title</title>
6     . . . . </section>
```

```

7  ....<example>
8  .....<title>Example title</title>
9  ....</example>
10 ..</body>
11 </topic>

```

## Hard line breaks

A line break that is preceded by two or more spaces is parsed as a hard line break. Because DITA doesn't have a `<br>` element for line break, hard line breaks are converted into `<?linebreak?>` processing instructions.

```

1  foo..
2  baz

```

```

1  <p>foo<?linebreak?>baz</p>

```

## Links

The format of local link targets is detected based on file extension. The following extensions are treated as DITA files:

extension	format
.dita	dita
.xml	dita
.md	markdown
.markdown	markdown

All other link targets use `format` from file extension and are treated as non-DITA files. Absolute links targets are treated as external scope links:

```

1  [Markdown](test.md)
2  [DITA](test.dita)
3  [HTML](test.html)
4  [External](http://www.example.com/test.html)

```

```

1  <xref href="test.md">Markdown</xref>
2  <xref href="test.dita">DITA</xref>
3  <xref href="test.html" format="html">HTML</xref>
4  <xref href="http://www.example.com/
test.html" format="html" scope="external">External</xref>

```

## Images

Images used in inline content will result in inline placement. If a block level image contains a title, it will be treated as an image wrapped in figure:

```

1  An inline ![Alt](test.jpg).
2
3  ![Alt](test.jpg)
4
5  ![Alt](test.jpg "Title")

```

```

1  <p>An inline <image href="test.jpg"><alt>Alt</alt></image>.</p>
2  <image href="test.jpg" placement="break">
3  ..<alt>Alt</alt>

```

```

4 </image>
5 <fig>
6   ..<title>Title</title>
7   ..<image href="test.jpg">
8     ....<alt>Alt</alt>
9   ..</image>
10 </fig>

```

## Key references

Key reference can be used with [shortcut reference links](#):

```

1 [key]
2 ![image-key]

```

```

1 <xref keyref="key" />
2 <image keyref="image-key" />

```

## Inline

The following inline elements are supported:

```

1 **bold**
2 *italic*
3 `code`
4 ~~strikethrough~~

```

```

1 <b>bold</b>
2 <i>italic</i>
3 <codeph>code</codeph>
4 <ph status="deleted">strikethrough</ph>

```

## Lists

Unordered can be marked up with either hyphen or asterisk:

```

1 *...one
2 *...two
3 ....-...three
4 ....-...four

```

```

1 <ul>
2 ..<li>one</li>
3 ..<li>two
4 ....<ul>
5 .....<li>three</li>
6 .....<li>four</li>
7 ....</ul>
8 ..</li>
9 </ul>

```

Ordered can be marked up with either number or number sign, followed by a period:

```

1 1...one
2 2...two
3 #...three

```

```
4   ... #. ... four
```

```
1 <ol>
2 ..<li>one</li>
3 ..<li>two
4   ...<ol>
5   ...<li>three</li>
6   ...<li>four</li>
7   ...</ol>
8 ..</li>
9 </ul>
```

Definition lists use the [PHP Markdown Extra](#) format:

```
1 Term
2 :... Definition.
```

```
1 <dl>
2 ..<delentry>
3   ...<dt>Term</dt>
4   ...<dd>Defintion.</dd>
5 ..</delentry>
6 </dl>
```

Each definition entry must have only one term and contain only inline content.

## Tables

Tables use [MultiMarkdown](#) table extension format:

```
1 | First Header | Second Header | Third Header |
2 | :-----: | :-----: | :-----: |
3 | Content | *Long Cell* | |
4 | Content | **Cell** | Cell |
```

```
1 <table>
2 ..<tgroup cols="3">
3   ...<colspec colname="col1"/>
4   ...<colspec colname="col2" align="center"/>
5   ...<colspec colname="col3" align="right"/>
6   ...<thead>
7     ...<row>
8       ...<entry>First Header</entry>
9       ...<entry>Second Header</entry>
10      ...<entry>Third Header</entry>
11     ...</row>
12   ...</thead>
13   ...<tbody>
14     ...<row>
15       ...<entry>Content</entry>
16       ...<entry name="col2" nameend="col3"><i>Long Cell</i></entry>
17     ...</row>
18     ...<row>
19       ...<entry>Content</entry>
20       ...<entry><b>Cell</b></entry>
21       ...<entry>Cell</entry>
22     ...</row>
23   ...</tbody>
24 ..</tgroup>
25 </table>
```

Table cells may only contain inline content and column spans; block content and row spans are not supported by Markdown DITA.

## Metadata

YAML metadata block as defined in Pandoc [pandoc\\_metadata\\_block](#) can be used to specify different metadata elements. The supported elements are:

- author
- source
- publisher
- permissions
- audience
- category
- keyword
- resourceid

Unrecognized keys are output using data element.

```
1 ---
2 author:
3   - Author One
4   - Author Two
5 source: Source
6 publisher: Publisher
7 permissions: Permissions
8 audience: Audience
9 category: Category
10 keyword:
11   - Keyword1
12   - Keyword2
13 resourceid:
14   - Resourceid1
15   - Resourceid2
16 workflow: review
17 ---
18
19 # Sample with YAML header
```

```
1 <title>Sample with YAML header</title>
2 <prolog>
3   <author>Author One</author>
4   <author>Author Two</author>
5   <source>Source</source>
6   <publisher>Publisher</publisher>
7   <permissions view="Permissions"/>
8   <metadata>
9     <audience audience="Audience"/>
10    <category>Category</category>
11    <keywords>
12      <keyword>Keyword1</keyword>
13      <keyword>Keyword2</keyword>
14    </keywords>
15  </metadata>
16  <resourceid appid="Resourceid1"/>
17  <resourceid appid="Resourceid2"/>
18  <data name="workflow" value="review"/>
19 </prolog>
```



---

# Part IV

---

## DITA-OT transformations (output formats)

---

DITA Open Toolkit ships with several core transformations that convert DITA content to different output formats. Additional formats are available from the plug-in registry at [dita-ot.org/plugins](http://dita-ot.org/plugins).

**Tip:** For information on how to install other formats, see [Adding and removing plug-ins](#) on page 125.



---

# Chapter

# 14

---

## PDF

---

The pdf transformation generates output in Portable Document Format.

This transformation was originally created as a plug-in and maintained outside of the main toolkit code. It was created as a more robust alternative to the demo PDF transformation in the original toolkit, and thus was known as PDF2. The plug-in was bundled into the default toolkit distribution with release 1.4.3.

To run the PDF transformation, set the transtype parameter to pdf, or pass the --format=pdf option to the `dita` command line.

```
dita --input=input-file --format=pdf
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related concepts

[Generating revision bars](#) on page 123

You can generate revision bars in your PDF output by using the `@changebar` and `@color` attributes of the DITAVAL `<revprop>` element.

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[PDF parameters](#) on page 94

Certain parameters are specific to the PDF transformation.



---

# Chapter 15

---

## HTML5

---

The `html5` transformation generates HTML5 output and a table of contents (TOC) file.

The HTML5 output is always associated with the default DITA-OT CSS file (`commonltr.css` or `commonrtl.css` for right-to-left languages). You can use toolkit parameters to add a custom style sheet that overrides the default styles, or generate a `<nav>` element with a navigation TOC in topic pages.

To run the HTML5 transformation, set the `transtype` parameter to `html5`, or pass the `--format=html5` option to the `dita` command line.

```
dita --input=input-file --format=html5
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related concepts

[Handling content outside the map directory](#) on page 114

By default, DITA-OT assumes content is located in or beneath the directory containing the DITA map file. The `generate.copy.outer` parameter can be used to adjust how output is generated for content that is located outside the map directory.

### Related tasks

[Setting parameters for custom HTML](#) on page 111

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

[HTML5 parameters](#) on page 99

The HTML5 transformation shares common parameters with other HTML-based transformations and provides additional parameters that are specific to HTML5 output.



---

# Chapter 16

---

## Eclipse help

---

The eclipsehelp transformation generates XHTML output, CSS files, and the control files that are needed for Eclipse help.

In addition to the XHTML output and CSS files, this transformation returns the following files, where *mapname* is the name of the root map.

File name	Description
plugin.xml	Control file for the Eclipse plug-in
<i>mapname</i> .xml	Table of contents
index.xml	Index file
plugin.properties	
META-INF/MANIFEST.MF	

To run the Eclipse help transformation, set the transtype parameter to eclipsehelp, or pass the --format=eclipsehelp option to the dita command line.

```
dita --input=input-file --format=eclipsehelp
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related concepts

[Handling content outside the map directory](#) on page 114

By default, DITA-OT assumes content is located in or beneath the directory containing the DITA map file. The generate.copy.outer parameter can be used to adjust how output is generated for content that is located outside the map directory.

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

[Eclipse Help parameters](#) on page 102

Certain parameters are specific to the Eclipse help transformation.

### Related information

[Official Eclipse website](#)





---

# Chapter

# 17

---

## HTML Help

---

The `htmlhelp` transformation generates HTML output, CSS files, and the control files that are needed to produce a Microsoft Compiled HTML Help (.chm) file.

In addition to the HTML output and CSS files, this transformation returns the following files, where *mapname* is the name of the root map.

File name	Description
<i>mapname</i> .hhc	Table of contents
<i>mapname</i> .hhk	Sorted index
<i>mapname</i> .hhp	HTML Help project file
<i>mapname</i> .chm	Compiled HTML Help file <b>Note:</b> The compiled file is only generated if the HTML Help Workshop is installed on the build system.

To run the HTML Help transformation, set the `transtype` parameter to `htmlhelp`, or pass the `--format=htmlhelp` option to the `dita` command line.

```
dita --input=input-file --format=htmlhelp
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related concepts

[Handling content outside the map directory](#) on page 114

By default, DITA-OT assumes content is located in or beneath the directory containing the DITA map file. The `generate.copy.outer` parameter can be used to adjust how output is generated for content that is located outside the map directory.

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

[Microsoft Compiled HTML Help parameters](#) on page 102

Certain parameters are specific to the Microsoft Compiled HTML Help (.chm) transformation.



---

# Chapter

# 18

---

## Markdown

---

Along with Markdown input, DITA-OT now provides three new transformation types to convert DITA content to Markdown, including the original syntax, GitHub-Flavored Markdown, and GitBook.

The new output formats can be used to feed DITA content into Markdown-based publishing systems or other workflows that lack the ability to process DITA XML.

### Generating Markdown output

Markdown output can be generated by passing one of the following transformation types to the `dita` command with the `--format` option:

- To publish Markdown DITA files, use the `markdown` transtype.
- To generate [GitHub-Flavored Markdown](#) files, use the `markdown_github` transtype.
- To publish GitHub-Flavored Markdown and generate a `SUMMARY.md` table of contents file for publication via [GitBook](#) or [mdBook](#), use the `markdown_gitbook` transtype.

Run the `dita` command and set the value of the output `--format` option to the desired format, for example:

```
dita --input=input-file --format=markdown
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.



---

# Chapter 19

---

## Normalized DITA

---

The `dita` transformation generates normalized topics and maps from DITA input. The normalized output includes the results of DITA Open Toolkit pre-processing operations, which resolve map references, keys, content references, code references and push metadata back and forth between maps and topics.

In comparison to the source DITA files, the normalized DITA files are modified in the following ways:

- References from one DITA map to another are resolved
- Map-based links, such as those generated by map hierarchy and relationship tables, are added to the topics.
- Link text is resolved.
- Map attributes that cascade are made explicit on child elements.
- Map metadata such as index entries and copyrights are pushed into topics.
- Topic metadata such as navigation titles, link text and short descriptions are pulled from topics into the map.
- XML comments are removed.

### Applications

Normalized output may be useful in situations where post-processing of DITA content is required, but the downstream systems are limited in their ability to resolve DITA references.

**Tip:** You can also use the normalized DITA transformation to convert [Markdown](#) or [Lightweight DITA](#) formats to DITA XML. You can then copy the generated DITA files from the output folder to your project and replace references to the lightweight topics with their XML equivalents.

### Generating normalized DITA output

Run the `dita` command and set the value of the output `--format` option to `dita`:

```
dita --input=input-file --format=dita
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.



---

# Chapter

# 20

---

## XHTML

---

The xhtml transformation generates XHTML output and a table of contents (TOC) file. This was the first transformation created for DITA Open Toolkit, and originally served as the basis for all HTML-based transformations.

The XHTML output is always associated with the default DITA-OT CSS file (`commonltr.css` or `commonrtl.css` for right-to-left languages). You can use toolkit parameters to add a custom style sheet to override the default styles.

To run the XHTML transformation, set the `transtype` parameter to `xhtml`, or pass the `--format=xhtml` option to the `dita` command line.

```
dita --input=input-file --format=xhtml
```

where:

- *input-file* is the DITA map or DITA file that you want to process.

### Related concepts

[Handling content outside the map directory](#) on page 114

By default, DITA-OT assumes content is located in or beneath the directory containing the DITA map file. The `generate.copy.outer` parameter can be used to adjust how output is generated for content that is located outside the map directory.

### Related tasks

[Setting parameters for custom HTML](#) on page 111

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

[XHTML parameters](#) on page 101

Certain parameters are specific to the XHTML transformation.





---

# Part

# V

---

## DITA Open Toolkit parameters

---

You can adjust DITA Open Toolkit behavior via `dita` command arguments and options, DITA-OT parameter settings, and configuration properties.



---

# Chapter 21

---

## Arguments and options for the dita command

---

The `dita` command takes mandatory arguments to process DITA content. Subcommands can be used to manage plug-ins, or print information about the current configuration. A series of options are available to modify the command behavior or specify additional configuration parameters.

### Usage

To convert content from one format to another, specify the file to transform and the desired output format. If necessary, you can set additional configuration parameters with options.

```
dita --input = file --format = name [ options ]  
dita --project = file [ options ]
```

**Note:** Most `dita` command options support several syntax alternatives. All options can be specified with a GNU-style option keyword preceded by two hyphens. In many cases, Unix-style single-letter options (preceded by a single hyphen) are also available for brevity and backwards compatibility.

The `dita` command also supports a series of subcommands that can be used to manage plug-ins, or print information about the current configuration or version.

```
dita deliverables file  
dita install [{ ID URL file }]  
dita plugins  
dita transtypes  
dita uninstall ID  
dita version
```



**Attention:** Prior to DITA-OT 3.5, subcommands were specified with the double-hyphen option syntax, which is still supported for backwards compatibility. (For example, `dita --install` will still work.)

### Arguments

Each transformation requires you to specify at least the file to transform and the desired output format.

**--input=*file***

**-i *file***

Specifies the main file for your documentation project.

This argument corresponds to the common parameter [args.inputargs.inputparametersargs.input](#) on page 90.

Typically this is a DITA map, however it also can be a DITA topic if you want to transform a single DITA file. The path can be absolute, relative to `args.input.dir`, or relative to the current directory if `args.input.dir` is not defined.

**--format=*name***

**-f *name***

Specifies the output format (transformation type).

This argument corresponds to the common parameter [transtype](#) on page 93.

To list the formats that are currently available in your environment, use `dita transtypes`.

You can create plug-ins to add new output formats; by default, the following values are available:

- dita
- eclipsehelp
- html5
- htmlhelp
- markdown, markdown\_gitbook, and markdown\_github
- pdf
- xhtml

**Tip:** See [DITA-OT transformations \(output formats\)](#) on page 65 for sample command line syntax and more information on each transformation.

## Subcommands

### **deliverables *file***

Show a list of the available deliverables in the specified project *file*.

### **install { *ID* / *URL* / *file* }**

#### **--install={ *ID* / *URL* / *file* }**

Install a single plug-in *ID* from the registry at [dita-ot.org/plugins](http://dita-ot.org/plugins) (or a local registry), from a remote *URL*, or a local ZIP *file*.

### **install**

#### **--install**

If no *ID*, *URL*, or *file* argument is provided, the installation process reloads the current set of plug-ins from the `plugins` directory (or any custom locations defined via the `pluginsdir` property in the `configuration.properties` file in the `config` directory). This approach can be used to add or remove multiple plug-ins at once, or any individual plug-ins you have already copied to (or removed from) the plug-in directories. Any plug-ins added or removed in the process will be listed by their plug-in ID.

### **uninstall *ID***

#### **--uninstall=*ID***

Remove the plug-in with the specified *ID*.

For a list of the currently installed plug-in IDs, use `dita plugins`.



**Attention:** The `uninstall` subcommand also removes the corresponding plug-in directory from the `plugins` folder.

### **plugins**

#### **--plugins**

Show a list of the currently installed plug-ins.

### **transtypes**

#### **--transtypes**

Show a list of the available output formats (transformation types).

The entries in this list may be passed as values to the `--format` argument.

### **version**

#### **--version**

Print version information and exit.

## Options

**--debug**

**-d**

Debug logging prints considerably more additional information. The debug log includes all information from the verbose log, plus details on Java classes, additional Ant properties and overrides, preprocessing filters, parameters, and stages, and the complete build sequence. Debug logging requires additional resources and can slow down the build process, so it should only be enabled when further details are required to diagnose problems.

**--output=dir**

**-o dir**

Specifies the path of the output directory; the path can be absolute or relative to the current directory.

This option corresponds to the common parameter [output.dir](#)[output.dir](#)[parameters.output.dir](#) on page 92.

By default, the output is written to the `out` subdirectory of the current directory.

**--filter=files**

Specifies filter file(s) used to include, exclude, or flag content. Relative paths are resolved against the current directory and internally converted to absolute paths.

### Note:

To specify multiple filter files, use the system path separator character to delimit individual file paths (semicolon ‘;’ on Windows, and colon ‘:’ on macOS and Linux) and wrap the value in quotes:

```
--filter="filter1.ditaval;filter2.ditaval;filter3.ditaval"
```

As of DITA-OT 3.6, the `--filter` option can also be passed multiple times:

```
--filter=filter1.ditaval --filter=filter2.ditaval --  
filter=filter3.ditaval
```

DITAVAL files are evaluated in the order specified, so conditions specified in the first file take precedence over matching conditions specified in later files, just as conditions at the start of a DITAVAL document take precedence over matching conditions later in the same document.

**--force**

Force-install an existing plug-in.

Passed as an additional option to the installation subcommand: `dita install plug-in-zip --force`

**--help**

**-h**

Print a list of available arguments, options, and subcommands.

**--logfile=file**

**-l file**

Write logging messages to a file.

**--parameter=value**

**-Dparameter=value**

Specify a value for a DITA-OT or Ant build parameter.

The GNU-style `--parameter=value` form is only available for parameters that are configured in the plug-in configuration file; the Java-style `-D` form can also be used to specify additional non-configured parameters or set system properties.

Parameters not implemented by the specified transformation type or referenced in a `.properties` file are ignored.

**Tip:** If you are building in different environments where the location of the input files is not consistent, set `args.input.dir` with the `dita` command and reference its value with `${args.input.dir}` in your `.properties` file.

### **--propertyfile=***file*

Use build parameters defined in the referenced `.properties` file.

Build parameters specified on the command line override those set in the `.properties` file.

### **--repeat=***N*

Repeat the transformation *N* number of times.

This option can be used by plug-in developers to measure performance. To run a conversion five times, for example, use `--repeat=5`. The duration of each execution will appear in the console when the final transformation is complete.

```
$ dita --input=docsrc/samples/sequence.ditamap --format=html5 \
    --repeat=5
1 11281ms
2 4132ms
3 3690ms
4 4337ms
5 3634ms
```

### **--resource=***file*

#### **-r** *file*

Specifies resource files.

This argument corresponds to the common parameter [args.resourcesargs.resourcesparametersargs.resources](#) on page 90.

Resource files can be used to convert partial documentation sets by processing input with additional information.

For example, to process a single topic file with a map that contains key definitions, use a command like this:

```
dita --input=topic.dita --resource=keys.ditamap --format=html5
```

To convert a chapter map to HTML5 and insert related links from relationship tables in a separate map, use:

```
dita --input=chapter.ditamap --resource=reltables.ditamap --
format=html5
```

### **--temp=***dir*

#### **-t** *dir*

Specifies the location of the temporary directory.

This option corresponds to the common parameter [dita.temp.dirdita.temp.dirparametersdita.temp.dir](#) on page 91.

The temporary directory is where DITA-OT writes intermediate files that are generated during the transformation process.

### **--verbose**

#### **-v**

Verbose logging prints additional information to the console, including directory settings, effective values for Ant properties, input/output files, and informational messages to assist in troubleshooting.

### Related tasks

[Building output using the `dita` command](#)

[Setting build parameters with `.properties` files](#) on page 26

Usually, DITA builds require setting a number of parameters that do not change frequently. You can reference a set of build parameters defined in a `.properties` file when building output with the `dita` command. If needed, you can override any parameter by specifying it explicitly as an argument to the `dita` command.

[Accessing help for the `dita` command](#) on page 255

You can access a list of subcommands and supported parameters for the `dita` command by passing the `--help` option on the command line.

### Related reference

[DITA-OT parameters](#) on page 89

Certain parameters apply to all DITA-OT transformations. Other parameters are common to the HTML-based transformations. Some parameters apply only to specific transformation types. These parameters can be passed as options to the `dita` command using the `--parameter=value` syntax or included in build scripts as Ant properties.

[Internal Ant properties](#) on page 107

DITA-OT uses these Ant properties in certain internal operations. They are not intended for general use, but may be adjusted by plug-in developers to configure custom transform types.





---

# Chapter

# 22

---

## DITA-OT parameters

---

Certain parameters apply to all DITA-OT transformations. Other parameters are common to the HTML-based transformations. Some parameters apply only to specific transformation types. These parameters can be passed as options to the `dita` command using the `--parameter=value` syntax or included in build scripts as Ant properties.

If your toolkit installation includes custom plug-ins that define additional parameters, you can add entries to the following topics by rebuilding the DITA-OT documentation.

### Related tasks

[Setting build parameters with .properties files](#) on page 26

Usually, DITA builds require setting a number of parameters that do not change frequently. You can reference a set of build parameters defined in a `.properties` file when building output with the `dita` command. If needed, you can override any parameter by specifying it explicitly as an argument to the `dita` command.

[Rebuilding the DITA-OT documentation](#) on page 135

When you add or remove plug-ins, you can rebuild the documentation to update the information on the extension points, messages, and parameters that are available in your environment.

## Common parameters

---

Certain parameters apply to all transformations that DITA Open Toolkit supports.

### **args.debug**

Specifies whether debugging information is included in the log. The allowed values are yes and no; the default value is no.

### **args.draft**

Specifies whether the content of `<draft-comment>` and `<required-cleanup>` elements is included in the output. The allowed values are yes and no; the default value is no.

Corresponds to the XSLT parameter DRAFT in most XSLT modules.

**Tip:** For PDF output, setting the `args.draft` parameter to yes causes the contents of the `<titlealts>` element to be rendered below the title.

### **args.figurelink.style**

Specifies how cross references to figures are styled in output. The allowed values are NUMBER, TITLE, and NUMTITLE.

Specifying NUMBER results in "Figure 5"; specifying TITLE results in the title of the figure. Corresponds to the XSLT parameter FIGURELINK.

**Note:** Support for PDF was added in DITA-OT 2.0. By default PDF uses the value NUMTITLE, which is not supported for other transformation types; this results in "Figure 5. Title".

### **args.filter**

Specifies filter file(s) used to include, exclude, or flag content. Relative paths are resolved against the DITA-OT base directory (for backwards compatibility) and internally converted to absolute paths.

**Note:**

To specify multiple filter files, use the system path separator character to delimit individual file paths (semicolon ‘;’ on Windows, and colon ‘:’ on macOS and Linux) and wrap the value in quotes:

```
--args.filter="filter1.ditaval;filter2.ditaval;filter3.ditaval"
```

DITAVAL files are evaluated in the order specified, so conditions specified in the first file take precedence over matching conditions specified in later files, just as conditions at the start of a DITAVAL document take precedence over matching conditions later in the same document.

**args.gen.task.lbl**

Specifies whether to generate headings for sections within task topics. The allowed values are YES and NO.

Corresponds to the XSLT parameter GENERATE-TASK-LABELS.

**args.grammar.cache**

Specifies whether the grammar-caching feature of the XML parser is used. The allowed values are yes and no; the default value is yes.

**Note:** This option dramatically speeds up processing time. However, there is a known problem with using this feature for documents that use XML entities. If your build fails with parser errors about entity resolution, set this parameter to no.

**args.input**

Specifies the main file for your documentation project.

This parameter corresponds to the command-line argument [--input](#).

Typically this is a DITA map, however it also can be a DITA topic if you want to transform a single DITA file. The path can be absolute, relative to args.input.dir, or relative to the current directory if args.input.dir is not defined.

**args.input.dir**

Specifies the base directory for your documentation project.

**args.output.base**

Specifies the name of the output file without file extension.

**args.rellinks**

Specifies which links to include in the output. The following values are supported:

- none – No links are included.
- all – All links are included.
- noparent – Ancestor and parent links are not included.
- nofamily – Parent, ancestor, child, descendant, sibling, next, previous, and cousin links are not included.

For PDF output, the default value is nofamily. Other formats include all link roles except ancestor links.

**args.resources**

Specifies resource files.

This parameter corresponds to the command-line option [--resource](#).

Resource files can be used to convert partial documentation sets by processing input with additional information.

For example, to process a single topic file with a map that contains key definitions, use a command like this:

```
dita --input=topic.dita --format=html5 --
args.resources=keys.ditamap
```

To convert a chapter map to HTML5 and insert related links from relationship tables in a separate map, use:

```
dita --input=chapter.ditamap --format=html5 --
args.resources=reltables.ditamap
```

#### **args.tablelink.style**

Specifies how cross references to tables are styled. The allowed values are NUMBER, TITLE, and NUMTITLE.

Specifying NUMBER results in "Table 5"; specifying TITLE results in the title of the table. Corresponds to the XSLT parameter TABLELINK.

**Note:** Support for PDF was added in DITA-OT 2.0. By default PDF uses the value NUMTITLE, which is not supported for other transformation types; this results in "Table 5. Title".

#### **clean.temp**

Specifies whether DITA-OT deletes the files in the temporary directory after it finishes a build. The allowed values are yes and no; the default value is yes.

#### **conserve-memory**

Conserve memory at the expense of processing speed. The allowed values are true and false; the default value is false.

#### **default.language**

Specifies the language that is used if the input file does not have the `@xml:lang` attribute set on the root element. By default, this is set to en. The allowed values are those that are defined in IETF BCP 47, [Tags for Identifying Languages](#).

#### **dita.dir**

Specifies where DITA-OT is installed.

#### **dita.input.valfile**

Specifies a filter file to be used to include, exclude, or flag content.

**Notice:** Deprecated in favor of the `args.filter` parameter.

#### **dita.temp.dir**

Specifies the location of the temporary directory.

This parameter corresponds to the command-line option `--temp`.

The temporary directory is where DITA-OT writes intermediate files that are generated during the transformation process.

#### **filter-stage**

Specifies whether filtering is done before all other processing, or after key and conref processing. The allowed values are early and late; the default value is early.

**Note:** Changing the filtering stage may produce different results for the same initial data set and filtering conditions.

#### **force-unique**

Generate copy-to attributes to duplicate topicref elements. The allowed values are true and false; the default value is false.

Setting this to true ensures that unique output files are created for each instance of a resource when a map contains multiple references to a single topic.

### generate-debug-attributes

Specifies whether the @xtrf and @xtrc debugging attributes are generated in the temporary files. The following values are supported:

- true (default) – Enables generation of debugging attributes
- false – Disables generation of debugging attributes

**Note:** Disabling debugging attributes reduces the size of temporary files and thus reduces memory consumption. However, the log messages no longer have the source information available and thus the ability to debug problems might deteriorate.

### generate.copy.outer

Adjust how output is generated for content that is located outside the directory containing the DITA map. The following values are supported:

- 1 (default) – Do not generate output for content that is located outside the DITA map directory.
- 3 – Shift the output directory so that it contains all output for the publication.

See [Handling content outside the map directory](#) on page 114 for more information.

### link-crawl

Specifies whether to crawl only those topic links found in maps, or all discovered topic links. The allowed values are map and topic; the default value is topic.

### onlytopic.in.map

Specifies whether files that are linked to, or referenced with a @conref attribute, generate output. The allowed values are true and false; the default value is false.

If set to true, only files that are referenced directly from the map will generate output.

### outer.control

Specifies whether to warn or fail if content is located outside the directory containing the DITA map. The following values are supported:

- fail – Fail quickly if files are going to be generated or copied outside of the directory.
- warn (default) – Complete the operation if files will be generated or copied outside of the directory, but log a warning.
- quiet – Quietly finish without generating warnings or errors.



**Warning:** Microsoft HTML Help Compiler cannot produce HTML Help for documentation projects that use outer content. The content files must reside in or below the directory containing the root map file, and the map file cannot specify ".." at the start of the @href attributes for <topicref> elements.

### output.dir

Specifies the name and location of the output directory.

This parameter corresponds to the command-line option `--output`.

By default, the output is written to *DITA-dir/out*.

### parallel

Run processes in parallel when possible. The allowed values are true and false; the default value is false.

### processing-mode

Specifies how DITA-OT handles errors and error recovery. The following values are supported:

- strict – When an error is encountered, DITA-OT stops processing
- lax (default) – When an error is encountered, DITA-OT attempts to recover from it

- **skip** – When an error is encountered, DITA-OT continues processing but does not attempt error recovery

### **remove-broken-links**

Remove broken related links. The allowed values are true and false; the default value is false.

### **result.rewrite-rule.class**

Specifies the name of the Java class used to rewrite filenames.

The custom class should implement the `org.dita.dost.module.RewriteRule` interface.

### **result.rewrite-rule.xsl**

Specifies the name of the XSLT file used to rewrite filenames.

See [Adjusting file names in map-first pre-processing](#) on page 165 for details.

### **root-chunk-override**

Override for map chunk attribute value.

Acceptable values include any value normally allowed on the `@chunk` attribute. If the map does not have a `@chunk` attribute, this value will be used; if the map already has a `@chunk` attribute specified, this value will be used instead.

### **store-type**

Temporary file store type. The allowed values are file and memory; the default value is file.

In-memory processing provides performance advantages in I/O bound environments such as cloud computing platforms, where processing time depends primarily on how long it takes to read and write temporary files. For more information, see [Store API – Processing in memory](#) on page 267.

**Important:** Custom plug-ins that expect to find certain files on disk in the temporary directory will not work with in-memory processing.

### **transtype**

Specifies the output format (transformation type).

This parameter corresponds to the command-line argument `--format`.

You can create plug-ins to add new output formats; by default, the following values are available:

- dita
- eclipsehelp
- html5
- htmlhelp
- markdown, markdown\_gitbook, and markdown\_github
- pdf
- xhtml

**Tip:** See [DITA-OT transformations \(output formats\)](#) on page 65 for sample command line syntax and more information on each transformation.

### **validate**

Specifies whether DITA-OT validates the content. The allowed values are true and false; the default value is true.

#### **Related concepts**

[Eclipse help transformation](#) on page 71

The eclipsehelp transformation generates XHTML output, CSS files, and the control files that are needed for Eclipse help.

[HTML help transformation](#) on page 73

The `htmlhelp` transformation generates HTML output, CSS files, and the control files that are needed to produce a Microsoft Compiled HTML Help (.chm) file.

[PDF transformation](#) on page 67

The `pdf` transformation generates output in Portable Document Format.

[XHTML transformation](#) on page 79

The `xhtml` transformation generates XHTML output and a table of contents (TOC) file. This was the first transformation created for DITA Open Toolkit, and originally served as the basis for all HTML-based transformations.

[HTML5 transformation](#) on page 69

The `html5` transformation generates HTML5 output and a table of contents (TOC) file.

### Related tasks

[Setting parameters for custom HTML](#) on page 111

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

### Related information

[Markdown transformations](#) on page 75

Along with Markdown input, DITA-OT now provides three new transformation types to convert DITA content to Markdown, including the original syntax, GitHub-Flavored Markdown, and GitBook.

[Normalized DITA transformations](#) on page 77

The `dita` transformation generates normalized topics and maps from DITA input. The normalized output includes the results of DITA Open Toolkit pre-processing operations, which resolve map references, keys, content references, code references and push metadata back and forth between maps and topics.

## PDF parameters

---

Certain parameters are specific to the PDF transformation.

### **args.artlbl**

Specifies whether to generate a label for each image; the label will contain the image file name. The allowed values are `yes` and `no`; the default value is `no`.

### **args.bookmap-order**

Specifies if the frontmatter and backmatter content order is retained in bookmap. The allowed values are `retain` and `discard`; the default value is `discard`.

### **args.bookmark.style**

Specifies whether PDF bookmarks are by default expanded or collapsed. The allowed values are `EXPANDED` and `COLLAPSE`.

### **args.chapter.layout**

Specifies whether chapter level TOCs are generated. The allowed values are `MINITOC` and `BASIC`; the default value is `MINITOC`.

### **args.fo.userconfig**

Specifies the user configuration file for FOP.

### **args.xsl.pdf**

Specifies an XSL file that is used to override the default XSL transformation.

You must specify the fully qualified file name.

### **axf.cmd**

Specifies the path to the Antenna House Formatter executable.

**axf.opt**

Specifies the user configuration file for Antenna House Formatter.

**custom.xep.config**

Specifies the user configuration file for RenderX.

**customization.dir**

Specifies the customization directory.

**maxJavaMemory**

Specifies the amount of memory allocated to the RenderX process.

**org.dita.index.skip**

Disable index processing. The allowed values are yes and no; the default value is no.

Up until DITA-OT 3.4, indexing code was provided in the PDF plug-in and only available for PDF output. In version 3.4 and above, indexing is provided by a separate plug-in to allow other transformations to access the results.

If you have overridden PDF index processing via the `transform.topic2fo` target in the past, you can set the `org.dita.index.skip` property to yes and re-enable the `transform.topic2fo.index` target with `<feature extension="depend.org.dita.pdf2.index" value="transform.topic2fo.index"/>` in your plug-in configuration.

**org.dita.pdf2.chunk.enabled**

Enables chunk attribute processing. The following values are supported:

- true – Enables chunk processing
- false (default) – Disables chunk processing

**org.dita.pdf2.i18n.enabled**

Enables internationalization (I18N) font processing to provide per-character font selection for FO renderers that do not support the `font-selection-strategy` property (such as Apache FOP).

When this feature is enabled, DITA-OT uses a font mapping process that takes the content language into consideration. The mapping process uses configuration files for each language to define characters that should be rendered with certain logical fonts, and font mappings that associate each logical font to physical font files.

The following values are allowed:

- true (default) — Enables font mapping
- false — Disables font mapping

**Tip:** If you don't use custom character mappings, turning off font mapping makes it easier to define custom fonts simply by changing font names in the XSL attributes files of your custom PDF plug-in. For details, see [Font configuration in PDF2](#).

**outputFile.base**

Specifies the base file name of the generated PDF file.

By default, the PDF file uses the base filename of the input `.ditamap` file.

**pdf.formatter**

Specifies the XSL processor. The following values are supported:

- fop (default) – Apache FOP
- ah – Antenna House Formatter
- xep – RenderX XEP Engine

**publish.required.cleanup**

Specifies whether draft-comment and required-cleanup elements are included in the output. The allowed values are yes, no, yes, and no.

The default value is the value of the args.draft parameter. Corresponds to the XSLT parameter publishRequiredCleanup.

**Notice:** This parameter is deprecated in favor of the args.draft parameter.

**xep.dir**

RenderX installation directory.

**Related concepts**

[PDF transformation](#) on page 67

The pdf transformation generates output in Portable Document Format.

**Related reference**

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

## HTML-based output parameters

---

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

**args.artlbl**

Specifies whether to generate a label for each image; the label will contain the image file name. The allowed values are yes and no; the default value is no.

**args.copycss**

Specifies whether to copy the custom .css file to the output directory. The allowed values are yes and no; the default value is no.

If an external process will copy your custom .css file to the output directory, leave this parameter unset (or set it to no). If DITA-OT should copy the file when generating output, set it to yes.

**args.css**

Specifies the name of a custom .css file.

The value of this parameter should be only the file name. The absolute path to the parent directory should be specified with args.cssroot.

**args.csspath**

Specifies the **destination** directory to which .css files are copied (relative to the output directory).

Corresponds to the XSLT parameter CSSPATH.

DITA-OT will copy the file **to** this location.

**Tip:** If args.csspath is not set, the custom CSS file (and the default CSS files) will be copied to the root level of the output folder. To copy CSS files to an output subfolder named `css`, set args.csspath to `css`.

**args.cssroot**

Specifies the **source** directory that contains the custom .css file.

DITA-OT will copy the file **from** this location.

**Important:** Enter the absolute path to the parent directory of the custom CSS file specified with args.css.



**args.dita.locale**

Specifies the language locale file to use for sorting index entries.

**Note:** This parameter is not available for the XHTML transformation.

**args.eclipse.provider**

Specifies the name of the person or organization that provides the Eclipse help.

**args.eclipse.symbolic.name**

Specifies the symbolic name (aka plugin ID) in the output for an Eclipse Help project.

**args.eclipse.version**

Specifies the version number to include in the output.

**args.eclipsehelp.country**

Specifies the region for the language that is specified by the args.

**args.eclipsehelp.jar.name**

Specifies that the output should be zipped and returned using this name.

**args.eclipsehelp.language**

Specifies the base language for translated content, such as en for English.

**args.ftr**

Specifies an XML file that contains content for a running footer.

Corresponds to the XSLT parameter FTR.

**Note:** The footer file should be specified using an absolute path and must contain valid XML. A common practice is to place all content into a <div> element. In HTML5 output, the footer file contents will be wrapped in an HTML5 <footer> element with the @role attribute set to contentinfo.

**args.gen.default.meta**

Generate metadata for parental control scanners, meta elements with name="security" and name="Robots". The allowed values are yes and no; the default value is no.

Corresponds to the XSLT parameter genDefMeta.

**args.hdf**

Specifies an XML file that contains content to be placed in the document head.

The contents of the header file will be inserted in the <head> element of the generated HTML files.

**Tip:** The header file should be specified using an absolute path and must contain valid XML. If you need to insert more than one element into the HTML page head, wrap the content in a <div> element. The division wrapper in the header file will be discarded when generating HTML files, and the contents will be inserted into each page head.

**args.hdr**

Specifies an XML file that contains content for a running header.

Corresponds to the XSLT parameter HDR.

**Note:** The header file should be specified using an absolute path and must contain valid XML. A common practice is to place all content into a <div> element. In HTML5 output, the contents of the header file will be wrapped in an HTML5 <header> element with the @role attribute set to banner.

**args.hide.parent.link**

Specifies whether to hide links to parent topics in the HTML or XHTML output. The allowed values are yes and no; the default value is no.

Corresponds to the XSLT parameter NOPARENTLINK.

**Notice:** This parameter is deprecated in favor of the `args.rellinks` parameter.

#### **args.htmlhelp.includefile**

Specifies the name of a file that you want included in the HTML Help.

#### **args.indexshow**

Specifies whether the content of `<indexterm>` elements are rendered in the output. The allowed values are yes and no; the default value is no.

#### **args.outext**

Specifies the file extension for HTML or XHTML output.

Corresponds to the XSLT parameter OUTEXT.

#### **args.xhtml.classattr**

Specifies whether to include the DITA class ancestry inside the XHTML elements. The allowed values are yes and no; the default value is yes.

For example, the `<prereq>` element (which is specialized from `<section>`) would generate `class="section prereq"`. Corresponds to the XSLT parameter PRESERVE-DITA-CLASS.

**Note:** Beginning with DITA-OT release 1.5.2, the default value is yes. For release 1.5 and 1.5.1, the default value was no.

#### **args.xhtml.contenttarget**

Specifies the value of the `@target` attribute on the `<base>` element in the TOC file.

#### **args.xhtml.toc**

Specifies the base name of the TOC file.

#### **args.xhtml.toc.class**

Specifies the value of the `@class` attribute on the `<body>` element in the TOC file.

#### **args.xhtml.toc.xsl**

Specifies a custom XSL file to be used for TOC generation.

#### **args.xsl**

Specifies a custom XSL file to be used instead of the default XSL transformation.

The parameter must specify a fully qualified file name.

### **Related concepts**

[Eclipse help transformation](#) on page 71

The eclipsehelp transformation generates XHTML output, CSS files, and the control files that are needed for Eclipse help.

[HTML help transformation](#) on page 73

The htmlhelp transformation generates HTML output, CSS files, and the control files that are needed to produce a Microsoft Compiled HTML Help (.chm) file.

[XHTML transformation](#) on page 79

The xhtml transformation generates XHTML output and a table of contents (TOC) file. This was the first transformation created for DITA Open Toolkit, and originally served as the basis for all HTML-based transformations.

[HTML5 transformation](#) on page 69

The html5 transformation generates HTML5 output and a table of contents (TOC) file.

### **Related tasks**

[Setting parameters for custom HTML](#) on page 111

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

[Bundling CSS in a custom HTML plug-in](#) on page 169

You can create a DITA-OT plug-in that provides a custom stylesheet with the typography and colors that define your corporate identity. Coworkers can install this plug-in to ensure consistent HTML output across projects without having to copy the stylesheet to each project.

[Embedding web fonts in HTML output](#) on page 171

A custom plug-in can be created to generate HTML output that uses custom fonts for enhanced typographic features, extended character sets or a unique corporate identity.

[Inserting JavaScript in generated HTML](#) on page 173

JavaScript code can be bundled in a custom plug-in and automatically inserted into the generated HTML pages to enable web analytics or dynamic content delivery.

### Related reference

[Eclipse Help parameters](#) on page 102

Certain parameters are specific to the Eclipse help transformation.

[HTML5 parameters](#) on page 99

The HTML5 transformation shares common parameters with other HTML-based transformations and provides additional parameters that are specific to HTML5 output.

[Microsoft Compiled HTML Help parameters](#) on page 102

Certain parameters are specific to the Microsoft Compiled HTML Help (.chm) transformation.

[XHTML parameters](#) on page 101

Certain parameters are specific to the XHTML transformation.

## HTML5 parameters

---

The HTML5 transformation shares common parameters with other HTML-based transformations and provides additional parameters that are specific to HTML5 output.

### args.artlbl

Specifies whether to generate a label for each image; the label will contain the image file name. The allowed values are yes and no; the default value is no.

### args.copycss

Specifies whether to copy the custom .css file to the output directory. The allowed values are yes and no; the default value is no.

If an external process will copy your custom .css file to the output directory, leave this parameter unset (or set it to no). If DITA-OT should copy the file when generating output, set it to yes.

### args.css

Specifies the name of a custom .css file.

The value of this parameter should be only the file name. The absolute path to the parent directory should be specified with args.cssroot.

### args.csspath

Specifies the **destination** directory to which .css files are copied (relative to the output directory).

Corresponds to the XSLT parameter CSSPATH.

DITA-OT will copy the file **to** this location.

**Tip:** If `args.csspath` is not set, the custom CSS file (and the default CSS files) will be copied to the root level of the output folder. To copy CSS files to an output subfolder named `css`, set `args.csspath` to `css`.

#### **args.cssroot**

Specifies the **source** directory that contains the custom .css file.

DITA-OT will copy the file **from** this location.

**Important:** Enter the absolute path to the parent directory of the custom CSS file specified with `args.css`.

#### **args.dita.locale**

Specifies the language locale file to use for sorting index entries.

#### **args.ftr**

Specifies an XML file that contains content for a running footer.

Corresponds to the XSLT parameter `FTR`.

**Note:** The footer file should be specified using an absolute path and must contain valid XML. A common practice is to place all content into a `<div>` element. In HTML5 output, the footer file contents will be wrapped in an HTML5 `<footer>` element with the `@role` attribute set to `contentinfo`.

#### **args.gen.default.meta**

Generate metadata for parental control scanners, meta elements with `name="security"` and `name="Robots"`. The allowed values are `yes` and `no`; the default value is `no`.

Corresponds to the XSLT parameter `genDefMeta`.

#### **args.hdf**

Specifies an XML file that contains content to be placed in the document head.

The contents of the header file will be inserted in the `<head>` element of the generated HTML files.

**Tip:** The header file should be specified using an absolute path and must contain valid XML. If you need to insert more than one element into the HTML page head, wrap the content in a `<div>` element. The division wrapper in the header file will be discarded when generating HTML files, and the contents will be inserted into each page head.

#### **args.hdr**

Specifies an XML file that contains content for a running header.

Corresponds to the XSLT parameter `HDR`.

**Note:** The header file should be specified using an absolute path and must contain valid XML. A common practice is to place all content into a `<div>` element. In HTML5 output, the contents of the header file will be wrapped in an HTML5 `<header>` element with the `@role` attribute set to `banner`.

#### **args.hide.parent.link**

Specifies whether to hide links to parent topics in the HTML5 output. The allowed values are `yes` and `no`; the default value is `no`.

Corresponds to the XSLT parameter `NOPARENTLINK`.

**Notice:** This parameter is deprecated in favor of the `args.rellinks` parameter.

#### **args.html5.classattr**

Specifies whether to include the DITA class ancestry inside the HTML5 elements. The allowed values are `yes` and `no`; the default value is `yes`.

**args.html5.contenttarget**

Specifies the value of the @target attribute on the <base> element in the TOC file.

**args.html5.toc**

Specifies the base name of the TOC file.

**args.html5.toc.class**

Specifies the value of the @class attribute on the <body> element in the TOC file.

**args.html5.toc.xsl**

Specifies a custom XSL file to be used for TOC generation.

**args.indexshow**

Specifies whether the content of <indexterm> elements are rendered in the output. The allowed values are yes and no; the default value is no.

**args.outext**

Specifies the file extension for HTML5 output.

Corresponds to the XSLT parameter OUTEXT.

**args.xsl**

Specifies a custom XSL file to be used instead of the default XSL transformation.

The parameter must specify a fully qualified file name.

**html5.toc.generate**

Generate TOC file from the DITA map. The allowed values are yes and no; the default value is yes.

**nav-toc**

Specifies whether to generate a table of contents (ToC) in the HTML5 <nav> element of each page. The navigation can then be rendered in a sidebar or menu via CSS.

The following values are supported:

- none (default) – No table of contents will be generated
- partial – Include the current topic in the ToC along with its parents, siblings and children
- full – Generate a complete ToC for the entire map

**Related concepts**

[HTML5 transformation](#) on page 69

The html5 transformation generates HTML5 output and a table of contents (TOC) file.

**Related tasks**

[Setting parameters for custom HTML](#) on page 111

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

**Related reference**

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

## XHTML parameters

---

Certain parameters are specific to the XHTML transformation.

**args.xhtml.contenttarget**

Specifies the value of the @target attribute on the <base> element in the TOC file.

The default value is contentwin. Change this value to use a different target name for the table of contents.

#### **args.xhtml.toc**

Specifies the base name of the TOC file.

#### **args.xhtml.toc.class**

Specifies the value of the @class attribute on the <body> element in the TOC file.

#### **args.xhtml.toc.xsl**

Specifies a custom XSL file to be used for TOC generation.

#### **Related concepts**

[XHTML transformation](#) on page 79

The xhtml transformation generates XHTML output and a table of contents (TOC) file. This was the first transformation created for DITA Open Toolkit, and originally served as the basis for all HTML-based transformations.

#### **Related tasks**

[Setting parameters for custom HTML](#) on page 111

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

#### **Related reference**

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

## Microsoft Compiled HTML Help parameters

---

Certain parameters are specific to the Microsoft Compiled HTML Help (.chm) transformation.

#### **args.htmlhelp.includefile**

Specifies the name of a file that you want included in the HTML Help.

#### **Related concepts**

[HTML help transformation](#) on page 73

The htmlhelp transformation generates HTML output, CSS files, and the control files that are needed to produce a Microsoft Compiled HTML Help (.chm) file.

#### **Related reference**

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

## Eclipse Help parameters

---

Certain parameters are specific to the Eclipse help transformation.

#### **args.eclipse.provider**

Specifies the name of the person or organization that provides the Eclipse help.

The default value is DITA.

**Tip:** The toolkit ignores the value of this parameter when it processes an Eclipse map.

#### **args.eclipse.symbolic.name**

Specifies the symbolic name (aka plugin ID) in the output for an Eclipse Help project.

The @id value from the DITA map or the Eclipse map collection (Eclipse help specialization) is the symbolic name for the plugin in Eclipse. The default value is org.sample.help.doc.

**Tip:** The toolkit ignores the value of this parameter when it processes an Eclipse map.

#### **args.eclipse.version**

Specifies the version number to include in the output.

The default value is 0.0.0.

**Tip:** The toolkit ignores the value of this parameter when it processes an Eclipse map.

#### **args.eclipsehelp.country**

Specifies the region for the language that is specified by the args.

For example, us, ca, and gb would clarify a value of en set for the args.eclipsehelp.language parameter. The content will be moved into the appropriate directory structure for an Eclipse fragment.

#### **args.eclipsehelp.jar.name**

Specifies that the output should be zipped and returned using this name.

#### **args.eclipsehelp.language**

Specifies the base language for translated content, such as en for English.

This parameter is a prerequisite for the args.eclipsehelp.country parameter. The content will be moved into the appropriate directory structure for an Eclipse fragment.

#### **Related concepts**

[Eclipse help transformation](#) on page 71

The eclipsehelp transformation generates XHTML output, CSS files, and the control files that are needed for Eclipse help.

#### **Related reference**

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

## **Other parameters**

---

These parameters enable you to reload style sheets that DITA-OT uses for specific pre-processing stages.

**dita.html5.reloadstylesheet**

**dita.preprocess.reloadstylesheet**

**dita.preprocess.reloadstylesheet.clean-map**

**dita.preprocess.reloadstylesheet.conref**

**dita.preprocess.reloadstylesheet.lag-module**

**dita.preprocess.reloadstylesheet.mapref**

**dita.preprocess.reloadstylesheet.mappull**

**dita.preprocess.reloadstylesheet.maplink**

## **dita.preprocess.reloadstylesheet.topicpull**

### **dita.xhtml.reloadstylesheet**

Specifies whether DITA-OT reloads the XSL style sheets that are used for the transformation. The allowed values are true and false; the default value is false.

During the pre-processing stage, DITA-OT processes one DITA topic at a time, using the same XSLT stylesheet for the entire process. These parameters control whether Ant will use the same Transformer object in Java, the object that handles the XSLT processing, for all topics, or create a separate Transformer for each topic.

The default (false) option uses the same Transformer, which is a little faster, because it will not need to parse/compile the XSLT stylesheets and only needs to read the source trees with document ( ) once. The downside is that it will not release the source trees from memory, so you can run out of memory.

**Tip:** For large projects that generate Java out-of-memory errors during transformation, set the parameter to true to allow the XSLT processor to release memory. You may also need to increase the memory available to Java.

### **Related tasks**

[Increasing Java memory allocation](#) on page 257

If you are working with large documents with extensive metadata or key references, you will need to increase the memory allocation for the Java process. You can do this from the command-line prompt for a specific session, or you can increase the value of the ANT\_OPTS environment variable.

### **Related reference**

[Other error messages](#) on page 253

In addition to error messages that DITA Open Toolkit generates, you might also encounter error messages generated by Java or other tools.



---

# Chapter 23

---

## Configuration properties

---

DITA-OT uses `.properties` files and internal properties that store configuration settings for the toolkit and its plug-ins. Configuration properties are available to both Ant and Java processes, but unlike argument properties, they cannot be set at run time.

When DITA-OT starts the Ant process, it looks for property values in the following order and locations:

1. Any property passed to Ant from the command line with `-Dproperty` or `--property=value`
2. A custom property file passed with `--propertyfile`
3. A `local.properties` file in the root directory of the DITA-OT installation
4. The `lib/org.dita.dost.platform/plugin.properties` file
5. The `configuration.properties` file

If a given property is set in multiple places, the first value “wins” and subsequent entries for the same property are ignored.

You can use this mechanism to override DITA-OT default settings for your environment by passing parameters to the `dita` command with `--property=value`, or using entries in `.properties` files.

### The `local.properties` file

---

A `local.properties` file in the root directory of the DITA-OT installation can be used to override the default values of various DITA-OT parameters.

For example, if you always use the same rendering engine to produce PDF output for all of your projects, you could create a `local.properties` file in the root directory of your DITA-OT installation to set the `pdf.formatter` parameter and additional options for the XSL processor:

```
1 # Use RenderX XEP Engine for PDF output
2 pdf.formatter = xep
3
4 # Specify the user configuration file for RenderX
5 custom.xep.config = /path/to/custom.config
```

Backslash “\” characters in `.properties` files must be escaped with a second backslash as “\\”. If you use Antenna House Formatter on a Windows system, for example, you would set the path to the command using a `properties` file entry like this:

```
1 # Use Antenna House Formatter for PDF output
2 pdf.formatter = ah
3
4 # Specify the path to the Antenna House Formatter command
5 ahf.cmd=C:\\Program Files\\Antenna House\\AHFormatterV62
```

**Note:** This file can only be used to set Ant property values that can be passed as argument parameters to the command line. The DITA-OT Java code does not read this file.

## The `plugin.properties` file

---

The `plugin.properties` file is used to store configuration properties that are set by the plug-in installation process.

The file is located in the `lib/org.dita.dost.platform` directory of the DITA-OT installation and stores a cached version of the plug-in configuration used by the Java code.

The contents of this file depend on the installed plug-ins. Each plug-in may contribute properties such as the path to the plug-in folder, supported extensions and print transformation types.



**Warning:** The `plugin.properties` file is regenerated each time the plug-in integration process is run, so it should not be edited manually as these changes would be lost the next time a plug-in is installed or removed.

## The `configuration.properties` file

---

The `configuration.properties` file controls certain common properties, as well as some properties that control PDF processing.

The contents of the `config/configuration.properties` file are added to the DITA-OT configuration in the `dost-configuration.jar` file when the plug-in integration process runs. The following properties are typically set in this file:

### `default.cascade`

Specifies the processing default value for the DITA 1.3 `@cascade` attribute, which determines how map-level metadata attributes are applied to the children of elements where the attributes are specified. DITA-OT uses the merge value by default for backwards compatibility with DITA 1.2 and earlier.



**Warning:** This property can only be set in `configuration.properties` and should not be modified.

### `temp-file-name-scheme`

This setting specifies the name of the Java class that defines how the source URL of a topic is mapped to the URL of the temporary file name. The current default method uses a 1:1 mapping, though future implementations may use alternative approaches such as hashes or full absolute paths as file names.



**Warning:** This property can only be set in `configuration.properties` and should not be modified.

### `cli.color`

Specifies whether the `dita` command prints colored output on the command line console. When set to true, error messages in `dita` command output will appear in red on terminals that support [ANSI escape codes](#), such as on Linux or macOS. Set to false to disable the color. (Colored output is not supported on Windows consoles such as `cmd.exe` or PowerShell).

### `plugindirs`

A semicolon-separated list of directory paths that DITA-OT searches for plug-ins to install; any relative paths are resolved against the DITA-OT base directory. Any immediate subdirectory that contains a `plugin.xml` file is installed.

**Tip:** You can use this property to test custom plug-ins that are stored in other locations. For example, to install all of the sample plug-ins that are included in the DITA-OT documentation, append `;docsrc/samples/plugins` to the property value and run `dita --install`. You can maintain custom plug-ins in version-controlled repositories outside of the DITA-OT installation directory, and add the repository locations to the list of plug-in directories here to test your code.

**plugin.ignores**

A semicolon-separated list of directory names to be ignored during plug-in installation; any relative paths are resolved against the DITA-OT base directory.

**plugin.order**

Defines the order in which plug-ins are processed. In XML catalog files, the order of imports is significant. If multiple plug-ins define the same thing (differently), the first catalog entry “wins”. DITA-OT uses this property to define the order in which catalog entries are written. This mechanism is currently used to ensure that DITA 1.3 grammar files take precedence over their DITA 1.2 equivalents.

**registry**

Defines the list (and order) of plug-in repositories that are searched for available plug-ins during the installation process. In addition to the main plug-in registry at [dita-ot.org/plugins](http://dita-ot.org/plugins), you can create a registry of your own to store the custom plug-ins for your company or organization. To add a new entry, append the URL for your custom registry directory to the `registry` key value, separating each entry with a space. For more information, see [Adding plug-ins via the registry](#) on page 131.

**org.dita.pdf2.i18n.enabled**

Enables internationalization (I18N) font processing to provide per-character font selection for FO renderers that do not support the `font-selection-strategy` property (such as Apache FOP).

When this feature is enabled, DITA-OT uses a font mapping process that takes the content language into consideration. The mapping process uses configuration files for each language to define characters that should be rendered with certain logical fonts, and font mappings that associate each logical font to physical font files.

The following values are allowed:

- `true` (default) — Enables font mapping
- `false` — Disables font mapping

**Tip:** If you don’t use custom character mappings, turning off font mapping makes it easier to define custom fonts simply by changing font names in the XSL attributes files of your custom PDF plug-in. For details, see [Font configuration in PDF2](#).

**default.coderef-charset**

As of DITA-OT 3.3, the default character set for code references can be changed by specifying one of the character set values supported by the Java [Charset](#) class.

**Related tasks**

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

**Related information**

## Internal Ant properties

---

DITA-OT uses these Ant properties in certain internal operations. They are not intended for general use, but may be adjusted by plug-in developers to configure custom transform types.



**Attention:** Internal properties are subject to change from one version of DITA-OT to another.

**include.rellinks**

A space-separated list of link roles to be output; the `#default` value token represents links without an explicit role (those for which no `@role` attribute is defined). Defined by `args.rellinks`, but may be overridden directly.

Valid roles include:

- parent
- child
- sibling
- friend
- next
- previous
- cousin
- ancestor
- descendant
- sample
- external
- other

**temp.output.dir.name**

This property can be used to place all output in an internal directory, so that a final step in the transform type can do some form of post-processing before the files are placed in the specified output directory.

For example, if a custom HTML5 transform sets the property to `zip_dir`, all output files (including HTML, images, and CSS) will be placed within the directory `zip_dir` in the temporary processing directory. A final step can then be used to add more files, zip the directory, and return that zip to the designated output directory.

---

# Part VI

---

## Customizing HTML output

---

You can modify the look and feel of your HTML output by changing parameter settings to include custom CSS, headers and footers, or table-of-contents navigation in topics.

### **Related concepts**

[Custom HTML plug-ins](#) on page 169

In addition to the basic modifications that can be made with parameter settings and property files, you can create custom HTML plug-ins that bundle custom fonts, JavaScript, and stylesheets; modify the HTML markup, or override other aspects of HTML processing.



---

# Chapter

# 24

---

## Setting parameters for custom HTML

---

For simple branded HTML pages, you can adjust the look and feel of the default output to match your company style by setting parameters to include custom CSS, header branding, or table-of-contents navigation in topics. (These changes do not require a custom plug-in.)

### Related concepts

[XHTML transformation](#) on page 79

The xhtml transformation generates XHTML output and a table of contents (TOC) file. This was the first transformation created for DITA Open Toolkit, and originally served as the basis for all HTML-based transformations.

[HTML5 transformation](#) on page 69

The html5 transformation generates HTML5 output and a table of contents (TOC) file.

### Related reference

[Common parameters](#) on page 89

Certain parameters apply to all transformations that DITA Open Toolkit supports.

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

[XHTML parameters](#) on page 101

Certain parameters are specific to the XHTML transformation.

[HTML5 parameters](#) on page 99

The HTML5 transformation shares common parameters with other HTML-based transformations and provides additional parameters that are specific to HTML5 output.

## Adding navigation to topics

---

In HTML5 output, you can set a parameter to include table-of-contents navigation in the <nav> element of each page. The navigation can be rendered in a sidebar or menu via CSS.

### About this task

Earlier versions of DITA-OT used the TocJS transformation to render a JavaScript-based table of contents in an XHTML frameset for topic navigation. Recent toolkit versions provide a modern HTML5 navigation alternative.

As of DITA-OT 2.2, the nav-toc parameter can be used in HTML5 transformations to embed navigation directly in topics using native HTML5 elements without JavaScript or framesets.

### Procedure

1. Set the nav-toc parameter to one of the following options:

- The partial option creates a table of contents with the portion of the navigation hierarchy that contains the current topic (along with its parents, siblings and children).
- The full option embeds the complete navigation for the entire map in each topic.

## 2. Optional: Add custom CSS rules to style the navigation.

For example, the DITA-OT documentation stylesheet includes the following rules to place the table of contents on the left side of the browser viewport and highlight the current topic in bold:

```

1  /* Style ToC nav as sidebar on desktop */
2  @media screen and (min-width: 992px) {
3    .nav.toc {
4      float: left;
5      width: 300px;
6    }
7  }
8
9  .nav.toc li.active > a {
10   font-weight: var(--font-weight-bold);
11 }

```

## Results

**Tip:** For an example of HTML output generated using this method, see the HTML5 version of the DITA-OT documentation included in the installation folder under `doc/index.html`.

## Adding custom CSS

---

To modify the appearance of the default HTML output that DITA Open Toolkit generates, you can reference a custom Cascading Style Sheet (CSS) file with the typography, colors, and other presentation aspects that define your corporate identity.

### About this task

You can use this approach when you need to adjust the look and feel of the default output for a single project, but don't want to create a custom DITA-OT plug-in.

You can version the CSS file along with the DITA source files in your project, so stylesheet changes can be tracked along with modifications to topic content.

You may also find this approach useful as you develop a custom stylesheet. Once the CSS rules stabilize, you can bundle the CSS file in a custom DITA-OT plug-in to ensure consistent HTML output across projects.

### Procedure

1. Create a custom CSS file and store it in your project along with your DITA source files.

**Note:** As a starting point, you can use the CSS file that is used for the DITA-OT documentation. This file is available in the installation folder under `docsrc/resources/dita-ot-doc.css`.

2. Set the `args.css` parameter to the name of your custom CSS file.

The value of this parameter should be only the file name. You can specify the absolute path to the file with `args.cssroot`.

3. Set the `args.copycss` parameter to yes.

This setting ensures that your custom CSS file will be copied to the output directory.

4. Set `args.cssroot` to the absolute path of the folder that contains your custom CSS file.
5. Optional: Set `args.csspath` to specify the location of the CSS file in the output folder.

If `args.csspath` is not set, the custom CSS file will be copied to the root level of the output folder. To copy the CSS file to a subfolder named `css`, set `args.csspath` to `css`.



## Results

**Tip:** For an example of HTML output generated using this method, see the HTML5 version of the DITA-OT documentation included in the installation folder under `doc/index.html`.

## Related tasks

[Bundling CSS in a custom HTML plug-in](#) on page 169

You can create a DITA-OT plug-in that provides a custom stylesheet with the typography and colors that define your corporate identity. Coworkers can install this plug-in to ensure consistent HTML output across projects without having to copy the stylesheet to each project.

# Adding custom headers and footers

You add a custom header to include a publication title, company logo, or other common branding elements in HTML output. A custom footer can also be added with copyright information, legal boilerplate, or other fine print.

## About this task

In HTML5 output, the contents of the header file will be wrapped in an HTML5 `<header>` element with the `@role` attribute set to `banner`. The footer file contents are wrapped in an HTML5 `<footer>` element with the `@role` attribute set to `contentinfo`.

For example, the DITA-OT documentation includes a simple header banner with the publication title and a horizontal rule to separate the header from the generated topic content:

```
1 <div class="header">
2   <p>DITA Open Toolkit</p>
3   <hr/>
4 </div>
```

**Note:** Header and footer files should be specified using absolute paths and must contain valid XML. A common practice is to place all content into a `<div>` element.

## Procedure

1. Set `args.hdr` to include an XML file as a running header that appears above the page content.
2. Set `args.ftr` to include an XML file as a running footer that appears below the page content.
3. Optional: Add custom CSS rules to style headers and/or footers.

For example, the DITA-OT documentation stylesheet includes the following header rules:

```
1 .header {
2   margin-bottom: 1rem;
3   padding: 0 12px;
4 }
5
6 .header p {
7   color: var(--headings-color);
8   font-size: 1.5rem;
9   margin: 0 0 16px;
10 }
11
12 .header hr {
13   border: 0;
14   border-bottom: 1px solid var(--secondary-light);
15   height: 0;
16 }
```

## Results

**Tip:** For an example of HTML output generated using this method, see the HTML5 version of the DITA-OT documentation included in the installation folder under `doc/index.html`.

## Handling content outside the map directory

---

By default, DITA-OT assumes content is located in or beneath the directory containing the DITA map file. The `generate.copy.outer` parameter can be used to adjust how output is generated for content that is located outside the map directory.

### Background

This is an issue in the following situations:

- The DITA map is in a directory that is a peer to directories that contain referenced objects.
- The DITA map is in a directory that is below the directories that contain the referenced objects.

Let's assume that the directory structure for the DITA content looks like the following:

```
images/
  fig.png
maps/
  start.ditamap
topics/
  topic.dita
```

The DITA map is in the `maps` directory, the topics are in the `topics` directory, and the images are in the `images` directory.

### Exclude content outside the map directory

Let's assume that you run the HTML5 transformation. By default, DITA-OT uses the `generate.copy.outer` parameter with a value of 1, which means that no output is generated for content that is located outside the DITA map directory.

You receive only the following output:

```
index.html
commonltr.css
commonrtl.css
```

The `index.html` file contains the navigation structure, but all the links are broken, since no HTML files were built for the topics.

How do you fix this? By adjusting the parameter setting to shift the output directory.

### Shift the output directory to include all content

To preserve the links to referenced topics and images and make it easier to copy the output directory, set the `generate.copy.outer` parameter to 3.

Now your output directory structure resembles the structure of the source directory:

```
images/
  fig.png
maps/
  index.html
topics/
  topic.html
commonltr.css
commonrtl.css
```

The `index.html` file is in the `maps` directory, the HTML files for the topics are in the `topics` directory, and the referenced images are in the `images` directory.

**Tip:** If `args.csspath` is not set, the default CSS files (and any custom CSS files specified via `args.css`) will be copied to the root level of the output folder. To copy CSS files to an output subfolder named `css`, set `args.csspath` to `css`.



---

# Chapter

# 25

---

## Customizing HTML with a `.properties` file

---

You can also use a `.properties` file to reference a set of build parameters when building output with the `dita` command. The DITA-OT documentation uses a `.properties` file to include custom CSS, header branding, and table-of-contents navigation in the HTML5 output.

### Procedure

1. Create a `.properties` file to store the parameter settings for your customization.

**Tip:** You can use one of the sample `.properties` files from the DITA-OT documentation as a starting point for your own customizations. These files are available in the installation folder under `docsrc/samples/properties/`.

For example:

```
1 # Directory that contains the custom .css file:
2 args.cssroot = ${args.input.dir}/css/
3
4 # Custom .css file used to style output:
5 args.css = style.css
6
7 # Copy the custom .css file to the output directory:
8 args.copycss = yes
9
10 # Location of the copied .css file relative to the output:
11 args.csspath = branding
12
13 # Generate a full navigation TOC in topic pages:
14 nav-toc = full
```

**Figure 12: The `docsrc/samples/properties/sequence-html5.properties` file**

2. Reference your `.properties` file with the `dita` command when building your output.

```
dita --input=my.ditamap --format=html5 --propertyfile=my.properties
```

### Results

**Note:** For an example of HTML output generated using this method, see the HTML5 version of the DITA-OT documentation included in the installation folder under `doc/index.html`.



---

# Part VII

---

## Customizing PDF output

---

You can adjust various aspects of PDF output by changing parameter settings. For more complex customizations, you can create custom DITA-OT plug-ins.

For example:

- To print the file names of the graphics underneath figures, set `args.artlbl` to `yes`.
- To disable the subsection links on the first page of each chapter, set `args.chapter.layout` to `BASIC`.
- To change the name of the PDF file to something other than the input map name, set `outputFile.base` to the desired file name (without the `.pdf` extension).

**Note:** For the full list of settings for PDF output, see [PDF parameters](#) on page 94.

### Related tasks

[Custom PDF plug-ins](#) on page 177

In most cases, PDF output should be customized by creating custom DITA-OT plug-ins that build on the default DITA to PDF transformation. PDF plug-ins can customize covers and page layouts, modify formatting, override the logic of the default PDF plug-in, and much more.





---

# Chapter

# 26

---

## PDF customization approaches

---

Various methods may be used to customize the PDF output that DITA Open Toolkit produces. Each of these approaches have advantages and shortcomings that should be considered when preparing a customization project.

**Note:** Some of these methods are considered “anti-patterns” with disadvantages that outweigh their apparent appeal. In most cases, you should create a custom PDF plug-in.

### Why not edit default files?

When first experimenting with PDF customization, novice users are often tempted to simply edit the default `org.dita.pdf2` files in place to see what happens.

As practical as this approach may seem, the DITA-OT project does not recommend changing any of the files in the default plug-ins.

While this method yields quick results and can help users to determine which files and templates control various aspects of PDF output, it quickly leads to problems, as any errors may prevent the toolkit from generating PDF output.



**Warning:** Any changes made in this fashion would be overwritten when upgrading to newer versions of DITA-OT, so users that have customized their toolkit installation in this way are often “stuck” on older versions of the toolkit and unable to take advantage of improvements in recent versions of DITA-OT.

### Using the Customization folder

The original Idiom plug-in used its own extension mechanism to provide overrides to the PDF transformation. With this approach, a dedicated folder within the plug-in is used to store customized files.

Files in the `org.dita.pdf2/Customization` folder can override their default counterparts, allowing users to adjust certain aspects of PDF output without changing any of the plug-in’s default files, or specifying additional parameters when generating output.

**Important:** While this approach is slightly better than editing default files in place, it can still cause problems when upgrading the toolkit to a new version. Since the `Customization` folder is located within the `org.dita.pdf2` plug-in’s parent directory, users must be take care to preserve the contents of this folder when upgrading to new toolkit versions.

Although recent versions of DITA-OT still support this mechanism to ensure backwards compatibility, this practice is deprecated in favor of custom PDF plug-ins.

**Tip:** Users who have used the `Customization` folder to modify the default PDF output are encouraged to create a custom PDF plug-in instead. In many cases, this may be as simple as copying the contents of the `Customization` folder to a new subfolder in the `plugins` folder and creating the necessary `plugin.xml` file and an Ant script to define the transformation type as described in the following example.

### Specifying an external customization directory

To ensure that overrides in customization folders are not overwritten when upgrading DITA-OT to a new release, an external customization directory can be specified at build time or in build scripts via the `customization.dir` parameter.

This method is preferable to the use of the `org.dita.pdf2/Customization` folder, as the contents of external folders are unaffected when upgrading DITA-OT. In distributed environments, users can use local installations of DITA-OT, yet still take advantage of common customizations stored in a network location available to the entire team, such as a shared drive.

It can also be useful in environments where corporate policy, CMS permissions, or network access rights prevent changes to the toolkit installation, which may prohibit the installation of custom plug-ins.

**Tip:** Users who specify external customization directories via `customization.dir` are encouraged to create a custom PDF plug-in if possible.

### Combining custom plug-ins & customization directories

A common custom plug-in may be used to store base overrides that are applicable to all company publications, and the `customization.dir` parameter can be passed at build time to override individual settings as necessary for a given project or publication.

In this case, any settings in the customization directory will take precedence over their counterparts in the custom plug-in or default `org.dita.pdf2` plug-in.

This approach allows a single custom plug-in to be shared between multiple publications or the entire company, without the need to create additional plug-in dependencies per project.

However, the use of multiple customization mechanisms can make it difficult to debug the precedence cascade and determine the origin of local formatting or processing overrides.

**Tip:** In most scenarios, the use of dedicated PDF customization plug-ins is preferable. Common customizations can be bundled in one plug-in, and any project-specific overrides can be maintained in separate plug-ins that build on the base branding or other settings in the common custom plug-in.

### Related tasks

[Custom PDF plug-ins](#) on page 177

In most cases, PDF output should be customized by creating custom DITA-OT plug-ins that build on the default DITA to PDF transformation. PDF plug-ins can customize covers and page layouts, modify formatting, override the logic of the default PDF plug-in, and much more.

---

# Chapter

# 27

---

## Generating revision bars

---

You can generate revision bars in your PDF output by using the `@changebar` and `@color` attributes of the DITAVAL `<revprop>` element.

The DITA [specification](#) for the `@changebar` attribute of the `<revprop>` element simply says:

**`@changebar`**

When flag has been set, specify a changebar color, style, or character, according to the changebar support of the target output format. If flag has not been set, this attribute is ignored.

The current version of DITA Open Toolkit uses two `<revprop>` attribute values to define revision bars:

- The `@changebar` attribute value defines the style to use for the line. The list of possible values is the same as for other XSL-FO rules (see [@change-bar-style](#)). The default value is `groove`.
- The `@color` attribute value specifies the change bar color using any color value recognized by XSL-FO, including the usual color names or a hex color value. The default value is `black`.

```
<revprop action="flag" changebar="solid" color="green"/>
```

### Figure 13: Sample revision bar configuration

DITA-OT uses a default offset of 2 mm to place the revision bar near the edge of the text column. The offset, placement and width are not currently configurable via attribute values.

XSL-FO 1.1 does not provide for revision bars that are not rules, so there is no way to get text revision indicators instead of rules, for example, using a number in place of a rule. Antenna House Formatter provides a proprietary extension to enable this, but the DITA-OT PDF transformation does not take advantage of it.



---

# Part VIII

---

## Adding and removing plug-ins

---

You can extend DITA-OT with additional plug-ins to change the default output types in various ways, add entirely new kinds of output formats, or implement DITA specializations. A variety of open source plug-ins are available from the plug-in registry at [dita-ot.org/plugins](http://dita-ot.org/plugins).



---

# Chapter

# 28

---

## Installing plug-ins

---

Use the `dita install` subcommand to install plug-ins.

### Procedure

At the command-line prompt, enter the following command:

```
dita install <plug-in>
```

where:

- the optional `<plug-in>` argument is one of the following:
  - the unique *ID* of the plug-in as defined in the plug-in registry at [dita-ot.org/plugins](http://dita-ot.org/plugins) (or a local registry)
  - the remote *URL* of the plug-in's distribution ZIP file
  - the name of a local ZIP *file*

**Note:** In earlier versions of DITA-OT (2.4–3.4), use the double-hyphen option syntax `dita --install`. In DITA-OT 2.0–2.3, use the single-hyphen form: `dita -install`.

**Tip:** If no *ID*, *URL*, or *file* argument is provided, the installation process reloads the current set of plug-ins from the `plugins` directory (or any custom locations defined via the `pluginsdir` property in the `configuration.properties` file in the `config` directory). This approach can be used to add or remove multiple plug-ins at once, or any individual plug-ins you have already copied to (or removed from) the plug-in directories. Any plug-ins added or removed in the process will be listed by their plug-in ID.

### Related reference

[The `configuration.properties` file](#) on page 106

The `configuration.properties` file controls certain common properties, as well as some properties that control PDF processing.

[Arguments and options for the `dita` command](#) on page 83

The `dita` command takes mandatory arguments to process DITA content. Subcommands can be used to manage plug-ins, or print information about the current configuration. A series of options are available to modify the command behavior or specify additional configuration parameters.

### Related information

[Adding plug-ins via the registry](#) on page 131

DITA-OT 3.2 supports a new plug-in registry that makes it easier to discover and install new plug-ins. The registry provides a searchable list of plug-ins at [dita-ot.org/plugins](http://dita-ot.org/plugins).





---

# Chapter

# 29

---

## Removing plug-ins

---

Use the `dita uninstall` subcommand to remove a plug-in.

### Procedure

At the command-line prompt, enter the following command:

```
dita uninstall <plug-in-id>
```

where:

- `<plug-in-id>` is the unique ID of the plug-in, as defined in the plug-in's configuration file (`plugin.xml`).

**Note:** In earlier versions of DITA-OT (2.4–3.4), use the double-hyphen option syntax `dita --uninstall`. In DITA-OT 2.0–2.3, use the single-hyphen form: `dita -uninstall`.



**Attention:** The `uninstall` subcommand also removes the corresponding plug-in directory from the `plugins` folder.

### Related reference

[Arguments and options for the dita command](#) on page 83

The `dita` command takes mandatory arguments to process DITA content. Subcommands can be used to manage plug-ins, or print information about the current configuration. A series of options are available to modify the command behavior or specify additional configuration parameters.



---

# Chapter

# 30

---

## Adding plug-ins via the registry

---

DITA-OT 3.2 supports a new plug-in registry that makes it easier to discover and install new plug-ins. The registry provides a searchable list of plug-ins at [dita-ot.org/plugins](https://dita-ot.org/plugins).

In the past, installing plug-ins required you to either download a plug-in to your computer and provide the path to the plug-in archive (.zip file) or pass the URL of the plug-in distribution file to the `dita` command and let DITA-OT download the file. This required that you know the URL of the plug-in distribution package.

### Installing plug-ins from the registry

With the registry, you can now search the list of available plug-ins at [dita-ot.org/plugins](https://dita-ot.org/plugins) and install new plug-ins by name and optional version.

Search the registry for a plug-in and install it by providing the plug-in name to the `dita` command.

```
dita --install=<plugin-name>
```

If the registry includes multiple versions of the same plug-in, you can specify the version to install as follows:

```
dita --install=<plugin-name>@<plugin-version>
```

If the plug-in requires other plug-ins, those are also installed recursively.

For example, to revert PDF output to the legacy PDF2 layout that was the default in DITA-OT before 2.5, install the `org.dita.pdf2.legacy` plug-in as follows:

```
dita --install=org.dita.pdf2.legacy
```

If a matching plug-in cannot be found, an error message will appear. Possible reasons for failure include:

- A plug-in with the specified name was not found in the registry
- A plug-in with the specified version was not found in the registry
- The specified plug-in version is not compatible with the installed DITA-OT version
- None of the available plug-in versions are compatible with the installed DITA-OT version

### Publishing plug-ins to the registry

The contents of the DITA Open Toolkit plug-in registry are stored in a Git repository at [github.com/dita-ot/registry](https://github.com/dita-ot/registry). New plug-ins or new versions can be added by sending a [pull request](#) that includes a single new plug-in entry in JavaScript Object Notation (JSON) format.

**Note:** As for all other contributions to the project, pull requests to the registry must be signed off by passing the `--signoff` option to the `git commit` command to certify that you have the rights to submit this contribution. For more information on this process, see [signing your work](#).

The version entries for each plug-in are stored in a file that is named after the plug-in ID as `<plugin-name>.json`. The file contains an array of entries with a pre-defined structure. You should have one entry for each supported version of the plug-in.

**Table 1: Plug-in version entry structure**

Key	Mandatory	Description
name	yes	Plug-in name
vers	yes	Plug-in version in <a href="#">semantic versioning</a> format
deps	yes	Array of dependency entries. The only mandatory plug-in dependency is <code>org.dita.base</code> , which defines the supported DITA-OT platform.
url	yes	Absolute URL to plug-in distribution file
cksum	no	SHA-256 hash of the plug-in distribution file
description	no	Description of the plug-in
keywords	no	Array of keywords
homepage	no	Plug-in homepage URL
license	no	License in <a href="#">SPDX</a> format

**Tip:** To calculate the SHA-256 checksum for the `cksum` key, use `shasum -a 256 <plugin-file>` on macOS or Linux. With Windows PowerShell, use `Get-FileHash <plugin-file> | Format-List`.

**Table 2: Structure for dependency entries**

Key	Mandatory	Description
name	yes	Plug-in name
req	yes	Required plug-in version in <a href="#">semantic versioning</a> format that may contain <a href="#">ranges</a> .

**Note:** Version numbers in the `vers` and `req` keys use the three-digit format specified by [semantic versioning](#). An initial development release of a plug-in might start at version 0.1.0, and an initial production release at 1.0.0. If your plug-in requires DITA-OT 3.1 or later, set the `req` key to `>=3.1.0`. Using the greater-than sign allows your plug-in to work with compatible maintenance releases, such as 3.1.3. If the requirement is set to `=3.1.0`, the registry will only offer it for installation on that exact version.

### Sample plug-in entry file

The example below shows an entry for the DocBook plug-in. The complete file is available in the registry as [org.dita.docbook.json](#).

```
[
  {
    "name": "org.dita.docbook",
    "description": "Convert DITA to DocBook.",
    "keywords": ["DocBook"],
    "homepage": "https://github.com/dita-ot/org.dita.docbook/",
    "vers": "2.3.0",
    "license": "Apache-2.0",
    "deps": [
      {
        "name": "org.dita.base",
        "req": ">=2.3.0"
      }
    ],
    "url": "https://github.com/dita-ot/org.dita.docbook/archive/2.3.zip",
```

```

    "cksum" :
    "eaf06b0dca8d942bd4152615e39ee8cfb73a624b96d70e10ab269ed6f8a13e21 "
  }
]

```

## Maintaining multiple plug-in versions

When you have multiple versions of a plug-in, include an entry for each version, separated by a comma:

```

[
  {
    "name": "org.example.myplugin",
    [...]
    "vers": "1.0.1",
    [...]
  },
  {
    "name": "org.example.myplugin",
    [...]
    "vers": "2.1.0",
    [...]
  }
]

```

**Tip:** To publish a new version of your plug-in to the registry, add a new entry to the array in the existing plug-in entry file rather than overwriting an existing entry. This allows users to install the previous version of the plug-in if they are using an older version of DITA-OT.

## Adding custom registries

In addition to the main plug-in registry at [dita-ot.org/plugins](https://dita-ot.org/plugins), you can create a registry of your own to store the custom plug-ins for your company or organization.

A registry is just a directory that contains JSON files like the one above; each JSON file represents one entry in the registry. To add a custom registry location, edit the `config/configuration.properties` file in the DITA-OT installation directory and add the URL for your custom registry directory to the `registry` key value, separating each entry with a space.

**Tip:** Custom registry entries are a simple way to test your own plug-in entry file before submitting to a common registry.

## Testing with a custom registry

To test your plug-in entry with a custom registry:

1. Fork the plug-in registry, which creates a new repository under your GitHub username—for example, `https://github.com/USERNAME/registry.git`.
2. Create a new branch for your plug-in entry, and add the JSON file to the branch—for example, create `org.example.newPlugin.json` in the branch `addPlugin`.
3. As long as your repository is accessible, that branch now represents a working “custom registry” that can be added to the `config/configuration.properties` file. Edit the `registry` key and add the raw GitHub URL for the branch that contains the JSON file. With the example username and branch name above, you can add your registry with:

```

registry=https://raw.githubusercontent.com/USERNAME/registry/addPlugin/
http://plugins.dita-ot.org/

```

4. You can now test the plug-in installation with:

```

dita --install=org.example.newPlugin

```

5. Once you've confirmed that the entry works, you can submit a pull request to have your entry added to the common registry.

**Related tasks**

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

---

# Chapter 31

---

## Rebuilding the DITA-OT documentation

---

When you add or remove plug-ins, you can rebuild the documentation to update the information on the extension points, messages, and parameters that are available in your environment.

### About this task

DITA-OT ships with a [Gradle](#) build script that enables you to rebuild the toolkit documentation. The build script reads the toolkit's plug-in configuration and automatically regenerates topics and properties file templates based on the extension points, messages, and parameters provided by the installed plug-ins.



**Attention:** If you have installed new plug-ins, you may need to add the corresponding generated topics to the DITA maps to include the new information in the output.

### Procedure

1. Change to the `docsrc/` subdirectory of the DITA-OT installation.
2. Run one of the following commands.
  - On Linux and macOS:

```
./gradlew target
```

- On Windows:

```
gradlew.bat target
```

The *target* parameter is optional and specifies a transformation type. It takes the following values:

- `html`
- `htmlhelp`
- `pdf`

If you do not specify a target, HTML5 and PDF output is generated.





---

# Part IX

---

## Creating custom plug-ins

---

In addition to adding plug-ins from the plug-in registry at [dita-ot.org/plugins](http://dita-ot.org/plugins), you can create custom DITA-OT plug-ins of your own to modify the default output, add new output formats, support new languages, or implement DITA topic specializations.

A plug-in consists of a directory, typically stored within the `plugins/` subdirectory of the DITA-OT installation. Every plug-in is controlled by a file named `plugin.xml`, which is located in the root directory of the plug-in.



---

# Chapter

# 32

---

## Plug-in benefits

---

Plug-ins allow you to extend the toolkit in a way that is consistent, easy-to-share, and possible to preserve through toolkit upgrades.

The DITA-OT plug-in mechanism provides the following benefits:

- Plug-ins can easily be shared with other users, teams, or companies. Typically, all users need to do is to unzip and run a single installation command. With many builds, even that installation step is automatic.
- Plug-ins permit overrides or customizations to grow from simple to complex over time, with no increased complexity to the extension mechanism.
- Plug-ins can be moved from version to version of DITA-OT by reinstalling or copying the directory from one installation to another. There is no need to re-integrate code based on updates to DITA-OT core processing.
- Plug-ins can build upon each other. If you like a plug-in, simply install that plug-in, and then create your own plug-in that builds on top of it. The two plug-ins can then be distributed to your team as a unit, or you can share your own extensions with the original provider.



---

# Chapter

# 33

---

## Plug-in descriptor file

---

The plug-in descriptor file (`plugin.xml`) controls all aspects of a plug-in, making each extension visible to the rest of the toolkit. The file uses pre-defined extension points to locate changes, and then integrates those changes into the core DITA-OT code.

### Validating plug-ins

DITA-OT includes a RELAX NG schema file that can be used to validate the `plugin.xml` files that define the capabilities of each plug-in.

To ensure the syntax of your custom plug-in is correct, include an `<?xml-model?>` processing instruction at the beginning of the `plugin.xml` file, immediately after the XML prolog:

```
<?xml-model href="https://www.dita-ot.org/rng/plugin.rnc" type="application/relax-ng-compact-syntax"?>
```

If your authoring environment does not apply this schema automatically, point your editor to `dita-ot-dir/resources/plugin.rnc` to associate the schema with your plug-in file.

### Plug-in identifiers

Every DITA-OT plug-in must have a unique identifier composed of one or more dot-delimited tokens, for example, `com.example.rss`. This identifier is used to identify the plug-in to the toolkit for installation, processing, and when determining plug-in dependencies.

**Note:** The default DITA-OT plug-ins use a reverse domain naming convention, as in `org.dita.html5`; this is strongly recommended to avoid plug-in naming conflicts.

Each token can include only the following characters:

- Lower-case letters (a-z)
- Upper-case letters (A-Z)
- Numerals (0-9)
- Underscores (`_`)
- Hyphens (`-`)

### `<plugin>`

The root element of the `plugin.xml` file is `<plugin>`, which has a required `@id` attribute set to the unique plug-in identifier.

```
<plugin id="com.example.html5-javascript">
```

**Figure 14: Sample `<plugin>` element**

### Plug-in elements

The `<plugin>` element can contain the following child elements:

**<extension-point>**

An optional element that defines a new extension point that can be used by other DITA-OT plug-ins.

The following attributes are supported:

Attribute	Description	Required?
<b>id</b>	Extension point identifier	Yes
<b>name</b>	Extension point description	No

Like plug-in identifiers, extension point identifiers are composed of one or more dot-delimited tokens.

**Note:** Extension point identifiers should begin with the identifier of the defining plug-in and append one or more tokens, for example, `org.dita.example.pre`.

```
<extension-point id="dita.xsl.html5" name="HTML5 XSLT import"/>
```

**Figure 15: Sample <extension-point> element**

**<feature>**

An optional element that supplies values to a DITA-OT extension point.

The following attributes are supported:

Attribute	Description	Required?
<b>extension</b>	Identifier of the DITA-OT extension point	Yes
<b>value</b>	Comma separated string value of the extension	Either the @value or @file attribute must be specified
<b>file</b>	Name and path of a file containing data for the extension point.  Depending on the extension point, this might be specified as an absolute path, a path relative to the <code>plugin.xml</code> file, or a path relative to the DITA-OT root.	Either the @value or @file attribute must be specified
<b>type</b>	Type of the @value attribute	No

If more than one <feature> element supplies values to the same extension point, the values are additive. For example, the following are equivalent:

```
<feature extension="org.dita.example.extension-point"
  value="a,b,c"/>
```

```
<feature extension="org.dita.example.extension-point" value="a"/>
<feature extension="org.dita.example.extension-point" value="b"/>
```

```
<feature extension="org.dita.example.extension-point" value="c"/>
```

**Figure 16: Sample <feature> elements**

## <metadata>

An optional element that defines metadata.

The following attributes are supported:

Attribute	Description	Required?
<b>type</b>	Metadata name	Yes
<b>value</b>	Metadata value	Yes

```
<metadata type="foo" value="bar"/>
```

**Figure 17: Sample <metadata> element**

## <require>

An optional element that defines plug-in dependencies.

The following attributes are supported:

Attribute	Description	Required?
<b>plugin</b>	The identifier of the required plug-in.  To specify alternative requirements, separate plug-in identifiers with a vertical bar.	Yes
<b>importance</b>	Identifies whether the plug-in is required (default) or optional. DITA-OT provides a warning if a required plug-in is not available.	No

```
<require plugin="org.dita.html5"/>
```

**Figure 18: Sample <require> element**

## <template>

An optional element that defines files that should be treated as templates.

Template files can be used to integrate DITA-OT extensions. Templates typically extend the default transformation-type-specific build files via <dita:extension> elements. When the plug-in installation process runs, template files are used to recreate build files, and the specified extension points are replaced with references to the appropriate plug-ins.

The following attributes are supported:

Attribute	Description	Required?
<b>file</b>	Name and path to the template file, relative to the plugin.xml file	Yes

```
<template file="build_dita2html5_template.xml"/>
```

**Figure 19: Sample <template> element**

## <transtype>

An optional element that defines a new output format (transformation type).

The following attributes are supported:

Attribute	Description	Required?
<b>name</b>	Transformation name	Yes
<b>desc</b>	Transformation type description	No
<b>abstract</b>	When true, sets the transformation type as “abstract”, meaning it can be extended by other plug-ins, but cannot be used directly.  For example, the org.dita.base plug-in defines an abstract “base” transformation type that is extended by other DITA-OT plug-ins.	No
<b>extends</b>	Specifies the name of the transformation type being extended	No

```
<transtype name="base" abstract="true" desc="Common">
  [...]
  <param name="link-crawl"
    desc="Specifies whether to crawl only topic links found
    in maps, or all discovered topic links."
    type="enum">
    <val>map</val>
    <val default="true">topic</val>
  </param>
  [...]
</transtype>
```

**Figure 20: Sample <transtype> element**

The <transtype> element may define additional parameters for the transformation type using the following child elements.

## <param>



An optional element that specifies a parameter for the transformation type.

The following parameter attributes are supported:

Attribute	Description	Required?
<b>name</b>	Parameter name	Yes
<b>desc</b>	Parameter description	No
<b>type</b>	Parameter type (enum, file, string)	Yes
<b>deprecated</b>	When true, identifies this parameter as deprecated	No
<b>required</b>	When true, identifies this parameter as required	No

**<val>**

A child of `<param>` (when `@type=enum`) that specifies an enumeration value.

The following attributes are supported:

Attribute	Description	Required?
<b>default</b>	When true, sets the enumeration value as the default value of the parent <code>&lt;param&gt;</code>	Only for the default <code>&lt;val&gt;</code>

Any extension that is not recognized by DITA-OT is ignored. Since DITA-OT version 1.5.3, you can combine multiple extension definitions within a single `plugin.xml` file; in older versions, only the last extension definition was used.

### Example `plugin.xml` file

The following is a sample of a `plugin.xml` file. This file adds support for a new set of specialized DTDs, and includes an override for the XHTML output processor.

This `plugin.xml` file would go into a directory such as `DITA-OT/plugins/music/` and referenced supporting files would also exist in that directory. A more extensive sample using these values is available in the actual music plug-in, available on [SourceForge](#).

```

1 <plugin id="org.metadita.specialization.music">
2   <feature extension="dita.specialization.catalog.relative"
3     ..... file="catalog-dita.xml" />
4   <feature extension="dita.xsl.xhtml" file="xsl/music2xhtml.xsl" />
5 </plugin>
```

### Related tasks

[Adding a new transformation type](#) on page 155

Plug-ins can add an entirely new transformation type. The new transformation type can be very simple, such as an HTML build that creates an additional control file; it also can be very complex, adding any number of new processing steps.

### Related reference

[Creating a new plug-in extension point](#) on page 162

If your plug-in needs to define its own extension points in an XML file, add the string `"_template"` to the filename before the file suffix. When the plug-in is installed, this file will be processed like the built-in DITA-OT templates.



---

# Chapter

# 34

---

## Plug-in coding conventions

---

To ensure custom plug-ins work well with the core toolkit code and remain compatible with future releases, the DITA Open Toolkit project recommends that plug-ins use modern development practices and common coding patterns.

### Best practices

Adhering to certain development practices will properly isolate your code from that of DITA Open Toolkit. This will make it easier to you to upgrade to new versions of DITA-OT when they are released.

- Use a properly-constructed DITA-OT plug-in.
- Use a version control system to store your code.
- Store the source code of your plug-ins outside of the DITA-OT installation directory, and add the repository location to the list of plug-in directories defined in the `plugindirs` entry of the [configuration.properties](#) file.
- Never modify any of the core DITA-OT code.

**Tip:** You may want to set the permissions on default plug-in directories such as `org.dita.pdf2` to “read-only” to ensure that you do not accidentally modify the files within as you develop your customized plug-in.

- Avoid copying entire DITA-OT files into your customization plug-in. When you only copy the attribute sets and templates that you need to override, there is less risk of impact from new features or fixes in the base code, making your code more stable and easier to upgrade between releases.
- If you only need to change a few attribute sets and templates, you may prefer to store your overrides in `custom.xsl` files, or a simple folder hierarchy within your custom plug-in.
- In cases that require substantial customizations, you may prefer to organize the files in a folder structure that mimics the hierarchy of the default plug-in you are customizing. This facilitates comparisons with the default settings in the base plug-in and makes it easier to migrate your changes to new toolkit versions. See [PDF plug-in structure](#) on page 178 for information on the files in the base PDF plug-in.
- Upgrade your customization plug-in to new versions of DITA-OT regularly. Do not wait through several major releases before upgrading.

### Use a custom namespace

For XSLT customizations, use a custom namespace for any modified template modes, template names, attribute sets, functions, and variables. This helps to clarify which portions of the code are specific to your customizations, and serves to isolate your changes in the event that items with the same name are added to the base plug-ins in the future.

For example, instead of creating a template named `searchbar`, use something like `corp:searchbar` instead. This ensures that if future versions of DITA-OT add a `searchbar` template, your custom version will be unaffected.

Instead of:

```
<xsl:template name="searchbar"/>
```

use:

```
<xsl:template name="corp:searchbar"/>
```

## Upgrade stylesheets to XSLT 2.0

The Saxon project has announced plans to remove XSLT 1.0 support from the Saxon-HE library that ships with DITA-OT:

...we're dropping XSLT 1.0 backwards compatibility mode from Saxon-HE, and hope to eliminate it entirely in due course.

<https://www.xml.com/news/release-saxon-98/>

DITA-OT 3.0 and 3.0.1 included Saxon-HE 9.8.0.5, which rejects XSLT stylesheets that specify `version="1.0"`. Plug-ins with XSLT templates specifying version 1.0 will fail with the message “XSLT 1.0 compatibility mode is not available in this configuration.”

To resolve this issue, change any occurrences of `<xsl:stylesheet version="1.0">` in custom plug-in stylesheets to at least `<xsl:stylesheet version="2.0">`.

**Tip:** DITA-OT 3.0.2 includes Saxon-HE 9.8.0.7, which restores XSLT 1.0 backwards-compatibility mode, but the DITA Open Toolkit project recommends upgrading all stylesheets to XSLT 2.0 to ensure plug-ins remain compatible with future versions of DITA-OT and Saxon-HE.

## Use custom `<pipeline>` elements

In Ant scripts, use the XSLT module from DITA-OT instead of Ant's built-in `<xslt>` or `<style>` tasks.

The XSLT module allows access to DITA-OT features like using the job configuration to select files in the temporary folder based on file metadata and custom XSLT extension functions.

**Important:** Future versions of DITA-OT may switch to a new XML resolver or in-memory storage features that are not supported by Ant's XSLT task. To ensure compatibility with future releases, plug-ins should replace these constructs with custom `<pipeline>` elements.

Instead of:

```
1 <xslt style="${dita.plugin.example.dir}/custom.xsl"
2 ..... basedir="${dita.temp.dir}"
3 ..... destdir="${dita.output.dir}"
4 ..... includesfile="${dita.temp.dir}/${fullditatopicfile}"/>
```

use:

```
1 <pipeline>
2 .. <xslt style="${dita.plugin.example.dir}/custom.xsl"
3 ..... destdir="${dita.output.dir}">
4 .... <ditafileset format="dita" />
5 .. </xslt>
6 </pipeline>
```

## Use the plug-in directory property

In Ant scripts, always refer to files in other plug-ins using the `dita.plugin.plugin-id.dir` property.

Instead of:

```
<property name="base" location="../example/custom.xsl"/>
```

use:

```
<property name="base" location="${dita.plugin.example.dir}/custom.xml"/>
```

This fixes cases where plug-ins are installed to custom plug-in directories or the plug-in folder name doesn't match the plug-in ID.

**Tip:** For details, see [Referencing files from other plug-ins](#) on page 151.

### Use the plugin URI scheme

In XSLT, use the plugin URI scheme in `<xsl:import>` and `<xsl:include>` to reference files in other plug-ins.

Instead of:

```
<xsl:import href="../../org.dita.base/xsl/common/output-message.xml"/>
```

use:

```
<xsl:import href="plugin:org.dita.base:xsl/common/output-message.xml"/>
```

As with the plug-in directory property in Ant, this allows plug-ins to resolve to the correct directory even when a plug-in moves to a new location. The plug-in is referenced using the syntax `plugin:plugin-id:path/within/plugin/file.xml`.

**Tip:** For details, see [Referencing files from other plug-ins](#) on page 151.

### Use `<ditafileset>` to select files

In Ant scripts, use `<ditafileset>` to select resources in the temporary directory.

For example, to select all images referenced by input DITA files, instead of:

```
1 <copy todir="${copy-image.todir}">
2 ..<fileset dir="${user.input.dir}">
3 ....<includes name="*.jpg"/>
4 ....<includes name="*.jpeg"/>
5 ....<includes name="*.png"/>
6 ....<includes name="*.gif"/>
7 ....<includes name="*.svg"/>
8 ..</fileset>
9 </copy>
```

use:

```
1 <copy todir="${copy-image.todir}">
2 ..<ditafileset format="image"/>
3 </copy>
```

The `<ditafileset>` resource collection can be used to select different types of files.

**Table 3: Usage examples of `<ditafileset>`**

Example	Description
<code>&lt;ditafileset format="dita"/&gt;</code>	Selects all DITA topics in the temporary directory.
<code>&lt;ditafileset format="ditamap"/&gt;</code>	Selects all DITA maps in the temporary directory.

Example	Description
<code>&lt;ditafilename format="image"/&gt;</code>	Selects images of all known types in the temporary directory.

### Match elements with their @class attribute

Use @class attributes to match elements in XPATH expressions instead of element names.

For example, instead of:

```
<xsl:template match="p"/>
```

use:

```
<xsl:template match="*[contains(@class,' topic/p ')]"/>
```

Specialization-aware processing uses these classes to distinguish the general class of elements to which the current element belongs.

**Tip:** Matching classes instead of elements ensures that the expression also applies to any specialized elements as well as to their more general ancestors. This means you can define new markup without necessarily requiring new processing rules.

### Validating plug-ins

DITA-OT includes a RELAX NG schema file that can be used to validate the `plugin.xml` files that define the capabilities of each plug-in.

To ensure the syntax of your custom plug-in is correct, include an `<?xml-model?>` processing instruction at the beginning of the `plugin.xml` file, immediately after the XML prolog:

```
<?xml-model href="https://www.dita-ot.org/rng/plugin.rnc" type="application/relax-ng-compact-syntax"?>
```

If your authoring environment does not apply this schema automatically, point your editor to `dita-ot-dir/resources/plugin.rnc` to associate the schema with your plug-in file.

### Related concepts

[Custom HTML plug-ins](#) on page 169

In addition to the basic modifications that can be made with parameter settings and property files, you can create custom HTML plug-ins that bundle custom fonts, JavaScript, and stylesheets; modify the HTML markup, or override other aspects of HTML processing.

[Plug-in dependencies](#) on page 151

A DITA-OT plug-in can be dependent on other plug-ins. Prerequisite plug-ins are installed first, which ensures that DITA-OT handles XSLT overrides correctly.

### Related tasks

[Custom PDF plug-ins](#) on page 177

In most cases, PDF output should be customized by creating custom DITA-OT plug-ins that build on the default DITA to PDF transformation. PDF plug-ins can customize covers and page layouts, modify formatting, override the logic of the default PDF plug-in, and much more.

[Referencing files from other plug-ins](#) on page 151

Starting with DITA-OT 1.5.4, you can use the `plugin:plugin-id` URI extension and the `${dita.plugin.plugin-id.dir}` Ant variable to reference the base path of another installed DITA-OT plug-in.

---

# Chapter

# 35

---

## Plug-in dependencies

---

A DITA-OT plug-in can be dependent on other plug-ins. Prerequisite plug-ins are installed first, which ensures that DITA-OT handles XSLT overrides correctly.

The `<require>` element in the `plugin.xml` file specifies whether the plug-in has dependencies. Use `<require>` elements to specify prerequisite plug-ins, in order from most general to most specific.

If a prerequisite plug-in is missing, DITA-OT prints a warning during installation. To suppress the warning but keep the installation order if both plug-ins are present, add `importance="optional"` to the `<require>` element.

If a plug-in can depend on any one of several optional plug-ins, separate the plug-in IDs with a vertical bar. This is most useful when combined with `importance="optional"`.

### Example: Plug-in with a prerequisite plug-in

The following plug-in will only be installed if the plug-in with the ID `com.example.primary` is available. If that plug-in is not available, a warning is generated and the installation operation fails.

```
1 <plugin id="com.example.builds-on-primary">
2   <!-- ... Extensions here -->
3   <require plugin="com.example.primary" />
4 </plugin>
```

### Example: Plug-in that has optional plug-ins

The following plug-in will only be installed if either the plug-in with the ID `pluginA` or the plug-in with the ID `pluginB` is available. If neither of those plug-ins are installed, a warning is generated but the installation operation is completed.

```
1 <plugin id="pluginC">
2   <!-- ... extensions here -->
3   <require plugin="pluginA|pluginB" importance="optional" />
4 </plugin>
```

### Related concepts

[Plug-in coding conventions](#) on page 147

To ensure custom plug-ins work well with the core toolkit code and remain compatible with future releases, the DITA Open Toolkit project recommends that plug-ins use modern development practices and common coding patterns.

---

## Referencing files from other plug-ins

---

Starting with DITA-OT 1.5.4, you can use the `plugin:plugin-id` URI extension and the `${dita.plugin.plugin-id.dir}` Ant variable to reference the base path of another installed DITA-OT plug-in.

Sometimes you need to reference content in another DITA-OT plug-in. However, the path to an installed plug-in is not guaranteed to be the same between different installed instances of DITA-OT. The `plugin:plugin-id` URI

extension and `${dita.plugin.plugin-id.dir}` Ant variable are provided so your build and XSLT files always use the correct path to the plug-in.

Within a single plug-in, you can safely use relative path references, for example, `xsl/my.xsl` without specifying the path to the plug-in itself.

## Procedure

- Use `${dita.plugin.plugin-id.dir}` in Ant build files.

Use the Ant variable `${dita.plugin.plugin-id.dir}` anywhere in your build file or template to point to the base path of an installed DITA-OT plug-in.

The following example copies CSS files from the HTML5 plug-in:

```
1 <copy todir="${dita.temp.dir}/css">
2   <fileset dir="${dita.plugin.org.dita.html5.dir}/css"
3     <includes="*.css"/>
4 </copy>
```

- Use `plugin:plugin-id` in XSLT files.

Use the URI extension `plugin:plugin-id` at the beginning of a file reference—usually in `<xsl:import>`—to point to the base path of an installed DITA-OT plug-in.

The following example imports the base output-message.xsl processing:

```
<xsl:import href="plugin:org.dita.base:xsl/common/output-message.xsl"/>
```

To use the URI extension, your plug-in must reference the DITA-OT catalog file. In your Ant build file, add an `<xmlcatalog>` element referencing the DITA-OT catalog file as a child of the `<xslt>` element.

```
1 <xslt style="xsl/my.xsl"
2   <.....in="${dita.temp.dir}/input.file"
3   <.....out="${dita.temp.dir}/output.file">
4   <xmlcatalog refid="dita.catalog"/>
5 </xslt>
```

For both of these methods, make sure you use the plug-in ID (defined in the `plugin.xml` file) rather than the folder name of the plug-in. In many cases, the folder name is not the same as the plug-in ID.

## Related concepts

[Plug-in coding conventions](#) on page 147

To ensure custom plug-ins work well with the core toolkit code and remain compatible with future releases, the DITA Open Toolkit project recommends that plug-ins use modern development practices and common coding patterns.



---

# Chapter

# 36

---

## Plug-in use cases

---

Plug-ins allow you to extend the functionality of DITA-OT. This might entail adding support for specialized document types, integrating processing overrides, or defining new output transformations.

### Setting parameters with plug-ins

---

To ensure that output is always generated with the same settings, you can create a plug-in to define a new output format that automatically sets certain DITA-OT parameters.

You might want to build a transformation type that ensures that certain DITA-OT parameters are used. For example, consider the following scenario.

#### Draft PDFs

You want to ensure that PDFs generated for internal review have the following characteristics:

- Use company style sheets
- Make draft comments visible to the reviewers, as they contain queries from the information developers
- Print the file names of the graphics underneath figures, so that graphic artists can more quickly respond to requested changes

To accomplish this, you can create a new plug-in. In the Ant script that defines the transformation type, specify the DITA-OT parameters. For example, to render draft comments and art labels, add `<property>` elements to specify the DITA-OT parameters:

```
1  <?xml version='1.0' encoding='UTF-8'?>
2  <project name="com.example.draft.pdf">
3  .. <target name="dita2draft.pdf.init">
4  .... <property name="customization.dir"
5  ..... location="${dita.plugin.com.example.draft.pdf.dir}/cfg"/>
6  .... <property name="args.draft" value="yes"/>
7  .... <property name="args.artlbl" value="yes"/>
8  .. </target>
9  .. <target name="dita2draft.pdf"
10 ..... depends="dita2draft.pdf.init, dita2production.pdf, dita2pdf2"/>
11 </project>
```

### Adding a new target to the Ant build process

---

As of DITA-OT 3.0, the `ant.import` extension point can be used to make new targets available to the Ant processing pipeline. This can be done as part of creating a new transformation, extending pre-processing, or simply to make new Ant targets available to other plug-ins.

#### Procedure

1. Create an Ant project file that contains the new target(s).

## 2. Create the `plugin.xml` file:

```
1 <plugin id="plugin-id">
2   <feature extension="ant.import" file="build-file"/>
3 </plugin>
```

where:

- *plugin-id* is the plug-in identifier, for example, `com.example.ant`.
- *build-file* is the Ant project file that contains the new build target(s).

## 3. Install the plug-in.

### Results

The targets from the project (*build-file*) are copied into the `build.xml` file, using the correct path. This makes the new Ant targets available to other processes.

**Tip:** Earlier versions of DITA-OT use the `dita.conductor.target.relative` to call a wrapper file with a dummy task that imports the Ant project file. This approach is still supported for backwards compatibility, but the simpler `ant.import` approach described above should be used for all new customizations.

### Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

### Related reference

[General extension points](#) on page 296

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

## Adding an Ant target to the pre-processing pipeline

You can add an Ant target to the pre-processing pipeline. This enables you to insert additional processing before or after the pre-processing chain or a specific step in the pre-processing operation.

### About this task

You can use the `depend.preprocess.pre` and `depend.preprocess.post` extension points to run a target before or after the entire pre-processing operation. In addition, there are extension points that enable you to run an Ant target before specific pre-processing steps.

**Tip:** For maximum compatibility with future versions of DITA-OT, most plug-ins should use the extension points that run **before** or **after** pre-processing.

### Procedure

1. Define and integrate the new Ant target.
2. Create the following `plugin.xml` file:

```
1 <plugin id="plugin-id">
2   <feature extension="extension-point" value="Ant-target"/>
3 </plugin>
```

where

- *plugin-id* is the plug-in identifier.
- *extension-point* is a pre-processing extension point.
- *Ant-target* is the name of the Ant target.

### 3. Install the plug-in.

#### Results

The new target is added to the Ant dependency list. The new target is now always run in conjunction with the specified step in the pre-processing pipeline.

#### Example

The following `plugin.xml` file specifies that the `myAntTargetBeforeChunk` target is always run before the `chunk` step in the pre-processing stage.

```
1 <plugin id="com.example.extendchunk">
2   <feature extension="depend.preprocess.chunk.pre"
3     ..... value="myAntTargetBeforeChunk" />
4 </plugin>
```

It assumes that the `myAntTargetBeforeChunk` target has already been defined and integrated.



**CAUTION:** The internal order of preprocessing steps is subject to change between versions of DITA-OT. New versions may remove, reorder, combine, or add steps to the process, so the extension points **within** the preprocessing stage should only be used if absolutely necessary.

#### Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

#### Related reference

[Pre-processing extension points](#) on page 297

You can use these extension points to run an Ant target before or after the pre-processing stage. If necessary, you can also run an Ant target before a specific pre-processing step — but this approach is not recommended.

## Adding a new transformation type

Plug-ins can add an entirely new transformation type. The new transformation type can be very simple, such as an HTML build that creates an additional control file; it also can be very complex, adding any number of new processing steps.

#### About this task

You can use the `<transtype>` element to define a new transformation type with any new custom parameters that are supported.

When a transformation type is defined, the build expects Ant code to be integrated to define the transformation process. The Ant code must define a target based on the name of the transformation type; if the transformation type is "new-transform", the Ant code must define a target named `dita2new-transform`.

#### Procedure

1. Create an Ant project file for the new transformation. This project file must define a target named "dita2new-transtype," where *new-transtype* is the name of the new transformation type.
2. Create a `plugin.xml` with the following content:

```
1 <plugin id="plugin-id">
2   <transtype name="new-transtype" />
3   <feature extension="dita.transtype.print" value="new-transtype" />
4   <feature extension="ant.import" file="ant-file" />
5 </plugin>
```

where:

- *plugin-id* is the plug-in identifier, for example, `com.dita-ot.pdf`.
- *new-transtype* is the name of the new transformation, for example, `dita-ot-pdf`.
- *ant-file* is the name of the Ant file, for example, `build-dita-ot-pdf.xml`.

Exclude the content that is highlighted in bold if the transformation is not intended for print.

### 3. Install the plug-in.

## Results

You now can use the new transformation.

## Examples

The following `plugin.xml` file defines a new transformation type named "print-pdf"; it also defines the transformation type to be a print type. The build will look for a `dita2print-pdf` target.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
  plugin.rnc" type="application/relax-ng-compact-syntax"?>
3
4 <plugin id="com.example.print-pdf">
5   <require plugin="org.dita.pdf2"/>
6   <transtype name="print-pdf" extends="pdf" desc="PDF on A4 paper"/>
7   <feature extension="dita.transtype.print" value="print-pdf"/>
8   <feature extension="ant.import" file="integrator.xml"/>
9 </plugin>

```

**Tip:** For a complete sample plug-in with all required code, see [Example: Creating a simple PDF plug-in](#) on page 181.

## Figure 21: Creating a new print transformation

If your custom transformation type supports custom parameters, they can be defined in nested `<param>` elements within the `<transtype>` element.

While the `org.dita.html5` plug-in was separated from `common-html` in version 2.4, the following example shows how earlier versions of that plug-in used the `<transtype>` element to extend the common HTML transformation with a new `html5` transformation type and define a new `nav-toc` parameter with three possible values:

```

1 <transtype name="html5" extends="common-html" desc="HTML5">
2   <param name="nav-toc" type="enum"
3     desc="Specifies whether to generate navigation in topic pages.">
4     <val default="true" desc="No TOC">none</val>
5     <val desc="Partial TOC that shows the current topic">partial</val>
6     <val desc="Full TOC">full</val>
7   </param>
8 </transtype>

```

## Figure 22: Defining new parameters

## Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

## Related reference

[General extension points](#) on page 296

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

[Plug-in descriptor file](#) on page 141

The plug-in descriptor file (`plugin.xml`) controls all aspects of a plug-in, making each extension visible to the rest of the toolkit. The file uses pre-defined extension points to locate changes, and then integrates those changes into the core DITA-OT code.

## Adding parameters to existing XSLT steps

You can pass parameters from the Ant build to existing XSLT steps in both the pre-processing pipeline and certain DITA-OT transformations. This can be useful if you want to make the parameters available as global `<xsl:param>` values within XSLT overrides.

### Procedure

1. Create an XML file that contains one or more Ant `<param>` elements nested within a `<dummy>` wrapper element.

```
1 <dummy>
2   <!-- Any Ant code allowed in xslt task is possible. Example: -->
3   <param name="paramNameinXSLT" expression="${antProperty}"
4   ..... if="antProperty" />
5 </dummy>
```

2. Construct a `plugin.xml` file that contains the following content:

```
1 <plugin id="plugin-id">
2   <feature extension="extension-point" file="file" />
3 </plugin>
```

where:

- *plugin-id* is the plug-in identifier, for example, `com.example.newparam`.
- *extension-point* is the DITA-OT extension point, for example, `dita.conductor.xhtml.param`. This indicates the DITA-OT processing step where the parameters will be available.
- *file* is the name of the XML file that you created in step 1 on page 157, for example, `insertParameters.xml`.

3. Install the plug-in.

### Results

The `plugin.xml` file passes the parameters to the specified transformation or pre-processing module.

### Example

The following plug-in passes the parameters defined in the `insertParameters.xml` file as input to the XHTML process. Generally, an additional XSLT override will make use of the parameters to do something new with the generated content.

```
1 <plugin id="com.example.newparam">
2   <feature extension="dita.conductor.xhtml.param"
3   ..... file="insertParameters.xml" />
4 </plugin>
```

### Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

### Related reference

[XSLT-parameter extension points](#) on page 300

You can use these extension points to pass parameters into existing XSLT steps in both the pre-processing pipeline and DITA-OT transformation. The parameters generally will be available as global `<xsl:param>` values with XSLT overrides.

## Overriding an XSLT-processing step

You can override specific XSLT-processing steps in both the pre-processing pipeline and certain DITA-OT transformations.

### Procedure

1. Develop an XSL file that contains the XSL override.
2. Construct a `plugin.xml` file that contains the following content:

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <plugin id="plugin-id">
3   <feature extension="extension-point" file="relative-path"/>
4 </plugin>
```

where:

- *plugin-id* is the plug-in identifier, for example, `com.example.brandheader`.
- *extension-point* is the DITA-OT extension point, for example, `dita.xsl.xhtml`. This indicates the DITA-OT processing step that the XSL override applies to.
- *relative-path* is the relative path and name of the XSLT file, for example, `xsl/header.xsl`.

3. Install the plug-in.

### Results

The plug-in installer adds an XSL import statement to the default DITA-OT code, so that the XSL override becomes part of the normal build.

### Example: Overriding XHTML header processing

The following two files represent a complete, simple style plug-in.

The `plugin.xml` file declares an XSLT file that extends XHTML processing:

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <plugin id="com.example.brandheader">
3   <feature extension="dita.xsl.xhtml" file="xsl/header.xsl"/>
4 </plugin>
```

The `xsl/header.xsl` XSLT file referenced in `plugin.xml` overrides the default header processing to add a banner:

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <xsl:stylesheet version="1.0"
3   xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
4   <xsl:template name="gen-user-header">
5     <div></div>
7   </xsl:template>
8 </xsl:stylesheet>
```

### Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

### Related reference

[XSLT-import extension points](#) on page 298

You can use these extension points to override XSLT processing steps in pre-processing and certain transformation types. The value of the `@file` attribute in the `<feature>` element specifies a relative path to an XSL file in the current plug-in. The plug-in installer adds a XSL import statement to the default DITA-OT code, so that the XSL override becomes part of the normal build.

## Adding a Java library to the classpath

You can use the `dita.conductor.lib.import` extension point to add an additional Java library to the DITA-OT classpath parameter.

### About this task

As of DITA-OT 3.1, the Java class path is managed automatically, meaning you do not (and should not) use explicit references to Java class paths in your build scripts. In particular, the old `dost.class.path` property has been deprecated and should not be used. If you are migrating older plug-ins that manage their class path directly, you should remove any explicit class path configuration. If your plug-in was not already using the `dita.conductor.lib.import` extension point to integrate its JAR dependencies you must add it.

The effective DITA-OT class path is the combination of the JAR files in the main `lib/` directory and the plug-in-contributed JARs, which are listed in `config/env.sh`. The `env.sh` file is updated automatically when plug-ins are installed or removed.

### Procedure

1. If necessary, compile the Java code into a JAR file.
2. Create a `plugin.xml` file that contains the following code:

```
1 <plugin id="plugin-id">
2   <feature extension="dita.conductor.lib.import" file="file"/>
3 </plugin>
```

where:

- `plugin-id` is the plug-in identifier, for example, `com.example.addjar`.
- `file` is the name of the JAR file, for example, `myJavaLibrary.jar`.

3. Install the plug-in.

### Results

The Ant or XSLT code now can make use of the Java code.

### Example

In the following extended example, the `myJavaLibrary.jar` file performs a validation step during processing, and you want it to run immediately before the `conref` step.

To accomplish this, you will need to use several features:

- The JAR file must be added to the classpath.
- The Ant target must be added to the dependency chain for `conref`.
- An Ant target must be created that uses this class, and integrated into the code.

The files might look like the following:

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <plugin id="com.example.samplejava">
```

```

3  <!-- Add the JAR file to the DITA-OT CLASSPATH -->
4  <feature extension="dita.conductor.lib.import"
5  ..... file="com.example.sampleValidation.jar"/>
6  <!-- Integrate the Ant code -->
7  <feature extension="ant.import" file="calljava-antcode.xml"/>
8  <!-- Define the Ant target to call, and when (before conref) -->
9  <feature extension="depend.preprocess.conref.pre"
10 ..... value="validateWithJava"/>
11 </plugin>

```

**Figure 23:** plugin.xml file

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <project default="validateWithJava">
3  .. <target name="validateWithJava">
4  .... <java classname="com.example.sampleValidation">
5  ..... <!-- The class was added to the DITA-OT classpath -->
6  .... </java>
7  .. </target>
8  </project>

```

**Figure 24:** calljava-antcode.xml file

### Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

### Related reference

[General extension points](#) on page 296

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

## Adding new diagnostic messages

Use the `dita.xsl.messages` extension point to add plug-in-specific messages to the diagnostic messages that are generated by DITA-OT. These messages then can be used by any XSLT override.

### Procedure

1. Create an XML file that contains the messages that you want to add. Be sure to use the following format for the XML file:

```

1  <messages>
2  .. <!-- See resources/messages.xml for the details. -->
3  .. <message id="PrefixNumberLetter" type="error-severity">
4  .... <reason>Message text</reason>
5  .... <response>How to resolve</response>
6  .. </message>
7  </messages>

```

where:

- *Prefix* is a sequence of four capital letters.

**Note:** By convention, the toolkit messages use DOTX but any sequence can be used by plug-in developers.

- *Number* is a three-digit integer.
- *Letter* is one of the following upper-case letters: I, W, E, F. It should match the value that is specified for the `@type` attribute.



**Note:** As the `@id` attribute is used as a whole and not decomposed by recent versions of the toolkit, you could use any sequence as the message identifier. Nevertheless, to facilitate reuse of the plug-in and make it more readable by other users, we recommend following these guidelines.

- *error-severity* specifies the severity of the error. It must be one of the following values:

<b>Info (I)</b>	Informational messages highlight the progress of transformation and call attention to conditions of which you should be aware. For example, draft comments are enabled and will be rendered in the output.
<b>Warning (W)</b>	The toolkit encountered a problem that should be corrected. Processing will continue, but the output might not be as expected.
<b>Error (E)</b>	The toolkit encountered a more severe problem, and the output is affected. For example, some content is missing or invalid, or the content is not rendered in the output
<b>Fatal (F)</b>	The toolkit encountered a severe condition, processing stopped, and no output is generated.

**Note:** The `FATAL` value throws a fatal error message in XSLT and an exception in Java.

**Tip:** If the `@id` attribute of your message is equal to the `@id` of a default DITA-OT message, your message will override the default one. An override cannot change the severity of the overridden message.

2. Create a `plugin.xml` file that contains the following content:

```
1 <plugin id="plugin-id">
2   <feature extension="dita.xsl.messages" file="file"/>
3 </plugin>
```

where:

- *plugin-id* is the plug-in identifier, for example, `com.example.newmsg`.
- *file* is the name of the new XML file containing the messages created in step 1 on page 160, for example, `myMessages.xml`.

3. Install the plug-in.

## What to do next

Add the following call in XSLT modules to generate a message when a specific condition occurs:

```
1 <xsl:call-template name="output-message">
2   <xsl:with-param name="id">prefixnumberletter</xsl:with-param>
3   <xsl:with-param name="msg">Message text and parameters.</xsl:with-param>
4 </xsl:call-template>
```

You can also pass custom parameters to the template by using the `@msgparams` parameter. The value of `@msgparams` is a semicolon separated list of strings, where each token consists of a percent sign prefixed parameter index, equals sign and parameter value.

```
1 <xsl:call-template name="output-message">
2   <xsl:with-param name="id">prefixnumberletter</xsl:with-param>
3   <xsl:with-param name="msgparams">%1=MyFirstValue;%2=MySecondValue</
xsl:with-param>
4 </xsl:call-template>
```

Use the `ctx` parameter if calling from a function.

**Related tasks**

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

**Related reference**

[General extension points](#) on page 296

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

## Creating a new plug-in extension point

---

If your plug-in needs to define its own extension points in an XML file, add the string `"_template"` to the filename before the file suffix. When the plug-in is installed, this file will be processed like the built-in DITA-OT templates.

Template files are used to integrate most DITA-OT extensions. For example, the `dita2xhtml_template.xml` file contains all of the default rules for converting DITA topics to XHTML, along with an extension point for plug-in extensions. When the plug-in is installed, the `dita2xhtml.xml` is recreated, and the extension point is replaced with references to all appropriate plug-ins.

To mark a new file as a template file, use the `<template>` element.

The template extension namespace has the URI `http://dita-ot.sourceforge.net`. It is used to identify elements and attributes that have a special meaning in template processing. This documentation uses the `dita:` prefix to refer to elements in the template extension namespace. However, template files are free to use any prefix, provided that there is a namespace declaration that binds the prefix to the URI of the template extension namespace.

**`<dita:extension>` element**

The `<dita:extension>` elements are used to insert generated content during the plug-in installation process. There are two required attributes:

- The `@id` attribute defines the extension point ID that provides the argument data.
- The `@behavior` attribute defines which processing action is used.

Supported values for the `@behavior` attribute:

**`org.dita.dost.platform.CheckTranstypeAction`**

Create Ant condition elements to check if the `${transtype}` property value equals a supported transformation type value.

**`org.dita.dost.platform.ImportAntLibAction`**

Create Ant `<pathelement>` elements for the [library import extension point](#). The `@id` attribute is used to define the extension point ID.

**`org.dita.dost.platform.ImportPluginCatalogAction`**

Include plug-in metadata catalog content.

**`org.dita.dost.platform.ImportPluginInfoAction`**

Create plug-in metadata Ant properties.

**`org.dita.dost.platform.ImportStringsAction`**

Include plug-in string file content based on the [generated text extension point](#). The `@id` attribute is used to define the extension point ID.

**`org.dita.dost.platform.ImportXSLAction`**

Create `<xsl:import>` elements based on the [XSLT import extension point](#). The `@id` attribute is used to define the extension point ID.

**`org.dita.dost.platform.InsertAction`**

Include plug-in conductor content based on the [Ant import extension point](#). The @id attribute is used to define the extension point ID.

#### **org.dita.dost.platform.InsertAntActionRelative**

Include plug-in conductor content based on the [relative Ant import extension point](#). The @id attribute is used to define the extension point ID.

#### **org.dita.dost.platform.InsertCatalogActionRelative**

Include plug-in catalog content based on the [catalog import extension point](#). The @id attribute is used to define the extension point ID.

#### **org.dita.dost.platform.ListTranstypeAction**

Create a pipe-delimited list of supported transformation types.

#### **@dita:extension attribute**

The @dita:extension attribute is used to process attributes in elements which are not in the template extension namespace. The value of the attribute is a space-delimited tuple, where the first item is the name of the attribute to process and the second item is the action ID.

Supported values:

#### **depends org.dita.dost.platform.InsertDependsAction**

The Ant target dependency list is processed to replace all target names that start with an opening brace { character and end with a closing brace }. The value of the extension point is the ID between the braces.

### **Example**

The following plug-in defines myBuildFile\_template.xml as a new template for extensions, and two new extension points.

```

1 <plugin id="com.example.new-extensions">
2   <extension-point id="com.example.new-extensions.pre"
3     name="Custom target preprocess"/>
4   <extension-point id="com.example.new-extensions.content"
5     name="Custom target content"/>
6   <template file="myBuildFile_template.xml"/>
7 </plugin>

```

When the plug-in is installed, this will be used to recreate myBuildFile.xml, replacing Ant file content based on extension point use.

```

1 <project xmlns:dita="http://dita-ot.sourceforge.net">
2   <target name="dita2custom"
3     dita:depends="dita2custom.init,
4       {com.example.new-extensions.pre},
5       dita2xhtml"
6     dita:extension="depends org.dita.dost.platform.InsertDependsAction">
7     <dita:extension id="com.example.new-extensions.content"
8       behavior="org.dita.dost.platform.InsertAction"/>
9   </target>
10 </project>

```

## Extending an XML catalog file

You can update either the main DITA-OT XML catalog or the XML catalog that is used by the PDF plug-in. This enables DITA-OT to support new specializations and document-type shells.

### About this task

You can use the `dita.specialization.catalog.relative` and `org.dita.pdf2.catalog.relative` extension points to update the DITA-OT catalog files.

**Remember:** The `dita.specialization.catalog` extension is deprecated. Use `dita.specialization.catalog.relative` instead.

### Procedure

1. Using the OASIS catalog format, create an XML catalog file that contains only the new values that you want to add to a DITA-OT catalog file.
2. Create a `plugin.xml` file that contains the following content:

```
1 <plugin id="plugin-id">
2   <feature extension="extension-point" file="file"/>
3 </plugin>
```

where:

- `plugin-id` is the plug-in identifier, for example, `com.example.catalog`.
  - `extension-point` is either `dita.specialization.catalog.relative` or `org.dita.pdf2.catalog.relative`.
  - `file` is the name of the new catalog file, for example, `catalog-dita.xml`.
3. Save the new XML catalog file to your plug-in. Be sure that the local file references are relative to the location of the catalog and plug-in.
  4. Install the plug-in.

### Results

The catalog entries inside of the new catalog file are added to the core DITA-OT catalog file.

### Example

This example assumes that `catalog-dita.xml` contains an OASIS catalog for any document-type shells inside this plug-in. The catalog entries in `catalog-dita.xml` are relative to the catalog itself; when the plug-in is installed, they are added to the core DITA-OT catalog (with the correct path).

```
1 <plugin id="com.example.catalog">
2   <feature extension="dita.specialization.catalog.relative"
3     ..... file="catalog-dita.xml"/>
4 </plugin>
```

### Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

### Related reference

[General extension points](#) on page 296

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

## Adjusting file names in map-first pre-processing

To dynamically adjust the names and locations of output files in the map-first pre-processing routine (`preprocess2`), you can create a custom plug-in and specify the code that contains your custom rewrite rules.

For example, set the `result.rewrite-rule.xml` parameter to specify a bundled XSLT stylesheet that contains your custom rewrite rules.

```

1 <?xml version='1.0' encoding='UTF-8'?>
2 <project name="com.example.rewrite.pdf">
3   <target name="dita2rewrite.pdf.init">
4     <property name="customization.dir"
5       location="${dita.plugin.com.example.rewrite.pdf.dir}/cfg"/>
6     <property name="result.rewrite-
rule.xml"
7       value="${dita.plugin.com.example.rewrite.pdf.dir}/custom-
rules.xml"/>
8   </target>
9   <target name="dita2rewrite.pdf"
10     depends="dita2rewrite.pdf.init, dita2production.pdf, dita2pdf2"/
11 >
12 </project>

```

Your plug-in would also include a `custom-rules.xml` file, which might contain templates like this to move all image files to an `images` subdirectory:

```

1 <xsl:template match="node() | @"*>
2   <xsl:copy>
3     <xsl:apply-template select="node() | @"*/>
4   </xsl:copy>
5 </xsl:template>
6
7 <xsl:template match="file[@format='image']/@result">
8   <xsl:attribute name="{local-name()}" select="concat('images/', .)"/>
9 </xsl:template>

```

**Note:** If your rewrite rules are contained in a Java class, you can set the `result.rewrite-rule.class` parameter instead, and pass the name of your Java class in the `@value` attribute. The custom class should implement the `org.dita.dost.module.RewriteRule` interface.

## Adding Saxon customizations

Plug-ins can contribute XSLT extension functions and collation URI resolvers. These customizations are automatically configured to work with Saxon when transformations are run using the DITA-OT `<pipeline>` task with custom XSLT.

Plug-ins can provide the following Saxon extensions:

- Extension functions
- Collation URI resolvers

Extensions are declared in plug-in-provided JAR files using the Java ServiceLoader feature that looks for service-declaring files in JAR files and loads classes. This requires adding one or more files in the `META-INF/services` directory in plug-in-provided JAR files.

You can create the file manually or generate it dynamically using `<service>` elements in Ant `<jar>` tasks. See the topics for the different extension types for details.

These extensions use the DITA Open Toolkit Ant `<pipeline>` element to wrap `<xslt>` elements. You can do this in plug-ins as shown in this excerpt from the DITA Community I18N plugin's `build.xml` file:

```
<target name="org.dita-community.il8n-saxon-extension-test">
  <pipeline message="Test the DITA Community il8n Saxon extension functions"
    taskname="il8n-extension-function-test">
    <xslt
      in="${dita.plugin.org.dita-community.il8n.dir}/test/xsl/data/test-
data.xml"
      style="${dita.plugin.org.dita-community.il8n.dir}/test/xsl/test-
extension-functions.xsl"
      out="${basedir}/out/extension-function-test-results.xml"
    >
    </xslt>
  </pipeline>
</target>
```

Normal XSLT extensions to built-in transformation types will automatically have the extensions available to them.

The dynamic Saxon configuration is implemented in the class `org.dita.dost.module.XsltModule`, which backs the `<pipeline>/<xslt>` element.

## Implementing Saxon extension functions

Plug-ins can contribute Saxon extension functions for use in XSLT transformations run by DITA Open Toolkit.

Starting with Saxon 9.2, the mechanism for implementing extension functions has changed such that Saxon HE, in particular, can no longer use the older “reflexive” mechanism for finding Java extension functions using a magic URL. Instead, you implement extension functions and then register them directly on the Saxon Configuration object. DITA-OT provides a dynamic mechanism to perform this registration for plug-in-provided extension functions.

To implement extension functions, you must do the following:

1. Add your plug-in's JAR file in the DITA-OT class path as described in [Adding a Java library to the classpath](#) on page 159.
2. For each function, implement a class that extends `net.sf.saxon.lib.ExtensionFunctionDefinition`. This class provides the namespace name and function name for the function as well as details about its arguments and so on. See [Integrated extension functions](#) in the Saxon documentation.
3. Include a file named `net.sf.saxon.lib.ExtensionFunctionDefinition` in the directory `META-INF/services` in the compiled JAR that your plug-in provides. Each line of the file must be the name of a class that implements `net.sf.saxon.lib.ExtensionFunctionDefinition`:

```
com.example.saxon.functions.Add
com.example.saxon.functions.Subtract
```

You can create the file using `<service>` elements in an Ant `<jar>` task:

```
<jar destfile="${basedir}/target/lib/example-saxon.jar">
  [...]
  <service type="net.sf.saxon.lib.ExtensionFunctionDefinition">
    <provider classname="com.example.saxon.functions.Add"/>
    <provider classname="com.example.saxon.functions.Subtract"/>
  </service>
  [...]
</jar>
```

4. In your XSLT transformations, declare the namespace the functions are bound to:

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:eg="http://example.com/saxon-extensions"
  version="2.0">
```

You should then be able to use the extension functions as you would any other function:

```
<xsl:variable name="test" select="eg:add(1, 2)"/>
```

## Implementing custom Saxon collation URI resolvers

Plug-ins can provide custom URI resolvers that provide collators for specific collation URIs.

To do custom sorting and grouping in XSLT, you identify collators using URIs that Saxon resolves to collator implementations. You implement the mapping from collation URIs to collators through custom collation URI resolvers.

For example, the DITA Community I18N plugin provides a custom collator for doing dictionary-based sorting and grouping of Simplified Chinese.

To allow multiple plug-ins to contribute collation URI resolvers, DITA-OT defines a superinterface of Saxon's `CollationUriResolver` interface, `org.dita.dost.module.saxon.DelegatingCollationUriResolver`, that takes a base resolver.

Implementations of `DelegatingCollationUriResolver` should delegate to their base resolver if they do not resolve the URI specified on the resolve request. When multiple plug-ins provide resolvers it results in a chain of resolvers, ending with the built-in Saxon default resolver.

**Note:** The order in which plug-ins will be processed during collation URI resolver configuration is variable, so two plug-ins should not try to resolve the same collation URI. In that case the first one configured will be used at run time.

A typical delegating collation URI resolver looks like this:

```
public class DCI18nCollationUriResolver implements
  DelegatingCollationUriResolver {

    public static final String DITA_COMMUNITY_I18N_ZH_CNAWARE_COLLATOR =
        "http://org.dita-community.i18n.zhCNawareCollator";
    public static final String LANG_URI_PARAM = "lang";

    private CollationUriResolver baseResolver;

    public DCI18nCollationUriResolver() {
        super();
        this.baseResolver = StandardCollationUriResolver.getInstance();
    }

    public net.sf.saxon.lib.StringCollator resolve(String uri, Configuration
configuration)
        throws XPathException {
        ZhCnAwareCollator collator = resolveToZhCnAwareCollator(uri, null,
configuration);
        if (null == collator) {
            return baseResolver.resolve(uri, configuration);
        }
        return (StringCollator) collator;
    }

    @Override
```

```

    public void setBaseResolver(CollationURIResolver baseResolver) {
        this.baseResolver = baseResolver;
    }

    /* ... Code to evaluate the collation URI and provide the appropriate
    collator goes here */
}

```

To implement a custom collation URI resolver:

1. Add your plugin's JAR file in the DITA-OT class path as described in [Adding a Java library to the classpath](#) on page 159.
2. Implement an instance of `org.dita.dost.module.saxon.DelegatingCollationUriResolver` as described above.
3. Include a file named `org.dita.dost.module.saxon.DelegatingCollationUriResolver` in the directory `META-INF/services` in the compiled JAR that your plugin provides. Each line of the file must be the name of a class that implements `org.dita.dost.module.saxon.DelegatingCollationUriResolver`:

```
org.example.i18n.saxon.MyCollationUriResolver
```

You can create the services file using `<service>` elements in an Ant `<jar>` task:

```

<jar destfile="${basedir}/target/lib/example-saxon.jar">
  [...]
  <service
    type="org.dita.dost.module.saxon.DelegatingCollationUriResolver">
      <provider classname="org.example.i18n.saxon.MyCollationUriResolver"/>
    </service>
  [...]
</jar>

```

4. To use the collator in XSLT style sheets, specify the collation URI on `@xsl:sort` elements (or anywhere a collator URI can be specified):

```

<xsl:apply-templates select="word">
  <xsl:sort collation="http://org.example.i18n.MyCollator"/>
</xsl:apply-templates>

```



---

# Chapter

# 37

---

## Custom HTML plug-ins

---

In addition to the basic modifications that can be made with parameter settings and property files, you can create custom HTML plug-ins that bundle custom fonts, JavaScript, and stylesheets; modify the HTML markup, or override other aspects of HTML processing.

**Note:** These examples are not intended to be used as-is, but illustrate basic techniques you can use in your own plug-ins. In practise, custom plug-ins often combine several of these approaches.

### Related concepts

[Plug-in coding conventions](#) on page 147

To ensure custom plug-ins work well with the core toolkit code and remain compatible with future releases, the DITA Open Toolkit project recommends that plug-ins use modern development practices and common coding patterns.

### Related tasks

[Customizing HTML output](#) on page 109

You can modify the look and feel of your HTML output by changing parameter settings to include custom CSS, headers and footers, or table-of-contents navigation in topics.

## Bundling CSS in a custom HTML plug-in

---

You can create a DITA-OT plug-in that provides a custom stylesheet with the typography and colors that define your corporate identity. Coworkers can install this plug-in to ensure consistent HTML output across projects without having to copy the stylesheet to each project.

### About this task

This scenario walks through the process of creating a very simple plug-in (`com.example.html5-custom-css`) that creates a new transformation type: `html5-custom-css`.

The `html5-custom-css` transformation includes a custom CSS file and sets four parameters to integrate the custom stylesheet in the generated HTML5 output. These parameter settings make the following changes:

- Specify the `css` subfolder of the plug-in as the source directory for custom CSS with `args.cssroot`.
- Specify the name of the custom CSS file with `args.css`.

The value of this parameter tells DITA-OT to use the `custom.css` file provided by the plug-in.

- Ensure that the CSS file is copied to the output directory by setting `args.copycss` to `yes`.
- Set the destination path for CSS files in the output folder with `args.csspath`.

CSS files are copied to the root level of the output folder by default. Setting this parameter places CSS files in a dedicated `css` subfolder.

All four parameters are set in the Ant script (`build_html5-custom-css.xml`).

### Procedure

1. In the `plugins` directory, create a directory named `com.example.html5-custom-css`.

2. In the new `com.example.html5-custom-css` directory, create a plug-in configuration file (`plugin.xml`) that declares the new `html5-custom-css` transformation and its dependencies.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
  plugin.rnc" type="application/relax-ng-compact-syntax"?>
3
4 <plugin id="com.example.html5-custom-css">
5   <require plugin="org.dita.html5"/>
6   <transtype name="html5-custom-
  css" extends="html5" desc="HTML5 with custom CSS"/>
7   <feature extension="ant.import" file="build_html5-custom-css.xml"/>
8 </plugin>

```

**Figure 25: Sample `plugin.xml` file**

**Note:** This plug-in will extend the default HTML5 transformation, so the `<require>` element explicitly defines `org.dita.html5` as a dependency.

3. In the `com.example.html5-custom-css` directory, create a subdirectory named `css`.
4. In the new `css` subdirectory, create a file named `custom.css` with your custom CSS rules.

```

1 /
2 * These custom styles extend or override DITA Open Toolkit default styles. */
3
4 body {
5   color: #F00;
6 }

```

**Figure 26: Sample `custom.css` file**

**Tip:** When you first create the plug-in, you may want to include a rule in your custom stylesheet that makes it readily apparent when the custom styles are applied (the example above will change body text to “red”). Once you have verified that the plug-in works as intended, replace the placeholder rule with your own custom styles.

5. In the `com.example.html5-custom-css` root directory, add an Ant script (`build_html5-custom-css.xml`) to define the transformation type.

```

1 <?xml version='1.0' encoding='UTF-8'?>
2
3 <project>
4   <target name="dita2html5-custom-css"
5     depends="dita2html5-custom-css.init,
6       dita2html5"/>
7   <target name="dita2html5-custom-css.init">
8     <property name="args.cssroot"
9       location="${dita.plugin.com.example.html5-custom-css.dir}/
  css"/>
10    <property name="args.css" value="custom.css"/>
11    <property name="args.copycss" value="yes"/>
12    <property name="args.csspath" value="css"/>
13  </target>
14 </project>

```

**Figure 27: Sample build file: `build_html5-custom-css.xml`**

## Results

**Tip:** The files for this sample plug-in are included in the DITA-OT installation directory under `docsrc/samples/plugins/com.example.html5-custom-css/` and on [GitHub](#).

The plug-in directory has the following layout and files:

```
com.example.html5-custom-css
### build_html5-custom-css.xml
### css
#   ### custom.css
### plugin.xml
```

### What to do next

1. Run `dita --install` to install the plug-in and make the `html5-custom-css` transformation available.
2. Build output with the new transformation type to verify that the plug-in works as intended.

```
dita --input=my.ditamap --format=html5-custom-css
```

3. Refine the styles in your `custom.css` file as necessary.

### Related tasks

[Adding custom CSS](#) on page 112

To modify the appearance of the default HTML output that DITA Open Toolkit generates, you can reference a custom Cascading Style Sheet (CSS) file with the typography, colors, and other presentation aspects that define your corporate identity.

### Related reference

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

## Embedding web fonts in HTML output

A custom plug-in can be created to generate HTML output that uses custom fonts for enhanced typographic features, extended character sets or a unique corporate identity.

### About this task

This scenario walks through the process of creating a very simple plug-in (`com.example.html5-webfont`) that creates a new transformation type: `html5-webfont`.

The `html5-webfont` transformation includes a custom CSS file and sets five parameters to integrate font links and a custom stylesheet in the generated HTML5 output. These parameter settings make the following changes:

- Specify a file that links to the font from the document head with `args.hdf`.
- Specify the `css` subfolder of the plug-in as the source directory for custom CSS with `args.cssroot`.
- Specify the name of the custom CSS file with `args.css`.

The value of this parameter tells DITA-OT to use the `custom.css` file provided by the plug-in.

- Ensure that the CSS file is copied to the output directory by setting `args.copycss` to `yes`.
- Set the destination path for CSS files in the output folder with `args.csspath`.

CSS files are copied to the root level of the output folder by default. Setting this parameter places CSS files in a dedicated `css` subfolder.

All five parameters are set in the Ant script (`build_html5-webfont.xml`).

### Procedure

1. In the `plugins` directory, create a directory named `com.example.html5-webfont`.

2. In the new `com.example.html5-webfont` directory, create a plug-in configuration file (`plugin.xml`) that declares the new `html5-webfont` transformation and its dependencies.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <?xml-model href="https://www.dita-ot.org/rng/
  plugin.rnc" type="application/relax-ng-compact-syntax"?>
3
4 <plugin id="com.example.html5-webfont">
5   <require plugin="org.dita.html5"/>
6   <transtype name="html5-
  webfont" extends="html5" desc="HTML5 with Noto Sans webfont"/>
7   <feature extension="ant.import" file="build_html5-webfont.xml"/>
8 </plugin>

```

**Figure 28: Sample `plugin.xml` file**

**Note:** This plug-in will extend the default HTML5 transformation, so the `<require>` element explicitly defines `org.dita.html5` as a dependency.

3. In the `com.example.html5-webfont` directory, create a subdirectory named `include`.
4. In the new `include` subdirectory, create a file named `webfont.hdf.xml` with your custom font links.

```

1 <div>
2   <link href="https://fonts.googleapis.com/css?family=Noto
  +Sans" rel="stylesheet"/>
3 </div>

```

**Figure 29: Sample `webfont.hdf.xml` file**

This example uses the [Noto Sans](#) font. You can use multiple fonts by creating additional `<link>` references in this file. The division wrapper will be discarded when generating HTML files, and the contents will be inserted into the `<head>` element of each page.

5. In the `com.example.html5-webfont` directory, create a subdirectory named `css`.
6. In the new `css` subdirectory, create a file named `custom.css` with the stylesheet rules that apply the custom font-family to the desired elements.

```

1 body {
2   font-family: 'Noto Sans', sans-serif;
3 }

```

**Figure 30: Sample `custom.css` file**

This example uses [Noto Sans](#) for all body content. In practice, you would normally use different fonts for headings, body content, tables, etc. by creating additional rules in your CSS file.

7. In the `com.example.html5-webfont` root directory, add an Ant script (`build_html5-webfont.xml`) to define the transformation type.

```

1 <?xml version='1.0' encoding='UTF-8'?>
2
3 <project>
4   <target name="dita2html5-webfont"
5     <depends="dita2html5-webfont.init,
6       dita2html5"/>
7   <target name="dita2html5-webfont.init">
8     <property name="args.hdf"
9       location="${dita.plugin.com.example.html5-webfont.dir}/
  include/webfont.hdf.xml"/>
10    <property name="args.cssroot"
11      location="${dita.plugin.com.example.html5-webfont.dir}/css"/>
12    <property name="args.css" value="custom.css"/>

```

```

13  ....<property name="args.copycss" value="yes"/>
14  ....<property name="args.csspath" value="css"/>
15  ..</target>
16 </project>

```

**Figure 31: Sample build file: `build_html5-webfont.xml`**

## Results

**Tip:** The files for this sample plug-in are included in the DITA-OT installation directory under `docsrc/samples/plugins/com.example.html5-webfont/` and on [GitHub](#).

The plug-in directory has the following layout and files:

```

com.example.html5-webfont
### build_html5-webfont.xml
### css
#   ### custom.css
### include
#   ### webfont.hdf.xml
### plugin.xml

```

## What to do next

1. Run `dita --install` to install the plug-in and make the `html5-webfont` transformation available.
2. Build output with the new transformation type to verify that the plug-in works as intended.

```
dita --input=my.ditamap --format=html5-webfont
```

3. Refine the styles in your `custom.css` file to adjust the font usage as necessary.

## Related reference

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.

# Inserting JavaScript in generated HTML

JavaScript code can be bundled in a custom plug-in and automatically inserted into the generated HTML pages to enable web analytics or dynamic content delivery.

## About this task

This scenario walks through the process of creating a very simple plug-in (`com.example.html5-javascript`) that creates a new transformation type: `html5-javascript`.

The `html5-javascript` transformation includes a custom page footer file with a JavaScript tracking snippet and sets the `args.ftr` parameter to integrate the script content in the HTML5 `<footer>` element of the generated pages.

**Note:** This example inserts a tracking snippet for Google Analytics, but the basic approach is the same for other analytics platforms or similar use cases that require custom JavaScript.

## Procedure

1. In the `plugins` directory, create a directory named `com.example.html5-javascript`.
2. In the new `com.example.html5-javascript` directory, create a plug-in configuration file (`plugin.xml`) that declares the new `html5-javascript` transformation and its dependencies.

```

1 <?xml version="1.0" encoding="UTF-8"?>

```

```

2 <?xml-model href="https://www.dita-ot.org/rng/
plugin.rnc" type="application/relax-ng-compact-syntax"?>
3
4 <plugin id="com.example.html5-javascript">
5   <require plugin="org.dita.html5"/>
6   <transtype name="html5-
javascript" extends="html5" desc="HTML5 with embedded JavaScript"/>
7   <feature extension="ant.import" file="build_html5-javascript.xml"/>
8 </plugin>

```

**Figure 32: Sample plugin.xml file**

**Note:** This plug-in will extend the default HTML5 transformation, so the `<require>` element explicitly defines `org.dita.html5` as a dependency.

3. In the `com.example.html5-javascript` directory, create a subdirectory named `include`.
4. In the new `include` subdirectory, create a file named `javascript.ftr.xml` with your custom JavaScript code.

```

1 <div>
2 <!-- Google Analytics -->
3 <script>
4   console.log('Adding Google Analytics tracker');
5
6   (function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;i[r]=i[r]||
function(){
7     (i[r].q=i[r].q||
[]).push(arguments)},i[r].l=1*new Date();a=s.createElement(o),
8   m=s.getElementsByTagName(o)
[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
9   })(window,document,'script','https://www.google-analytics.com/
analytics.js','ga');
10
11   ga('create','UA-XXXXX-Y','auto');
12   ga('send','pageview');
13 </script>
14 <!-- End Google Analytics -->
15 </div>

```

**Figure 33: Sample javascript.ftr.xml file**

The division wrapper will be discarded when generating HTML files, and the contents will be inserted into the `<footer>` element of each page.

The file contents must be well-formed XML. If your JavaScript snippets include attributes without values (such as the `async` script attribute), use valid XML syntax to define the empty attribute:

Instead of:

```

1 <script>
2   <script id="MathJax-script" async src="https://cdn.jsdelivr.net/npm/
mathjax@3/es5/tex-mml-cthtml.js"></script>
3 </script>

```

use:

```

1 <script>
2   <script id="MathJax-script" async="" src="https://cdn.jsdelivr.net/
npm/mathjax@3/es5/tex-mml-cthtml.js"></script>
3 </script>

```

5. In the `com.example.html5-javascript` root directory, add an Ant script (`build_html5-javascript.xml`) to define the transformation type and set the path to the JavaScript footer file created in the previous step.

```

1 <?xml version='1.0' encoding='UTF-8'?>
2
3 <project>
4   <target name="dita2html5-javascript"
5     <depends="dita2html5-javascript.init,
6       dita2html5"/>
7   <target name="dita2html5-javascript.init">
8     <property name="args.ftr"
9       location="${dita.plugin.com.example.html5-javascript.dir}/
include/javascript.ftr.xml"/>
10   </target>
11 </project>

```

**Figure 34: Sample build file: `build_html5-javascript.xml`**

**Note:** When defining the path to the footer file from the Ant script, use the plug-in directory property with the *plugin-id* as shown in the example above: `${dita.plugin.plugin-id.dir}`.

## Results

**Tip:** The files for this sample plug-in are included in the DITA-OT installation directory under `docsrc/samples/plugins/com.example.html5-javascript/` and on [GitHub](#).

The plug-in directory has the following layout and files:

```

com.example.html5-javascript
### build_html5-javascript.xml
### include
#   ### javascript.ftr.xml
### plugin.xml

```

## What to do next

1. Run `dita --install` to install the plug-in and make the `html5-javascript` transformation available.
2. Build output with the new transformation type to verify that the plug-in works as intended.

```
dita --input=my.ditamap --format=html5-javascript
```

3. Open one of the generated HTML topic files in a modern web browser and check the JavaScript **Console**. When the page is loaded, Adding Google Analytics tracker will appear on the console to verify that the sample script is loaded.
4. Remove the `console.log` debugging message from the sample JavaScript code, and replace the `'UA-XXXXX-Y'` placeholder string with the tracking ID of the Google Analytics property you wish to track.

**Tip:** This example places the JavaScript code in the page footer to ensure that page display is not delayed while the script is loaded. If your JavaScript code supports pre-loading and your application targets modern browsers that recognize the `async` script attribute, you may prefer to insert the JavaScript snippet in the `<head>` element of the generated HTML files using the `args.hdf` parameter instead.

## Related reference

[HTML-based output parameters](#) on page 96

Certain parameters apply to all HTML-based transformation types: HTML5, XHTML, HTML Help, and Eclipse help.





---

# Chapter

# 38

---

## Custom PDF plug-ins

---

In most cases, PDF output should be customized by creating custom DITA-OT plug-ins that build on the default DITA to PDF transformation. PDF plug-ins can customize covers and page layouts, modify formatting, override the logic of the default PDF plug-in, and much more.

### Related concepts

[Customizing PDF output](#) on page 119

You can adjust various aspects of PDF output by changing parameter settings. For more complex customizations, you can create custom DITA-OT plug-ins.

[PDF customization approaches](#) on page 121

Various methods may be used to customize the PDF output that DITA Open Toolkit produces. Each of these approaches have advantages and shortcomings that should be considered when preparing a customization project.

[Plug-in coding conventions](#) on page 147

To ensure custom plug-ins work well with the core toolkit code and remain compatible with future releases, the DITA Open Toolkit project recommends that plug-ins use modern development practices and common coding patterns.

## Types of custom PDF plug-ins

---

There are two common types of plug-ins: A plug-in that simply sets the DITA-OT parameters to be used when a PDF is generated, and a plug-in that overrides aspects of the base DITA-OT PDF transformation. A plug-in can, of course, do both of these things.

### Plug-in that only provides DITA-OT parameters

You might want to build a transformation type that uses a transformation as-is; however, you might want to ensure that certain DITA-OT parameters are used. For an example of this approach, see [Setting parameters with plug-ins](#) on page 153.

### Plug-in that overrides the base PDF transformation

Production uses of DITA-OT typically rely on a custom PDF plug-in to render PDFs that are styled to match corporate or organizational guidelines. Such customization plug-ins often override the following aspects of DITA-OT default output:

- Generated text strings
- XSL templates
- XSL-FO attribute sets

## PDF plug-in structure

In cases that require substantial customizations, it is often useful to organize the files in a folder structure that mimics the hierarchy of the default PDF plug-in.

**Note:** For simpler customizations, you may want to structure your plug-in differently, but the information in this topic may help you to locate the files you need to customize.

The original Idiom plug-in used its own extension mechanism to provide overrides to the PDF transformation. With this approach, a dedicated `Customization` folder within the plug-in was used as a customization layer to store files that override the default behavior.

While this method is no longer recommended, the same organization principles can be used in custom PDF plug-ins to facilitate comparisons with the default settings in the base PDF plug-in and make it easier to migrate customizations to new toolkit versions.

```
.
### build.properties.orig
### catalog.xml.orig
### fo/
###   attrs/
###   #   ### custom.xsl.orig
###   xsl/
###     custom.xsl.orig
```

**Figure 35: Default Customization folder content**

To begin creating a new custom plug-in, you can copy the contents of the customization layer template in `plugins/org.dita.pdf2/Customization` to a new folder that will serve as your new custom plug-in folder, such as `plugins/com.company.pdf`.

To mimic the hierarchy of the default PDF plug-in, you may want to add a `cfg/` subfolder and move the contents of the `fo/` folder to `cfg/fo/`.

DITA-OT provides template files that you can start with throughout the `Customization` directory structure. These files end in the suffix `.orig` (for example, `catalog.xml.orig`). To enable these files, remove the `.orig` suffix from the copies in your new custom plug-in folder. (For example, rename `catalog.xml.orig` to `catalog.xml`).

You can then make modifications to the copy in your custom plug-in folder, and copy any other files from the default PDF plug-in that you need to override, such as the page layouts in `layout-masters.xsl`, or the `font-mappings.xml` file that tells your PDF renderer which fonts to use and where to find them.

**Important:** Wherever possible, avoid copying entire XSL files from the PDF2 plug-in to your custom plug-in. Instead, copy only the specific attribute sets and templates that you want to override. For details, see [Plug-in coding conventions](#) on page 147.

Things you can currently override include:

- Custom XSL via `xsl/custom.xsl` and `attrs/custom.xsl`
- Layout overrides via `layout-masters.xsl`
- Font overrides via `font-mappings.xml`
- Per-locale variable overrides via `common/vars/[language].xml`
- I18N configuration via `i18n/[language].xml`
- Index configuration via `index/[language].xml`

When customizing any of these areas, modify the relevant file(s) in your custom plug-in folder. Then, to enable the changes in the publishing process, you find the corresponding entry for each file you modified in the `catalog.xml` file.

It should look like this:

```
<!--uri name="cfg:fo/attrs/custom.xsl" uri="fo/attrs/custom.xsl"/-->
```

Remove the comment markers `!--` and `--` to enable the change:

```
<uri name="cfg:fo/attrs/custom.xsl" uri="fo/attrs/custom.xsl"/>
```

Your customization should now be enabled as part of the publishing process.

```
.
### plugin.xml
### ant-include.xml
### cfg/
###   catalog.xml
###   common/
###     #   ### artwork/
###     #   #   ### logo.svg
###     #   ### vars/
###     #   ### strings.xml
###     #   ### en.xml
###   fo/
###     ### attrs/
###     #   ### custom.xsl
###     ### font-mappings.xml
###     ### layout-masters.xml
###     ### xsl/
###     ###   custom.xsl
```

**Figure 36: Sample custom plug-in structure**

When your custom plug-in is installed, the files in its subfolders will override the out-of-the-box settings from their counterparts in `org.dita.pdf2/cfg/fo/attrs` and `org.dita.pdf2/xsl/fo`.

The following topics describe the contents of the base PDF plug-in subfolders and provide additional information on customizing various aspects of the default PDF output.

## Custom artwork

The `common/artwork` folder houses custom artwork files that override the standard icons in `org.dita.pdf2/cfg/common/artwork`.

These files are used to graphically identify different types of DITA `<note>` element.

The mapping between `<note>` type and graphic is contained in the common variables file `org.dita.pdf2/cfg/common/vars/commonvariables.xml`.

The variables that control `<note>` graphics all follow the form

```
<variable id="{type} Note Image Path"> {path to image file} </variable>
```

where *{type}* contains a possible value for the `<note>` `@type` attribute and *{path to image file}* is the path to the note icon image.

## Index configuration

The `common/index` folder houses custom index definition files that override the standard definitions in `org.dita.pdf2/cfg/common/index`.

Each file contains data for a single language, and should take that language's ISO 639-1 language designator as its name (for example, `pt.xml` for Portuguese). If necessary, locale-specific customizations can be provided by adding a region designator to the file name (for example, `pt_BR.xml` for Brazilian Portuguese).

The index files consist of `<index.group>` elements which contain sorting information on one or more characters. Index groups are listed in sort order (“specials” before numbers, numbers before the letter ‘A’, etc), and the `<char.set>` entries they contain are also listed in sort order (uppercase before lowercase).

The best way to start editing a custom index file is by making a copy of the original from `org.dita.pdf2/cfg/common/index` and making changes as desired.

In order to apply a custom index definition to your publishing outputs, edit `catalog.xml` and uncomment the appropriate entry in the “Index configuration override entries” section.

## Variable overrides

The `common/vars` folder houses custom variable definitions that override the standard definitions in `org.dita.pdf2/cfg/common/vars`.

As with index configuration, each file contains data for a single language, and should take that language’s ISO 639-1 language designator as its name.

Variable files contain a set of `<variable>` elements, identified by their `@id` attribute. The variable definitions are used to store static text that is used as part of the published outputs. For example, page headers, hyperlinks, etc. The `id` attribute for each variable should make it clear how the variable text is being used.

Some variables contain `<param>` elements which indicate parameter values that are substituted at publish time by the XSL. For example, a page number that is being generated as part of the publishing process might be identified by `<param ref-name="number" />`. When editing or translating a variable file, these should be included in the translation, though they can be moved and rearranged within the `<variable>` content as needed.

The best way to start editing a custom variables file is by making a copy of the original from `org.dita.pdf2/cfg/common/vars` and making changes as desired. When adding a new language, start from an existing language’s list of variables and translate each entry as needed.

Note that unchanged `<variable>` elements can be omitted: the custom variables file need only include those `<variable>` elements which you have modified. Variables not found in the custom file will be taken from the standard variable files.

Applying a custom variable does not require modifying the `catalog.xml` file. The publishing process will automatically use any custom variables definitions in place of the original ones.

### Related reference

[How to add or modify generated text strings](#) on page 187

Generated text is the term for strings that are automatically added by the build process, such as the word “*Note*” before the contents of a `<note>` element.

## Custom attributes

The `fo/attrs` folder houses custom attribute configuration files that override the standard attributes in `org.dita.pdf2/cfg/fo/attrs`.

These files define the appearance of different elements in XML assets when they are rendered to PDF output. The different DITA elements are organized into files by element type – index-related definitions in `index-attr.xsl`, table-related definitions in `tables-attr.xsl`, etc.

The XSL attribute sets defined in these files can be used to override the presentation of DITA elements, including font size, color, spacing, etc.

## Internationalization configuration

The `fo/i18n` folder houses custom internationalization files that override the standard configurations in `org.dita.pdf2/cfg/fo/i18n`.

As with index configuration and variable overrides, each file contains data for a single language, and should take that language’s ISO 639-1 language designator as its name.



```
10 </project>
```

**Figure 38: integrator.xml file**

4. In the new plug-in directory, add a `cfg/catalog.xml` file that specifies the custom XSLT style sheets.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <catalog prefer="system"
3   .....xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">
4   ..<uri name="cfg:fo/attrs/custom.xml" uri="fo/attrs/custom.xml"/>
5   ..<uri name="cfg:fo/xsl/custom.xml" uri="fo/xsl/custom.xml"/>
6 </catalog>
```

**Figure 39: cfg/catalog.xml file**

5. Create the `cfg/fo/attrs/custom.xml` file, and add attribute and variable overrides to it. For example, add the following variables to change the page size to A4.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
3   .....version="2.0">
4   ..<!-- Change page size to A4 -->
5   ..<xsl:variable name="page-width">210mm</xsl:variable>
6   ..<xsl:variable name="page-height">297mm</xsl:variable>
7 </xsl:stylesheet>
```

**Figure 40: cfg/fo/attrs/custom.xml file**

6. Create the `cfg/fo/xsl/custom.xml` file, and add XSLT overrides to it. For example, the following code changes the rendering of `<figure>` elements.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
3   .....xmlns:xs="http://www.w3.org/2001/XMLSchema"
4   .....xmlns:fo="http://www.w3.org/1999/XSL/Format"
5   .....version="2.0">
6   ..<!-- Move figure title to top and description to bottom -->
7   ..<xsl:template match="*[contains(@class,'topic/fig')]">
8     ..<fo:block xsl:use-attribute-sets="fig">
9       .....<xsl:call-template name="commonattributes"/>
10      .....<xsl:if test="not(@id)">
11        .....<xsl:attribute name="id">
12          .....<xsl:call-template name="get-id"/>
13        .....</xsl:attribute>
14      .....</xsl:if>
15      .....<xsl:apply-templates select="*[contains(@class,'topic/
16        title')]" />
17      .....<xsl:apply-templates select="*[not(contains(@class,'topic/
18        title') or contains(@class,'topic/desc'))]" />
19      .....<xsl:apply-templates select="*[contains(@class,'topic/desc')]" />
20    ..</fo:block>
21  ..</xsl:template>
22 </xsl:stylesheet>
```

**Figure 41: cfg/fo/xsl/custom.xml file**

7. Create an English-language variable-definition file (`cfg/common/vars/en.xml`) and make any necessary modifications to it.

For example, the following code removes the period after the number for an ordered-list item; it also specifies that the bullet for an unordered list item should be an em dash.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <variables>
```

```

3  · · <!-- Remove dot from list number -->
4  · · <variable id="Ordered List Number">
5  · · · · <param ref-name="number"/>
6  · · </variable>
7  · · <!-- Change unordered list bullet to an em dash -->
8  · · <variable id="Unordered List bullet">&#x2014;</variable>
9  </variables>

```

**Figure 42:** `cfg/common/vars/en.xml` file

## Results

**Tip:** The files for this sample plug-in are included in the DITA-OT installation directory under `docsrc/samples/plugins/com.example.print-pdf/` and on [GitHub](#).

The plug-in directory has the following layout and files:

```

com.example.print-pdf
### cfg
#   ### catalog.xml
#   ### common
#   #   ### vars
#   #   ### en.xml
#   ### fo
#   ### attrs
#   #   ### custom.xsl
#   ### xsl
#   ### custom.xsl
### integrator.xml
### plugin.xml

```

## What to do next

1. Run `dita --install` to install the plug-in and make the print-pdf transformation available.
2. Build output with the new transformation type to verify that the plug-in works as intended.

```
dita --input=my.ditamap --format=print-pdf
```

## Related tasks

[Installing plug-ins](#) on page 127

Use the `dita install` subcommand to install plug-ins.

## Resources for custom PDF plug-ins

There are several external resources that can help you generate and refine custom PDF plug-ins for DITA Open Toolkit.

### PDF Plugin Generator

This online tool, developed and maintained by Jarno Elovirta, enables you to generate a PDF customization plug-in automatically.

The application at [dita-generator.elovirta.com](http://dita-generator.elovirta.com) walks you through the process of creating a custom PDF plug-in and allows you to adjust a variety of settings for your PDF output. For example, you can:

- Define the target environment, selecting from the most current and two previous versions of DITA-OT
- Select the XSL formatting engine (FOP, Antenna House Formatter, or RenderX XEP)
- Specify page size, columns, and margins
- Select from (limited) options for headers and footers

- Specify layout options for chapters
- Select formatting for the following publication components:
  - Normal text
  - Headings (levels one through four)
  - Titles for sections and examples
  - Tables and figures
  - Notes and examples
  - Lists (unordered, ordered, and definition)
  - Code blocks and pre-formatted text
  - Inline elements such as links and trademarks

For each component, you can specify:

- Font family, size, weight, and style
- Color and background color
- Alignment, indentation, spacing, and padding

**Tip:** The PDF Plugin Generator should be your first stop as you start developing a brand-new PDF customization plug-in.

### ***DITA for Print: A DITA Open Toolkit Workbook (Second Edition, 2017)***

Authored by Leigh W. White, DITA Specialist at IXIASOFT, and published by XML Press, *DITA for Print* walks readers through developing a PDF customization from scratch.

Here is an excerpt from the back cover:

*DITA for Print* is for anyone who wants to learn how to create PDFs using the DITA Open Toolkit without learning everything there is to know about XSL-FO, XSLT, or XPath, or even about the DITA Open Toolkit itself. *DITA for Print* is written for non-programmers, by a non-programmer, and although it is written for people who have a good understanding of the DITA standard, you don't need a technical background to get custom PDFs up and running quickly.

This is an excellent, long-needed resource that was initially developed in 2013 for DITA-OT 1.8.

The second edition has been revised to cover DITA Open Toolkit Version 2, including customizing the DITA 1.3 troubleshooting topic type, localization strings, bookmarks, and the new back-cover functionality.

#### **Important:**

The first edition of *DITA for Print* recommended copying entire files from the PDF2 plug-in to your custom plug-in. The DITA-OT project — and the second edition of the book — do not recommend this practice.

Instead, you should copy only the specific attribute sets and templates that you want to override. Following this practice will more cleanly isolate your customizations from the DITA-OT code, which will make it easier for you to update your plug-ins to work with future versions of DITA-OT.

### ***DITA for Practitioners: Volume 1, Architecture and Technology (2012)***

Authored by Eliot Kimber and published by XML Press, this seminal resource contains a chapter dedicated to DITA Open Toolkit: “Running, Configuring, and Customizing the Open Toolkit”. In addition to a robust overview of DITA-OT customization and extension, the chapter contains a detailed example of customizing a PDF plug-in to specify 7" × 10" paper size and custom fonts for body text and headers.

The DITA-OT chapter in *DITA for Practitioners: Volume 1* was written for DITA-OT 1.5.4, which was the latest stable version at the time it was written.



---

# Chapter

# 39

---

## Globalizing DITA content

---

The DITA standard supports content that is written in or translated to any language. In general, DITA Open Toolkit passes content through to the output format unchanged. DITA-OT uses the values for the `@xml:lang` and `@dir` attributes that are set in the source content to provide globalization support. You can create custom plug-ins to support additional languages.

### Related reference

[Localization overview in the OASIS DITA standard](#)

## Globalization support

---

DITA Open Toolkit supports globalization with generated text strings, index sorting, and bi-directional text.

### Generated text

*Generated text* is text that is rendered automatically in the output that is generated by DITA-OT; this text is not located in the DITA source files. The following are examples of generated text:

- The word “*Chapter*” in a PDF file.
- The phrases “*Related concepts*”, “*Related tasks*”, and “*Related reference*” in HTML output.

### Index sorting

DITA-OT can use only a single language to sort indexes.

### Bi-directional text

DITA-OT contains style sheets (CSS files) that support both left-to-right (LTR) and right-to-left (RTL) languages in HTML-based transformations. PDF supports both LTR and RTL rendering based on the document language. The `@dir` attribute can be used to override the default rendering direction.

When DITA-OT generates output, it takes the first value that it encounters for the `@xml:lang` attribute, and uses that value to create generated text, sort index entries, and determine which default CSS file is used. If no value for the `@xml:lang` attribute is found, the toolkit defaults to U.S. English. You can use the [Configuration properties](#) on page 105 to change the default language.

## Supported languages

---

The following languages are supported for PDF and HTML-based output.

**Note:** While language codes listed below use the conventional capitalization style of “aa-BB” and “aa-Script-BB”, DITA-OT processing is not case sensitive when reading these values from the `@xml:lang` attribute.

**Table 4: Supported languages**

Language	Language code	Notes
##### (Arabic)	ar or ar-EG	Defaults to right-to-left presentation.
##### (Belarusian)	be or be-BY	
Bosanski (Bosnian)	bs or bs-BA	
##### (Bulgarian)	bg or bg-BG	
Català (Catalan)	ca-ES	
#### (Simplified Chinese)	zh-CN or zh-Hans	PDF index is not properly collated by default.
#### (Traditional Chinese)	zh-TW or zh-Hant	PDF index is not properly collated by default.
Hrvatski (Croatian)	hr or hr-HR	
#eština (Czech)	cs or cs-CZ	
Dansk (Danish)	da or da-DK	
Nederlands (Dutch)	nl or nl-NL	Subset of generated text also available for Belgian Dutch (nl-BE)
English (US)	en or en-US	Subset of generated text also available for British English (en-GB) and Canadian English (en-CA)
Eesti (Estonian)	et or et-EE	
Suomi (Finnish)	fi or fi-FI	
Français (French)	fr or fr-FR	Subset of generated text also available for Belgian French (fr-BE), Canadian French (fr-CA), and Swiss French (fr-CH)
Deutsch (German)	de or de-DE	Subset of generated text also available for Swiss German (de-CH)
##### (Greek)	el or el-GR	
#### (Hebrew)	he or he-IL	Defaults to right-to-left presentation.
##### (Hindi)	hi or hi-HI	
Magyar (Hungarian)	hu or hu-HU	
Íslenska (Icelandic)	is or is-IS	
Bahasa Indonesia (Indonesian)	id or id-ID	
Italiano (Italian)	it or it-IT	Subset of generated text also available for Swiss Italian (it-CH)
### (Japanese)	ja or ja-JP	PDF index is not properly collated by default.
##### (Kazakh)	kk or kk-KZ	
### (Korean)	ko or ko-KR	
Latviešu (Latvian)	lv or lv-LV	
Lietuvi# (Lithuanian)	lt or lt-LT	
##### (Macedonian)	mk or mk-MK	

Language	Language code	Notes
Bahasa Melayu (Malay)	ms or ms-MY	
Crnogorski (Montenegrin)	sr-Latn-ME	
Norsk (Norwegian)	no or no-NO	
Polski (Polish)	pl or pl-PL	
Português (Portuguese)	pt or pt-PT	
Português do Brasil (Brazilian Portuguese)	pt-BR	
Român# (Romanian)	ro or ro-RO	
##### (Russian)	ru or ru-RU	
##### (Serbian - Cyrillic script)	sr, sr-CS, sr-RS, or sr-SP	
Srpski (Serbian - Latin script)	sr-Latn-RS	
Sloven#ina (Slovak)	sk or sk-SK	
Slovenš#ina (Slovenian)	sl or sl-SI	
Español (Spanish)	es or es-ES	Also supported using es-419 (Latin American Spanish).
Svenska (Swedish)	sv or sv-SE	
##### (Thai)	th or th-TH	
Türkçe (Turkish)	tr or tr-TR	
##### (Ukrainian)	uk or uk-UA	
#### (Urdu)	ur or ur-PK	Defaults to right-to-left presentation.
Ti#ng Vi#t (Vietnamese)	vi or vi-VN	

### Related reference

[How to add or modify generated text strings](#) on page 187

Generated text is the term for strings that are automatically added by the build process, such as the word “*Note*” before the contents of a <note> element.

## Customizing generated text

Generated text is the term for strings that are automatically added by the build process, such as the word “*Note*” before the contents of a <note> element.

### dita.xsl.strings

Add new strings to generated text file.

The generated text extension point is used to add new strings to the default set of generated text from **org.dita.base** for any non-PDF transformation type and from **org.dita.pdf2** for PDF. It also creates the <gentext> element in the intermediate files used by the toolkit. There are several reasons you may want to use the dita.strings.xsl extension point:

- It can be used to add new text for your own processing extensions; for example, it could be used to add localized versions of the string “*User response*” to aid in rendering troubleshooting information.
- It can be used to override the default strings in the toolkit; for example, it could be used to reset the English string “*Figure*” to “*Fig.*”

- It can be used to add support for new languages. For example, it could be used to add support for Vietnamese or Gaelic; it could also be used to support a new variant of a previously supported language, such as Australian English.

If two plug-ins define the same string or add support for the same language using different values, the result will be non-deterministic. In other words, when the same content is processed multiple times, you may get inconsistent generated text results. This is because the toolkit cannot determine which string to use, since more than one match is found. Avoid this possibility by ensuring that only one plug-in defines or overrides string values for each string in each language. Also consider using a naming convention for attributes used to look up the string value by using the ID or purpose of your plug-in.

Generated strings are available to the `getVariable` template used in many DITA-OT XSLT files.

Prior to DITA-OT 3.7, there were two different XML structures for adding or modifying generated text (gentext). The base plug-in **org.dita.base** and any custom overrides defined via the `dita.strings.xml` extension point used a root element `<strings>`, with individual strings in `<str>` elements with `@name` attributes. This format was previously used for HTML, and all other output formats except PDF.

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <strings xml:lang="en-US">
3   <str name="String1">English generated text</str>
4 </strings>
```

**Figure 43: Base strings file structure prior to DITA-OT 3.7**

The PDF plug-in **org.dita.pdf2** used a root element `<vars>` with an XML namespace, and strings in `<variable>` elements with `@id` attributes.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <vars xmlns="http://www.idiominc.com/opentopic/vars">
3   <variable id="String1">English generated text</variable>
4 </vars>
```

**Figure 44: PDF2 strings file structure prior to DITA-OT 3.7**

Starting with DITA-OT 3.7, these structures have been deprecated and replaced with a new unified format. All files now use `<variables>` as the root element, with the `<variable>` elements previously used in PDF strings. The new format supports the XSL parameters used by the earlier PDF strings format to pass dynamic information such as chapter numbers or figure titles.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <variables>
3   <variable id="String1">English generated text</variable>
4 </variables>
```

**Figure 45: New common variable format as of DITA-OT 3.7**

The old formats are still supported, but plug-in developers should update any generated text files to reflect the new structure, as support for the old formats may be removed in a future release. [#3817](#)

### Related reference

[Languages supported by the core toolkit](#) on page 185

The following languages are supported for PDF and HTML-based output.

### Related information

[Variable overrides for PDF](#) on page 180

The `common/vars` folder houses custom variable definitions that override the standard definitions in `org.dita.pdf2/cfg/common/vars`.

## Adding new strings

Add new generated strings to your plug-in for the toolkit to include in your output.

### Procedure

1. Copy this file to your plug-in.

- non-PDF output: `plugins/org.dita.base/xsl/common/strings.xml`
- PDF output: `plugins/org.dita.pdf2/cfg/common/vars/strings.xml`

2. In your plug-in, edit `strings.xml` to contain references to the language files for which you are providing custom strings.

The en-US language must be present; other language files are optional.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <!-- Provide strings for my plug-in; this plug-in supports
3      English, Icelandic, and Russian. -->
4 <langlist>
5   <lang xml:lang="en"      filename="my-added-strings-en-us.xml"/>
6   <lang xml:lang="en-US"   filename="my-added-strings-en-us.xml"/>
7   <lang xml:lang="is"      filename="my-added-strings-is-is.xml"/>
8   <lang xml:lang="is-IS"   filename="my-added-strings-is-is.xml"/>
9   <lang xml:lang="ru"      filename="my-added-strings-ru-ru.xml"/>
10  <lang xml:lang="ru-RU"   filename="my-added-strings-ru-ru.xml"/>
11 </langlist>

```

3. In `xsl/common` or `cfg/common/vars`, create a new file called `my-added-strings-en-us.xml`.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <variables>
3
4 </variables>

```

4. For each new string you want, add a `<variable>` element with an `@id` attribute and the text you want the toolkit to use.

The `@id` attribute value must be unique in the file and should reflect the purpose of the generated text.

The toolkit uses the text found inside the element when inserting generated text.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <variables>
3   <variable id="String1">English generated text</variable>
4   <variable id="Another String">Another string in English</variable>
5 </variables>

```

5. Repeat step 3 on page 189 and step 4 on page 189 for each language.
6. Update your `plugin.xml` file to extend the strings available.

```

1 <plugin id="com.example.your-plugin">
2   <feature extension="dita.xsl.strings" file="xsl/common/strings.xml"/>
3 </plugin>

```

Your custom strings are available to your stylesheets. For example, if processing in a context where the `@xml:lang` value is `en-US`, the following call returns “*Another string in English*” because it was defined as the text for the variable with `@id` value of `Another String` in step 4 on page 189.

```

1 <xsl:call-template name="getVariable">

```

```

2  · · <xsl:with-param name="id" select="'Another String'"/>
3  </xsl:call-template>

```

You can also use the same strings in multiple languages by assigning a file with common strings to each language in addition to the language-specific custom strings files.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <langlist>
3  · · <lang xml:lang="en" · · · · · filename="my-added-strings-en-us.xml"/>
4  · · <lang xml:lang="en-US" · · filename="my-added-strings-en-us.xml"/>
5  · · <lang xml:lang="en" · · · · · filename="my-added-strings-mul.xml"/>
6  · · <lang xml:lang="en-US" · · filename="my-added-strings-mul.xml"/>
7  · · <lang xml:lang="is" · · · · · filename="my-added-strings-is-is.xml"/>
8  · · <lang xml:lang="is-IS" · · filename="my-added-strings-is-is.xml"/>
9  · · <lang xml:lang="is" · · · · · filename="my-added-strings-mul.xml"/>
10 · · <lang xml:lang="is-IS" · · filename="my-added-strings-mul.xml"/>
11 · · <lang xml:lang="ru" · · · · · filename="my-added-strings-ru-ru.xml"/>
12 · · <lang xml:lang="ru-RU" · · filename="my-added-strings-ru-ru.xml"/>
13 · · <lang xml:lang="ru" · · · · · filename="my-added-strings-mul.xml"/>
14 · · <lang xml:lang="ru-RU" · · filename="my-added-strings-mul.xml"/>
15 </langlist>

```

### Related reference

[How to add or modify generated text strings](#) on page 187

Generated text is the term for strings that are automatically added by the build process, such as the word “*Note*” before the contents of a `<note>` element.

## Overriding strings

Override the default strings in the toolkit when you want to replace an existing string with one of your own; for example, it could be used to reset the English string “*Figure*” to “*Fig.*”

### Procedure

1. Copy this file to your plug-in.
  - non-PDF output: `plugins/org.dita.base/xsl/common/strings.xml`
  - PDF output: `plugins/org.dita.pdf2/cfg/common/vars/strings.xml`
2. In your plug-in, edit `strings.xml` to contain references to the language files you want to override.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <!-- Provide strings for my plug-in; this plug-in supports
3  · · · · English and German. -->
4  <langlist>
5  · · <lang xml:lang="en" · · · · · filename="strings-en-us.xml"/>
6  · · <lang xml:lang="en-US" · · filename="strings-en-us.xml"/>
7  · · <lang xml:lang="de" · · · · · filename="strings-de-de.xml"/>
8  · · <lang xml:lang="de-DE" · · filename="strings-de-de.xml"/>
9  </langlist>

```

3. Copy the language file from you want to override. Paste it into your plug-in's `xsl/common` or `cfg/common/vars` directory.

Language files are found in:

- non-PDF output: `plugins/org.dita.base/xsl/common/`
- PDF output: `plugins/org.dita.pdf2/cfg/common/vars/`

4. Open the language file. Remove all of the variables except those you want to override.

By removing the variables you will not override, you limit where variables are defined in the toolkit while making your file easier to maintain.

5. Change the contents of the variable to your desired text.

Do not modify the @id attribute.

```
1 <variables>
2   · · · <variable id="Figure">Fig.</variable>
3 </variables>
```

6. Update your plugin.xml file to extend the strings available.

```
1 <plugin id="com.example.your-plugin">
2   · · <feature extension="dita.xsl.strings" file="xsl/common/strings.xml"/>
3 </plugin>
```

Your overrides are available to your stylesheets. For example, if processing in a context where the @xml:lang value is en-US, the following call returns “Fig.”, because it was defined as the text for the variable with @id value of Figure in step 5 on page 191, which overrides the default text found in **org.dita.base**.

```
1 <xsl:call-template name="getVariable">
2   · · <xsl:with-param name="id" select="Figure"/>
3 </xsl:call-template>
```

### Related reference

[How to add or modify generated text strings](#) on page 187

Generated text is the term for strings that are automatically added by the build process, such as the word “*Note*” before the contents of a <note> element.

## Adding new languages

Extend the toolkit’s generated text capabilities by adding new language files.

### Procedure

1. Copy this file to your plug-in.
  - non-PDF output: plugins/org.dita.base/xsl/common/strings.xml
  - PDF output: plugins/org.dita.pdf2/cfg/common/vars/strings.xml
2. In your plug-in, edit strings.xml to contain references to the language files for which you are providing custom strings.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <!-- Provide new languages for Gaelic and Vietnamese. -->
3 <langlist>
4   · · <lang xml:lang="ga" · · · · filename="strings-ga-ga.xml"/>
5   · · <lang xml:lang="ga-GA" · · filename="strings-ga-ga.xml"/>
6   · · <lang xml:lang="vi" · · · · filename="strings-vi-vn.xml"/>
7   · · <lang xml:lang="vi-VN" · · filename="strings-vi-vn.xml"/>
8 </langlist>
```

3. Copy this file to your plug-in into the same directory as step 1 on page 191.
  - non-PDF output: plugins/org.dita.base/xsl/common/strings-en-us.xml
  - PDF output: plugins/org.dita.pdf2/cfg/common/vars/en.xml
4. Rename the file to match the language you wish to add (for instance, strings-vi-vn.xml).
5. Without changing the @id value, replace the generated text string for each variable.

```
1 <variables>
2   · · · <variable id="Figure">Hi#nh</variable>
3   · · · <variable id="Table">Ba#ng</variable>
4   · · · <variable id="Next topic">Chu# · #ê# · tiê#p · theo</variable>
```

```

5  ....[...]
6  ...<variable id="Copyright">Ba#n quyê#n</variable>
7  ...<variable id="ally.and-then"/>
8  </variables>

```

6. Repeat step 3 on page 191 to step 5 on page 191 for each language.
7. Update your plugin.xml file to extend the strings available.

```

1  <plugin id="com.example.your-plugin">
2  ..<feature extension=" dita.xsl.strings" file="xsl/common/strings.xml"/>
3  </plugin>

```

Your custom language strings are available to your stylesheets. For example, if processing in a context where the @xml:lang value is vi-VN, the following call returns “*Chu# #ê#p tiê#p theo*” because it was defined as the text for the variable with @id value of `Next topic` in step 5 on page 191.

```

1  <xsl:call-template name="getVariable">
2  ..<xsl:with-param name="id" select="'Next topic'"/>
3  </xsl:call-template>

```

### Related reference

[How to add or modify generated text strings](#) on page 187

Generated text is the term for strings that are automatically added by the build process, such as the word “*Note*” before the contents of a `<note>` element.



---

# Chapter

# 40

---

## Migrating customizations

---

If you have XSL transformation overrides, plug-ins or other customizations written prior to DITA-OT 3.7, you may need to make changes to ensure your overrides work properly with the latest toolkit versions.

In some cases, you may be able to remove old code that is no longer needed. In other cases, you may need to refactor your code to point to the modified extension points, templates or modes in recent toolkit versions.

When migrating customizations, identify the version of the toolkit you're currently using (base version) and the version of the toolkit you want to migrate to (target version). Then, review all of the migration changes described in *all* of the versions from the base through the target. For instance, if you're currently on 2.2 and want to move to 3.3, you should review all of the changes in 2.3 through 3.3. You may want to start at the oldest version and read forward so you can chronologically follow the changes, since it is possible that files or topics have had multiple changes.

### Note:

DITA-OT releases follow [semantic versioning](#) guidelines. Version numbers use the *major.minor.patch* syntax, where *major* versions may include incompatible API changes, *minor* versions add functionality in a backwards-compatible manner and *patch* versions are maintenance releases that include backwards-compatible bug fixes.

Custom plug-ins developed for a previous *major* version may require changes to work correctly with recent toolkit versions. Most plug-ins should be compatible with subsequent *minor* and *patch* versions of the *major* release for which they were originally developed.

## Migrating to release 3.7

---

DITA-OT 3.7 includes stable IDs in re-used content, a common variable format for generated text strings, and an updated preview of features for the latest draft of the upcoming DITA 2.0 standard, such as the new “combine” chunk action, the `<titlealt>` element, and the alternative titles domain.

**Note:** This topic provides a summary of changes in DITA-OT 3.7 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.7 Release Notes](#).

### Common format for generated text

Prior to DITA-OT 3.7, there were two different XML structures for adding or modifying generated text (gentext). The base plug-in **org.dita.base** and any custom overrides defined via the `dita.strings.xsl` extension point used a root element `<strings>`, with individual strings in `<str>` elements with `@name` attributes. This format was previously used for HTML, and all other output formats except PDF.

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <strings xml:lang="en-US">
3   <str name="String1">English generated text</str>
4 </strings>
```

**Figure 46: Base strings file structure prior to DITA-OT 3.7**

The PDF plug-in **org.dita.pdf2** used a root element `<vars>` with an XML namespace, and strings in `<variable>` elements with `@id` attributes.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <vars xmlns="http://www.idiominc.com/opentopic/vars">
3   <variable id="String1">English generated text</variable>
4 </vars>
```

**Figure 47: PDF2 strings file structure prior to DITA-OT 3.7**

Starting with DITA-OT 3.7, these structures have been deprecated and replaced with a new unified format. All files now use `<variables>` as the root element, with the `<variable>` elements previously used in PDF strings. The new format supports the XSL parameters used by the earlier PDF strings format to pass dynamic information such as chapter numbers or figure titles.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <variables>
3   <variable id="String1">English generated text</variable>
4 </variables>
```

**Figure 48: New common variable format as of DITA-OT 3.7**

The old formats are still supported, but plug-in developers should update any generated text files to reflect the new structure, as support for the old formats may be removed in a future release. [#3817](#)

## CSS precedence

The order of elements in the `<head>` element of the HTML template files was changed to facilitate overrides. The common CSS stylesheets and any custom CSS files specified via `args.css` now come **after** the contents of the custom header file specified via `args.hdf`. This change better supports use cases in which the custom header file is used to insert references to external CSS stylesheets for frameworks like [Bootstrap](#). In previous versions of DITA-OT, framework styles took precedence over any equivalent rules in the user's custom stylesheet. This change allows rules in custom CSS files specified via `args.css` to override any of the framework styles as necessary.

## Deprecated legacy gen-user templates

The legacy `gen-user` templates that were originally used to add content to the `<head>` element have been deprecated and will be removed in a future release. For each of these templates, parameter-based customizations are available that can be used to specify files that contain content that extends the default processing. [#3835](#)

- `gen-user-head` # use `args.hdf` instead
- `gen-user-header` # use `args.hdr`
- `gen-user-footer` # use `args.ftr`
- `gen-user-scripts` # use `args.hdf`
- `gen-user-styles` # use `args.css`

## Ancestor links

The mappull processing step has changed how related links are generated with `args.rellinks`. Starting in 3.7, `noparent` will not generate any ancestor links and `nofamily` will not generate sibling, cousin, ancestor, or descendant links.

Prior to 3.7, `args.rellinks=all` did not actually include all links. Now it will. As in previous versions, the default value for PDF output is `nofamily`, and other output formats include all link roles except ancestor links.

The default processing sets the internal Ant property `include.rellinks` to `#default parent child sibling friend next previous cousin descendant sample external other`.

## ToC navigation role

Table of contents navigation in HTML5 output used a `<nav>` element with the ARIA `@role` attribute set to `toc`. Certain accessibility tools flagged this as an error. The invalid role has been replaced with the `navigation` landmark role. A new `toc` class allows custom CSS styles to target the ToC navigation. CSS rules that use the `nav[role='toc']` selector can be simplified to `nav.toc`.

## Common attributes mode

A `commonattributes` mode was added to the HTML5, PDF, and XHTML plug-ins to allow for easier extension. This is a backwards compatible change, however, existing plug-ins should be changed to use the new `commonattributes` mode.

```
<xsl:template name="commonattributes">
  <!-- whole copy of commonattributes named template with customizations -->
</xsl:template>
```

**Figure 49: Named template prior to version 3.7**

```
<xsl:template match="@* | node()" mode="commonattributes">
  <xsl:param name="default-output-class" as="xs:string*" />
  <xsl:next-match>
    <xsl:with-param name="default-output-class" select="$default-output-
class" />
  </xsl:next-match>
  <!-- customizations -->
</xsl:template>
```

**Figure 50: Template mode as of version 3.7**

## XSL modes

The HTML5 stylesheets were updated to use XSL modes instead of named templates.

This is a backwards compatible change, however, existing plug-ins should be changed to use modes instead of named templates for:

- `copyright`
- `gen-endnotes`
- `generateDefaultMeta`
- `generateCssLinks`
- `generateChapterTitle`
- `processHDF`
- `generateBreadcrumbs`
- `processHDR`
- `processFTR`
- `generateCharset`

## Migrating to release 3.6

DITA-OT 3.6 includes performance enhancements such as processing in parallel and in memory, support for PDF changebars with Apache™ FOP, and an updated preview of features for the latest draft of the upcoming DITA 2.0 standard, including the `<audio>` and `<video>` elements, and the new emphasis domain.

**Note:** This topic provides a summary of changes in DITA-OT 3.6 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.6 Release Notes](#).

## Parallel processing

Preprocessing module code can now be run in parallel by setting the `parallel` parameter to `true`. The performance benefits this option provides depend heavily on the source file set, the DITA features used in the project, and the computer doing the processing, but under the right circumstances, you may see notable improvements when this option is enabled.

## In-memory processing

DITA-OT 3.6 introduces a new Store API with preview support for in-memory processing. The Cache Store can be activated by setting the `store-type` parameter to `memory`. In-memory processing provides performance advantages in I/O bound environments such as cloud computing platforms, where processing time depends primarily on how long it takes to read and write temporary files. For more information, see [Store API – Processing in memory](#) on page 267.

## Caching DITA class instances

The DITA-OT Java code uses a new caching `DitaClass.getInstance(cls)` factory method rather than generating `DitaClass` instances directly. This allows previously created instances to be re-used, which reduces the number of instances that need to be created.

**Important:** Custom plug-ins that use the `DitaClass` constructor in Java code should be updated to use the `getInstance` factory method instead.

## PDF changebars with Apache™ FOP

For DITA-OT 3.4, the bundled Apache™ Formatting Objects Processor library was upgraded to version 2.4, which included support for changebars, but those features were not yet enabled in DITA-OT 3.4 pending further testing. DITA-OT 3.6 removes the FOP-specific overrides that disabled changebars in earlier versions, allowing the default PDF2 flagging routines to be applied when generating PDFs with FOP. For details, see [Generating revision bars](#) on page 123.

Plug-ins that implemented custom FOP flagging by overriding the `org.dita.pdf2.fop/xsl/fo/flagging_fop.xsl` stylesheet in prior versions will need to be updated, as this file is no longer available in DITA-OT 3.6. [#3511](#), [#3591](#)

## Dublin Core metadata removed from HTML5

Up to version 3.5, DITA-OT included the [Dublin Core Metadata Element Set](#) in both XHTML and HTML5 output. DITA-OT 3.6 no longer generates Dublin Core metadata in HTML5 output.

**Tip:** If necessary, the [org.dita.html5.dublin-core](#) plug-in can be installed from the plug-in registry at [dita-ot.org/plugins](#) to add Dublin Core metadata to HTML5.

To install the plug-in, run the following command:

```
dita install org.dita.html5.dublin-core
```

## Legacy style attributes moved to CSS

Remaining inline style attributes were removed from HTML5 code, which prevented custom plug-ins from overriding the presentation of the corresponding elements, including:

- `<del>` and `<u>` elements
- syntax diagrams
- long quote citations
- Boolean states

These changes move the default presentation rules to CSS to allow users to override these styles in custom stylesheets. The output is visually equivalent to the results generated by previous toolkit versions.

**Important:** In publishing environments that do not use the default common CSS files, these styles may need to be implemented in custom stylesheets.

### XSL variable `msgprefix` removed

The `msgprefix` variable (“DOTX”) has been deprecated since DITA-OT 2.3 and is now removed from DITA-OT 3.6. For more information, see [Migrating to release 2.3](#) on page 206.

## Migrating to release 3.5

---

DITA-OT 3.5 includes support for additional input resources, an alternative subcommand syntax for the `dita` command, and an initial preview of features for the latest draft of the upcoming DITA 2.0 standard.

**Note:** This topic provides a summary of changes in DITA-OT 3.5 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.5 Release Notes](#).

### New subcommands

The `dita` command line interface has been refactored to support subcommands for common operations.

**Important:** The new subcommands supersede the deprecated X-Toolkit-style single-hyphen keyword variants (such as `-install`), and the corresponding GNU-style option keywords preceded by two hyphens (such as `--install`).

<code>dita install</code>	Installs or reloads plug-ins (replaces <code>dita --install</code> )
<code>dita plugins</code>	Prints a list of installed plug-ins (replaces <code>dita --plugins</code> )
<code>dita transtypes</code>	Prints a list of installed transformation types, or <i>output formats</i> (replaces <code>dita --transtypes</code> )
<code>dita uninstall</code>	Removes and deletes a plug-in (replaces <code>dita --uninstall</code> )
<code>dita version</code>	Prints version information and exits (replaces <code>dita --version</code> )

**Tip:** The double-hyphen option syntax has been retained for backwards compatibility, so if you use commands like `dita --install` in scripts, they will still work, but you may want to migrate your scripts to the new subcommand syntax.

### Legacy constructs removed

DITA-OT 3.5 no longer includes the following legacy properties, list files, and targets, which were deprecated in previous releases. These constructs were no longer used in recent releases, and have now been removed entirely.

The following Ant targets have been removed from the pre-processing pipeline:

- `mappull` and `mappull-check`, which were used to pull metadata (such as `navtitle`) into the map from referenced topics prior to DITA-OT 2.2 (merged with `move-meta-entries`)
- `conref-check`, deprecated since 2.3
- `coderef`, which was used to resolve code references in input files prior to 2.3 (merged with `topic-fragment`)
- `copy-subsidiary` and `copy-subsidiary-check`, which were used to copy files to the temporary directory prior to 2.1

Recent DITA-OT versions provide alternative mechanisms to achieve the same results, such as the `<ditafileset>` element to select resources in the temporary directory.

Along with the obsolete targets, the following Ant properties have been removed:

- `canditopicfile`

- `canditopicslist`
- `conreffile`
- `conreflist`
- `conreftargetsfile`
- `conreftargetslist`
- `copytosourcefile`
- `copytosourcelist`
- `fullditamapandtopicfile`
- `fullditamapandtopiclist`
- `fullditamapfile`
- `fullditamaplist`
- `fullditatopicfile`
- `fullditatopiclist`
- `hrefditatopicfile`
- `hrefditatopiclist`
- `hreftargetsfile`
- `hreftargetslist`
- `htmlfile`
- `htmllist`
- `imagefile`
- `imagelist`
- `outditafilesfile`
- `outditafileslist`
- `resourceonlyfile`
- `resourceonlylist`
- `subjectschemefile`
- `subjectschemelist`
- `subtargetsfile`
- `subtargetslist`
- `user.input.file.listfile`
- `user.input.file`

The following obsolete list files are no longer generated in the temporary directory:

- `canditopics.list`
- `conref.list`
- `conreftargets.list`
- `copytosource.list`
- `fullditamap.list`
- `fullditamapandtopic.list`
- `fullditatopic.list`
- `hrefditatopic.list`
- `hreftargets.list`
- `html.list`
- `image.list`
- `outditafiles.list`
- `resourceonly.list`
- `subjectscheme.list`
- `subtargets.list`
- `user.input.file.list`
- `usr.input.file.list`

For example, if your plug-in previously used the `fullditatopicfile` to select resources in the temporary directory like this:

```
1 <xslt basedir="${dita.temp.dir}"
2 ..... destdir="${output.dir}"
3 ..... includesfile="${dita.temp.dir}${file.separator}${fullditatopicfile}"
4 ..... style="${args.xml}">
5 .. [...]
6 </xslt>
```

With DITA-OT 2.4 or newer, use the `<ditafileset>` element instead:

```
1 <xslt basedir="${dita.temp.dir}"
2 ..... destdir="${output.dir}"
3 ..... style="${args.xml}">
4 .. <ditafileset format="dita" processingRole="normal" />
5 .. [...]
6 </xslt>
```

If your plug-in previously used the `user.input.file.listfile` to process the start map like this:

```
1 <xslt [...]
2 ..... includesfile="${dita.temp.dir}${file.separator}${user.input.file.listfile}" /
>
```

Use the `<ditafileset>` element as follows:

```
1 <xslt [...]>
2 .. <ditafileset input="true" format="ditamap" />
3 </xslt>
```

## Adjusting output file names

Two new parameters can be used to dynamically adjust the names and locations of output files in transformations that use the map-first pre-processing routine (`preprocess2`).

These parameters can be passed on the command line, or included in a custom plug-in via `<property>` elements in an Ant script as described in [Adjusting file names in map-first pre-processing](#) on page 165.

- Use `result.rewrite-rule.class` to rewrite filenames with a Java class that implements the `org.dita.dost.module.RewriteRule` interface
- Use `result.rewrite-rule.xml` to rewrite via an XSLT stylesheet

## Migrating to release 3.4

---

DITA-OT 3.4 includes an official Docker container image, a separate plug-in for PDF indexing, a new option to skip HTML5 cover pages, and initial support for project files that allow you to define multiple deliverables in advance, and publish them all at once.

**Note:** This topic provides a summary of changes in DITA-OT 3.4 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.4 Release Notes](#).

### New indexing plug-in

DITA-OT 3.4 extracts the PDF indexing code to a separate `org.dita.index` plug-in, and adds a new `depend.org.dita.pdf2.index` extension point that can be used to add custom index processing targets to PDF output.

The built-in index processing has been disabled and deprecated. If you have overridden index processing via the `transform.topic2fo` target in the past, you can set the new `org.dita.index.skip` property to `yes` and re-enable the `transform.topic2fo.index` target with `<feature extension="depend.org.dita.pdf2.index" value="transform.topic2fo.index"/>` in your plug-in configuration.

**Table 5: New plug-ins**

Plug-in	Source code location
org.dita.index	<a href="https://github.com/dita-ot/org.dita.index">https://github.com/dita-ot/org.dita.index</a>

### Legacy plug-ins removed

DITA-OT 3.4 no longer includes the following legacy transformation plug-ins in the default distribution:

**Table 6: Legacy plug-ins**

Plug-in	Source code location
TocJS	<a href="https://github.com/dita-ot/com.sophos.tocjs">https://github.com/dita-ot/com.sophos.tocjs</a>
troff	<a href="https://github.com/dita-ot/org.dita.troff">https://github.com/dita-ot/org.dita.troff</a>

**Note:** If necessary, legacy plug-ins may be re-installed from earlier DITA-OT distributions, but they are no longer actively maintained or supported by the core toolkit committers. The source code is available on GitHub for anyone interested in maintaining the plug-ins for use with future toolkit versions.

To re-install the plug-in(s) from the plug-in registry at [dita-ot.org/plugins](https://dita-ot.org/plugins), run the following command(s):

```
dita --install=com.sophos.tocjs
dita --install=org.dita.troff
```

## Migrating to release 3.3

DITA-OT 3.3 includes new attribute sets for HTML5 customization, support for custom integration processing, rotated table cells in PDF output, and hazard statements in HTML output.

**Note:** This topic provides a summary of changes in DITA-OT 3.3 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.3 Release Notes](#).

### Secure connections to the plug-in registry



**Attention:** To ensure data integrity during the plug-in installation process, Transport Layer Security (TLS) will soon be required to access the plug-in registry. If you are using DITA-OT 3.3, 3.2, or 3.2.1 and are unable to upgrade to the latest version, modify the `registry` key in the `config/configuration.properties` file to switch the URI schema to `https://`, so the entry reads `https://plugins.dita-ot.org/`.

For more information, see [Adding plug-ins via the registry](#) on page 131.

### Base plug-in files moved to `plugins` directory

Various XSLT files and other resources have been moved from the root of the DITA-OT installation directory to the base plug-in directory `plugins/org.dita.base`.



**Attention:** There is no longer an `xsl/` directory in the installation root.



If your plug-ins use the `plugin` URI scheme as recommended in the [Plug-in coding conventions](#) on page 147, this change should not require any modifications to custom plug-in code:

In XSLT, use the `plugin` URI scheme in `<xsl:import>` and `<xsl:include>` to reference files in other plug-ins.

Instead of:

```
<xsl:import href="../../org.dita.base/xsl/common/output-message.xsl" />
```

use:

```
<xsl:import href="plugin:org.dita.base:xsl/common/output-message.xsl" />
```

As with the plug-in directory property in Ant, this allows plug-ins to resolve to the correct directory even when a plug-in moves to a new location. The plug-in is referenced using the syntax `plugin:plugin-id:path/within/plugin/file.xsl`.

## Relocated catalog

Along with the other base plug-in files, the `catalog-dita.xml` file has been moved from the root of the DITA-OT installation directory to `plugins/org.dita.base`. External systems that rely on this catalog should be updated with the new location. Ant scripts and DITA-OT plug-ins should use the `plugin` directory property to refer to the file as `${dita.plugin.org.dita.base.dir}/catalog-dita.xml`. A placeholder with a `<nextCatalog>` entry is provided in the original location for backwards compatibility, but this file may be removed in an upcoming release.

```
<nextCatalog catalog="plugins/org.dita.base/catalog-dita.xml" />
```

**Figure 51: Legacy catalog placeholder content**

## Deprecated properties

The `templates` key in configuration properties has been deprecated in favor of the `<template>` element in `plugin.xml`.

## New attribute sets for HTML5 customization

A series of new attribute sets has been added to the default HTML5 transformation to facilitate customization with additional ARIA roles, attributes, or CSS classes. Attribute sets are provided for:

- `article`
- `banner`
- `footer`
- `main`
- `navigation`
- `toc`

If you have previously copied XSL templates (or template modes) to custom plug-ins only to add classes required by web frameworks such as Bootstrap or Foundation (or your company CSS), you may be able to simplify your customizations by using the new attribute sets instead of overriding the default templates.

## Migrating to release 3.2

---

DITA-OT 3.2 includes new command-line options, support for RELAX NG parsing and validation, preliminary processing for the XDITA authoring format proposed for Lightweight DITA, and a plug-in registry that makes it easier to discover and install new plug-ins.

**Note:** This topic provides a summary of changes in DITA-OT 3.2 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.2 Release Notes](#).

### Deprecated targets

The configuration-jar Ant target used during the plug-in integration process has been deprecated and may be removed in an upcoming release. This was previously used to package additional configuration files and properties into `lib/dost-configuration.jar`, but recent versions of DITA-OT include the `config` directory in the classpath for this purpose, so the configuration JAR is no longer necessary.

### Secure connections to the plug-in registry



**Attention:** To ensure data integrity during the plug-in installation process, Transport Layer Security (TLS) will soon be required to access the plug-in registry. If you are using DITA-OT 3.2 or 3.2.1 and are unable to upgrade to the latest version, modify the `registry` key in the `config/configuration.properties` file to switch the URI schema to `https://`, so the entry reads `https://plugins.dita-ot.org/`.

For more information, see [Adding plug-ins via the registry](#) on page 131.

## Migrating to release 3.1

---

DITA-OT 3.1 includes support for DITA 1.3 SVG domain elements, enhanced `<codeblock>` processing, and incremental improvements to Lightweight DITA processing and PDF output.

**Note:** This topic provides a summary of changes in DITA-OT 3.1 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.1 Release Notes](#).

### Custom if/unless attributes in Ant scripts

Ant scripts for DITA-OT builds now make use of `@if:set` and `@unless:set` attributes in the Ant namespace, which can be used to control whether parameters are passed to XSLT modules. These attributes replace custom implementations of `if` and `unless` logic introduced before Ant had this capability.

If your plug-ins include Ant scripts that use `@if` or `@unless` on `<param>` elements that pass XSLT parameters, add the following namespace attributes to the root project:

- `xmlns:if="ant:if"`
- `xmlns:unless="ant:unless"`

In custom Ant build files and in any files that supply parameters to existing DITA-OT XSLT modules, replace all occurrences of `if="property"` on `<param>` elements with `if:set="property"` (and `unless #` `unless:set` respectively).

```
1 <root xmlns:if="ant:if" xmlns:unless="ant:unless">
2   <param name="antProperty" expression="{antProperty}"
3     if:set="antProperty"/>
4 </root>
```

For more information on passing parameters to existing XSLT steps, see [XSLT-parameter extension points](#) on page 300.

## Deprecated properties

As of DITA-OT 3.1, the Java class path is managed automatically, meaning you do not (and should not) use explicit references to Java class paths in your build scripts. In particular, the old `dost.class.path` property has been deprecated and should not be used. If you are migrating older plug-ins that manage their class path directly, you should remove any explicit class path configuration. If your plug-in was not already using the `dita.conductor.lib.import` extension point to integrate its JAR dependencies you must add it.

The effective DITA-OT class path is the combination of the JAR files in the main `lib/` directory and the plug-in-contributed JARs, which are listed in `config/env.sh`. The `env.sh` file is updated automatically when plug-ins are installed or removed.

The `xml.catalog.files` property has been deprecated and should not be used. Replace any such references with the `xml.catalog.path` instead.

## PDF – Enabling line numbers in codeblocks

The `codeblock.generate-line-number` template mode default has been changed to check for the `show-line-numbers` keyword in the `@outputclass` attribute. Earlier versions of DITA-OT required custom PDF plug-ins to override the template mode to return `true()`.

## Migrating to release 3.0

---

DITA-OT 3.0 adds support for Markdown, normalized DITA output, and the alternative authoring formats proposed for Lightweight DITA. The map-first preprocessing approach provides a modern alternative to the default `preprocess` operation.

**Note:** This topic provides a summary of changes in DITA-OT 3.0 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 3.0 Release Notes](#).

## Upgrade stylesheets to XSLT 2.0

The Saxon project has announced plans to remove XSLT 1.0 support from the Saxon-HE library that ships with DITA-OT:

...we're dropping XSLT 1.0 backwards compatibility mode from Saxon-HE, and hope to eliminate it entirely in due course.

<https://www.xml.com/news/release-saxon-98/>

DITA-OT 3.0 and 3.0.1 included Saxon-HE 9.8.0.5, which rejects XSLT stylesheets that specify `version="1.0"`. Plug-ins with XSLT templates specifying version 1.0 will fail with the message “XSLT 1.0 compatibility mode is not available in this configuration.”

To resolve this issue, change any occurrences of `<xsl:stylesheet version="1.0">` in custom plug-in stylesheets to at least `<xsl:stylesheet version="2.0">`.

**Tip:** DITA-OT 3.0.2 includes Saxon-HE 9.8.0.7, which restores XSLT 1.0 backwards-compatibility mode, but the DITA Open Toolkit project recommends upgrading all stylesheets to XSLT 2.0 to ensure plug-ins remain compatible with future versions of DITA-OT and Saxon-HE.

## Legacy plug-ins removed

DITA-OT 3.0 no longer includes the following legacy transformation plug-ins in the default distribution:

**Table 7: Legacy plug-ins**

Plug-in	Source code location
JavaHelp	<a href="https://github.com/dita-ot/org.dita.javahelp">https://github.com/dita-ot/org.dita.javahelp</a>

**Note:** If necessary, legacy plug-ins may be re-installed from earlier DITA-OT distributions, but they are no longer actively maintained or supported by the core toolkit committers. The source code is available on GitHub for anyone interested in maintaining the plug-ins for use with future toolkit versions.

To re-install the JavaHelp plug-in, run the following command:

```
dita --install=https://github.com/dita-ot/org.dita.javahelp/archive/2.5.zip
```

## Map-first preprocessing

DITA-OT 3.0 provides a map-first preprocessing option as an alternative to the default `preprocess` operation. The method, which was introduced in DITA-OT 2.5 as an experimental feature, has been improved and is ready for use in many production scenarios. Map-first-preprocessing provides the same functionality as the default `preprocess`, but takes a different approach.

The internal extension points that run before or after individual steps in the original `preprocess` pipeline (`preprocess.*.pre/preprocess.*.post`) are not available in the newer map-first preprocessing pipeline (`preprocess2`), which is used in the PDF and HTML Help transformations as of DITA-OT 3.0.

**Tip:** See [Map-first preprocessing](#) on page 264 for information on how to use (or test) map-first preprocessing, or revert to the default `preprocess` target.

## New `ant.import` extension point

A new extension point has been added to make it easier to add new targets to the Ant processing pipeline.

Earlier versions of DITA-OT use the `dita.conductor.target.relative` to call a wrapper file with a dummy task that imports the Ant project file. This approach is still supported for backwards compatibility, but the simpler `ant.import` approach should be used for all new customizations.

**Tip:** See [Adding a new target to the Ant build process](#) on page 153 for details.

# Migrating to release 2.5

---

In DITA-OT 2.5, several frequently-overridden legacy style settings were removed from the default PDF plug-in. A separate plug-in can be used to restore the original settings.

**Note:** This topic provides a summary of changes in DITA-OT 2.5 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 2.5 Release Notes](#).

## Deprecated logging parameters

The `args.debug` and `args.logdir` properties have been deprecated and will be removed in an upcoming version of DITA-OT.

- To enable debug logging, use `dita --debug`.



**Attention:** Debug logging requires additional resources and can slow down the build process, so it should only be enabled when further details are required to diagnose problems.

- To write the log to a file, use `dita --logfile=file` or `ant -l file` and specify the path to the log file.

Unless an absolute path is specified, the value will be interpreted relative to the current directory.

## Default PDF style improvements

Several legacy styles have been modified or removed in the default PDF plug-in `org.dita.pdf2`, including the following:

- In task topics with only a single step, the step is now rendered as a simple block (rather than as a list item without a label).
- Table containers now inherit the initial indentation (`start-indent`) from the parent elements.

- Borders and indentation have been removed from `<example>` elements.
- Links are no longer italicized.
- Titles for related link lists have been standardized to use the `common.title` attribute set (which applies the `sans-serif` font-family) and bold font weight.
- Several remaining occurrences of left/right borders, margins, padding, and text alignment now use the corresponding start/end equivalents to better support right-to-left languages.

### External plug-in for legacy PDF styling

If you have a custom PDF plug-in that explicitly depends on the previous default settings for the aforementioned styles, the `org.dita.pdf2.legacy` plug-in can be used to restore the pre-2.5 styles.

Plug-in	Source code location
<code>org.dita.pdf2.legacy</code>	<a href="https://github.com/dita-ot/org.dita.pdf2.legacy">https://github.com/dita-ot/org.dita.pdf2.legacy</a>

To install the legacy PDF plug-in, run the following command:

```
dita --install=https://github.com/dita-ot/org.dita.pdf2.legacy/archive/2.5.zip
```



**Attention:** Only install the legacy PDF plug-in if you have a custom PDF plug-in that requires the pre-2.5 styles. If your plug-in was designed for DITA-OT 2.4 and does not override these settings, there is no need to install the legacy PDF plug-in.

## Migrating to release 2.4

In DITA-OT 2.4, the HTML5 transformation was refactored as an independent plug-in that no longer depends on the XHTML plug-in.

**Note:** This topic provides a summary of changes in DITA-OT 2.4 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 2.4 Release Notes](#).

### HTML5

- The HTML5 transformation introduced in release 2.0 as part of the XHTML plug-in was moved to a separate HTML5 plug-in in release 2.2, but that version of the HTML5 transformation still depended on the XHTML plug-in for certain common processing.

In release 2.4, all dependencies between HTML5 and XHTML have been removed to ensure that HTML5 processing can be further refactored in the future without affecting XHTML output, or other HTML-based transformations such as `eclipsehelp`, `htmlhelp` or `javaahelp`.

Customizations that extended the previous HTML5 output under the XHTML plug-in (as provided in releases 2.0 and 2.1) or the HTML5 plug-in that shipped with release 2.2 will need to be refactored to build on the new HTML5 plug-in.

- Note title processing was revised in release 2.2 to include a common `note__title` class for note elements of all types. The legacy `{ $type }title` classes (such as `.notetitle`, `.cautiontitle`, `.tiptitle`, etc.) were included in release 2.2 for backwards compatibility, but have now been removed in release 2.4.

Stylesheets that apply formatting overrides to note titles should be revised to replace the deprecated class selectors with the equivalent descendant selectors, for example:

- `.note_note .note__title`
- `.note_caution .note__title`
- `.note_tip .note__title`

### Legacy plug-ins removed

DITA-OT 2.4 no longer includes the following legacy transformation plug-ins in the default distribution:

**Table 8: Legacy plug-ins**

Plug-in	Source code location
DocBook	<a href="https://github.com/dita-ot/org.dita.docbook">https://github.com/dita-ot/org.dita.docbook</a>
Eclipse Content	<a href="https://github.com/dita-ot/org.dita.eclipsecontent">https://github.com/dita-ot/org.dita.eclipsecontent</a>
OpenDocument Text	<a href="https://github.com/dita-ot/org.dita.odt">https://github.com/dita-ot/org.dita.odt</a>
Word RTF	<a href="https://github.com/dita-ot/org.dita.wordrtf">https://github.com/dita-ot/org.dita.wordrtf</a>

**Note:** If necessary, legacy plug-ins may be re-installed from earlier DITA-OT distributions, but they are no longer actively maintained or supported by the core toolkit committers. The source code is available on GitHub for anyone interested in maintaining the plug-ins for use with future toolkit versions.

## Migrating to release 2.3

In DITA-OT 2.3, HTML5 table processing has been refactored to use HTML5 best practices and improved CSS properties. In PDF output, table heads and key columns no longer include shading, and unused localization variables have been deprecated. The template for generated error messages has been updated to use a single `id` variable that contains the entire message ID.

**Note:** This topic provides a summary of changes in DITA-OT 2.3 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 2.3 Release Notes](#).

### HTML5

The HTML5 table processing has been refactored to use valid HTML5 markup, HTML5 best practices, and better CSS properties for styling. BEM-style CSS classes are now generated with the name of the containing element, the name of the attribute, and the value of the attribute.

Common CSS files are now generated using separate modules for each DITA domain, implemented as [Sass](#) partials to better support extensions with CSS frameworks, custom plug-ins and future toolkit versions.

### HTML-based formats

The XSLT `tm-area` named template, which used to toggle rendering of trademark symbols in US English and Asian languages (Japanese, Korean, and both Chinese) but ignore them in all other languages, has been deprecated. Trademark symbols are now rendered uniformly for all languages and the template will be removed in an upcoming release.

In previous releases, short descriptions in `<abstract>` elements were rendered as division elements (`<div>`), rather than paragraphs (`<p>`). Processing has been revised to ensure that short descriptions are consistently rendered as paragraphs, regardless of whether they appear in `<abstract>` elements. Users who have previously implemented custom CSS rules to style `div.shortdesc` like paragraphs should be able to remove these rules.

### PDF

The `antiquewhite` background color has been removed from table heads and key column contents in `<simpletable>` and `<properties>` tables to synchronize presentation with `<choicetable>` and provide a more uniform customization baseline between PDF output and HTML-based formats.

PDF: The I18N Java and XSLT processing code has been merged into single task. This eliminated the need for a `stage3.fo` file in the temporary directory; instead, `topic.fo` is generated directly from `stage2.fo`. If custom plug-ins were implemented to handle `stage3.fo`, they would need to be updated.

Localization variables that are no longer used in PDF processing have been deprecated and will be removed in an upcoming release. PDF customization plug-ins that make use of these variables should plan to refactor accordingly:

- Back button title
- Contents button title
- Forward button title
- Index button title
- Index multiple entries separator
- Main page button title
- Next page button title
- Online help prefix
- Online Help Search Method And
- Online Help Search Method Field
- Online Help Search Method Or
- Previous page button title
- Search button title
- Search Case Sensitive Switch
- Search Excluded Stop Words Message
- Search Highlight Switch
- Search index button title
- Search index field title
- Search index next button title
- Search Search Give No Results Message
- Search Search in Progress Message
- Search Stopped Message
- Search text button title
- Search text field title
- Search title
- Search Whole Words Switch
- Untitled section

**Note:** Most of these variables were never used by the PDF process, and most were not supported (or localized) for any language other than English.

### Deprecated properties and targets

The following Ant properties have been deprecated:

- conreffile

The following preprocessing targets have been deprecated:

- conref-check
- coderef

### Pre-processing

The order of the `chunk` and `move-meta-entries` pre-processing stages has been switched so that `chunk` comes first. This ensures that metadata is properly pulled or pushed into the chunked version of DITA topics.

### Generating error messages

Previously, the XSLT `output-message` named template for generating error messages combined a global `msgprefix` variable and two parameters to determine the actual message ID. This function has been updated to use a single `id` variable that contains the entire message ID.

Plug-ins that make use of the `output-message` function should be updated to use the single `id` variable, as in:

```
1 <xsl:call-template name="output-message">
2   <xsl:with-param name="id" select="'FULLMESSAGENUMBER'"/>
3   <xsl:with-param name="msgparams">optional-message-parameters</xsl:with-
param>
4 </xsl:call-template>
```

The `msgprefix` XSL variable (“DOTX”) has been deprecated and will be removed in an upcoming release.

## Migrating to release 2.2

---

In DITA-OT 2.2, the HTML5 transformation was refactored as its own plug-in and separate plug-ins were created for each of the rendering engine-specific PDF transformations.

**Note:** This topic provides a summary of changes in DITA-OT 2.2 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 2.2 Release Notes](#).

### HTML5

The HTML5 transformation introduced in release 2.0 as part of the XHTML plug-in has been moved to a separate HTML5 plug-in. Customizations that extended the previous HTML5 output under the XHTML plug-in will probably need to be refactored on the new HTML5 plug-in.

Note title processing has been revised to use a common `note__title` class for note elements of all types. The legacy `{ $type }title` classes (such as `.notetitle`, `.cautiontitle`, `.tiptitle`, etc.) are included for backwards compatibility, but are deprecated and will be removed in an upcoming release. Stylesheets that apply formatting overrides to note titles should be revised to replace the deprecated class selectors with the equivalent descendant selectors, for example `.note_note .note__title`, `.note_caution .note__title`, `.note_tip .note__title`, etc.

### PDF

Processing specific to Apache FOP, Antenna House Formatter, and RenderX XEP has been separated into separate plug-ins for each of those rendering engines. Customizations that extended this processing might need to extend the new `org.dita.pdf2.fop`, `org.dita.pdf2.axf`, or `org.dita.pdf2.xep` plug-ins.

PDF customizations that are not specific to a rendering engine can continue to extend the `org.dita.pdf2` plug-in as before.

The default format for page numbers in the table of contents (`<toc>`) was switched to roman to align with `<preface>` and ensure consistent numbering styles for all `<frontmatter>` components in `<bookmap>`. This prevents numbering from switching back and forth between styles in bookmaps where the Preface follows the table of contents. Earlier versions of DITA-OT produced numbering sequences like 1, 2, 3, 4, v, vi, 7, 8 in this use case.

### Deprecated properties

The following Ant properties have been deprecated:

- `user.input.file`, use `user.input.file.uri` instead to specify the input file system path
- `user.input.dir`, use `user.input.dir.uri` instead to specify the input directory system path
- `InputMapDir`, use `InputMapDir.uri` instead to specify the input map directory system path



## Migrating to release 2.1

---

In DITA-OT 2.1, the `insertVariable` template was deprecated for PDF transformations and should be replaced with the `getVariable` template. Various `dita.out.map.*` targets have been deprecated in favor of updated `dita.map.*` equivalents.

**Note:** This topic provides a summary of changes in DITA-OT 2.1 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 2.1 Release Notes](#).

The `customFileUtils` code used to handle input and output in earlier versions of DITA-OT has been replaced with the [Apache Commons IO](#) utilities library.

### Deprecated targets

The following build targets have been deprecated and will be removed in an upcoming release:

- The `help` target that includes a reference to the current DITA-OT version during the build process.

### Preprocessing

The following Ant properties and generated list files have been deprecated:

- `imagefile` property and `image.list` file
- `htmlfile` property and `html.list` file

The following pre-processing targets and extension points have been deprecated:

- The `copy-subsidiary` target used to copy subsidiary files
- The `copy-subsidiary-check` target used to check for subsidiary files
- The `depend.preprocess.copy-subsidiary.pre` extension point used to insert an Ant target before the `copy-subsidiary` step in the pre-processing stage.

A `newdita.parser` extension point has been added to allow plug-ins to contribute a custom parser for DITA files. If a custom DITA parser is defined, the preprocessing routines will use it during the gen-list and debug-filter stages to output DITA XML.

### PDF

The following template has been deprecated:

- `insertVariable`, use `getVariable` instead

Calls to that template will result in warnings in the build log.

To update your plug-in, make the following changes:

```
1 <xsl:call-template name="insertVariablegetVariable">
2   <xsl:with-param name="theVariableIDid" select="var-id"/>
3   <xsl:with-param name="theParametersparams">
4     <del>params</del>
5   </xsl:with-param>
6 </xsl:call-template>
```

### HTML-based output formats

The `keydefs` variable and the following XSL parameters have been deprecated:

- `KEYREF-FILE`
- `displaytext`
- `keys`
- `target`

The following template modes have been deprecated:

- `pull-in-title`
- `common-processing-phrase-within-link`

## XHTML

The `dita.out.map.xhtml.toc` target has been deprecated and should be replaced with the updated `dita.map.xhtml.toc` equivalent.

Keydef processing has been removed from the XHTML rendering code. Keys are now resolved in one preprocessing step, whereas in earlier versions of DITA-OT, the XHTML code returned to the `keydef.xml` file to look up targets for phrase elements and pull in text when needed.

This change affects non-linking elements that can't take `@href` attributes, such as `<ph>`, `<keyword>`, `<cite>`, `<dt>`, `<term>`, and `<indexterm>` (when `$INDEXSHOW` is active).

## HTMLHelp

The `dita.out.map.htmlhelp.*` targets have been deprecated and should be replaced with the updated `dita.map.htmlhelp.*` equivalents:

- `dita.out.map.htmlhelp.hhp`, use `dita.map.htmlhelp.hhp` instead
- `dita.out.map.htmlhelp.hhc`, use `dita.map.htmlhelp.hhc` instead
- `dita.out.map.htmlhelp.hhk`, use `dita.map.htmlhelp.hhk` instead

## JavaHelp

The `dita.out.map.javahelp.*` targets have been deprecated and should be replaced with the updated `dita.map.javahelp.*` equivalents:

- `dita.out.map.javahelp.toc`, use `dita.map.javahelp.toc` instead
- `dita.out.map.javahelp.map`, use `dita.map.javahelp.map` instead
- `dita.out.map.javahelp.set`, use `dita.map.javahelp.set` instead
- `dita.out.map.javahelp.index`, use `dita.map.javahelp.index` instead

## OpenDocument Text

Support for the `args.odt.img.embed` parameter has been removed from OpenDocument Text transformations. The previous default behavior was to embed images as Base64-encoded text, but editors do not use this as a default. Instead, office packages such as LibreOffice will convert embedded images into linked images on opening and saving an ODT file.

## Migrating to release 2.0

---

In DITA-OT 2.0, XSLT templates were converted to XSLT 2.0, variable typing was implemented, and some older templates were refactored or removed. In addition, the `dita` command simplifies distribution of plugins by allowing installation from a URL.

**Note:** This topic provides a summary of changes in DITA-OT 2.0 that may require modifications to custom stylesheets or plug-ins. For more information on changes in this release, see the [DITA-OT 2.0 Release Notes](#).

### All transformations — variable typing

XSLT stylesheets were converted to XSLT 2.0. With that change, variable types were also implemented. Plug-ins that change template variable values will need to make the following changes:

- Declare the same types defined in the default templates with `@as`.
- Ensure that the generated values conform to the declared type.

For example:

```
<xsl:variable name="urltest">
<xsl:variable name="urltest" as="xs:boolean">
```

## All transformations — refactoring

Much of the toolkit code was refactored for release 2.0. Customization changes that were based on a specific template in a previous version of the toolkit might not work because the modified template is no longer used. If this is the case, the changes will need to be reimplemented based on the new XSLT templates.

## HTML5

A new HTML5 transformation type has been added. Customizations that previously modified the XHTML output to generate valid HTML5 should still work, but basing your customization on the new transformation type might simplify the customization and reduce the work required to maintain compatibility with future versions of the toolkit.

**Note:** The HTML5 transformation was refactored with release 2.2. Before basing your customization on the changes in release 2.0, consider whether you might want to move to release 2.2 instead. See [Migrating to release 2.2](#) on page 208.

## Plug-in installation and distribution

Plug-ins can now be installed or uninstalled from a ZIP archive using the new `dita` command. Plug-ins can also be installed from a referenced URL. See [Arguments and options for the dita command](#) on page 83.

# Migrating to release 1.8

---

In DITA-OT 1.8, certain stylesheets were moved to plug-in specific folders and various deprecated Ant properties, XSLT stylesheets, parameters and modes were removed from the XHTML, PDF and ODT transformations.

Stylesheets for the following transformation types have moved to plug-in specific folders:

- eclipsehelp
- htmlhelp
- javahelp
- odt
- xhtml

## Preprocessing

The following deprecated Ant properties have been removed:

- `dita.script.dir`, use `${dita.plugin.id.dir}` instead
- `dita.resource.dir`, use `${dita.plugin.org.dita.base.dir}/resource` instead
- `dita.empty`
- `args.message.file`

## XHTML

XSLT Java extension `ImgUtils` has been removed from stylesheets and been replaced with preprocessing module `ImageMetadataModule`. The old `ImgUtils` Java classes are still included in the build.

## PDF

The following deprecated XSLT stylesheets have been removed:

- `artwork-preprocessor.xsl`

- `otdita2fo_frontend.xml`

The following deprecated XSLT templates have been removed:

- `insertVariable.old`

The following deprecated XSLT modes have been removed:

- `layout-masters-processing`
- `toc-prefix-text`, use `tocPrefix` mode instead
- `toc-topic-text`, use `tocText` mode instead

Link generation has been simplified by removing deprecated arguments in favor of `args.rellinks`. The following deprecated Ant properties have been removed:

- `args.fo.include.rellinks`

The following XSLT parameters have been removed:

- `antArgsIncludeRelatedLinks`
- `disableRelatedLinks`

A call to a named template `pullPrologIndexTerms.end-range` has been added to `processTopic*` templates to handle topic wide index ranges.

## Legacy PDF

The following deprecated XSLT stylesheets have been removed:

- `dita2fo-shell_template.xml`
- `topic2fo-shell.xml`

## ODT

Link generation has been simplified by removing deprecated arguments in favor of `args.rellinks`. The following deprecated Ant properties have been removed:

- `args.odt.include.rellinks`

The following XSLT parameters have been added:

- `include.rellinks`

The following XSLT parameters have been removed:

- `disableRelatedLinks`

## Migrating to release 1.7

---

In DITA-OT 1.7, a new preprocessing step implements flagging for HTML-based output formats. PDF processing was corrected with regard to `shortdesc` handling, and a new XSLT template mode was introduced for HTML TOC processing. Several stylesheets were moved to plug-in specific folders and deprecated properties and XSLT variables were removed.

A new job status file `.job.xml` has been introduced and replaces `dita.list` and `dita.xml.properties` as the normative source for job status. If you have custom processing which modifies the job properties, you should change your code to modify `.job.xml` instead.

Support for the following deprecated properties has been removed:

- `dita.input`
- `dita.input.dirname`
- `dita.extname`

Stylesheets for the following transformation types have moved to plug-in specific folders:

- docbook
- eclipsecontent
- troff
- wordrtf

If custom plug-ins have hard coded paths to these stylesheets, update references to use either `plugin` URIs in `xsl:import` instructions or use `dita.plugin.*` Ant properties.

The integration process has been changed to use strict mode by default. For old plug-ins which are not valid, lax processing mode can still be used.

Plug-ins that use the `MessageUtils` Java class must use `getInstance` method to access the `MessageUtils` instance, as `getMessage` methods have been changed to instance methods.

## Preprocessing

The preprocessing Ant dependency chain has been cleaned up. Tasks no longer depend on the previous task in the default chain, but rather the whole preprocess dependency chain is defined by the `preprocess` task.

## HTML

Core TOC generation has been moved to a separate XSLT stylesheet `xsl/map2htmltoc/map2htmlImpl.xsl` and the new templates use the mode `toc`. Plug-ins which override HTML TOC processing should change the map processing templates to `toc` mode.

## HTML and extended transformation types

Flagging logic has been pulled out of the core X/HTML code and moved to a preprocess step. This significantly simplifies and optimizes the X/HTML code, while making flagging logic available to any other transformation type. The new preprocess step implements all flagging logic; for each active flag, it adds a DITA-OT specific hint into the intermediate topics (implemented as a specialization of the DITA `<foreign>` element). As part of this change, all flagging-related templates in the XHTML code (such as `start-flagit` and `gen-style`) are deprecated.

If you override the X/HTML transforms, you may need to update your overrides to use the new flagging logic. In most cases this just means deleting calls to the deprecated templates; in some cases, the calls can be replaced with 2 lines to process flags in new places. You should compare your override to the updated XHTML code and update as needed. See [XHTML migration for flagging updates in DITA-OT 1.7](#) on page 214 for details.

Plug-ins that provide support for new transforms need to ensure that they properly support the DITA `<foreign>` element, which should be ignored by default; if so, this change will have no immediate impact. Support for flagging new transformation types may be more easily added based on this update, because there is no need to re-implement flagging logic, but this is not required. See [Flagging \(flag-module\)](#) on page 272 for details on how to add flagging support.

## PDF

The following deprecated XSLT variables have been removed:

- `page-margin-left`
- `page-margin-right`

XSLT stylesheets have been split to separate specialization topic code and new `xsl:import` instructions have been added to `topic2fo.xsl`. Plug-ins which define their own shell stylesheet should be revised to import all the required stylesheet modules.

PDF processing used to replace `topic shortdesc` with `map shortdesc`, but this behavior was incorrect and was removed to comply with the DITA specification.

A new `#note-separator` variable string was added to facilitate customization.

## XHTML migration for flagging updates in DITA-OT 1.7

This topic is primarily of interest to developers with XHTML transform overrides written prior to DITA-OT 1.7. Due to significant changes in the flagging process with the 1.7 release, some changes may be needed to make overrides work properly with DITaval-based flagging. The new design is significantly simpler than the old design; in many cases, migration will consist of deleting old code that is no longer needed.

### Which XHTML overrides need to migrate?

If your override does not contain any code related to DITaval flagging, then there is nothing to migrate.

If your builds do not make use of DITaval-based flagging, but call the deprecated flagging templates, then you should override but there is little urgency. You will not see any difference in the output, but those templates will be removed in a future release.

If you do make use of DITaval-based flagging, try using your override with 1.7. Check the elements you override:

1. In some cases flags may be doubled. This will be the case if you call routines such as "start-flagit".
2. In some cases flags may be removed. This will be the case if you call shortcut routines such as "revtext" or "revblock".
3. In other cases, flags may still appear properly, in which case migration is less urgent.

For any override that needs migration, please see the instructions that follow.

### Deprecated templates in DITA-OT 1.7

All of the old DITaval based templates are deprecated in DITA-OT 1.7. If your overrides include any of the following templates, they should be migrated for the new release; in many cases the templates below will not have any effect on your output, but all instances should be migrated.

- The "gen-style" template used to add CSS styling
- The "start-flagit" and "end-flagit" templates used to generate image flags based on property attributes like @audience
- The "start-revflag" and "end-revflag" templates, used to generate images for active revisions
- Shortcut templates that group these templates into a single call, such as:
  - "start-flags-and-rev" and "end-flags-and-rev", used to combine flags and revisions into one call
  - "revblock" and "revtext", both used to output start revisions, element content, and end revisions
  - The modes "outputContentsWithFlags" and "outputContentsWithFlagsAndStyle", both used to combine processing for property/revision flags with content processing
- All other templates that make use of the \$flagrules variable, which is no longer used in any of the DITA-OT 1.7 code
- All templates within flag.xsl that were called from the templates listed above
- Element processing handled with mode="elementname-fmt", such as mode="ul-fmt" for processing unordered lists and mode="section-fmt" for sections.

### What replaces the templates?

The new flagging design described in the preprocess design section now adds literal copies of relevant DITaval elements, along with CSS based flagging information, into the relevant section of the topic. This allows most flags to be processed in document order; in addition, there is never a need to read the DITaval, interpret CSS, or evaluate flagging logic. The htmlflag.xsl file contains a few rules to match and process the start/end flags; in most cases, all code to explicitly process flags can be deleted.

For example, the common logic for most element rules before DITA-OT 1.7 could be boiled down to the following:

1. Match element
2. Create "flagrules" variable by reading DITaval for active flags
3. Output start tag such as <div> or <span>

4. Call "commonattributes" and ID processing
5. Call "gen-style" with \$flagrules, to create DITaval based CSS
6. Call "start-flagit" with \$flagrules, to create start flag images
7. Call "start-revflag" with \$flagrules, to create start revision images
8. Output contents
9. Call "end-revflag" with \$flagrules, to create end revision images
10. Call "end-flagit" with \$flagrules, to create end flag images
11. Output end tag such as </div> or </span>

In DITA-OT 1.7, style and images are typically handled with XSLT fallback processing. This removes virtually all special flag coding from element rules, because flags are already part of the document and processed in document order.

The sample above is reduced to:

1. Match element
2. Output start tag such as <div> or <span>
3. Call "commonattributes" and ID processing
4. Output contents
5. Output end tag such as </div> or </span>

### Migrating "gen-style" named template

Calls to the "gen-style" template should be deleted. There is no need to replace this call for most elements.

The "gen-style" template was designed to read a DITaval file, find active style-based flagging (such as colored or bold text), and add it to the generated @style attribute in HTML.

With DITA-OT 1.7, the style is calculated in the pre-process flagging module. The result is created as @outputclass on a <ditaval-startprop> sub-element. The "commonattributes" template now includes a line to process that value; the result is that for every element that calls "commonattributes", DITaval style will be processed when needed. Because virtually every element includes a call to this common template, there is little chance that your override needs to explicitly process the style. The new line in "commonattributes" that handles the style is:

```
<xsl:apply-templates select="*[contains(@class,' ditaot-d/ditaval-startprop ')]/@outputclass" mode="add-ditaval-style"/>
```

### Migrating "start-flagit", "start-revflag", "end-flagit", and "end-revflag" named templates

Calls to these templates fall into two general groups.

If the flow of your element rule is to create a start tag like <div>, "start-flagit"/"start-revflag", process contents, "end-revflag"/"end-flagit", end tag - you just need to delete the calls to these templates. Flags will be generated simply by processing the element contents in document order.

If the flow of your element rule processes flags outside of the normal document-order. There are generally two reasons this is done. The first case is for elements like <ol>, where flags must appear before the <ol> in order to create valid XHTML. The second is for elements like <section>, where start flags are created, followed by the title or some generated text, element contents, and finally end flags. In either of these cases, support for processing flags in document order is disabled, so they must be explicitly processed out-of-line.

This is done with the following two lines (one for start flag/revision, one for end flag/revision):

- Create starting flag and revision images:

```
<xsl:apply-templates select="*[contains(@class,' ditaot-d/ditaval-startprop ')]" mode="out-of-line"/>
```

- Create ending flag and revision images:

```
<xsl:apply-templates select="*[contains(@class,' ditaot-d/ditaval-endprop
')] " mode="out-of-line"/>
```

For example, the following lines are used in DITA-OT 1.7 to process the `<ul>` element (replacing the 29 lines used in DITA-OT 1.6):

```
1 <xsl:template match="*[contains(@class,' topic/ul ')]">
2   <xsl:apply-templates select="*[contains(@class,' ditaot-d/ditaval-
startprop ')]" mode="out-of-line"/>
3   <xsl:call-template name="setaname"/>
4   <ul>
5     <xsl:call-template name="commonattributes"/>
6     <xsl:apply-templates select="@compact"/>
7     <xsl:call-template name="setid"/>
8     <xsl:apply-templates/>
9   </ul>
10  <xsl:apply-templates select="*[contains(@class,' ditaot-d/ditaval-
endprop ')]" mode="out-of-line"/>
11  <xsl:value-of select="$newline"/>
12 </xsl:template>
```

### Migrating "start-flags-and-rev" and "end-flags-and-rev"

- "start-flags-and-rev" is equivalent to calling "start-flagit" followed by "start-revflag"; it should be migrated as in the previous section.
- "end-flags-and-rev" is equivalent to calling "end-revflag" followed by "end-flagit"; it should be migrated as in the previous section.

### Migrating "revblock" and "revtext"

Calls to these two templates can be replaced with a simple call to `<xsl:apply-templates/>`.

### Migrating modes "outputContentsWithFlags" and "outputContentsWithFlagsAndStyle"

Processing an element with either of these modes can be replaced with a simple call to `<xsl:apply-templates/>`.

### Migrating mode="elementname-fmt"

Prior to DITA-OT 1.7, many elements were processed with the following logic:

```
Match element
  Set variable to determine if revisions are active and $DRAFT is on
  If active
    create division with rev style
    process element with mode="elementname-fmt"
  end division
Else
  process element with mode="elementname-fmt"

Match element with mode="elementname-fmt"
  Process as needed
```

Beginning with DITA-OT 1.7, styling from revisions is handled automatically with the "commonattributes" template. This means there is no need for the extra testing, or the indirection to mode="elementname-fmt". These templates are deprecated, and element processing will move into the main element rule. Overrides that include this indirection may remove it; overrides should also be sure to match the default rule, rather than matching with mode="elementname-fmt".



## Migrating to release 1.6

In DITA-OT 1.6, various demo plug-ins were removed along with many deprecated properties, targets, templates and modes. The PDF2 transformation no longer supports the beta version of DITA from IBM, the "bkinfo" demo plug-in, or `layout-masters.xml` configuration.

Support for the old DITAVAL format (used before OASIS added DITAVAL to the standard in 2007) has been removed.

The demo folder has been deprecated and the following plug-ins have been moved to the `plugins` folder:

old path	new path
<code>demo/ditall</code>	<code>plugins/org.dita.specialization.ditall</code>
<code>demo/dita132</code>	<code>plugins/org.dita.specialization.dita132</code>
<code>demo/eclipsemap</code>	<code>plugins/org.dita.specialization.eclipsemap</code>
<code>demo/fo</code>	<code>plugins/org.dita.pdf2</code>
<code>demo/tocjs</code>	<code>plugins/com.sophos.tocjs</code>
<code>demo/h2d</code>	<code>plugins/h2d</code>
<code>demo/legacypdf</code>	<code>plugins/legacypdf</code>

The remaining plug-ins in the demo folder have been moved to a separate repository at [github.com/dita-ot/ext-plugins](https://github.com/dita-ot/ext-plugins).

The deprecated property `dita.input.valfile` should be replaced with the new argument property `args.filter`.

The `dita-preprocess` target has been removed and dependencies should be replaced with a target sequence `build-init`, `preprocess`.

Support for the `args.message.file` argument has been removed as message configuration has become static configuration.

The `workdir` processing instruction has been deprecated in favor of `workdir-uri`. The only difference between the two processing instructions is that `workdir-uri` contains a URI instead of a system path.

### Preprocessing

The following deprecated templates and modes have been removed in topic pull stylesheets:

- `inherit`
- `get-stuff`
- `verify-type-attribute`
- `classval`
- `getshortdesc`
- `getlinktext`
- `blocktext`
- `figtext`
- `tabletext`
- `litext`
- `fntext`
- `dlentrytext`

- firstclass
- invalid-list-item
- xref

## PDF2

The following deprecated items are no longer supported in the PDF transform:

- Support for the beta version of DITA, available from IBM before the OASIS standard was created in 2005.
- Support for the "bkinfo" demo plug-in, used to support book metadata before OASIS created the BookMap format in 2007.
- Support for `layout-masters.xml` configuration. Plug-ins should use the `createDefaultLayoutMasters` template instead.

The following extension-points have been added:

- `dita.conductor.pdf2.param` to add XSLT parameters to XSL FO transformation.

Custom PDF2 shell stylesheets need to be revised to not include separate IBM and OASIS DITA stylesheets. The `*_1.0.xsl` stylesheets have been removed and their imports must be removed from shell stylesheets.

The following template modes have been deprecated:

- toc-prefix-text
- toc-topic-text

The following named templates have been removed:

- processTopic
- createMiniToc
- processTopicTitle
- createTopicAttrsName
- processConcept
- processReference
- getTitle
- placeNoteContent
- placeImage
- processUnknowType
- insertReferenceTitle
- buildRelationships
- processTask

The main FO generation process now relies on the merging process to rewrite duplicate IDs. The default merging process did this already in previous releases, but now also custom merging processes must fulfill the duplicate ID rewrite requirement.

## XHTML

The following named templates have been deprecated:

- make-index-ref

The following deprecated templates have been removed:

- revblock-deprecated
- revstyle-deprecated
- start-revision-flag-deprecated
- end-revision-flag-deprecated
- concept-links
- task-links

- reference-links
- relinfo-links
- sort-links-by-role
- create-links
- add-linking-attributes
- add-link-target-attribute
- add-user-link-attributes

The removed templates have been replaced by other templates in earlier releases and plug-ins should be changed to use the new templates.

## ODT

The following deprecated templates have been removed:

- revblock-deprecated
- revstyle-deprecated
- start-revision-flag-deprecated
- end-revision-flag-deprecated

The removed templates have been replaced by other templates in earlier releases and plug-ins should be changed to use the new templates.

## Migrating to release 1.5.4

---

DITA-OT 1.5.4 adds new extension points to configure behavior based on file extensions, declare print transformation types and add mappings to the PDF configuration catalog file. PDF output supports mirrored page layout and uses new font family definitions. Support for several new languages was added for PDF and XHTML output.

### Configuration properties file changes

In previous versions, the `lib/configuration.properties` file was generated by the integration process. Integration has been changed to generate `lib/org.dita.dost.platform/plugin.properties` and the role of the old `lib/configuration.properties` has been changed to contain defaults and configuration options, such as default language.

The `dita.plugin.org.dita.*.dir` properties have been changed to point to the DITA-OT base directory.

To allow access to configuration files, the `lib` directory needs to be added to the Java classpath.

### New plug-in extension points

New plug-in extension points have been added allow configuring DITA-OT behavior based on file extensions.

Extension point	Description	Default values
<code>dita.topic.extension</code>	DITA topic	<code>.dita</code> , <code>.xml</code>
<code>dita.map.extensions</code>	DITA map	<code>.ditamap</code>
<code>dita.html.extensions</code>	HTML file	<code>.html</code> , <code>.htm</code>
<code>dita.resource.extensions</code>	Resource file	<code>.pdf</code> , <code>.swf</code>

Both HTML and resource file extensions are used to determine if a file in source is copied to output.

A new plug-in extension point has been added to declare transformation types as print types.

Extension point	Description
<code>dita.transtype.print</code>	Declare transformation type as a print type.

The `print_transtypes` property in `integrator.properties` has been deprecated in favor of `dita.transtype.print`.

### Plugin URI scheme

Support for the plugin URI scheme has been added to XSLT stylesheets. Plug-ins can refer to files in other plug-ins without hard-coding relative paths, for example:

```
<xsl:import href="plugin:org.dita.pdf2:xsl/fo/topic2fo_1.0.xsl"/>
```

### XHTML

Support for the following languages has been added:

- Indonesian
- Kazakh
- Malay

### PDF

Support for mirrored page layout was added. The default is the unmirrored layout. The following XSLT configuration variables have been deprecated:

- `page-margin-left`
- `page-margin-right`

The following variables should be used instead to control page margins:

- `page-margin-outside`
- `page-margin-inside`

The `args.bookmap-order` property has been added to control how front and back matter are processed in bookmaps. The default is to reorder the frontmatter content as in previous releases.

A new extension point has been added to add mappings to the PDF configuration catalog file.

Extension point	Description
<code>org.dita.pdf2.catalog.relative</code>	Configuration catalog includes.

Support for the following languages has been added:

- Finnish
- Hebrew
- Romanian
- Russian
- Swedish

PDF processing no longer copies images or generates XSL FO to output directory. Instead, the temporary directory is used for all temporary files and source images are read directly from source directory. The legacy processing model can be enabled by setting `org.dita.pdf2.use-out-temp` to true in configuration properties; support for the legacy processing model may be removed in future releases.

Support for FrameMaker index syntax has been disabled by default. To enable FrameMaker index syntax, set `org.dita.pdf2.index.frame-markup` to true in configuration properties.

A configuration option has been added to disable internationalization (I18N) font processing and use stylesheet-defined fonts. To disable I18N font processing, set `org.dita.pdf2.i18n.enabled` to `false` in configuration properties.

The XSLT parameters `customizationDir` and `fileProfilePrefix` have been removed in favor of the `customizationDir.url` parameter.

A new shell stylesheet has been added for FOP and other shell stylesheets have also been revised. Plug-ins which have their own shell stylesheets for PDF processing should make sure all required stylesheets are imported.

Font family definitions in stylesheets have been changed from Sans, Serif, and Monospaced to sans-serif, serif, and monospace, respectively. The I18N font processing still uses the old logical names and aliases are used to map the new names to old ones.



---

# Part

# X

---

## Error messages and troubleshooting

---

This section contains information about problems that you might encounter and how to resolve them.





---

# Chapter 41

---

## Logging build information

---

When you run DITA-OT, key information is logged on the screen. This information can also be written to a log file. If you encounter a problem, you can analyze this information to determine the source of the problem and then take action to resolve it.

The logging behavior varies depending on whether you use the `dita` command or Ant to invoke a toolkit build.

### **dita** command

By default, only warning and error messages are written to the screen.

- For more information, enable verbose logging with `dita --verbose`.

Verbose logging prints additional information to the console, including directory settings, effective values for Ant properties, input/output files, and informational messages to assist in troubleshooting.

- To enable debug logging, use `dita --debug`.

Debug logging prints considerably more additional information. The debug log includes all information from the verbose log, plus details on Java classes, additional Ant properties and overrides, preprocessing filters, parameters, and stages, and the complete build sequence.



**Attention:** Debug logging requires additional resources and can slow down the build process, so it should only be enabled when further details are required to diagnose problems.

- To write the log to a file, use `dita --logfile=file` and specify the path to the log file.

Unless an absolute path is specified, the value will be interpreted relative to the current directory.

### **Ant**

By default, status information is written to the screen. If you issue the `-l` parameter, the build runs silently and the information is written to a log file with the name and location that you specified.

### **Using other Ant loggers**

You also can use other Ant loggers; see [Listeners & Loggers](#) in the Ant documentation for more information.

For example, you can use the **AnsiColorLogger** to colorize the messages written on the screen.

## dita command

To use a custom Ant logger with the dita command, add the logger to the ANT\_ARGS environment variable by calling the following command before calling the dita command:

```
export ANT_ARGS="-logger  
org.apache.tools.ant.listener.AnsiColorLogger"
```

Now you will get colorized messages when the dita command runs.

**Tip:** Environment variables can also be set permanently. See [How do I set or change the PATH system variable?](#) for information on how to set the [PATH environment variable](#). You can set the ANT\_ARGS environment variable in the same way.

## Ant

If you prefer to launch DITA-OT directly from Ant, you can also add the logger to the ANT\_ARGS environment variable, as explained above. You can also set the logger with the -logger parameter when calling Ant.

```
ant -logger  
org.apache.tools.ant.listener.AnsiColorLogger
```

## FOP debug logging

In PDF processing with Apache™ FOP, DITA-OT uses the Simple Logging Facade for Java (SLF4J) for better control and formatting of FOP log messages. To reduce noise on the console, all FOP messages are set to the Info level and hidden by default.

To enable debug logging, modify the config/logback.xml file or add your own logback.xml to the classpath with a higher priority to override the default settings. For more information, see the [Logback configuration documentation](#).



**Attention:** Enabling FOP debug logging will dramatically increase the size of generated log files.

---

# Chapter

# 42

---

## Enabling debug mode

---

Debug logging prints considerably more additional information. The debug log includes all information from the verbose log, plus details on Java classes, additional Ant properties and overrides, preprocessing filters, parameters, and stages, and the complete build sequence. The debug log can help you determine the root cause of a problem.

### Procedure

From the command prompt, add the following parameters:

Application	Parameters
<b> dita command</b>	--debug, -debug, or -d
<b>Ant</b>	-v -Dargs.debug=yes

You also can add a `<property>` element to an Ant target in your build file, for example:

```
<property name="args.debug" value="yes"/>
```



**Attention:** Debug logging requires additional resources and can slow down the build process, so it should only be enabled when further details are required to diagnose problems.



---

# Chapter

# 43

---

## DITA-OT error messages

---

This topic lists each error message generated by the toolkit and provides additional information that might be helpful in understanding and resolving the error condition. If your toolkit installation includes custom plug-ins that define additional messages, you can add to this list by rebuilding the DITA-OT documentation.

Each message ID is composed of a message prefix, a message number, and a letter that indicates the severity level (I, W, E, or F).

The toolkit uses the following severity scale:

**Info (I)**

Informational messages highlight the progress of transformation and call attention to conditions of which you should be aware. For example, draft comments are enabled and will be rendered in the output.

**Warning (W)**

The toolkit encountered a problem that should be corrected. Processing will continue, but the output might not be as expected.

**Error (E)**

The toolkit encountered a more severe problem, and the output is affected. For example, some content is missing or invalid, or the content is not rendered in the output.

**Fatal (F)**

The toolkit encountered a severe condition, processing stopped, and no output is generated.

Plug-ins may be used to add additional messages to the toolkit; for more information, see [Rebuilding the DITA-OT documentation](#) on page 135.

Message ID	Severity	Message text	Additional details
DOTA001F	Fatal	"%I" is not a recognized transformation type. Supported transformation types are dita, eclipsehelp, html5, htmlhelp, markdown, markdown_gitbook, markdown_github, pdf, pdf2, xhtml.	Default transformation types that ship with the toolkit include dita, eclipsehelp, html5, htmlhelp, markdown variants, pdf (or pdf2), and xhtml. Additional transformation types may be available if toolkit plug-ins are installed.
DOTA002F	Fatal	Input file is not specified, or is specified using the wrong parameter.	The input parameter was not specified, so there is no DITA or DITAMAP file to transform. Ensure the parameter is set properly; see <a href="#">DITA-OT common parameters (args.input)</a> if you are unsure how to specify the input file.
DOTA003F	Fatal	Cannot find the user specified XSLT stylesheet '%I'.	An alternate stylesheet was specified to run in place of the default XSLT output process, but that stylesheet could not be loaded.

Message ID	Severity	Message text	Additional details
			Please correct the parameter to specify a valid stylesheet.
DOTA004F	Fatal	Invalid DITA topic extension '%I'. Supported values are '.dita' and '.xml'.	This optional parameter is used to set an extension for DITA topic documents in the temporary processing directory. Only "dita", ".dita", "xml", or ".xml" are allowed.
DOTA006W	Warning	Absolute paths on the local file system are not supported for the CSSPATH parameter. Please use a relative path or full URI instead.	If the CSSPATH uses an absolute path, it should be one that can still be accessed after the files are moved to another system (such as <code>http://www.example.org/</code> ). Absolute paths on the local file system will be broken if the content is moved to a new system.
DOTA007E	Error	Cannot find the running-footer file "%I". Please double check the value to ensure it is specified correctly.	The running footer file, which contains content to be added to the bottom of each XHTML output topic, cannot be located or read. This is usually caused by a typo in the parameter value. You should also ensure that the value is not specified with "file:" as a prefix.
DOTA008E	Error	Cannot find the running-header file "%I". Please double check the value to ensure it is specified correctly.	The running header file, which contains content to be added to the top of each XHTML output topic, cannot be located or read. This is usually caused by a typo in the parameter value. You should also ensure that the value is not specified with "file:" as a prefix.
DOTA009E	Error	Cannot find the specified heading file "%I". Please double check the value to ensure it is specified correctly.	The running heading file, which contains content to be added to the <head> section of each HTML output topic, cannot be located or read. This is usually caused by a typo in the parameter value. You should also ensure that the value is not specified with "file:" as a prefix.
DOTA011W	Warning	Argument "%I" is deprecated. This argument is no longer supported in the toolkit.	
DOTA012W	Warning	Argument "%I" is deprecated. Please use the argument "%2" instead.	
DOTA013F	Fatal	Cannot find the specified DITaval "%I".	
DOTA014W	Warning	Attribute @%I is deprecated. Use attribute @%2 instead.	
DOTA066F	Fatal	Cannot find the user specified XSLT stylesheet "%I".	An alternate stylesheet was specified to run in place of the default XSL-FO output process, but that stylesheet could not be

Message ID	Severity	Message text	Additional details
			loaded. Please correct the parameter to specify a valid stylesheet.
DOTA067W	Warning	Ignoring index-see '%I' inside parent index entry '%2' because the parent indexterm contains indexterm children.	According to the OASIS DITA Specification, the <index-see> element should be ignored if the parent <indexterm> contains other <indexterm> children.
DOTA068W	Warning	Ignoring index-see-also '%I' inside parent index entry '%2' because the parent indexterm contains indexterm children.	According to the OASIS DITA Specification, the <index-see-also> element should be ignored if the parent <indexterm> contains other <indexterm> children.
DOTA069F	Fatal	Input file '%I' cannot be located or read. Ensure that file was specified properly and that you have permission to access it.	Please ensure that the input file path and file name were entered correctly.
DOTA069W	Warning	Target "%I" is deprecated. Remove references to this target from your custom XSLT or plugins.	
DOTJ005F	Fatal	Failed to create new instance for '%I'. Please ensure that '%I' exists and that you have permission to access it.	
DOTJ007E	Error	Duplicate condition in filter file for rule '%I'. The first encountered condition will be used.	
DOTJ007I	Info	Duplicate condition in filter file for rule '%I'. The first encountered condition will be used.	
DOTJ007W	Warning	Duplicate condition in filter file for rule '%I'. The first encountered condition will be used.	
DOTJ009E	Error	Cannot overwrite file '%I' with file '%2'. The modified result may not be consumed by the following steps in the transform pipeline. Check to see whether the file is locked by some other application during the transformation process.	The transform was unable to create files properly during the transform; results may not be as expected.
DOTJ012F	Fatal	Failed to parse the input file '%I'.	This message may indicate an invalid input file (such as accidentally specifying a PDF file as input rather than a DITA map file), an input file that uses elements which are not allowed, are not part of a DITA file that

Message ID	Severity	Message text	Additional details
			has errors and cannot be parsed as XML. You could also be using a specialized DITA document type that needs external plug-ins in order to be parsed correctly. The message issued by the XML parser should provide additional information to help diagnose the cause.
DOTJ013E	Error	Failed to parse the referenced file '%I'.	This message may indicate a reference to an invalid file (such as accidentally referencing a PDF or unknown XML file as if it was DITA), a referenced file that uses elements which are not allowed, or a referenced DITA file that has errors and cannot be parsed as XML. You could also be using a specialized DITA document type that needs external plug-ins in order to be parsed correctly. The message issued by the XML parser should provide additional information to help diagnose the cause.
DOTJ014W	Warning	Found an indexterm element with no content. Setting the term to ***.	An empty <indexterm> element was found, and will appear in the index as ***. This index term should be removed from the source.
DOTJ018I	Info	Log file '%I' was generated successfully in directory '%2'. Any messages from the transformation process are available in the log file; additional details about each message are available in the DITA-OT documentation.	
DOTJ020W	Warning	At least one plug-in in '%I' is required by plug-in '%2'. Plug-in '%2' cannot be loaded. Check and see whether all prerequisite plug-ins are installed in toolkit.	This will appear when one installed plug-in requires another in order to function correctly, but the required plug-in is not found. The installed plug-in will be ignored.
DOTJ021E	Error	File '%I' will not generate output because because all content has been filtered out by DITaval "exclude" conditions, or because the file is not valid DITA.	
DOTJ021W	Warning	File '%I' will not generate output since it is invalid or all of its content has been filtered out by the ditaval file. Please check the file '%I' and the ditaval file to see if this is the intended result.	This may appear if filter conditions on the root element of a topic cause the entire topic to be filtered out. To remove this message, you could place any filter conditions on the reference to this file, which will prevent the build from accessing this file.
DOTJ022F	Fatal	Failed to parse the input file '%I' because all of its content has been filtered out. This will	Either the input file or the ditaval file should change, otherwise your build is explicitly excluding all content.



Message ID	Severity	Message text	Additional details
		happen if the input file has filter conditions on the root element, and a ditaval excludes all content based on those conditions.	
DOTJ023E	Error	Failed to get the specified image file '%I', so it will not be included with your output.	Check whether the image exists in the source location or already exists in the output directory.
DOTJ025E	Error	The input to the "topic merge" transform process could not be found. Correct any earlier transform errors and try the build again, or see the DITA-OT documentation for additional causes.	<p>This message should only appear in the following cases:</p> <ul style="list-style-type: none"> <li>Errors earlier in the transform prevented this step of the transform from running; correct any errors and try the build again.</li> <li>An Ant build or plug-in is directly calling the toolkit's topic merge module, and is doing so improperly; in this case the Ant build or plug-in needs to be fixed.</li> <li>In the past, problems have been encountered when calling this module with an absolute path; this should no longer be an issue, but may be fixed in older releases by updating the Ant build or plug-in.</li> </ul>
DOTJ026E	Error	The "topic merge" did not generate any output. Correct any earlier transform errors and try the build again, or see the DITA-OT documentation for additional causes.	This message should only appear if an Ant build or plug-in is directly calling the toolkit's topic merge module, or if earlier errors resulted in problems with some of the content. If the topic merge module is called correctly, then this indicates a program error that should be reported to the DITA-OT development team via the <a href="#">GitHub issues tracker</a> .
DOTJ028E	Error	No format attribute was found on a reference to file '%I', which does not appear to be a DITA file. If this is not a DITA file, set the format attribute to an appropriate value, otherwise set the format attribute to "dita".	When referencing a non-DITA file, the format attribute should indicate the type of file referenced (such as "html" for HTML topics or "pdf" for PDF files). Otherwise, the transform may attempt to parse the referenced document as a DITA topic.
DOTJ029I	Info	No 'domains' attribute was found for element '<%I>'. This generally indicates that your DTD or Schema was not developed properly according to the DITA specification.	The domains attribute is used in specialized DITA documents to help determine which domain elements are legal. This message will only appear if a DITA specialization was not defined properly.
DOTJ030I	Info	No 'class' attribute for was found for element '<%I>'. The element will be processed as an unknown or non-DITA element.	All specialized DITA elements must define a class attribute to provide ancestry information. This message will only appear if a specialized DITA element did not define a class attribute, or if non-DITA elements are included in a DITA context.

Message ID	Severity	Message text	Additional details
DOTJ031I	Info	No specified rule for '%I' was found in the ditaval file. This value will use the default action, or a parent prop action if specified. To remove this message, you can specify a rule for '%I' in the ditaval file.	This informational message is intended to help you catch filter conditions that may have been specified improperly; if the value is correct, no action is needed.
DOTJ033E	Error	No valid content is found in topicref '%I' during chunk processing. Please specify an existing and valid topic for the topicref.	
DOTJ034F	Fatal	Failed to parse the input file '%I' (the content of the file is not valid). If the input file '%I' does not have a DOCTYPE declaration, please make sure that all class attributes are present in the file.	DITA processing is based on class attributes defined for every element. Usually these are defaulted in the DTD or Schema; if no DTD or Schema is used, the class attributes must be explicitly included in the map or topic.
DOTJ035F	Fatal	The file "%I" is outside the scope of the input dita/map directory. If you want to lower the severity level, please use the Ant parameter 'outer.control', and set the value to "warn" or "quiet". Otherwise, move the referenced file "%I" into the input dita/map directory.	This will appear when a topic is outside the scope of the map; for example, if the main input map references ". . /other-directory/some.dita". The result would cause an output file to be created outside of the output directory. See <a href="#">DITA-OT common parameters (outer.control and generate.copy.outer)</a> for details.
DOTJ036W	Warning	The file "%I" is outside the scope of the input dita/map directory.	This will appear when a topic is outside the scope of the map; for example, if the main input map references ". . /other-directory/some.dita". The result would cause an output file to be created outside of the output directory. If you do not want to see the warning message, please use the Ant parameter 'outer.control', and set the value to "quiet". Otherwise, move the referenced file into the input dita/map directory. See <a href="#">DITA-OT common parameters (outer.control and generate.copy.outer)</a> for details.
DOTJ037W	Warning	The XML schema and DTD validation function of the parser is turned off. Please make sure the input is normalized DITA with class attributes included, otherwise it will not be processed correctly.	DITA processing is based on class attributes defined for every element. Usually these are defaulted in the DTD or Schema; if validation against the DTD or Schema is turned off, the class attributes must be explicitly included in the map or topic.
DOTJ038E	Error	The tag "%I" is specialized from unrecognized metadata. Please make sure that tag "%I"	This appears to indicate an error in creating specialized metadata elements. Please verify that the document type you are

Message ID	Severity	Message text	Additional details
		is specialized from an existing metadata tag in the core DITA vocabulary.	using is complete and complies with DITA Specialization rules.
DOTJ039E	Error	There is no target specified for conref push action "pushafter". Please add <elementname conref="pushtarget" conaction="mark"> before current element.	Please see the topic on <a href="#">Conref Push</a> in the DITA specification for details on expected syntax for this function.
DOTJ040E	Error	An element uses the attribute conaction="replace", but a conref attribute is not found in the expected location.	Please see the topic on <a href="#">Conref Push</a> in the DITA specification for details on expected syntax for this function.
DOTJ041E	Error	The attribute conref="%I" uses invalid syntax. The value should contain '#' followed by a topic or map ID, optionally followed by '/' elemID' for a sub-topic element.	The conref attribute must be a URI reference to a DITA element. Please see the topic on <a href="#">URI-based addressing</a> in the DITA specification for details on the expected syntax.
DOTJ042E	Error	Two elements both use conref push to replace the target "%I". Please delete one of the duplicate "replace" actions.	The conref push function was used to replace a single element with two or more alternatives. Only one element may directly replace another using conref push. See <a href="#">Conref Push</a> in the DITA specification for more information about the conref push "replace" function.
DOTJ043W	Warning	The conref push function is trying to replace an element that does not exist (element "%I" in file "%2").	The target for a conref push action does not exist; please make sure that the syntax is correct and that the target exists. See the topic on <a href="#">URI-based addressing</a> in the DITA specification for details on the expected syntax. If the syntax is correct, it is possible that the target was filtered out of your build using a DITaval file.
DOTJ044W	Warning	There is a redundant conref action "pushbefore". Please make sure that "mark" and "pushbefore" occur in pairs.	Please see the topic on <a href="#">Conref Push</a> in the DITA specification for details on expected syntax for this function.
DOTJ045I	Info	The key "%I" is defined more than once in the same map file.	This informational message is intended to help you catch duplicate key definitions; if the keys are defined as expected, no action is needed.
DOTJ046E	Error	Conkeyref="%I" can not be resolved because it does not contain a key or the key is not defined. The build will use the conref attribute for fallback, if one exists.	See <a href="#">the conkeyref definition</a> for details on expected syntax and usage.
DOTJ047I	Info	Unable to find key definition for key reference "%I" in root scope.	This message is intended to help you locate incorrectly specified keys; if the key was

Message ID	Severity	Message text	Additional details
		The href attribute may be used as fallback if it exists	specified correctly, this message may be ignored.
DOTJ048I	Info	Unable to find key definition for key reference "%1" in scope "%2". The href attribute may be used as fallback if it exists	
DOTJ049W	Warning	The attribute value %1="%3" on element "%2" does not comply with the specified subject scheme. According to the subject scheme map, the following values are valid for the %1 attribute: %4	A DITA Subject Scheme map was used to limit values that are available to the specified attribute. Please correct the attribute so that it uses one of the allowed values.
DOTJ050W	Warning	Found an <index-see> or <index-see-also> reference to the term '%1', but that term is not defined in the index.	The Eclipse index will contain a value such as "See also otherEntry", but otherEntry does not exist in this index. The index reference will be broken unless this plug-in is <i>always</i> loaded into Eclipse with another plug-in that defines otherEntry as an index term.
DOTJ051E	Error	Unable to load target for coderef "%1".	<p>The target for a coderef element, which specifies an external text-based file, could not be located or loaded. Please verify that the reference is correct.</p> <p>Note that for security reasons, references to code samples outside of the scope of the map directory are not supported by default, as this could allow a reference to access and display any restricted or hidden file on the system. If you are certain that the path is valid and the file should be loaded, the current workaround is to set a parameter to allow these references. See <a href="#">DITA-OT common parameters (outer.control and generate.copy.outer)</a> for details.</p>
DOTJ052E	Error	Code reference charset "%1" not supported. See the DITA-OT documentation for supported charset values on the format attribute.	DITA-OT supports a special syntax on coderef elements to specify the character set of the target document. See <a href="#">Extended codeblock processing</a> on page 286 for details on the expected syntax.
DOTJ053W	Warning	Input file '%1' is not valid DITA file name. Please check '%1' to see if it is correct. The extensions ".dita" or ".xml" are supported for DITA topics.	By default, DITA-OT supports the extensions "dita" and "xml" for DITA topics, as mandated by the DITA specification. Please verify that your topics use one of these extensions, or configure the toolkit to allow additional extensions.
DOTJ054E	Error	Unable to parse invalid %1 attribute value "%2"	This message indicates that the @href value specified in %1 does not use proper URI syntax. This may occur when @href includes characters that should be escaped (such as the space character, which should

Message ID	Severity	Message text	Additional details
			be %20 when in a URI). In strict processing mode this will cause a build failure; in other processing modes the build will continue using the value in %2.
DOTJ055E	Error	Invalid key name "%I".	
DOTJ056E	Error	Invalid xml:lang "%I".	
DOTJ057E	Error	The id attribute value "%I" is not unique within the topic that contains it.	
DOTJ058E	Error	Both %I and %2 attributes defined. A single element may not contain both generalized and specialized values for the same attribute.	
DOTJ059E	Error	Invalid key scope name "%I".	
DOTJ060W	Warning	Key "%I" was used in conkeyref but is not bound to a DITA topic or map. Cannot resolve conkeyref value "%2" as a valid conref reference.	
DOTJ061E	Error	Topic reference target is a DITA map but format attribute has not been set. Set format attribute value to "ditamap".	
DOTJ062E	Error	Invalid %I attribute value "%2".	
DOTJ063E	Error	The cols attribute is "%I" but number of colspec elements was %2.	
DOTJ064W	Warning	Chunk attribute uses both "to-content" and "by-topic" that conflict with each other. Ignoring "by-topic" token.	
DOTJ065I	Info	Branch filter generated topic %I used more than once. Renaming %I to %2.	
DOTJ066E	Error	No id attribute on topic type element %I. Using generated id %2.	
DOTJ067E	Error	No id attribute on topic type element %I.	
DOTJ068E	Error	Conref action "mark" without conref target.	A conref "mark" action has been used to mark a target element without a corresponding content reference target. This may occur when the order of the "mark" element and the pushed element is reversed.

Message ID	Severity	Message text	Additional details
DOTJ069E	Error	Circular key definition <i>%I</i> .	<p>A circular reference was found in key definitions: a series of key references where the last key references the first.</p> <p>This may occur if a <code>&lt;topicref&gt;</code> element contains both a key name in the <code>@keys</code> attribute and a reference to the same key in the <code>@keyref</code> attribute, or if a <code>@keyref</code> attribute points to a key that refers back to the referencing element.</p> <p>To resolve this issue, change the target of the <code>@keyref</code> so the key is defined by pointing to a resource other than itself.</p>
DOTJ070I	Info	Invalid 'class' attribute ' <i>%I</i> ' for was found for element ' <i>&lt;%2&gt;</i> '. The element will be processed as an unknown or non-DITA element.	<p>When a <code>@class</code> attribute does not use the expected syntax, this usually indicates that <code>@class</code> has been explicitly set on a DITA element. The attribute should be removed from the document so that the expected default value can be automatically used.</p> <p>If this is a non-DITA element, it needs to be placed inside a <code>&lt;foreign&gt;</code> element so that is not validated against DITA rules.</p>
DOTJ071E	Error	Cannot find the specified DITaval <i>%I</i> '.	Ensure that the DITaval file exists. If more than one DITaval file is specified, ensure that the paths are delimited using the file path separator character appropriate for your operating system (semicolon ';' on Windows, or colon ':' on macOS or Linux).
DOTJ072E	Error	Email link without correct 'format' attribute. Using 'format' attribute value 'email'.	
DOTJ073E	Error	Email link without correct 'scope' attribute. Using 'scope' attribute value 'external'.	
DOTJ074W	Warning	Rev attribute cannot be used with prop filter.	
DOTJ075W	Warning	Absolute link ' <i>%I</i> ' without correct 'scope' attribute. Using 'scope' attribute value 'external'.	
DOTJ076W	Warning	Absolute link ' <i>%I</i> ' without correct 'scope' attribute.	
DOTJ077F	Fatal	Invalid action attribute ' <i>%I</i> ' on DITaval property.	
DOTJ078F	Fatal	Input file ' <i>%I</i> ' could not be loaded. Ensure that grammar files for this document type are referenced and installed properly.	

Message ID	Severity	Message text	Additional details
DOTJ079E	Error	File '%I' could not be loaded. Ensure that grammar files for this document type are referenced and installed properly.	
DOTJ080W	Warning	Integrator configuration '%I' has been deprecated. Use plugin configuration '%I' instead.	
DOTJ081W	Warning	Ignoring empty conref attribute conref="".	
DOTJ082E	Error	Processing table cell failed.	
DOTJ083E	Error	The resource referenced as %I is capitalized differently on disk	
DOTJ085E	Error	The '%I' parameter cannot be set with 'param' in project files. Use '%2' instead.	
DOTX001W	Warning	No string named '%I' was found for language '%2'. Using the default language '%3'. Add a mapping between default language and desired language for the string '%I'.	This build uses generated text, such as the phrase "Related information" (which is generated above many link groups). The toolkit was unable to locate the string %I for your specified language, so the string will appear in the default language. This generally indicates that the toolkit's strings need to be updated to support your language, or that your language setting is incorrect.
DOTX002W	Warning	The title element or attribute in the ditamap is required for Eclipse output.	The Eclipse help system requires a title in the project files generated from your map. Please add a title to your input map to get valid Eclipse help output.
DOTX003I	Info	The anchorref attribute should either reference another dita map or an Eclipse XML TOC file. The value '%I' does not appear to reference either.	Eclipse uses anchor references to connect with other TOC files. For this to work in content generated from a DITA map, the anchorref element must reference either an existing Eclipse TOC XML file, or another DITA map (which will presumably also be converted to an Eclipse TOC).
DOTX004I	Info	Found a navref element that does not reference anything. The navref element should either reference another dita map or an Eclipse XML file.	Eclipse builds use DITA's <navref> element to pull in other Eclipse TOC files. The build found a <navref> element that does not reference any other file; the element will be ignored.
DOTX005E	Error	Unable to find navigation title for reference to '%I'. The build will use '%I' as the title in the Eclipse Table of Contents.	To remove this message, provide a navigation title for the referenced object in the map or topic, or ensure that you are referencing a valid local DITA target.
DOTX006E	Error	Unknown file extension in href="%I". References to non-DITA resources should set the format attribute to match the	Set the format attribute to identify the format of the file. If the reference is to a DITA document, ensure that the document uses

Message ID	Severity	Message text	Additional details
		resource (for example, 'txt', 'pdf', or 'html').	a valid DITA extension (default supported extensions are "dita" and "xml").
DOTX007I	Info	Only DITA topics, HTML files, and images may be included in your compiled CHM file. The reference to "%I" will be ignored. To remove this message, you can set the toc="no" or processing-role="resource-only" attribute on your topicref.	The HTML Help compiler will only include some types of information in the compiled CHM file; the current reference will not be included.
DOTX008E	Error	File '%I' does not exist or cannot be loaded.	Ensure that the file exists and can be read. Note that the name of the file in this message may have been changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.
DOTX008W	Warning	File '%I' cannot be loaded, and no navigation title is specified for the table of contents.	To fix the table of contents, specify a navigation title in your map or ensure that the referenced file is local and can be accessed. Note that the name of the file in this message may have been changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.
DOTX009W	Warning	Could not retrieve a title from '%I'. Using '%2' instead.	No title was found in the specified topic, so the table of contents will use the indicated fallback value for this topic.
DOTX010E	Error	Unable to find target for conref="%I".	<p>The conref attribute must be a URI reference to an existing DITA element. Please see the topic on <a href="#">URI-based addressing</a> in the DITA specification for details on the expected syntax. Note that the name of the file in this message may have been changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.</p> <p>If the target element exists in your source file, check to make sure it is not filtered out of the build with a DITaval file (which will remove the target before conref processing runs).</p>
DOTX011W	Warning	There is more than one possible target for the reference conref="%I". Only the first will	When pulling content with a conref attribute, you may only pull from a single element, but the target ID appears twice in the referenced topic. Note that the name of the file in this



Message ID	Severity	Message text	Additional details
		be used. Remove the duplicate id in the referenced file.	message may have be changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.
DOTX012W	Warning	When you conref another topic or an item in another topic, the domains attribute of the target topic must be equal to or a subset of the current topic's domains attribute. Put your target under an appropriate domain. You can see the messages guide for more help.	This message is deprecated and should no longer appear in any logs.
DOTX013E	Error	A element with attribute conref="%I" indirectly includes itself, which results in an infinite loop.	This may appear if (for example) you have a <ph> element that references another phrase, but that phrase itself contains a reference to the original. This will result in an infinite loop. The toolkit will stop following the conref trail when this is detected; you will need to correct the reference in your source files. Note that the name of the file in this message may have be changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.
DOTX014E	Error	The attribute conref="%I" uses invalid syntax. Conref references to a map element should contain '#' followed by an ID, such as mymap.ditamap#mytopicrefid.	The conref attribute must be a URI reference to a DITA element. Please see the topic on <a href="#">URI-based addressing</a> in the DITA specification for details on the expected syntax.
DOTX015E	Error	The attribute conref="%I" uses invalid syntax. The value should contain '#' followed by a topic or map ID, optionally followed by '/' elemID' for a sub-topic element.	The conref attribute must be a URI reference to a DITA element. Please see the topic on <a href="#">URI-based addressing</a> in the DITA specification for details on the expected syntax. Note that the name of the file in this message may have be changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.
DOTX016W	Warning	A reference to "%2" appears to reference a DITA document, but the format attribute has inherited a value of "%I". The document will not be processed as DITA.	This warning is intended to catch instances where a non-DITA format setting unexpectedly cascades to a DITA topic, which will prevent the topic from being processed. To remove this message, set the format attribute directly on the indicated

Message ID	Severity	Message text	Additional details
			reference. Note that the name of the file in this message may have been changed to use a standard dita topic file extension ('.dita' or '.xml'), instead of the original extension used by the file; it may also include a path to the temporary directory rather than to the original.
DOTX017E	Error	Found a link or cross reference with an empty href attribute (href=""). Remove the empty href attribute or provide a value.	Found a value such as <xref href="">link text</xref>. The empty href attribute is not serving a purpose and has caused problems with some tools in the past; you should remove the attribute entirely or specify a value.
DOTX018I	Info	The type attribute on a topicref was set to '%I', but the topicref references a more specific '%2' topic. Note that the type attribute cascades in maps, so the value '%I' may come from an ancestor topicref.	The type attribute in DITA is intended to describe the type of the target; for example, a reference to a concept topic may use type="concept". Generally, this attribute is optional, and the DITA-OT build will automatically determine the value during processing. In this case, the type attribute lists a more general type than what is actually found. This is not an error but may result in unexpected sorting for links to this topic.
DOTX019W	Warning	The type attribute on a topicref was set to '%I', but the topicref references a '%2' topic. This may cause your links to sort incorrectly in the output. Note that the type attribute cascades in maps, so the value '%I' may come from an ancestor topicref.	The type attribute in DITA is intended to describe the type of the target; for example, a reference to a concept topic may use type="concept". Generally, this attribute is optional, and the DITA-OT build will automatically determine the value during processing. In this case, the specified type value does not match the target, which may cause your links to sort inappropriately.
DOTX020E	Error	Missing navtitle attribute or element for peer topic "%I". References must provide a local navigation title when the target is not a local DITA resource.	DITA-OT is only able to dynamically retrieve titles when the target is a local (not peer or external) DITA resource.
DOTX021E	Error	Missing navtitle attribute or element for non-DITA resource "%I". References must provide a local navigation title when the target is not a local DITA resource.	DITA-OT is only able to dynamically retrieve titles when the target is a local DITA resource.
DOTX022W	Warning	Unable to retrieve navtitle from target: '%I'. Using linktext (specified in topicmeta) as the navigation title.	The build was unable to get a title from the referenced topic; instead, a navigation title will be created based on the specified <linktext> element inside of <topicmeta>.

Message ID	Severity	Message text	Additional details
DOTX023W	Warning	Unable to retrieve navtitle from target: '%I'.	If the target is a local DITA topic, ensure the reference is correct and the topic is available. Otherwise, provide a navigation title, and ensure the scope and format attributes are set appropriately.
DOTX024E	Error	Missing linktext and navtitle for peer topic "%I". References must provide a local navigation title when the target is not a local DITA resource.	DITA-OT is only able to dynamically retrieve titles and link text when the target is a local (not peer or external) DITA resource.
DOTX025E	Error	Missing linktext and navtitle for non-DITA resource "%I". References must provide a local navigation title when the target is not a local DITA resource.	DITA-OT is only able to dynamically retrieve titles when the target is a local DITA resource.
DOTX026W	Warning	Unable to retrieve linktext from target: '%I'. Using navigation title as fallback.	The referenc to this document did not specify any link text for generated map-based links; the navigation title will be used as fallback.
DOTX027W	Warning	Unable to retrieve linktext from target: '%I'.	The referenced file did not specify any link text for generated map-based links, and no fallback text could be located. Any links generated from this reference will have incorrect link text.
DOTX028E	Error	Link or cross reference must contain a valid href or keyref attribute; no link target is specified.	The link or cross reference has no target specified and will not generate a link.
DOTX029I	Info	The type attribute on a %I element was set to %3, but the reference is to a more specific %4 %2. This may cause your links to sort incorrectly in the output.	The type attribute in DITA is intended to describe the type of the target; for example, a reference to a concept topic may use type="concept". Generally, this attribute is optional, and the DITA-OT build will automatically determine the value during processing. In this case, the type attribute lists a more general type than what is actually found. This is not an error but may result in unexpected sorting for links to this topic.
DOTX030W	Warning	The type attribute on a %I element was set to %3, but the reference is to a %4 %2. This may cause your links to sort incorrectly in the output.	The type attribute in DITA is intended to describe the type of the target; for example, a reference to a concept topic may use type="concept". Generally, this attribute is optional, and the DITA-OT build will automatically determine the value during processing. In this case, the specified type value does not match the target, which may cause your links to sort inappropriately.
DOTX031E	Error	The file %I is not available to resolve link information.	The build attempted to access the specified file in order to retrieve a title or short

Message ID	Severity	Message text	Additional details
			description, but the file could not be found. If the file exists, it is possible that a DITaval file was used to remove the file's contents from the build. Be aware that the path information above may not match the link in your topic.
DOTX032E	Error	Unable to retrieve link text from target: '%I'. If the target is not accessible at build time, or does not have a title, provide the link text inside the reference.	When a link or cross reference does not have content, the build will attempt to pull the target's title for use as link text. If the target is unavailable, be sure to set the scope attribute to an appropriate value. If the target does not have a title (such as when linking to a paragraph), be sure to provide link text inside the cross reference.
DOTX033E	Error	Unable to generate link text for a cross reference to a list item: '%I'	An <xref> element specifies type="li", which indicates a link to a list item, but the item number could not be determined to use as link text. Please specify link text inside the reference, or ensure that you are referencing an available list item.
DOTX034E	Error	Unable to generate link text for a cross reference to an undereed list item: '%I'	The cross reference goes to a list item in an unordered list. The process could not automatically generate link text because the list item is not numbered. Please provide link text within the cross reference.
DOTX035E	Error	Unable to generate the correct number for a cross reference to a footnote: '%I'	An <xref> element specifies type="fn", which indicates a link to a footnote, but the footnote number could not be determined to use as link text. Please specify link text inside the reference, or ensure that you are referencing an available footnote.
DOTX036E	Error	Unable to generate link text for a cross reference to a dentry (the dentry or term could not be found): '%I'	An <xref> element specifies type="dentry", which indicates a link to a definition list entry, but the term could not be located to use as link text. Please specify link text inside the reference, or ensure that you are referencing an available definition list entry
DOTX037W	Warning	No title found for this document; using "****" as HTML page title.	No title was found for the current document, so the HTML output file will set the <title> to "****". This value generally appears in the title bar at the top of a browser.
DOTX038I	Info	The longdesc attribute on tag '%I' will be ignored. Accessibility for object elements needs to be handled another way.	The <object> element in HTML does not support using longdesc for accessibility. To make the object accessible, you may need to add text before or after the element. You may also be able to handle it with a <param> element inside the object.

Message ID	Severity	Message text	Additional details
DOTX039W	Warning	Required cleanup area found. To remove this message and hide the content, build your content without using the DRAFT parameter.	This message is generated when creating draft output in order to help you locate all topics that need to be cleaned up; the cleanup items will appear in your output with styling that makes it stand out. The content will be hidden when the draft parameter is not active.
DOTX040I	Info	Draft comment area found. To remove this message and hide the comments, build your content without using the DRAFT parameter.	This message is generated when creating draft output in order to help you locate all topics that have draft comments. Each comment will appear in your HTML output; the comments will be hidden when the draft parameter is not active.
DOTX041W	Warning	Found more than one title element in a %I element. Using the first one for the %I's title.	Because of the way XML and DITA are defined, it is generally not possible to prohibit adding a second title to a section during editing (or to force that title to come first). However, the DITA specification states that only one title should be used in a section. When multiple titles are found, only the first one will appear in the output.
DOTX042I	Info	DITaval based flagging is not currently supported for inline phrases in XHTML; ignoring flag value on '%I' attribute.	If it is important to flag this piece of information, try placing a flag on the block element that contains your phrase. If you just want to have an image next to the phrase, you may place an image directly into the document.
DOTX043I	Info	The link to '%I' may appear more than once in '%2'.	DITA-OT is able to remove duplicate links in most cases. However, if two links to the same resource use different attributes or link text, it is possible for them to appear together. For example, if the same link shows up with role="next" and again with no specified role, it may show up as both the "Next topic" link and as a related link. Note that links generated from a <reltable> in a DITA map will have the role attribute set to "friend".
DOTX044E	Error	The area element in an image map does not specify a link target. Please add an xref element with a link target to the area element.	The <area> element in an image map must provide a link target for the specified area. Please add an <xref> element as a child of <area> and ensure that it specifies a link target.
DOTX045W	Warning	The area element in an image map should specify link text for greater accessibility. Link text should be specified directly when the target is not a local DITA resource.	Cross reference text inside the <area> element is used to provide accessibility for screen readers that can identify different areas of an image map. If text cannot be retrieved automatically by referencing a DITA element, it should be specified directly in the cross reference.

Message ID	Severity	Message text	Additional details
DOTX046W	Warning	Area shape should be: default, rect, circle, poly, or blank (no value). The value '%I' is not recognized.	The specified value was passed as-is through to the <area> element in the HTML.
DOTX047W	Warning	Area coordinates are blank. Coordinate points for the shape need to be specified.	The area element is intended to define a region in an image map; coordinates must be specified in order to define that region.
DOTX048I	Info	In order to include peer or external topic '%I' in your help file, you may need to recompile the CHM file after making the file available.	The build will not look for peer or external topics before compiling your CHM file, so they may not be included. If you are referencing an actual HTML file that will not be available, it cannot be included in the project, and you should set the toc attribute to "no" on your topicref element. Otherwise, check to be sure your HTML file was included in the CHM; if it was not, you will need to place it in the correct location with your other output files and recompile.
DOTX049I	Info	References to non-dita files will be ignored by the PDF, ODT, and RTF output transforms.	The PDF, ODT, and RTF output processes cannot automatically convert non-DITA content into DITA in order to merge it with the rest of your content. The referenced items are ignored.
DOTX050W	Warning	Default id "org.sample.help.doc" is used for Eclipse plug-in. If you want to use your own plug-in id, please specify it using the id attribute on your map.	Eclipse requires that an ID be specified when creating an Eclipse Help project; the toolkit expects to locate that ID on the root element of your input map.
DOTX052W	Warning	No string named '%I' was found when creating generated text; using the value '%I' in your output file.	The toolkit is attempting to add generated text, such as the string "Related information" that appears above links. The requested string could not be found in any language. Your output may contain a meaningful string, or it may contain a code that was intended to map to a string. This likely indicates an error in a plug-in or XSL override; either the string was requested incorrectly, or you will need to provide a mapping for the string in all of the languages you require.
DOTX053E	Error	A element that references another map indirectly includes itself, which results in an infinite loop. The original map reference is to '%I'.	This will occur if a map references another map, and then that second map (or another further nested map) references the original map. The result is an infinite nesting of maps; please correct the chain of map references to remove circular reference.
DOTX054W	Warning	Conflict text style is applied on the current element based on DITAVAL flagging rules. Please check ditaval and dita source	This will occur when a DITAVAL file contains multiple styling rules that apply to the same element.

Message ID	Severity	Message text	Additional details
		to make sure there is no style conflict on the element which needs to be flagged.	
DOTX055W	Warning	Customized stylesheet uses deprecated template "flagit". Conditional processing is no longer supported using this template. Please update your stylesheet to use template "start-flagit" instead of deprecated template "flagit".	The "flagit" named template was deprecated in DITA-OT version 1.4, when the OASIS standard formalized the DITaval syntax. The template is removed in DITA-OT 1.6. Stylesheets that used this template need to be updated.
DOTX056W	Warning	The file '%I' is not available to resolve link information.	The build attempted to access the specified file in order to retrieve a title or short description, but the file could not be found. If the file exists, it is possible that a DITaval file was used to remove the file's contents from the build. Another possibility is that the file is located outside of the scope of the main input directory, and was not available because the <a href="#">onlytopic.in.map</a> parameter was specified. Be aware that the path information above may not match the link in your topic.
DOTX057W	Warning	The link or cross reference target '%I' cannot be found, which may cause errors creating links or cross references in your output file.	The link appears to use valid syntax to reference a DITA element, but that element cannot be found. Please verify that the element exists, and is not removed from the build by DITaval based filtering.
DOTX058W	Warning	No glossary entry was found associated with key '%I' on %2 element. The build will try to determine the best display text and hover text for terms and abbreviations.	Processing for terms, acronyms, or abbreviated forms will associate the key from the element's keyref attribute with a glossentry (glossary entry) topic. This message will appear if the key was defined, but was not associated with a glossentry topic. The process will try to use the best available fallback (usually the title of the referenced topic).
DOTX060W	Warning	Key '%I' was used in an abbreviated-form element, but the key is not associated with a glossary entry. Abbreviated-form should ONLY be used to reference to a glossary entry.	Processing for abbreviated form elements will associate the key from the element's keyref attribute with a glossentry (glossary entry) topic. This message will appear if the key was defined, but was not associated with a glossentry topic. This element is only supported with keys that are associated with glossary topics; the element will not generate any output. Please correct the reference, or use a different element to reference your topic.
DOTX061W	Warning	ID '%I' was used in topicref tag but did not reference a topic element. The href attribute on	According to the DITA Specification, references from maps should either go to DITA Maps, DITA Topics, or any non-DITA resource. References below the topic level

Message ID	Severity	Message text	Additional details
		a topicref element should only reference topic level elements.	should only be made from cross references (using <xref> or similar) inside of a topic. For details, see the href attribute description in the OASIS standard's definition of the <a href="#">topicref element</a> .
DOTX062I	Info	It appears that this document uses constraints, but the conref processor cannot validate that the target of a conref is valid. To enable constraint checking, please upgrade to an XSLT 2.0 processor.	
DOTX063W	Warning	The dita document '%I' is linked to from your content, but is not referenced by a topicref tag in the ditamap file. Include the topic in your map to avoid a broken link.	This will appear when generating PDF or ODT output that includes a link to a local topic, but the referenced topic is not part of the map itself. This will result in a broken link. You should include the topic in your map or remove the link from the build.
DOTX064W	Warning	The copy-to attribute [copy-to="%I"] uses the name of a file that already exists, so this attribute is ignored.	The copy-to attribute is used to copy a topic over a document that already exists. Please make sure that any copy-to attributes use a unique name so that the copy will not overwrite existing content.
DOTX065W	Warning	Two unique source files each specify copy-to="%2", which results in a collision. The value associated with href="%I" is ignored.	Two different topics are copied to the same location using copy-to; as a result, one of these files would be over-written. Only the first instance of this copy-to value will be recognized. Please correct the use of copy-to attributes.
DOTX066W	Warning	Template "%I" is deprecated. Remove references to this template from your custom XSLT or plug-ins.	This message indicates that your custom XSLT or plug-ins rely on templates that will be removed in an upcoming release. Typically this occurs when a named template has been converted to a mode template; any code that uses the deprecated template should be updated.
DOTX067E	Error	No string named '%I' was found for language '%2'. Add a mapping for the string '%I'.	This PDF build uses generated text, such as the phrase "Related information" (which is generated above many link groups). The toolkit was unable to locate the string %I for your specified language, so the string will appear in the default language. This generally indicates that the toolkit's strings need to be updated to support your language, or that your language setting is incorrect.
DOTX068W	Warning	A topicref element that references a map contains child topicref elements. Child topicref elements are ignored.	



Message ID	Severity	Message text	Additional details
DOTX069W	Warning	Template mode "%I" is deprecated. Remove references to this template mode from your custom XSLT or plug-ins.	
DOTX070W	Warning	Target "%I" is deprecated. Remove references to this target from your custom Ant files.	
DOTX071E	Error	Conref range: Unable to find conref range end element with ID "%I".	
DOTX071W	Warning	Parameter "%I" on template "%2" is deprecated. Use parameter "%3" instead.	
DOTX072I	Info	Ignoring navtitle within topicgroup.	
DOTX073I	Info	Removing broken link to "%I".	
DOTX074W	Warning	No formatting defined for unknown class attribute value "%I".	
DOTX075W	Warning	A content reference in a constrained document type is pulling content from an unconstrained document type. The reference will resolve, but may result in content that violates one of the document constraints in "%I".	
DOTX076E	Error	A content reference in a constrained document type cannot be resolved because it would violate one of the document constraints "%I". The current constrained document may only reuse content from documents with equivalent constraints.	
DOTX077I	Info	Resolving content references results in duplicate ID '%I'. Rewriting resolved version to '%2'.	
INDX001I	Info	Index entry '%I' will be sorted under the "Special characters" heading.	
INDX002E	Error	The PDF indexing process could not find the proper sort location for '%I', so the term has been dropped from the index.	

Message ID	Severity	Message text	Additional details
INDX003E	Error	The build failed due to problems encountered when sorting the PDF index.	
PDFJ001E	Error	The PDF indexing process could not find the proper sort location for '%I', so the term has been dropped from the index.	
PDFJ002E	Error	The build failed due to problems encountered when sorting the PDF index. Please address any messages located earlier in the log.	The PDF index process relies on pre-defined letter headings when sorting terms. The specified term does not begin with a character that can be mapped to an existing heading. Typically this term would be placed in a "Special characters" group, but the current language did not specify such a group when setting up the index sort process.
PDFJ003I	Info	Index entry '%I' will be sorted under the "Special characters" heading.	The PDF index process relies on pre-defined letter headings when sorting terms. The specified term does not begin with a character that can be mapped to an existing heading, so it has been placed under a heading for terms that begin with special characters such as punctuation. If this term should be sorted under a new or existing letter heading, please open an issue with DITA-OT to correct the sort.
PDFX001W	Warning	There is an index term specified with start="%I", but there is no matching end for this term. Add an index term in a valid location with end="%I".	
PDFX002W	Warning	There are multiple index terms specified with start="%I", but there is only one term to end this range, or the ranges for this term overlap. Ensure that each term with this start value has a matching end value, and that the specified ranges for this value do not overlap	
PDFX003W	Warning	There are multiple index entries found to close the index range for "%I". Ensure that any index term with start="%I" has only one matching end term with end="%I".	
PDFX004F	Error	A topic reference was found with href="". Please specify a target or remove the href attribute.	

Message ID	Severity	Message text	Additional details
PDFX005F	Error	The topic reference href="%I" could not be found. Please correct the reference, or set the scope or format attribute if the target is not a local DITA topic.	
PDFX007W	Warning	Found an index term with end="%I", but no starting term was found for this entry.	
PDFX008W	Warning	Font definition not found for the logical name or alias '%I'.	
PDFX009E	Error	Attribute set reflection cannot handle XSLT element %I.	
PDFX011E	Error	The index term '%2' uses both an index-see element and %I element. Convert the index-see element to index-see-also.	Found an <index-see> element as a child of a term that also exists as a standalone index term, or as a term that also uses <index-see-also>. When using <index-see> with an index term, that term should not be used to create page references and should not reference additional terms. Treating the <index-see> as <index-see-also>.
PDFX012E	Error	Found a table row with more entries than allowed.	
PDFX013F	Fatal	The PDF file '%I' could not be generated.	
XEPJ001W	Warning	%I	
XEPJ002E	Error	%I	
XEPJ003E	Error	%I	

### Related tasks

[Rebuilding the DITA-OT documentation](#) on page 135

When you add or remove plug-ins, you can rebuild the documentation to update the information on the extension points, messages, and parameters that are available in your environment.



---

# Chapter

# 44

---

## Other error messages

---

In addition to error messages that DITA Open Toolkit generates, you might also encounter error messages generated by Java or other tools.

### Out of Memory error

In some cases, you might receive a message stating the build has failed due to an `Out of Memory` error. Try the following approaches to resolve the problem:

1. Increase the memory available to Java.
2. Reduce memory consumption by setting the `generate-debug-attributes` option to `false`. This option is set in the `lib/configuration.properties` file. This will disable debug attribute generation (used to trace DITA-OT error messages back to source files) and will reduce memory consumption.
3. Set `dita.preprocess.reloadstylesheet` Ant property to `true`. This will allow the XSLT processor to release memory when converting multiple files.
4. Run the transformation again.

### UnsupportedClassVersionError

If you receive a `java.lang.UnsupportedClassVersionError` error message with an `Unsupported major.minor version` and a list of Java classes, make sure your system meets the minimum Java requirements as listed in the *Release Notes* and installation instructions.

### Unable to locate tools.jar

If a Java Runtime Environment (JRE) is used when building output via Ant, the `Unable to locate tools.jar` error may appear. This message is safe to ignore, since DITA-OT does not rely on any of the functions in this library. If a Java Development Kit (JDK) is also installed, setting the `JAVA_HOME` environment variable to the location of the JDK will prevent this message from appearing.

### Related tasks

[Increasing Java memory allocation](#) on page 257

If you are working with large documents with extensive metadata or key references, you will need to increase the memory allocation for the Java process. You can do this from the command-line prompt for a specific session, or you can increase the value of the `ANT_OPTS` environment variable.

[Installing DITA Open Toolkit](#) on page 11

The DITA-OT distribution package can be installed on Linux, macOS, and Windows. It contains everything that you need to run the toolkit except for Java.

### Related reference

[Other parameters](#) on page 103

These parameters enable you to reload style sheets that DITA-OT uses for specific pre-processing stages.

[DITA Open Toolkit 3.7 Release Notes](#) on page 313



---

# Chapter

# 45

---

## Accessing help for the dita command

---

You can access a list of subcommands and supported parameters for the `dita` command by passing the `--help` option on the command line.

### Procedure

1. Open a command prompt or terminal session.
2. Issue the following command:

```
dita --help
```

3. Optional: For details on the arguments and options available for each subcommand, pass the `--help` option after the subcommand name.  
For example: `dita install --help`.

### Results

A brief usage summary appears in the command-line window, along with a list of subcommands, arguments, and options.

### Related tasks

[Building output using the dita command](#)

### Related reference

[DITA-OT parameters](#) on page 89

Certain parameters apply to all DITA-OT transformations. Other parameters are common to the HTML-based transformations. Some parameters apply only to specific transformation types. These parameters can be passed as options to the `dita` command using the `--parameter=value` syntax or included in build scripts as Ant properties.

[Internal Ant properties](#) on page 107

DITA-OT uses these Ant properties in certain internal operations. They are not intended for general use, but may be adjusted by plug-in developers to configure custom transform types.

[Arguments and options for the dita command](#) on page 83

The `dita` command takes mandatory arguments to process DITA content. Subcommands can be used to manage plug-ins, or print information about the current configuration. A series of options are available to modify the command behavior or specify additional configuration parameters.





---

# Chapter

# 46

---

## Increasing Java memory allocation

---

If you are working with large documents with extensive metadata or key references, you will need to increase the memory allocation for the Java process. You can do this from the command-line prompt for a specific session, or you can increase the value of the `ANT_OPTS` environment variable.

### Procedure

- To change the value for a specific session, from the command prompt, issue the following command:

Platform	Command
Linux or macOS	<code>export ANT_OPTS=\$ANT_OPTS -Xmx1024M</code>
Windows	<code>set ANT_OPTS=%ANT_OPTS% -Xmx1024M</code>

This increases the JVM memory allocation to 1024 megabytes. The amount of memory which can be allocated is limited by available system memory and the operating system.

- To persistently change the value, change the value allocated to the `ANT_OPTS` environment variable on your system.



---

# Chapter

# 47

---

## Speeding up builds

---

Several configuration changes can significantly reduce DITA-OT processing time.

### Disable debug attribute generation

The `generate-debug-attributes` parameter determines whether debugging attributes are generated in the temporary files. By changing the value to `false`, DITA-OT will no longer generate the `@xtrf` and `@xtrc` debug attributes. This will make it more difficult to track down the source file location from which a given issue may have originated, but it will reduce the size of the temporary files. As a result, XML parsing will take less time and overall processing time will be reduced.

### Use a fast disk for the temporary directory

DITA-OT keeps topic and map files as separate files and processes each file multiple times during preprocessing. Thus reading from disk, parsing XML, serializing XML, and writing to disk makes processing quite I/O intensive. Use either an [SSD](#) or a [RAM disk](#) for temporary files, and never use a temporary directory that is not located on the same machine as where the processing takes place.

### Enable parallel processing

As of DITA-OT 3.6, preprocessing module code can be run in parallel by setting the `parallel` parameter to `true`. The performance benefits this option provides depend heavily on the source file set, the DITA features used in the project, and the computer doing the processing, but under the right circumstances, you may see notable improvements when this option is enabled.

### Enable in-memory processing

As of DITA-OT 3.6, the Cache Store can be activated by setting the `store-type` parameter to `memory`. In-memory processing provides performance advantages in I/O bound environments such as cloud computing platforms, where processing time depends primarily on how long it takes to read and write temporary files. For more information, see [Store API – Processing in memory](#) on page 267.

### Reuse the JVM instance

For all but large source sets, the Java virtual machine (JVM) will not have enough time to warm-up. By reusing the same JVM instance, the first few DITA-OT conversions will be “normal”, but when the Just-In-Time (JIT) compiler starts to kick in, the performance increase may be 2-10 fold. This is especially noticeable with smaller source sets, as much of the DITA-OT processing is I/O intensive.

**Tip:** The [Gradle Daemon](#) uses this mechanism (along with incremental builds) to reduce processing time. You can run DITA-OT with these features via the [DITA-OT Gradle Plugin](#).

### Use the latest Java version

DITA-OT 2.0 to 2.3 require Java 7, and DITA-OT 2.4 and newer require Java 8. However, using a newer version of Java may further reduce processing time, depending on your operating system.

### **Re-enable Java file caching**

As of Java 12, the file canonicalization cache is no longer enabled by default (see [JDK-8207005](#)). On Windows, this results in significantly longer build times, and slight increases on Linux. To re-enable file caching, add `-Dsun.io.useCanonCaches=true` to the Java invocation command in the `dita.bat` and `ant.bat` wrapper scripts.

**Note:** As of DITA-OT 3.7.3, this system property is set by default in the bundled wrapper scripts.

### **Collected links**

---

# Part XI

---

## Reference

---

The *Reference* topics provide more advanced information about the DITA-OT architecture, OASIS specification support, and licensing.



---

# Chapter 48

---

## DITA Open Toolkit Architecture

---

DITA Open Toolkit is an open-source implementation of the OASIS specification for the Darwin Information Typing Architecture. The toolkit uses Ant, XSLT, and Java to transform DITA content (maps and topics) into different deliverable formats.

### Processing structure

---

DITA-OT implements a multi-stage, map-driven architecture to process DITA content. Each stage in the process examines some or all of the content; some stages result in temporary files that are used by later steps, while others stages result in updated copies of the DITA content. Most of the processing takes place in a temporary working directory; the source files themselves are never modified.

DITA-OT is designed as a pipeline. Most of the pipeline is common to all output formats; it is known as the *pre-processing stage*. In general, any DITA process begins with this common set of pre-processing routines.

Once the pre-processing is completed, the pipeline diverges based on the requested output format. Some processing is still common to multiple output formats; for example, Eclipse Help and HTML Help both use the same routines to generate XHTML topics, after which the two pipelines branch to create different sets of navigation files.

The following image illustrates how the pipeline works for several common output formats: PDF, Eclipse Help, HTML Help, XHTML, and HTML5.

**Note:** Other output formats may implement additional processing steps.

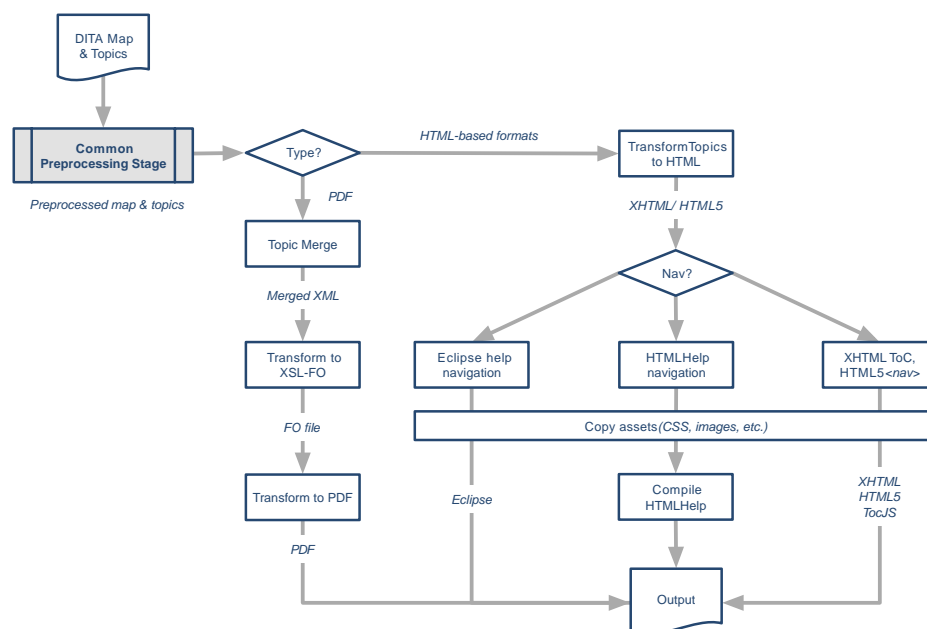


Figure 52: Diagram of some possible paths through the transformation pipeline

## Map-first preprocessing

DITA-OT 3.0 provides a map-first preprocessing option as an alternative to the default `preprocess` operation. The method, which was introduced in DITA-OT 2.5 as an experimental feature, has been improved and is ready for use in many production scenarios. Map-first-preprocessing provides the same functionality as the default `preprocess`, but takes a different approach.

Whereas the default preprocessing routine handles both maps and topics at the same time, often switching back and forth between map operations and topic operations, the map-first approach only begins processing topics after nearly all map processing is complete. This simplifies the processing logic and creates cleaner module responsibilities, which makes it easier to process only those topics that are actually referenced after filtering, for example, or to only process the map to validate the map structure.

The current preprocessing architecture was established during the DITA 1.0 era when there were fewer DITA features that operated on the map level. Initially, the difference between processing modes was not that great. DITA 1.2 and 1.3 introduced many more map-level features, such as keys and key scopes, that make it difficult to reliably work with topics before all map features have been resolved.

The original preprocessing operation already handles many map operations first, but this was not the original design and requires regular refactoring to handle edge cases. The new map-first preprocessing is designed with this model in mind, improving the overall processing flow and making it more formal about the map-first model. The new model also takes advantage of hashed topic file names in the temporary directory, which simplifies many processing steps, and is better able to handle topics referenced outside of the map directory (that case has resulted in a variety of issues with the original model).

**Note:** The map-first preprocessing option is enabled by default in DITA-OT 3.0 for PDF and HTML Help. These formats were chosen because they generate a compiled result file, so temporarily hashed file names should all be invisible to the build. After further testing and feedback, the new option will most likely become the default for other output formats in future versions. Because the DITA-OT development team cannot have access to all varieties of DITA, all edge cases, or even all the ways DITA-OT itself is extended, the switch to default map-first preprocessing for other output formats will be smoother for everyone if more people can test and provide feedback.

### How to use map-first preprocessing

To use (or test) map-first preprocessing, call the `preprocess2` Ant target in your custom transformation types instead of using the default `preprocess` target.

For example, if you have a custom HTML5 transformation type named "myhtml", then you may have a plug-in extension that looks this:

```
<!-- Simple variant: set properties and call default HTML5 -->
<target name="dita2myhtml" depends="myhtml.init,dita2html5"/>
```

This type of extension is quite common, and is used to set default properties for your environment followed by a normal build to use those properties. In this case, you'll need to replace `dita2html5` with the normal HTML5 steps, swapping out `preprocess` for `preprocess2`:

```
1 <!-- Simple variant: set properties and call default HTML5 -->
2 <target name="dita2myhtml"
3   ..... depends="myhtml.init,
4   ..... html5.init,
5   ..... build-init,
6   ..... preprocess2,
7   ..... html5.topic,
8   ..... html5.map,
9   ..... html5.css"/>
```

**Note:** If you use this simple method for customized PDF or HTML Help builds, you will automatically be using `preprocess2`.



Some custom transformation types already require you to repeat the default dependencies, in which case you should already call `preprocess` directly, as in the following:

```
1 <!-- More complex variant: add processing steps to default HTML5 -->
2 <target name="dita2myhtml"
3 ..... depends="myhtml.init,
4 ..... build-init,
5 ..... preprocess,
6 ..... local-extensions-after-preprocess,
7 ..... html5.topic,
8 ..... html5.map,
9 ..... html5.css"/>
```

In such cases, the modification is much easier – simply add a 2 to the existing `preprocess` target.

## How to test in a production environment

In some cases, you may be responsible for maintaining transformation types that are actually run by many people on your team or around a company. In this case, you likely need to maintain your existing transformation types based on the backwards-compatible `preprocess` modules, but also want to provide your colleagues with a way to test their own documents using `preprocess2`.

There are several ways to do this. One fairly straightforward approach would be to create a new custom transformation type that is exactly the same, except for preprocessing. For example, if you have a local HTML variant called `myhtml` as above, instead of modifying that transformation directly, you could create a second transformation type called `myhtml-beta` that provides exactly the same support, but with the new map-first preprocessing:

```
1 <!-- Original "myhtml" is not modified, used for production -->
2 <target name="dita2myhtml5" depends="myhtml.init,dita2html5"/>
3
4 <!-- "myhtml-beta" used to test and provide feedback on preprocess2 -->
5 <target name="dita2myhtml-beta"
6 ..... depends="myhtml.init,
7 ..... html5.init,
8 ..... build-init,
9 ..... preprocess2,
10 ..... html5.topic,
11 ..... html5.map,
12 ..... html5.css"/>
```

## Known limitations

The `preprocess2` implementation details are subject to change; dependencies within `preprocess2` may be renamed or removed based on feedback.

The internal extension points that run before or after individual steps in the original `preprocess` pipeline (`preprocess.*.pre/preprocess.*.post`) are not available in the newer map-first preprocessing pipeline (`preprocess2`), which is used in the PDF and HTML Help transformations as of DITA-OT 3.0.

## Processing modules

The DITA-OT processing pipeline is implemented using Ant. Individual modules within the Ant script are implemented in either Java or XSLT, depending on such factors as performance or requirements for customization. Virtually all Ant and XSLT modules can be extended by adding a plug-in to the toolkit; new Ant targets may be inserted before or after common processing, and new rules may be imported into common XSLT modules to override default processing.

## XSLT modules

The XSLT modules use shell files. Typically, each shell file begins by importing common rules that apply to all topics. This set of common processing rules may in turn import additional common modules, such as those used for reporting errors or determining the document locale. After the common rules are imported, additional imports can be included in order to support processing for DITA specializations.

For example, XHTML processing is controlled by the `xsl/dita2xhtml.xsl` file. The shell begins by importing common rules that are applicable to all general topics: `xslhtml/dita2htmlImpl.xsl`. After that, additional XSLT overrides are imported for specializations that require modified processing. For example, an override for reference topics is imported in order to add default headers to property tables. Additional modules are imported for tasks, for the highlighting domain, and for several other standard specializations. After the standard XSLT overrides occur, plug-ins may add in additional processing rules for local styles or for additional specializations.

## Java modules

Java modules are typically used when XSLT is a poor fit, such as for processes that make use of standard Java libraries (like those used for index sorting). Java modules are also used in many cases where a step involves copying files, such as the initial process where source files are parsed and copied to a temporary processing directory.

## Processing order

The order of processing is often significant when evaluating DITA content. Although the DITA specification does not mandate a specific order for processing, DITA-OT has determined that performing filtering before conref resolution best meets user expectations. Switching the order of processing, while legal, may give different results.

The DITA-OT project has found that filtering first provides several benefits. Consider the following sample that contains a `<note>` element that both uses conref and contains a `@product` attribute:

```
<note conref="documentA.dita#doc/note" product="MyProd" />
```

If the `@conref` attribute is evaluated first, then `documentA` must be parsed in order to retrieve the note content. That content is then stored in the current document (or in a representation of that document in memory). However, if all content with `product="MyProd"` is filtered out, then that work is all discarded later in the build.

If the filtering is done first (as in DITA-OT), this element is discarded immediately, and `documentA` is never examined. This provides several important benefits:

- Time is saved by discarding unused content as early as possible; all future steps can load the document without this extra content.
- Additional time is saved case by not evaluating the `@conref` attribute; in fact, `documentA` does not even need to be parsed.
- Any user reproducing this build does not need `documentA`. If the content is sent to a translation team, that team can reproduce an error-free build without `documentA`; this means `documentA` can be kept back from translation, preventing accidental translation and increased costs.

If the order of these two steps is reversed, so that conref is evaluated first, it is possible that results will differ. For example, in the code sample above, the `@product` attribute on the reference target will override the product setting on the referencing note. Assume that the referenced `<note>` element in `documentA` is defined as follows:

```
<note id="note" product="SomeOtherProduct">This is an important note!</note>
```

A process that filters out `product="SomeOtherProduct"` will remove the target of the original conref before that conref is ever evaluated, which will result in a broken reference. Evaluating conref first would resolve the reference, and only later filter out the target of the conref. While some use cases can be found where this is the desired behavior, benefits such as those described above resulted in the current processing order used by DITA-OT.

## Store API – Processing in memory

---

DITA-OT originally assumed resources would be available on disk and available from file paths. Recent versions added URI input, so HTTPS resources could be used, but temporary and output resources were still file-based. DITA-OT 3.6 introduces a new Store API that can process temporary resources in memory instead of writing them to disk.

The Store API (`org.dita.dost.store.Store`) is a Java abstraction over temporary file operations. So for example instead of reading resources directly with `FileInputStream`, the Store API provides operations for this. This abstraction allows implementations of the Store API to choose how they handle resources, enables optimizations or non-file-based storage. Since DITA-OT processes a lot of XML data, the Store API offers operations for XML processing directly. For example, a read method to directly get a `DOM Document`, instead of opening a file stream manually, parsing it with an XML parser, and getting the `Document` instance from the parser.

The Store API is extendable using Java's [Resource Loader](#) with the `org.dita.dost.store.StoreBuilder` service. This is a builder interface to get named Store instances ("a Store").

### Stream Store for file-based processing

This Store could also be a File Store, since it uses disk and local files for temporary resources. This is the traditional DITA-OT implementation, where temporary XML files are stored under the `dita.temp.dir` path.

The Stream Store is activated by setting the store-type parameter to file.

**Note:** To ensure backwards compatibility, the file Store is the default setting in DITA-OT 3.6.

### Cache Store for in-memory processing

This Store is an in-memory Store, that keeps all temporary resources in memory. The name comes from the feature of the Store, that it caches the parsed XML after reading. That is, instead of storing XML as a byte array, it keeps it as a `DOM Document` or `S9api XdmNode`. When the same resource is re-read later, it doesn't have to parse it again, only return the parsed document. Resources that are not available in the temporary directory are handled with the Stream Store.

While the Store doesn't write anything to the temporary directory, it will still use URIs where the resources are under the temporary directory. The URIs are simply used for addressing, similarly to URNs. Future releases of DITA-OT may use some other method of addressing, such as a tmp URI scheme.

**Tip:** As of DITA-OT 3.6, the Cache Store can be activated by setting the store-type parameter to memory.

### Benefits

The initial implementation of the Cache Store is provided in DITA-OT 3.6 as a preview to allow integration partners to test this new feature.

In-memory processing provides performance advantages in I/O bound environments such as cloud computing platforms, where processing time depends primarily on how long it takes to read and write temporary files.

The Store API also makes the Saxon `S9api` easier to use. It offers an XML document model that is in most cases easier to work with than DOM. The abstraction Store makes it easier to work with XML, so various modules don't need to repeat the same type of XML processing code.

### Caveats

Not all custom plug-ins will work with the Cache Store, because they may assume files are used and expect direct file access for resource operations.

**Important:** To take advantage of the Store API, custom plug-ins must use DITA-OT XSLT modules in custom `<pipeline>` elements instead of Ant's built-in `<xslt>` tasks as recommended in [Plug-in coding conventions](#) on page 147.

## Pre-processing modules

The pre-processing operation is a set of steps that typically runs at the beginning of every DITA-OT transformation. Each step or stage corresponds to an Ant target in the build pipeline; the `preprocess` target calls the entire set of steps.

### Generate lists (gen-list)

The `gen-list` step examines the input files and creates lists of topics, images, document properties, or other content. These lists are used by later steps in the pipeline. This step is implemented in Java.

For example, one list includes all topics that make use of the `conref` attribute; only those files are processed during the `conref` stage of the build. The list file name `name` is derived from the list file property. For example, the `conref.list` file is generated for “`conref`” and a corresponding list property is provided for each generated list, in this case “`conreflist`”.

The result of this step is a set of several list files in the temporary directory, including `dita.list` and `dita.xml.properties`.

List file property	List file	Usage
<code>canditopicfile</code>	<code>canditopic.list</code>	
<code>conref</code>	<code>conref.list</code>	Documents that contain <code>conref</code> attributes that need to be resolved in <code>preprocess</code> .
<code>conreftargetsfile</code>	<code>conreftargets.list</code>	
<code>copytosourcefile</code>	<code>copytosource.list</code>	
<code>flagimagefile</code>	<code>flagimage.list</code>	
<code>fullditamapandtopicfile</code>	<code>fullditamapandtopic.list</code>	All of the <code>ditamap</code> and <code>topic</code> files that are referenced during the transformation. These may be referenced by <code>href</code> or <code>conref</code> attributes.
<code>fullditamapfile</code>	<code>fullditamap.list</code>	All of the <code>ditamap</code> files in <code>dita.list</code>
<code>fullditatopicfile</code>	<code>fullditatopic.list</code>	All of the <code>topic</code> files in <code>dita.list</code>
<code>hrefditatopicfile</code>	<code>hrefditatopic.list</code>	All of the <code>topic</code> files that are referenced with an <code>href</code> attribute
<code>hreftargetsfile</code>	<code>hreftargets.list</code>	Link targets
<code>htmlfile</code>	<code>html.list</code>	Resource files
<code>imagefile</code>	<code>image.list</code>	Image files that are referenced in the content
<code>outditafilesfile</code>	<code>outditafiles.list</code>	
<code>resourceonlyfile</code>	<code>resourceonly.list</code>	
<code>subjectschemefile</code>	<code>subjectscheme.list</code>	
<code>subtargetsfile</code>	<code>subtargets.list</code>	
<code>tempdirToinputmapdir.relative.value</code>		
<code>uplevels</code>		
<code>user.input.dir</code>		Absolute input directory path

List file property	List file	Usage
user.input.file.listfile		Input file list file
user.input.file		Input file path, relative to the input directory

## Debug and filter (debug-filter)

The `debug-filter` step processes all referenced DITA content and creates copies in a temporary directory. As the DITA content is copied, filtering is performed, debugging information is inserted, and table column names are adjusted. This step is implemented in Java.

The following modifications are made to the DITA source:

- If a DITaval file is specified, the DITA source is filtered according to the entries in the DITaval file.
- Debug information is inserted into each element using the `@xtrf` and `@xtrc` attributes. The values of these attributes enable messages later in the build to reliably indicate the original source of the error. For example, a message might trace back to the fifth `<ph>` element in a specific DITA topic. Without these attributes, that count might no longer be available due to filtering and other processing.
- The table column names are adjusted to use a common naming scheme. This is done only to simplify later `conref` processing. For example, if a table row is pulled into another table, this ensures that a reference to "column 5 properties" will continue to work in the fifth column of the new table.

## Resolve map references (mapref)

The `mapref` step resolves references from one DITA map to another. This step is implemented in XSLT.

Maps reference other maps by using the following sorts of markup:

```
<topicref href="other.ditamap" format="ditamap" />
...
<mapref href="other.ditamap" />
```

As a result of the `mapref` step, the element that references another map is replaced by the topic references from the other map. Relationship tables are pulled into the referencing map as a child of the root element (`<map>` or a specialization of `<map>`).

## Branch filtering (branch-filter)

The `branch-filter` step filters topics using DITAVAL files defined in the map.

## Resolve key references (keyref)

The `keyref` step examines all the keys that are defined in the DITA source and resolves the key references. Links that make use of keys are updated so that any `@href` value is replaced by the appropriate target; key-based text replacement is also performed. This step is implemented in Java.

## Copy topics (copy-to)

The `copy-to` step makes a copy of original topic resources to new resources defined by the `@copy-to` attribute.

## Conref push (conrefpush)

The `conrefpush` step resolves "conref push" references. This step only processes documents that use conref push or that are updated due to the push action. This step is implemented in Java.

## Resolve content references (conref)

The `conref` step resolves content references, processing only the DITA maps or topics that use the `@conref` attribute. This step is implemented in XSLT.

The values of the `@id` attribute on referenced content are changed as the elements are pulled into the new locations. This ensures that the values of the `@id` attribute within the referencing topic remain unique.

If an element is pulled into a new context along with a cross reference that references the target, both the values of the `@id` and `@xref` attributes are updated so that they remain valid in the new location. For example, a referenced topic might include a section as in the following example:

```

1 <topic id="referenced_topic">
2   <title>...</title>
3   <body>
4     <section id="sect">
5       <title>Sample section</title>
6       <p>Figure <xref href="#referenced_topic/fig"/>
7         contains a code sample that demonstrates ....</p>
8       <fig id="fig">
9         <title>Code sample</title>
10        <codeblock>....</codeblock>
11      </fig>
12    </section>
13  </body>
14 </topic>

```

**Figure 53: Referenced topic that contains a section and cross reference**

When the section is referenced using a `@conref` attribute, the value of the `@id` attribute on the `<fig>` element is modified to ensure that it remains unique in the new context. At the same time, the `<xref>` element is also modified so that it remains valid as a local reference. For example, if the referencing topic has an `@id` set to "new\_topic", then the conrefed element may look like this in the intermediate document `<section>`.

```

1 <section id="sect">
2   <title>Sample section</title>
3   <p>Figure <xref href="#new_topic/d1e25"/> contains a code sample
4   that demonstrates ....</p>
5   <fig id="d1e25">
6     <title>Code sample</title>
7     <codeblock>....</codeblock>
8   </fig>

```

```
9 </section>
```

**Figure 54: Resolved conrefed `<section>` element after the conref step**

In this case, the value of the `@id` attribute on the `<fig>` element has been changed to a generated value of "d1e25". At the same time, the `<xref>` element has been updated to use that new generated ID, so that the cross reference remains valid.

## Filter conditional content (profile)

The `profile` step removes content from topics and maps based on the rules in DITAVAL files or the `@print` attribute setting. Output can differ based on when filtering is done.

## Resolve topic fragments and code references (topic-fragment)

The `topic-fragment` step expands content references to elements in the same topic and resolves references made with the `<coderef>` element. This step is implemented in SAX pipes.

Content references to elements in the same topic are defined via same-topic fragments such as `# ./ID` in URIs.

The `<coderef>` element is used to reference code stored externally in non-XML documents. During the pre-processing step, the referenced content is pulled into the containing `<codeblock>` element.

### Related reference

[Extended codeblock processing](#) on page 286

DITA-OT provides additional processing support beyond that which is mandated by the DITA specification. These extensions can be used to define character encodings or line ranges for code references, normalize indentation, add line numbers or display whitespace characters in code blocks.

## Chunk topics (chunk)

The `chunk` step breaks apart and assembles referenced DITA content based on the `@chunk` attribute in maps. This step is implemented in Java.

DITA-OT has implemented processing for the following values of the `@chunk` attribute:

- `select-topic`
- `select-document`
- `select-branch`
- `by-topic`
- `by-document`
- `to-content`
- `to-navigation`

### Related information

[Chunking definition in the DITA 1.2 specification](#)

## Move metadata (move-meta-entries) and pull content into maps (mappull)

The `move-meta-entries` step pushes metadata back and forth between maps and topics. For example, index entries and copyrights in the map are pushed into affected topics, so that the topics can be processed later in isolation while retaining all relevant metadata. This step is implemented in Java.

**Note:** As of DITA-OT 2.2, the `move-meta-entries` and `mappull` steps have been merged. The `mappull` step has been moved into `move-meta-entries`.

The `mappull` step pulls content from referenced topics into maps, and then cascades data within maps. This step is implemented in XSLT.

The `mappull` step makes the following changes to the DITA map:

- Titles are pulled from referenced DITA topics. Unless the `@locktitle` attribute is set to "yes", the pulled titles replace the navigation titles specified on the `<topicref>` elements.

- The `<linktext>` element is set based on the title of the referenced topic, unless it is already specified locally.
- The `<shortdesc>` element is set based on the short description of the referenced topic, unless it is already specified locally.
- The `@type` attribute is set on `<topicref>` elements that reference local DITA topics. The value of the `@type` attribute is set to value of the root element of the topic; for example, a `<topicref>` element that references a task topic is given a `@type` attribute set to "task".
- Attributes that cascade, such as `@toc` and `@print`, are made explicit on any child `<topicref>` elements. This allows future steps to work with the attributes directly, without reevaluating the cascading behavior.

## Map based linking (maplink)

This step collects links based on a map and moves those links into the referenced topics. The links are created based on hierarchy in the DITA map, the `@collection-type` attribute, and relationship tables. This step is implemented in XSLT and Java.

The `maplink` module runs an XSLT stylesheet that evaluates the map; it places all the generated links into a single file in memory. The module then runs a Java program that pushes the generated links into the applicable topics.

## Pull content into topics (topicpull)

The `topicpull` step pulls content into `<xref>` and `<link>` elements. This step is implemented in XSLT.

If an `<xref>` element does not contain link text, the target is examined and the link text is pulled. For example, a reference to a topic pulls the title of the topic; a reference to a list item pulls the number of the item. If the `<xref>` element references a topic that has a short description, and the `<xref>` element does not already contain a child `<desc>` element, a `<desc>` element is created that contains the text from the topic short description.

The process is similar for `<link>` elements. If the `<link>` element does not have a child `<linktext>` element, one is created with the appropriate link text. Similarly, if the `<link>` element does not have a child `<desc>` element, and the short description of the target can be determined, a `<desc>` element is created that contains the text from the topic short description.

## Flagging (flag-module)

Beginning with DITA-OT 1.7, flagging support is implemented as a common `flag-module` preprocessing step. The module evaluates the DITAVAL against all flagging attributes, and adds DITA-OT-specific hints to the topic when flags are active. Any extended transformation type may use these hints to support flagging without adding logic to interpret the DITAVAL.

### Evaluating the DITAVAL flags

Flagging is implemented as a reusable module during the preprocess stage. If a DITAVAL file is not used with a build, this step is skipped with no change to the file.

When a flag is active, relevant sections of the DITAVAL itself are copied into the topic as a sub-element of the current topic. The active flags are enclosed in a pseudo-specialization of the `<foreign>` element (referred to as a pseudo-specialization because it is used only under the covers, with all topic types; it is not integrated into any shipped document types).

#### `<ditaval-startprop>`

When any flag is active on an element, a `<ditaval-startprop>` element will be created as the first child of the flagged element:

```
<ditaval-startprop class="+ topic/foreign ditaot-d/ditaval-startprop ">
```

The `<ditaval-startprop>` element will contain the following:

- If the active flags should create a new style, that style is included using standard CSS markup on the `@outputclass` attribute. Output types that make use of CSS, such as XHTML, can use this value as-is.



- If styles conflict, and a `<style-conflict>` element exists in the DITAVAL, it will be copied as a child of `<ditaval-startprop>`.
- Any `<prop>` or `<revprop>` elements that define active flags will be copied in as children of the `<ditaval-startprop>` element. Any `<startflag>` children of the properties will be included, but `<endflag>` children will not.

### `<ditaval-endprop>`

When any flag is active on an element, a `<ditaval-endprop>` element will be created as the last child of the flagged element:

```
<ditaval-endprop class="+ topic/foreign ditaot-d/ditaval-endprop">
```

CSS values and `<style-conflict>` elements are not included on this element.

Any `<prop>` or `<revprop>` elements that define active flags will be copied in as children of `<ditaval-prop>`. Any `<startflag>` children of the properties will be included, but `<endflag>` children will not.

## Supporting flags in overrides or custom transformation types

For most transformation types, the `<foreign>` element should be ignored by default, because arbitrary non-DITA content may not mix well unless coded for ahead of time. If the `<foreign>` element is ignored by default, or if a rule is added to specifically ignore `<ditaval-startprop>` and `<ditaval-endprop>`, then the added elements will have no impact on a transform. If desired, flagging support may be integrated at any time in the future.

The processing described above runs as part of the common preprocess, so any transform that uses the default preprocess will get the topic updates. To support generating flags as images, XSLT based transforms can use default fallthrough processing in most cases. For example, if a paragraph is flagged, the first child of `<p>` will contain the start flag information; adding a rule to handle images in `<ditaval-startprop>` will cause the image to appear at the start of the paragraph content.

In some cases fallthrough processing will not result in valid output; for those cases, the flags must be explicitly processed. This is done in the XHTML transform for elements like `<ol>`, because fallthrough processing would place images in between `<ol>` and `<li>`. To handle this, the code processes `<ditaval-startprop>` before starting the element, and `<ditaval-endprop>` at the end. Fallthrough processing is then disabled for those elements as children of `<ol>`.

## Example DITAVAL

Assume the following DITAVAL file is in use during a build. This DITAVAL will be used for each of the following content examples.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <val>
3   <!-- Define what happens in the case of conflicting styles -->
4   <style-conflict background-conflict-color="red"/>
5
6   <!-- Define two flagging properties that give styles (no image) -->
7   <prop action="flag" att="audience" style="underline" val="user"
8     .... bgcolor="green"/>
9   <prop action="flag" att="platform" style="overline" val="win"
10    .... bgcolor="blue"/>
11
12  <!-- Define a property that includes start and end image flags -->
13  <prop action="flag" att="platform" val="linux" style="overline"
14    .... bgcolor="blue">
15    <startflag imageref="startlin.png">
16      <alt-text>Start linux</alt-text></startflag>
17    <endflag imageref="endlin.png">
18      <alt-text>End linux</alt-text></endflag>
```

```

19  </prop>
20
21  <!-- Define a revision that includes start and end image flags -->
22  <revprop action="flag" style="double-underline" val="rev2">
23    <startflag imageref="start_rev.gif">
24      <alt-text>START</alt-text></startflag>
25    <endflag imageref="end_rev.gif"><alt-text>END</alt-text></endflag>
26  </revprop>
27  </val>

```

### Content example 1: Adding style

Now assume the following paragraph exists in a topic. Class attributes are included, as they would normally be in the middle of the preprocess routine; @xtrf and @xtrc are left off for clarity.

```
<p audience="user">Simple user; includes style but no images</p>
```

Based on the DITaval above, audience="user" results in a style with underlining and with a green background. The interpreted CSS value is added to @outputclass on <ditaval-startprop>, and the actual property definition is included at the start and end of the element. The output from the flagging step looks like this (with newlines added for clarity, and class attributes added as they would appear in the temporary file):

The resulting file after the flagging step looks like this; for clarity, newlines are added, while @xtrf and @xtrc are removed:

```

1  <p audience="user" class="- topic/p ">
2  <ditaval-startprop
3  <class="+ topic/foreign ditaot-d/ditaval-startprop "
4  <outputclass="background-color:green;text-decoration:underline;">
5  <prop action="flag" att="audience" style="underline" val="user"
6  <backcolor="green"/>
7  </ditaval-startprop>
8  Simple user; includes style but no images
9  <ditaval-endprop
10 <class="+ topic/foreign ditaot-d/ditaval-endprop ">
11 <prop action="flag" att="audience" style="underline" val="user"
12 <backcolor="green"/>
13 </ditaval-endprop>
14 </p>

```

### Content example 2: Conflicting styles

This example includes a paragraph with conflicting styles. When the audience and platform attributes are both evaluated, the DITaval indicates that the background color is both green and blue. In this situation, the <style-conflict> element is evaluated to determine how to style the content.

```
<p audience="user" platform="win">Conflicting styles (still no images)</p>
```

The <style-conflict> element results in a background color of red, so this value is added to @outputclass on <ditaval-startprop>. As above, active properties are copied into the generated elements; the <style-conflict> element itself is also copied into the generated <ditaval-startprop> element.

The resulting file after the flagging step looks like this; for clarity, newlines are added, while @xtrf and @xtrc are removed:

```

1  <p audience="user" platform="win" class="- topic/p ">
2  <ditaval-startprop
3  <class="+ topic/foreign ditaot-d/ditaval-startprop "
4  <outputclass="background-color:red;">
5  <style-conflict background-conflict-color="red"/>
6  <prop action="flag" att="audience" style="underline" val="user"
7  <backcolor="green"/>

```

```

8   ... <prop action="flag" att="platform" style="overline" val="win"
9   ..... bgcolor="blue"/>
10  ... </ditaval-startprop>
11
12  ... Conflicting styles (still no images)
13
14  ... <ditaval-endprop
15  ..... class="+ topic/foreign ditaot-d/ditaval-endprop ">
16  ... <prop action="flag" att="platform" style="overline" val="win"
17  ..... bgcolor="blue"/>
18  ... <prop action="flag" att="audience" style="underline" val="user"
19  ..... bgcolor="green"/>
20  ... </ditaval-endprop>
21 </p>

```

### Content example 3: Adding image flags

This example includes image flags for both `@platform` and `@rev`, which are defined in DITAVAL `<prop>` and `<revprop>` elements.

```
1 <ol platform="linux" rev="rev2">
2   <li>Generate images for platform="linux" and rev="2"</li>
3 </ol>
```

As above, the `<ditaval-startprop>` and `<ditaval-endprop>` nest the active property definitions, with the calculated CSS value on `@outputclass`. The `<ditaval-startprop>` drops the ending image, and `<ditaval-endprop>` drops the starting image. To make document-order processing more consistent, property flags are always included before revisions in `<ditaval-startprop>`, and the order is reversed for `<ditaval-endprop>`.

The resulting file after the flagging step looks like this; for clarity, newlines are added, while `@xtrf` and `@xtrc` are removed:

```

1 <ol platform="linux" rev="rev2" class="- topic/ol">
2   <ditaval-startprop
3     class="+ topic/foreign ditaot-d/ditaval-startprop"
4     outputclass="background-color:blue;
5     text-decoration:underline;
6     text-decoration:overline;">
7     <prop action="flag" att="platform" val="linux" style="overline"
8       bgcolor="blue">
9       <startflag imageref="startlin.png">
10        <alt-text>Start linux</alt-text></startflag></prop>
11      <revprop action="flag" style="double-underline" val="rev2">
12        <startflag imageref="start_rev.gif">
13          <alt-text></alt-text></startflag></revprop>
14      </ditaval-startprop>
15      <li class="- topic/li">
16        Generate images for platform="linux" and rev="2"
17      </li>
18    <ditaval-endprop
19      class="+ topic/foreign ditaot-d/ditaval-endprop">
20      <revprop action="flag" style="double-underline" val="rev2">
21        <endflag imageref="end_rev.gif">
22          <alt-text>END</alt-text></endflag></revprop>
23      <prop action="flag" att="platform" val="linux" style="overline"
24        bgcolor="blue">
25        <endflag imageref="endlin.png">
26          <alt-text>End linux</alt-text></endflag></prop>
27      </ditaval-endprop>
28 </ol>

```

## Map cleanup (clean-map)

The `clean-map` step removes any elements and attributes that were added to files to support preprocessing.

## Copy related files (copy-files)

The `copy-files` step copies non-DITA resources to the output directory, such as HTML files that are referenced in a map or images that are referenced by a DITAVAL file. Which files are copied depends on the transformation type.

## HTML-based processing modules

---

DITA-OT ships with several varieties of HTML output, each of which follows roughly the same path through the processing pipeline. All HTML-based transformations begin with the same call to the pre-processing module, after which they generate HTML files and then branch to create the transformation-specific navigation files.

### Common HTML-based processing

After the pre-processing operation runs, HTML-based builds each run a common series of Ant targets to generate HTML file. Navigation may be created before or after this set of common routines.

After the pre-processing is completed, the following targets are run for all of the HTML-based builds:

- If the `args.css` parameter is passed to the build to add a CSS file, the `copy-css` target copies the CSS file from its source location to the relative location in the output directory.
- If a DITAVAL file is used, the `copy-revflag` target copies the default start- and end-revision flags into the output directory.
- The DITA topics are converted to HTML files. Unless the `@chunk` attribute was specified, each DITA topic in the temporary directory now corresponds to one HTML file. The `dita.inner.topics.xhtml` target is used to process documents that are in the map directory (or subdirectories of the map directory). The `dita.outer.topics.xhtml` target is used to process documents that are outside of the scope of the map, and thus might end up outside of the designated output directory. Various DITA-OT parameters control how documents processed by the `dita.outer.topics.xhtml` target are handled.

### XHTML processing

After the XHTML files are generated by the common routine, the `dita.map.xhtml` target is called by the `xhtml` transformation. This target generates a TOC file called `index.html`, which can be loaded into a frameset.

### HTML5 processing

After the HTML5 files are generated, the `html5` transformation generates a table of contents (ToC) file called `index.html`, which can be loaded as a cover page or rendered in a navigation sidebar or menu via CSS.

As of DITA-OT 2.2, the `nav-toc` parameter can be used in HTML5 transformations to embed navigation directly in topics using native HTML5 elements without JavaScript or framesets.

### Eclipse help processing

The `eclipsehelp` transformation generates XHTML-based output and files that are needed to create an Eclipse Help system plug-in. Once the normal XHTML process has run, the `dita.map.eclipse` target is used to create a set of control files and navigation files.

Eclipse uses multiple files to control the plug-in behavior. Some of these control files are generated by the build, while others might be created manually. The following Ant targets control the Eclipse help processing:

<code>dita.map.eclipse.init</code>	Sets up various default properties
<code>dita.map.eclipse.toc</code>	Creates the XML file that defines an Eclipse table of contents
<code>dita.map.eclipse.index</code>	Creates the sorted XML file that defines an Eclipse index

<b>dita.map.eclipse.plugin</b>	Creates the <code>plugin.xml</code> file that controls the behavior of an Eclipse plug-in
<b>dita.map.eclipse.plugin.properties</b>	Creates a Java properties file that sets properties for the plug-in, such as name and version information
<b>dita.map.eclipse.manifest.file</b>	Creates a <code>MANIFEST.MF</code> file that contains additional information used by Eclipse
<b>copy-plugin-files</b>	Checks for the presence of certain control files in the source directory, and copies those found to the output directory
<b>dita.map.eclipse.fragment.language.init</b>	Works in conjunction with the <code>dita.map.eclipse.fragment.language.country.init</code> and <code>dita.map.eclipse.fragment.error</code> targets to control Eclipse fragment files, which are used for versions of a plug-in created for a new language or locale

Several of the targets listed above have matching templates for processing content that is located outside of the scope of the map directory, such as `dita.out.map.eclipse.toc`.

## HTML Help processing

The `htmlhelp` transformation creates HTML Help control files. If the build runs on a system that has the HTML Help compiler installed, the control files are compiled into a CHM file.

Once the pre-processing and XHTML processes are completed, most of the HTML Help processing is handled by the following targets:

<b>dita.map.htmlhelp</b>	Create the HHP, HHC, and HHK files. The HHK file is sorted based on the language of the map.
<b>dita.htmlhelp.convertlang</b>	Ensures that the content can be processed correctly by the compiler, and that the appropriate code pages and languages are used.
<b>compile.HTML.Help</b>	Attempts to detect the HTML Help compiler. If the compiler is found, the full project is compiled into a single CHM file.

## PDF processing modules

---

The PDF (formerly known as PDF2) transformation process runs the pre-processing routine and follows it by a series of additional targets. These steps work together to create a merged set of content, convert the merged content to XSL-FO, and then format the XSL-FO file to PDF.

The PDF process includes many Ant targets. During a typical conversion from map to PDF, the following targets are most significant.

<b>map2pdf2</b>	Creates a merged file by calling a common Java merge module. It then calls the <code>publish.map.pdf</code> target to do the remainder of the work.
<b>publish.map.pdf</b>	Performs some initialization and then calls the <code>transform.topic2pdf</code> target to do the remainder of processing.

<b><code>transform.topic2pdf</code></b>	Converts the merged file to XSL-FO, generates the PDF, and deletes the <code>topic.fo</code> file, unless instructed to keep it.
The <code>transform.topic2pdf</code> target uses the following targets to perform those tasks:	
<b><code>transform.topic2fo</code></b>	Convert the merged file to an XSL-FO file. This process is composed of several sub-targets.
<b><code>transform.topic2fo.index</code></b>	Runs a Java process to set up index processing, based on the document language. This step generates the file <code>stage1.xml</code> in the temporary processing directory.
<b><code>transform.topic2fo.flagging</code></b>	Sets up preprocessing for flagging based on a DITaval file. This step generates the file <code>stage1a.xml</code> in the temporary processing directory.
<b><code>transform.topic2fo.main</code></b>	Does the bulk of the conversion from DITA to XSL-FO. It runs the XSLT-based process that creates <code>stage2.fo</code> in the temporary processing directory.
<b><code>transform.topic2fo.i18n</code></b>	Does additional localization processing on the FO file; it runs a Java process that converts <code>stage2.fo</code> into <code>stage3.fo</code> , followed by an XSLT process that converts <code>stage3.fo</code> into <code>topic.fo</code> .
<b><code>transform.fo2pdf</code></b>	Converts the <code>topic.fo</code> file into PDF using the specified FO processor (Antenna House, XEP, or Apache FOP).
<b><code>delete.fo2pdf.topic.fo</code></b>	Deletes the <code>topic.fo</code> file, unless otherwise specified by setting an Ant property or command-line option.

## History of the PDF transformation

The DITA Open Toolkit PDF transformation was originally based on a third-party contribution by Idiom Technologies, and is commonly known as the “pdf2” plug-in.

When IBM developed the code that later became DITA-OT, it included only a proof-of-concept PDF transformation. IBM had their own processing chain for producing PDFs from SGML, which they had developed over several decades, so resources were focused primarily on XHTML output and preprocessing.

Since the initial proof-of-concept transformation was not robust enough for production-grade output, companies began to develop their own PDF transformations. One company, Idiom Technologies, made their transformation (known as the “pdf2” transformation) available as open source on 23 February 2006. The Idiom plug-in was initially available as a separately-downloadable plug-in that could be installed into DITA-OT.

Later the DITA-OT project formally incorporated the Idiom plug-in as a demonstration in the `demo/fo` directory. Beginning with DITA-OT version 1.5, released 18 December 2009, the “pdf2” code served as the main, supported PDF transformation. (The original PDF transformation was deprecated and renamed “legacypdf”.) In DITA-OT version 1.6, the “pdf2” plug-in was moved to `plugins/org.dita.pdf2`.

The fact that the current PDF transformation was not originally developed in parallel with the other core DITA-OT transformations led to anomalies that often confuse users:

- Elements are often (by default) styled differently in the XHTML and PDF transformations. For example, consider the `<info>` element in a task topic. In HTML output, this is an inline element; in PDF output, it is a block-level element.
- The auto-generated strings used for localization are different, and so languages that are supported by DITA-OT differ based on whether the XHTML or PDF transformation is used.
- The Idiom plug-in used its own extension mechanism (the `Customization` folder) to provide overrides to the PDF transformation.

- Before the release of DITA 1.1 (which added support for the indexing domain), Idiom developed an index extension that used a FrameMaker-inspired syntax.





---

# Chapter

# 49

---

## DITA specification support

---

DITA Open Toolkit 3.7 supports all versions of the OASIS DITA specification, including 1.0, 1.1, 1.2, and 1.3.

### DITA 1.2 support

---

DITA Open Toolkit 3.7 supports the DITA 1.2 specification. While 1.2 is no longer the latest version of DITA, the grammar files (DTD and XML Schema) are still included with DITA-OT and content explicitly created for 1.2 continues to work as intended.

Highlights of DITA 1.2 support in the toolkit include:

- Processing support for all new elements and attributes
- Link redirection and text replacement using `@keyref`
- New `@processing-role` attribute in maps to allow references to topics that will not produce output artifacts
- New content reference extensions, including the ability to reference a range of elements, to push content into another topic, and to use keys for resolving a `@conref` attribute.
- The ability to filter content with controlled values and taxonomies using Subject Scheme Maps
- Processing support for both default versions of task (original, limited task, and the general task with fewer constraints on element order)
- Acronym and abbreviation support with the new `<abbreviated-form>` element
- New link grouping abilities available with headers in relationship tables
- OASIS Subcommittee specializations from the learning and machine industry domains (note that the core toolkit contains only basic processing support for these, but can be extended to produce related artifacts such as SCORM modules)

To find detailed information about any of these features, see the specification documents at OASIS. The DITA Adoption Technical Committee has also produced several papers to describe individual new features. In general, the white papers are geared more towards DITA users and authors, while the specification is geared more towards tool implementors, though both may be useful for either audience. The DITA Adoption papers can be found from that committee's main web page.

#### Related information

### DITA 1.3 support

---

DITA Open Toolkit 3.7 provides processing support for the OASIS DITA 1.3 specification. Initial preview support for this specification was added in version 2.0 of the toolkit; version 2.2 extended this foundation to support key scopes and branch filtering along with additional DITA 1.3 features.

Because DITA 1.3 is fully backwards compatible with previous DITA DTDs and schemas, DITA-OT provides the 1.3 materials as the default grammar files for processing. The XML Catalog resolution maps any references for unversioned DITA document types to the 1.3 versions. All processing ordinarily dependent on the 1.0, 1.1, or 1.2 definitions continues to work as usual, and any documents that make use of the newer DITA 1.3 elements or attributes will be supported with specific new processing.

## Major features of DITA 1.3

The following DITA 1.3 features are supported in DITA Open Toolkit.

- [Scoped keys](#) supported using DITA 1.3 @keyscope attribute
- [Branch filtering](#) using <ditavalref> elements in a map
- Support formatting based on new XML Mention elements, such as adding angle brackets around elements tagged with <xmlelement> and adding @ before attributes tagged with <xmlatt>
- New highlighting elements <line-through> and <overline>
- Support for profiling based on @deliveryTarget attribute
- Support for the new @orient attribute for rotating tables
- Profile (filter or flag) based on [groups within profiling attributes](#)
- @keyref and related key referencing attributes supported on <object>
- New in-topic link syntax using . in place of the topic ID: #./figure
- Support for additional new elements, such as the <div> element for grouping
- Support @cascade attribute in maps (processing defaults to the value merge, which is the [default cascade operation](#) described by the DITA specification)

**Note:** For the latest status information on DITA 1.3-related features and fixes, see the [DITA 1.3 label](#) in the GitHub issues tracker.

### Related information

## DITA 2.0 preview support

---

DITA Open Toolkit 3.7 provides a preview of features for the upcoming OASIS DITA 2.0 specification. This preliminary processing support is provided on the basis of the latest DRAFT versions of the DITA 2.0 DTD and RELAX NG grammar files from OASIS (as of January 2022).

DITA documents that reference the draft grammar files can be parsed, and where features overlap with DITA 1.3, those features will work as expected.

### DITA-OT 3.5

DITA-OT 3.5 provided an initial preview of DITA 2.0 features.

- The new <include> element can be used to reference text or XML content from other files. In addition to the processing mandated by the specification, DITA-OT also supports the character set definition and line range extraction options previously provided for <coderef> elements (see [Extended codeblock processing](#) on page 286).
- The new @specializations attribute, which replaces the DITA 1.x @domains attribute, can now be used as an alternative method of declaring specialized attributes.
- The @outputclass attribute can now be specified as a flagging behavior in DITaval files. This allows you to flag an element with a CSS class keyword that will be added to the @class attribute value in the generated HTML. Output classes allow you to pick up pre-defined styles from existing web frameworks, and are more easily overridden with custom CSS files than the inline @style attributes generated by DITA 1.x flagging options such as @color and @backcolor.
- Titles can now be specified on simple tables, and <simpletable> entries now support row and column spanning attributes.
- Where DITA 1.x defined conflicting @class values for <linktext>, <shortdesc>, and <searchtitle> in maps and topics, the new draft of DITA 2.0 uses the topic-based @class value in all cases. Processing is updated to recognize the updated value when these elements are used in maps.

### DITA-OT 3.6

DITA-OT 3.6 added support for additional DITA 2.0 features.

- Where earlier DITA versions relied on the `<object>` element to embed media in DITA source files, DITA 2.0 provides new `<audio>` and `<video>` elements that correspond to their HTML5 equivalents.
- For HTML5 compatibility, the new emphasis domain adds support for the `<strong>` and `<em>` elements in addition to the existing `<b>` and `<i>` elements in the highlighting domain.
- The troubleshooting domain has been updated with additional constructs that can be used to provide detailed diagnostic information.
- Several obsolete elements and attributes have been removed from DITA 2.0, including:
  - `<boolean>`
  - `<data-about>`
  - `<indextermref>`
  - `@alt` on `<image>`
  - `@navtitle` on `<topicref>`
  - `@query` on `<topicref>`
  - `@refcols` on `<simpletable>`
  - `@xtrc`
  - `@xtrf`

### DITA-OT 3.7

DITA-OT 3.7 adds support for additional DITA 2.0 features.

- The new “combine” chunk action can be used to merge content into new output documents.

When the `@chunk` attribute is set to `combine` on a map, branch, or map reference, all source DITA documents grouped by that reference will be combined into a single document in the output.

(Support for the DITA 2.0 “split” chunk action has not yet been implemented.)

**Note:** The new chunk action is only applied if the root map has a DITA 2.0 doctype, such as:

```
<!DOCTYPE map PUBLIC "-//OASIS//DTD DITA 2.0 Map//EN" "map.dtd">
```

If the root map uses an unversioned (or 1.x) doctype, DITA 1.3 processing will be applied, and 2.0 chunk actions will be ignored. With a 2.0 root map, any 1.3 chunk actions are ignored.

- The new `<keytext>` element can be used to define variable text referenced by `@keyref`. Although the DITA 2.0 grammar files in this release support the use of `<keytext>` in authored files, DITA-OT 3.7 does not yet have processing support for the element.
- The new alternative titles domain and `<titlealt>` element (separate from the `<titlealts>` element in DITA 1.3) may be used when you need to use an alternate title, such as for a navigation title, search title, link title, subtitle, or title hint.
- The new `@appid-role` attribute is available on `<resourceid>`. The default is `context-sensitive-help`.
- The `@keyref` attribute was added to all elements in the highlighting domain and the new emphasis domain.
- The `@href`, `@format`, and `@scope` attributes are now used consistently for linking elements.
- Several obsolete elements and attributes have been removed from DITA 2.0, including:
  - `<anchor>`
  - `<anchorref>`
  - `<data-about>`
  - `<hasInstance>`
  - `<hasKind>`
  - `<hasNarrower>`
  - `<hasPart>`
  - `<hasRelated>`
  - `<longquoteref>`
  - `<relatedSubjects>`

- `<sectiondiv>`
- `<subjectRel>`
- `<subjectRelHeader>`
- `<subjectRelTable>`
- `<subjectRole>`
- `@anchorref` from `<map>`
- `@copy-to`
- `@href`, `@format`, `@type`, `@scope`, `@reftitle` from `<lq>` (`@keyref` remains)
- `@locktitle`
- `@longdesc`
- `@mapkeyref`
- `@print`
- `@query`
- `@specentry` from `<stentry>`
- `@spectitle`

**Note:** Other new or revised features proposed for DITA 2.0 are not yet supported. Additional features will be implemented in future versions of DITA-OT as the specification evolves.

**Tip:** For the latest status information on DITA 2.0-related features and fixes, see the [DITA 2.0 label](#) in the GitHub issues tracker.

### Related information

## Implementation-dependent features

---

For certain features, the DITA specification allows conforming processors to choose between different implementation alternatives. In these cases, there may be differences in behavior when DITA content is handled by different processors. DITA-OT supports implementation-specific features by applying one or more of the permissible processing approaches.

### Chunking

DITA content can be divided or merged into new output documents in different ways, depending on the value of the `@chunk` attribute.

DITA-OT supports the following chunking methods:

- `select-topic`
- `select-document`
- `select-branch`
- `by-topic`
- `by-document`
- `to-content`
- `to-navigation`.

When no chunk attribute values are given, no chunking is performed.

**Note:** For HTML-based transformation types, this is effectively equivalent to `select-document` and `by-document` defaults.

Error recovery:

- When two tokens from the same category are used, no error or warning is thrown.
- When an unrecognized chunking method is used, no error or warning is thrown.

### Filtering

Error recovery:

- When there are multiple `<revprop>` elements with the same `@val` attribute, no error or warning is thrown
- When multiple `prop` elements define a duplicate attribute and value combination, attribute default, or fall-back behavior, the DOTJ007W warning is thrown.

## Debugging attributes

The debug attributes are populated as follows:

**xtrf**

The XML trace filename is used to store the absolute system path of the original source document.

**xtrc**

The XML trace counter stores an element counter with the following format:

```
element-name ":" integer-counter ";"
line-number ":" column-number
```

## Image scaling

If both height and width attributes are given, the image is scaled non-uniformly.

If the scale attribute is not an unsigned integer, no error or warning is thrown during preprocessing.

## Map processing

When a `<topicref>` element that references a map contains child `<topicref>` elements, the DOTX068W error is thrown and the child `<topicref>` elements are ignored.

## Link processing

When the value of a hyperlink reference in the `@href` attribute is not a valid URI reference, the DOTJ054E error is thrown. Depending on the [processing-mode](#) setting, error recovery may be attempted.

## Copy-to processing

When the `@copy-to` attribute is specified on a `<topicref>`, the content of the `<shortdesc>` element is not used to override the short description of the topic.

## Coderef processing

When `<coderef>` elements are used within code blocks to reference external files with literal code samples, the system default character set is used as the target file encoding unless a different character set is explicitly defined via the mechanisms described under [Character set definition](#) on page 286.

## Extended codeblock processing

DITA-OT provides additional processing support beyond that which is mandated by the DITA specification. These extensions can be used to define character encodings or line ranges for code references, normalize indentation, add line numbers or display whitespace characters in code blocks.

### Character set definition

For `<coderef>` elements, DITA-OT supports defining the code reference target file encoding using the `@format` attribute. The supported format is:

```
format ( ";" space* "charset=" charset )?
```

If a character set is not defined, the system default character set will be used. If the character set is not recognized or supported, the DOTJ052E error is thrown and the system default character set is used as a fallback.

```
<coderef href="unicode.txt" format="txt; charset=UTF-8"/>
```

As of DITA-OT 3.3, the default character set for code references can be changed by adding the `default.coderef-charset` key to the [configuration.properties](#) file:

```
default.coderef-charset = ISO-8859-1
```

The character set values are those supported by the Java [Charset](#) class.

### Line range extraction

Code references can be limited to extract only a specified line range by defining the `line-range` pointer in the URI fragment. The format is:

```
uri ( "#line-range(" start ( "," end )? ")" )?
```

Start and end line numbers start from 1 and are inclusive. If the end range is omitted, the range ends on the last line of the file.

```
<coderef href="Parser.scala#line-range(5,10)" format="scala"/>
```

Only lines from 5 to 10 will be included in the output.

### RFC 5147

DITA-OT also supports the line position and range syntax from [RFC 5147](#). The format for line range is:

```
uri ( "#line=" start? "," end? )?
```

Start and end line numbers start from 0 and are inclusive and exclusive, respectively. If the start range is omitted, the range starts from the first line; if the end range is omitted, the range ends on the last line of the file. The format for line position is:

```
uri ( "#line=" position )?
```

The position line number starts from 0.

```
<coderef href="Parser.scala#line=4,10" format="scala"/>
```

Only lines from 5 to 10 will be included in the output.

## Line range by content

Instead of specifying line numbers, you can also select lines to include in the code reference by specifying keywords (or “tokens”) that appear in the referenced file.

DITA-OT supports the token pointer in the URI fragment to extract a line range based on the file content. The format for referencing a range of lines by content is:

```
uri ("token=" start? (" end)? )?
```

Lines identified using start and end tokens are exclusive: the lines that contain the start token and end token will be not be included. If the start token is omitted, the range starts from the first line in the file; if the end token is omitted, the range ends on the last line of the file.

Given a Haskell source file named `fact.hs` with the following content,

```
1 -- START-FACT
2 fact :: Int -> Int
3 fact 0 = 1
4 fact n = n * fact (n-1)
5 -- END-FACT
6 main = print $ fact 7
```

a range of lines can be referenced as:

```
<coderef href="fact.hs#token=START-FACT,END-FACT" />
```

to include the range of lines that follows the `START-FACT` token on Line 1, up to (but not including) the line that contains the `END-FACT` token (Line 5). The resulting `<codeblock>` would contain lines 2–4:

```
fact :: Int -> Int
fact 0 = 1
fact n = n * fact (n-1)
```

**Tip:** This approach can be used to reference code samples that are frequently edited. In these cases, referencing line ranges by line number can be error-prone, as the target line range for the reference may shift if preceding lines are added or removed. Specifying ranges by line content makes references more robust, as long as the token keywords are preserved when the referenced resource is modified.

## Whitespace normalization

DITA-OT can adjust the leading whitespace in code blocks to remove excess indentation and keep lines short. Given an XML snippet in a codeblock with lines that all begin with spaces (indicated here as dots “.”),

```
..<subjectdef keys="audience">
....<subjectdef keys="novice"/>
....<subjectdef keys="expert"/>
..</subjectdef>
```

DITA-OT can remove the leading whitespace that is common to all lines in the code block. To trim the excess space, set the `@outputclass` attribute on the `<codeblock>` element to include the `normalize-space` keyword.

In this case, two spaces (“..”) would be removed from the beginning of each line, shifting content to the left by two characters, while preserving the indentation of lines that contain additional whitespace (beyond the common indent):

```
<subjectdef keys="audience">
.<subjectdef keys="novice"/>
.<subjectdef keys="expert"/>
</subjectdef>
```

## Whitespace visualization (PDF)

DITA-OT can be set to display the whitespace characters in code blocks to visualize indentation in PDF output.

To enable this feature, set the @outputclass attribute on the <codeblock> element to include the show-whitespace keyword.

When PDF output is generated, space characters in the code will be replaced with a middle dot or “interpunct” character ( · ); tab characters are replaced with a rightwards arrow and three spaces ( # ).

```
#   for·i·in·0..10·{
#   #   println(i)
#   }
```

**Figure 55: Sample Java code with visible whitespace characters (PDF only)**

## Line numbering (PDF)

DITA-OT can be set to add line numbers to code blocks to make it easier to distinguish specific lines.

To enable this feature, set the @outputclass attribute on the <codeblock> element to include the show-line-numbers keyword.

```
1 #   for·i·in·0..10·{
2 #   #   println(i)
3 #   }
```

**Figure 56: Sample Java code with line numbers and visible whitespace characters (PDF only)**

## Related concepts

[Resolve topic fragments and code references \(topic-fragment\)](#) on page 271

The topic-fragment step expands content references to elements in the same topic and resolves references made with the <coderef> element. This step is implemented in SAX pipes.

# DITA features in the documentation

DITA Open Toolkit uses various recent DITA features in the project documentation.

The [source files](#) for the DITA-OT documentation include examples of the following DITA features (among others):

- subjectScheme classification for controlling available attributes
- profiling and branch filtering (novice/expert content)
- extending topics with conref push
- keys and key references
- XML mention domain

## Subject schemes

Various topics, sections and elements in the docs are profiled by audience:

```
1 <li·id="novice-variables-last"·audience="novice">
2   ··<p·id="common-format-info">
3     ····<varname>format</
varname>·is·the·output·format·(transformation·type)·.·This·argument·corresponds·to·the
4     ····common·parameter·<xref·keyref="parameters-base/transtype"/
>·.·Use·the·same·values·as·for·the
5     ····<parmname>transtype</
parmname>·build·parameter,·for·example·<option>html5</option>·or
6     ····<option>pdf</option>·.</p>
7 </li>
```



An “audience” subject scheme controls the values that are available for the @audience attribute:

```
1 <subjectdef keys="audience">
2   ..<subjectdef keys="novice"/>
3   ..<subjectdef keys="expert"/>
4   ..<subjectdef keys="xslt-customizer"/>
5 </subjectdef>
```

A dedicated subject scheme map defines several series of permissible values for @outputclass attributes, which apply styling to elements on the project website, enable [extended codeblock processing](#) such as whitespace visualization and line numbering in PDF output, or trigger [HTML5-compliant syntax highlighting](#) via [prism.js](#).

```
1 <schemeref href="subjectscheme-outputclass.ditamap"/>
```

## Branch filtering: re-using profiled content

*Installing DITA-OT* pulls a subset of the build description from *using the dita command*, filtered to display only content deemed suitable for novice users under [Building output](#):

```
1 <topicref href="using-dita-command.dita"
2   .....keys="first-build-using-dita-command" locktitle="yes">
3   ..<topicmeta>
4     ...<navtitle>Building output</navtitle>
5   ..</topicmeta>
6   ..<ditavalref href="../resources/novice.ditaval">
7     ...<ditavalmeta>
8       .....<dvrResourcePrefix>first-build-</dvrResourcePrefix>
9     ...</ditavalmeta>
10  ..</ditavalref>
11 </topicref>
```

The same content appears later in [Using the dita command](#) with additional information on arguments, options and examples.

```
1 <topicref href="using-dita-command.dita"
2   .....keys="build-using-dita-command" locktitle="yes">
3   ..<topicmeta>
4     ...<navtitle>Using the <cmdname>dita</cmdname> command</navtitle>
5   ..</topicmeta>
6   ..<ditavalref href="../resources/expert.ditaval">
7     ...<ditavalmeta>
8       .....<dvrResourcePrefix>build-</dvrResourcePrefix>
9     ...</ditavalmeta>
10  ..</ditavalref>
```

## Conref push

The docs build uses the conref push mechanism (with the pushreplace, mark, and pushafter [conactions](#)) to extend the parameter descriptions embedded in the default plug-ins:

```
1 <plentry id="args.cssspath">
2   ..<pt>
3     ...<parmname>args.cssspath</parmname>
4   ..</pt>
5   ..<pd conaction="pushreplace" conref="parameters-html5.dita#html5/
args.cssspath.desc">
6     ...<div conref="../ant-parameters-details.dita#base-html/
args.cssspath.desc"/>
7   ..</pd>
```

```

 8  ..<pd conaction="mark" conref="parameters-html5.dita#html5/
args.csspath.desc"/>
 9  ..<pd conaction="pushafter">
10  ....<div conref="./ant-parameters-details.dita#base-html/
args.csspath.details"/>
11  ..</pd>
12 </plentry>

```

The pushed content appears in the output after the default description. (See [HTML-based output parameters](#) on page 96.)

**Tip:** You could also use the same mechanism to extend the documentation with custom information that applies only to your company's toolkit distribution.

## Keys and key references

The `key-definitions.ditamap` defines keys for version references, re-usable links, etc.

This key definition defines the maintenance release version:

```

<keydef keys="maintenance-version">
  <topicmeta>
    <keywords>
      <keyword>3.7.3</keyword>
    </keywords>
  </topicmeta>
</keydef>

```

In topics, the keyword is used in place of hard-coded version references:

```

<title>DITA Open Toolkit <keyword keyref="maintenance-version"/> Release
Notes</title>

```

## XML mention domain

The docs use the [XML mention domain](#) to mark up XML elements and attributes:

```

<li id="1777">
  DITA 1.3: Initial support has been added for the <xmlatt>orient</xmlatt>
  attribute on <xmlelement>table</xmlelement> elements. These changes allow
  Antenna House Formatter to render tables in landscape mode when the
  <xmlatt>orient</xmlatt> attribute is set to <option>land</option>. [...]
</li>

```

When the toolkit generates output for the sample above:

- the XML element name is wrapped in angle brackets as `<table>`
- the attribute name is prefixed with an “at” sign as `@orient`

---

# Chapter

# 50

---

## Extension point reference

---

DITA Open Toolkit provides a series of extension points that can be used to integrate changes into the core code. Extension points are defined in the `plugin.xml` file for each plug-in. When plug-ins are installed, DITA-OT makes each extension visible to the rest of the toolkit.

### All DITA-OT extension points

---

The pre-defined extension points can be used to add new functionality to DITA-OT. If your toolkit installation includes custom plug-ins that define additional extension points, you can add to this list by rebuilding the DITA-OT documentation.

**dita.conductor.target**

Defined in plug-in [org.dita.base](#).

Adds an Ant import to the main Ant build file.



**Attention:** This extension point is deprecated; use `ant.import` instead.

**dita.conductor.target.relative**

Defined in plug-in [org.dita.base](#).

Adds an Ant import to the main Ant build file.

**Tip:** As of DITA-OT 3.0, the `ant.import` extension point can be used instead.

**dita.conductor.plugin**

Defined in plug-in [org.dita.base](#).

Ant conductor plug-in information

**ant.import**

Defined in plug-in [org.dita.base](#).

Adds an Ant import to the main Ant build file.

**depend.preprocess.chunk.pre**

Defined in plug-in [org.dita.base](#).

Runs an Ant target before the `chunk` step in the pre-processing stage.

**depend.preprocess.clean-temp.pre**

Defined in plug-in [org.dita.base](#).

Runs an Ant target before the `clean-temp` step in the pre-processing stage.

**depend.preprocess.coderef.pre**

Defined in plug-in [org.dita.base](#).

Runs an Ant target before the `coderef` step in the pre-processing stage.

**org.dita.pdf2.catalog.relative**

Defined in plug-in [org.dita.pdf2](#).

Adds the content of a catalog file to the main catalog file for the PDF plug-in.

**dita.xsl.conref**

Defined in plug-in [org.dita.base](#).

<b>dita.preprocess.conref.param</b>	Content reference XSLT import Defined in plug-in <a href="#">org.dita.base</a> .
<b>depend.preprocess.conref.pre</b>	Content reference XSLT parameters Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the conref step in the pre-processing stage.
<b>depend.preprocess.conrefpush.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the conrefpush step in the pre-processing stage.
<b>depend.preprocess.copy-html.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the copy-html step in the pre-processing stage.
<b>depend.preprocess.copy-files.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the copy-files step in the pre-processing stage.
<b>depend.preprocess.copy-flag.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the copy-flag step in the pre-processing stage.
<b>depend.preprocess.copy-image.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the copy-image step in the pre-processing stage.
<b>depend.preprocess.copy-subsiary.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the copy-subsiary step in the pre-processing stage.
<b>dita.parser</b>	Defined in plug-in <a href="#">org.dita.base</a> . Custom DITA parser
<b>depend.preprocess.debug-filter.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the debug-filter step in the pre-processing stage.
<b>dita.preprocess.debug-filter.param</b>	Defined in plug-in <a href="#">org.dita.base</a> . Debug filter module parameters
<b>dita.preprocess.map-reader.param</b>	Defined in plug-in <a href="#">org.dita.base</a> . Debug filter module parameters
<b>dita.preprocess.topic-reader.param</b>	Defined in plug-in <a href="#">org.dita.base</a> . Debug filter module parameters
<b>dita.xsl.messages</b>	Defined in plug-in <a href="#">org.dita.base</a> . Adds new diagnostic messages to DITA-OT.
<b>dita.conductor.eclipse.toc.param</b>	Defined in plug-in <a href="#">org.dita.eclipsehelp</a> . Pass parameters to the XSLT step that generates the Eclipse Help table of contents (TOC).
<b>dita.xsl.eclipse.toc</b>	Defined in plug-in <a href="#">org.dita.eclipsehelp</a> . Overrides the default XSLT step that generates the Eclipse Help table of contents (TOC).

<b>dita.map.eclipse.index.pre</b>	Defined in plug-in <a href="#">org.dita.eclipsehelp</a> . Runs an Ant target before the Eclipse index extraction process.
<b>dita.xsl.eclipse.plugin</b>	Defined in plug-in <a href="#">org.dita.eclipsehelp</a> . Overrides the default XSLT step that generates the <code>plugin.xml</code> file for Eclipse Help.
<b>dita.basedir-resource-directory</b>	Defined in plug-in <a href="#">org.dita.base</a> . Flag to use basedir as resource directory
<b>dita.conductor.pdf2.formatter.check</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Formatter check
<b>depend.org.dita.pdf2.format.post</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Formatting post-target
<b>depend.org.dita.pdf2.format.pre</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Formatting pre-target
<b>depend.org.dita.pdf2.format</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Formatting target
<b>depend.preprocess.gen-list.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the <code>gen-list</code> step in the pre-processing stage.
<b>dita.xsl.strings</b>	Defined in plug-in <a href="#">org.dita.base</a> . Generated text
<b>dita.xsl.htmlhelp.map2hhc</b>	Defined in plug-in <a href="#">org.dita.htmlhelp</a> . Overrides the default XSLT step that generates the HTML Help contents ( <code>.hhc</code> ) file.
<b>dita.xsl.htmlhelp.map2hhp</b>	Defined in plug-in <a href="#">org.dita.htmlhelp</a> . Overrides the default XSLT step that generates the HTML Help project ( <code>.hhp</code> ) file.
<b>dita.conductor.html.param</b>	Defined in plug-in <a href="#">org.dita.xhtml</a> . Pass parameters to the HTML and HTML Help transformations.
<b>dita.html.extensions</b>	Defined in plug-in <a href="#">org.dita.base</a> . HTML file extension
<b>dita.xsl.html.cover</b>	Defined in plug-in <a href="#">org.dita.xhtml</a> . Overrides the default HTML cover page generation process.
<b>dita.xsl.htmltoc</b>	Defined in plug-in <a href="#">org.dita.xhtml</a> . Overrides the default XSLT step that generates the HTML table of contents (TOC).
<b>dita.xsl.xhtml</b>	Defined in plug-in <a href="#">org.dita.xhtml</a> . Overrides the default HTML or XHTML transformation, including HTML Help and Eclipse Help. The referenced file is integrated directly into the XSLT step that generates XHTML.
<b>dita.conductor.xhtml.toc.param</b>	Defined in plug-in <a href="#">org.dita.xhtml</a> .

	Pass parameters to the XSLT step that generates the XHTML table of contents (TOC).
<b>dita.conductor.html5.toc.param</b>	Defined in plug-in <a href="#">org.dita.html5</a> . Pass parameters to the XSLT step that generates the HTML5 table of contents (TOC).
<b>dita.xsl.html5.cover</b>	Defined in plug-in <a href="#">org.dita.html5</a> . Overrides the default HTML5 cover page generation process.
<b>dita.xsl.html5.toc</b>	Defined in plug-in <a href="#">org.dita.html5</a> . Overrides the default XSLT step that generates the HTML5 table of contents (TOC).
<b>dita.xsl.html5</b>	Defined in plug-in <a href="#">org.dita.html5</a> . Overrides the default HTML5 transformation. The referenced file is integrated directly into the XSLT step that generates HTML5.
<b>dita.conductor.html5.param</b>	Defined in plug-in <a href="#">org.dita.html5</a> . Pass parameters to the HTML5 transformation.
<b>dita.image.extensions</b>	Defined in plug-in <a href="#">org.dita.base</a> . Image file extension
<b>depend.org.dita.pdf2.index</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Indexing target
<b>depend.org.dita.pdf2.init.pre</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Initialization pre-target
<b>dita.conductor.lib.import</b>	Defined in plug-in <a href="#">org.dita.base</a> . Adds a Java library to the DITA-OT classpath.
<b>depend.preprocess.keyref.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the keyref step in the pre-processing stage.
<b>dita.xsl.maplink</b>	Defined in plug-in <a href="#">org.dita.base</a> . Map link XSLT import
<b>depend.preprocess.maplink.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the maplink step in the pre-processing stage.
<b>dita.preprocess.mappull.param</b>	Defined in plug-in <a href="#">org.dita.base</a> . Map pull XSLT parameters
<b>dita.xsl.mappull</b>	Defined in plug-in <a href="#">org.dita.base</a> . Map pull XSLT import
<b>depend.preprocess.mappull.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the mappull step in the pre-processing stage.
<b>dita.xsl.mapref</b>	Defined in plug-in <a href="#">org.dita.base</a> . Map reference XSLT import
<b>dita.preprocess.mapref.param</b>	Defined in plug-in <a href="#">org.dita.base</a> .

<b>depend.preprocess.mapref.pre</b>	Map reference XSLT parameters Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the <code>mapref</code> step in the pre-processing stage.
<b>depend.preprocess.move-meta-entries.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the <code>move-meta-entries</code> step in the pre-processing stage.
<b>dita.xsl.xslfo.i18n-postprocess</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . PDF I18N postprocess import
<b>dita.xsl.xslfo</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Overrides the default PDF transformation. The referenced XSL file is integrated directly into the XSLT step that generates the XSL-FO.
<b>dita.conductor.pdf2.param</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . Pass parameters to the PDF transformation.
<b>org.dita.pdf2.xsl.topicmerge</b>	Defined in plug-in <a href="#">org.dita.pdf2</a> . PDF2 topic merge XSLT import
<b>dita.catalog.plugin-info</b>	Defined in plug-in <a href="#">org.dita.base</a> . Plug-in XML catalog information
<b>package.support.email</b>	Defined in plug-in <a href="#">org.dita.base</a> . Specifies the e-mail address of the person who provides support for the DITA-OT plug-in.
<b>package.support.name</b>	Defined in plug-in <a href="#">org.dita.base</a> . Specifies the person who provides support for the DITA-OT plug-in.
<b>package.version</b>	Defined in plug-in <a href="#">org.dita.base</a> . Specifies the version of the DITA-OT plug-in.
<b>depend.preprocess.post</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target after the pre-processing stage.
<b>depend.preprocess.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the pre-processing stage.
<b>dita.transtype.print</b>	Defined in plug-in <a href="#">org.dita.base</a> . Defines a transformation as a print type.
<b>dita.resource.extensions</b>	Defined in plug-in <a href="#">org.dita.base</a> . Resource file extension
<b>dita.xsl.topicpull</b>	Defined in plug-in <a href="#">org.dita.base</a> . Topic pull XSLT import
<b>dita.preprocess.topicpull.param</b>	Defined in plug-in <a href="#">org.dita.base</a> . Topic pull XSLT parameters
<b>depend.preprocess.topicpull.pre</b>	Defined in plug-in <a href="#">org.dita.base</a> . Runs an Ant target before the <code>topicpull</code> step in the pre-processing stage.

**dita.conductor.transtype.check**

Defined in plug-in [org.dita.base](#).

Adds a new value to the list of valid transformation types.

**Tip:** This extension point is still supported for backwards compatibility, but since DITA-OT 2.1, any new customizations should instead use the `<transtype>` element in the [Plug-in descriptor file](#) on page 141 to define a new transformation.

**dita.conductor.xhtml.param**

Defined in plug-in [org.dita.xhtml](#).

Pass parameters to the XHTML and Eclipse Help transformations.

**dita.specialization.catalog**

Defined in plug-in [org.dita.base](#).

Adds the content of a catalog file to the main DITA-OT catalog file.



**Attention:** This extension point is deprecated; use `dita.specialization.catalog.relative` instead.

**dita.specialization.catalog.relative**

Defined in plug-in [org.dita.base](#).

Adds the content of a catalog file to the main DITA-OT catalog file.

## General extension points

---

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

**ant.import**

Adds an Ant import to the main Ant build file.

**dita.conductor.lib.import**

Adds a Java library to the DITA-OT classpath.

**dita.conductor.target**

Adds an Ant import to the main Ant build file.



**Attention:** This extension point is deprecated; use `ant.import` instead.

**dita.conductor.target.relative**

Adds an Ant import to the main Ant build file.

**Tip:** As of DITA-OT 3.0, the `ant.import` extension point can be used instead.

**dita.conductor.transtype.check**

Adds a new value to the list of valid transformation types.

**Tip:** This extension point is still supported for backwards compatibility, but since DITA-OT 2.1, any new customizations should instead use the `<transtype>` element in the [Plug-in descriptor file](#) on page 141 to define a new transformation.

**dita.specialization.catalog**

Adds the content of a catalog file to the main DITA-OT catalog file.





**Attention:** This extension point is deprecated; use `dita.specialization.catalog.relative` instead.

`dita.specialization.catalog.relative`

Adds the content of a catalog file to the main DITA-OT catalog file.

`dita.transtype.print`

Defines a transformation as a print type.

`dita.xsl.messages`

Adds new diagnostic messages to DITA-OT.

`org.dita.pdf2.catalog.relative`

Adds the content of a catalog file to the main catalog file for the PDF plug-in.

### Related reference

[Extension points in `org.dita.base`](#) on page 302

The `org.dita.base` plug-in provides common extension points that are available to extend processing in all transformations that DITA Open Toolkit supports.

## Pre-processing extension points

---

You can use these extension points to run an Ant target before or after the pre-processing stage. If necessary, you can also run an Ant target before a specific pre-processing step — but this approach is not recommended.

**Tip:** For maximum compatibility with future versions of DITA-OT, most plug-ins should use the extension points that run **before** or **after** pre-processing.

`depend.preprocess.pre`

Runs an Ant target before the pre-processing stage.

`depend.preprocess.post`

Runs an Ant target after the pre-processing stage.

### Legacy pre-processing extensions

The following extension points are available in the original `preprocess` pipeline that was used by default for all transformations prior to DITA-OT 3.0. These extensions are not available in the newer [map-first preprocessing](#) pipeline (`preprocess2`), which is used in the PDF and HTML Help transformations as of DITA-OT 3.0.



**CAUTION:** The internal order of preprocessing steps is subject to change between versions of DITA-OT. New versions may remove, reorder, combine, or add steps to the process, so the extension points **within** the preprocessing stage should only be used if absolutely necessary.

`depend.preprocess.chunk.pre`

Runs an Ant target before the `chunk` step in the pre-processing stage.

`depend.preprocess.coderef.pre`

Runs an Ant target before the `coderef` step in the pre-processing stage.

`depend.preprocess.conref.pre`

Runs an Ant target before the `conref` step in the pre-processing stage.

`depend.preprocess.conrefpush.pre`

Runs an Ant target before the `conrefpush` step in the pre-processing stage.

`depend.preprocess.clean-temp.pre`

Runs an Ant target before the `clean-temp` step in the pre-processing stage.

`depend.preprocess.copy-files.pre`

Runs an Ant target before the `copy-files` step in the pre-processing stage.

`depend.preprocess.copy-flag.pre`

Runs an Ant target before the `copy-flag` step in the pre-processing stage.

<b>depend.preprocess.copy-html.pre</b>	Runs an Ant target before the <code>copy-html</code> step in the pre-processing stage.
<b>depend.preprocess.copy-image.pre</b>	Runs an Ant target before the <code>copy-image</code> step in the pre-processing stage.
<b>depend.preprocess.copy-subsiary.pre</b>	Runs an Ant target before the <code>copy-subsiary</code> step in the pre-processing stage.
<b>depend.preprocess.debug-filter.pre</b>	Runs an Ant target before the <code>debug-filter</code> step in the pre-processing stage.
<b>depend.preprocess.gen-list.pre</b>	Runs an Ant target before the <code>gen-list</code> step in the pre-processing stage.
<b>depend.preprocess.keyref.pre</b>	Runs an Ant target before the <code>keyref</code> step in the pre-processing stage.
<b>depend.preprocess.maplink.pre</b>	Runs an Ant target before the <code>maplink</code> step in the pre-processing stage.
<b>depend.preprocess.mappull.pre</b>	Runs an Ant target before the <code>mappull</code> step in the pre-processing stage.
<b>depend.preprocess.mapref.pre</b>	Runs an Ant target before the <code>mapref</code> step in the pre-processing stage.
<b>depend.preprocess.move-meta-entries.pre</b>	Runs an Ant target before the <code>move-meta-entries</code> step in the pre-processing stage.
<b>depend.preprocess.topicpull.pre</b>	Runs an Ant target before the <code>topicpull</code> step in the pre-processing stage.

### Related reference

[Extension points in `org.dita.base`](#) on page 302

The `org.dita.base` plug-in provides common extension points that are available to extend processing in all transformations that DITA Open Toolkit supports.

## XSLT-import extension points

---

You can use these extension points to override XSLT processing steps in pre-processing and certain transformation types. The value of the `@file` attribute in the `<feature>` element specifies a relative path to an XSL file in the current plug-in. The plug-in installer adds a XSL import statement to the default DITA-OT code, so that the XSL override becomes part of the normal build.

### Pre-processing

You can use the following extension points to add XSLT processing to modules in the pre-processing pipeline:

<b>dita.xsl.conref</b>	Overrides the pre-processing step that resolves <code>conref</code> .
<b>dita.xsl.maplink</b>	Overrides the <code>maplink</code> step in the pre-processing pipeline. This is the step that generates map-based links.
<b>dita.xsl.mappull</b>	Overrides the <code>mappull</code> step in the pre-processing pipeline. This is the step that updates navigation titles in maps and causes attributes to cascade.
<b>dita.xsl.mapref</b>	Overrides the <code>mapref</code> step in the pre-processing pipeline. This is the step that resolves references to other maps.

**dita.xsl.topicpull**

Overrides the `topicpull` step in the pre-processing pipeline. This is the step that pulls text into `<xref>` elements, as well as performing other tasks.

**Transformations**

You can use the following extension points to add XSLT processing to modules in DITA-OT transformations:

**dita.map.eclipse.index.pre**

Runs an Ant target before the Eclipse index extraction process.

**dita.xsl.eclipse.plugin**

Overrides the default XSLT step that generates the `plugin.xml` file for Eclipse Help.

**dita.xsl.eclipse.toc**

Overrides the default XSLT step that generates the Eclipse Help table of contents (TOC).

**dita.xsl.html.cover**

Overrides the default HTML cover page generation process.

**dita.xsl.htmltoc**

Overrides the default XSLT step that generates the HTML table of contents (TOC).

**dita.xsl.html5**

Overrides the default HTML5 transformation. The referenced file is integrated directly into the XSLT step that generates HTML5.

**dita.xsl.html5.cover**

Overrides the default HTML5 cover page generation process.

**dita.xsl.html5.toc**

Overrides the default XSLT step that generates the HTML5 table of contents (TOC).

**dita.xsl.htmlhelp.map2hhc**

Overrides the default XSLT step that generates the HTML Help contents ( `.hhc` ) file.

**dita.xsl.htmlhelp.map2hhp**

Overrides the default XSLT step that generates the HTML Help project ( `.hhp` ) file.

**dita.xsl.xhtml**

Overrides the default HTML or XHTML transformation, including HTML Help and Eclipse Help. The referenced file is integrated directly into the XSLT step that generates XHTML.

**dita.xsl.xslfo**

Overrides the default PDF transformation. The referenced XSL file is integrated directly into the XSLT step that generates the XSL-FO.

**Example**

The following two files represent a complete (albeit simple) plug-in that adds a company banner to the XHTML output. The `plugin.xml` file declares an XSLT file that extends the XHTML processing; the `xsl/header.xml` file overrides the default header processing to provide a company banner.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <plugin id="com.example.brandheader">
3   <feature extension="dita.xsl.xhtml" file="xsl/header.xml"/>
4 </plugin>
```

**Figure 57: Contents of the `plugin.xml` file**

```
1 <?xml version="1.0" encoding="UTF-8"?>
```

```

2 <xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/
Transform">
3   <xsl:template name="gen-user-header">
4     <div>
5       
7     </div>
8   </xsl:template>
9 </xsl:stylesheet>

```

**Figure 58: Contents of the `xsl/header.xsl` file**

## XSLT-parameter extension points

---

You can use these extension points to pass parameters into existing XSLT steps in both the pre-processing pipeline and DITA-OT transformation. The parameters generally will be available as global `<xsl:param>` values with XSLT overrides.

### Pre-processing

You can use the following extension points to pass parameters to modules in the pre-processing pipeline:

<b><code>dita.preprocess.conref.param</code></b>	Pass parameters to the <code>conref</code> module in the pre-processing pipeline
<b><code>dita.preprocess.mappull.param</code></b>	Pass parameters to the <code>mappull</code> module in the pre-processing pipeline
<b><code>dita.preprocess.mapref.param</code></b>	Pass parameters to the <code>mapref</code> module in the pre-processing pipeline
<b><code>dita.preprocess.topicpull.param</code></b>	Pass parameters to the <code>topicpull</code> module in the pre-processing pipeline

### Transformations

You can use the following extension points to pass parameters to modules in DITA-OT transformations:

<b><code>dita.conductor.eclipse.toc.param</code></b>	Pass parameters to the XSLT step that generates the Eclipse Help table of contents (TOC).
<b><code>dita.conductor.html.param</code></b>	Pass parameters to the HTML and HTML Help transformations.
<b><code>dita.conductor.html5.param</code></b>	Pass parameters to the HTML5 transformation.
<b><code>dita.conductor.html5.toc.param</code></b>	Pass parameters to the XSLT step that generates the HTML5 table of contents (TOC).
<b><code>dita.conductor.pdf2.param</code></b>	Pass parameters to the PDF transformation.
<b><code>dita.conductor.xhtml.param</code></b>	Pass parameters to the XHTML and Eclipse Help transformations.
<b><code>dita.conductor.xhtml.toc.param</code></b>	Pass parameters to the XSLT step that generates the XHTML table of contents (TOC).

## Example

The following two files represent a complete (albeit simple) plug-in that passes the parameters defined in the `insertParameters.xml` file to the XHTML transformation process.

```
1 <plugin id="com.example.newparam">
2   <feature extension="dita.conductor.xhtml.param"
3     ..... file="insertParameters.xml"/>
4 </plugin>
```

**Figure 59: Contents of the `plugin.xml` file**

```
1 <dummy xmlns:if="ant:if" xmlns:unless="ant:unless">
2   <!-- Any Ant code allowed in xslt task is possible. Example: -->
3   <param name="paramNameinXSLT" expression="{antProperty}"
4     ..... if:set="antProperty"/>
5 </dummy>
```

**Figure 60: Contents of the `insertParameters.xml`**

## Version and support information

You can use these extension points to define version and support information for a plug-in. Currently, DITA-OT does not do anything with this information, but it might do so in the future.

<b>package.support.name</b>	Specifies the person who provides support for the DITA-OT plug-in.
<b>package.support.email</b>	Specifies the e-mail address of the person who provides support for the DITA-OT plug-in.
<b>package.version</b>	Specifies the version of the DITA-OT plug-in. The value uses the following syntax:

```
major.minor.micro.qualifier
```

where:

- *major* is a number and is required.
- *minor* is a number and is optional.
- *micro* is a number and is optional.
- *qualifier* is optional and can be composed of numerals, uppercase or lower case letters, underscores, and hyphens.

By default, the `package.version` value is set to 0.0.0.

## Example

```
1 <plugin id="com.example.WithSupportInfo">
2   <feature extension="package.support.name" value="Joe the Author"/>
3   <feature extension="package.support.email" value="joe@example.com"/>
4   <feature extension="package.version" value="1.2.3"/>
5 </plugin>
```

## Related reference

[Extension points in `org.dita.base`](#) on page 302

The `org.dita.base` plug-in provides common extension points that are available to extend processing in all transformations that DITA Open Toolkit supports.

## Extension points by plug-in

---

The default plug-ins that ship with DITA Open Toolkit include a series of extension points that can be used to modify various aspects of toolkit processing.

If your toolkit installation includes custom plug-ins that define additional extension points, you can add topics by rebuilding the DITA-OT documentation.

### Related tasks


[Rebuilding the DITA-OT documentation](#) on page 135

When you add or remove plug-ins, you can rebuild the documentation to update the information on the extension points, messages, and parameters that are available in your environment.

## Extension points in `org.dita.base`

The `org.dita.base` plug-in provides common extension points that are available to extend processing in all transformations that DITA Open Toolkit supports.

<b><code>ant.import</code></b>	Adds an Ant import to the main Ant build file.
<b><code>depend.preprocess.chunk.pre</code></b>	Runs an Ant target before the <code>chunk</code> step in the pre-processing stage.
<b><code>depend.preprocess.clean-temp.pre</code></b>	Runs an Ant target before the <code>clean-temp</code> step in the pre-processing stage.
<b><code>depend.preprocess.coderef.pre</code></b>	Runs an Ant target before the <code>coderef</code> step in the pre-processing stage.
<b><code>depend.preprocess.conref.pre</code></b>	Runs an Ant target before the <code>conref</code> step in the pre-processing stage.
<b><code>depend.preprocess.conrefpush.pre</code></b>	Runs an Ant target before the <code>conrefpush</code> step in the pre-processing stage.
<b><code>depend.preprocess.copy-files.pre</code></b>	Runs an Ant target before the <code>copy-files</code> step in the pre-processing stage.
<b><code>depend.preprocess.copy-flag.pre</code></b>	Runs an Ant target before the <code>copy-flag</code> step in the pre-processing stage.
<b><code>depend.preprocess.copy-html.pre</code></b>	Runs an Ant target before the <code>copy-html</code> step in the pre-processing stage.
<b><code>depend.preprocess.copy-image.pre</code></b>	Runs an Ant target before the <code>copy-image</code> step in the pre-processing stage.
<b><code>depend.preprocess.copy-subsiary.pre</code></b>	Runs an Ant target before the <code>copy-subsiary</code> step in the pre-processing stage.
<b><code>depend.preprocess.debug-filter.pre</code></b>	Runs an Ant target before the <code>debug-filter</code> step in the pre-processing stage.
<b><code>depend.preprocess.gen-list.pre</code></b>	Runs an Ant target before the <code>gen-list</code> step in the pre-processing stage.
<b><code>depend.preprocess.keyref.pre</code></b>	Runs an Ant target before the <code>keyref</code> step in the pre-processing stage.
<b><code>depend.preprocess.maplink.pre</code></b>	Runs an Ant target before the <code>maplink</code> step in the pre-processing stage.

<b>depend.preprocess.mappull.pre</b>	Runs an Ant target before the <code>mappull</code> step in the pre-processing stage.
<b>depend.preprocess.mapref.pre</b>	Runs an Ant target before the <code>mapref</code> step in the pre-processing stage.
<b>depend.preprocess.move-meta-entries.pre</b>	Runs an Ant target before the <code>move-meta-entries</code> step in the pre-processing stage.
<b>depend.preprocess.post</b>	Runs an Ant target after the pre-processing stage.
<b>depend.preprocess.pre</b>	Runs an Ant target before the pre-processing stage.
<b>depend.preprocess.topicpull.pre</b>	Runs an Ant target before the <code>topicpull</code> step in the pre-processing stage.
<b>dita.basedir-resource-directory</b>	Flag to use <code>basedir</code> as resource directory
<b>dita.catalog.plugin-info</b>	Plug-in XML catalog information
<b>dita.conductor.lib.import</b>	Adds a Java library to the DITA-OT classpath.
<b>dita.conductor.plugin</b>	Ant conductor plug-in information
<b>dita.conductor.target</b>	Adds an Ant import to the main Ant build file.
	 <b>Attention:</b> This extension point is deprecated; use <code>ant.import</code> instead.
<b>dita.conductor.target.relative</b>	Adds an Ant import to the main Ant build file.
	<b>Tip:</b> As of DITA-OT 3.0, the <code>ant.import</code> extension point can be used instead.
<b>dita.conductor.transtype.check</b>	<p>Adds a new value to the list of valid transformation types.</p> <p><b>Tip:</b> This extension point is still supported for backwards compatibility, but since DITA-OT 2.1, any new customizations should instead use the <code>&lt;transtype&gt;</code> element in the <a href="#">Plug-in descriptor file</a> on page 141 to define a new transformation.</p>
<b>dita.html.extensions</b>	HTML file extension
<b>dita.image.extensions</b>	Image file extension
<b>dita.parser</b>	Custom DITA parser
<b>dita.preprocess.conref.param</b>	Content reference XSLT parameters
<b>dita.preprocess.debug-filter.param</b>	Debug filter module parameters
<b>dita.preprocess.map-reader.param</b>	Debug filter module parameters
<b>dita.preprocess.mappull.param</b>	Map pull XSLT parameters
<b>dita.preprocess.mapref.param</b>	Map reference XSLT parameters
<b>dita.preprocess.topic-reader.param</b>	Debug filter module parameters
<b>dita.preprocess.topicpull.param</b>	Topic pull XSLT parameters
<b>dita.resource.extensions</b>	Resource file extension
<b>dita.specialization.catalog</b>	Adds the content of a catalog file to the main DITA-OT catalog file.



**Attention:** This extension point is deprecated; use `dita.specialization.catalog.relative` instead.

**dita.specialization.catalog.relative**

Adds the content of a catalog file to the main DITA-OT catalog file.

**dita.transtype.print**

Defines a transformation as a print type.

**dita.xsl.conref**

Content reference XSLT import

**dita.xsl.maplink**

Map link XSLT import

**dita.xsl.mappull**

Map pull XSLT import

**dita.xsl.mapref**

Map reference XSLT import

**dita.xsl.messages**

Adds new diagnostic messages to DITA-OT.

**dita.xsl.strings**

Generated text

**dita.xsl.topicpull**

Topic pull XSLT import

**package.support.email**

Specifies the e-mail address of the person who provides support for the DITA-OT plug-in.

**package.support.name**

Specifies the person who provides support for the DITA-OT plug-in.

**package.version**

Specifies the version of the DITA-OT plug-in.

### Related reference

[Pre-processing extension points](#) on page 297

You can use these extension points to run an Ant target before or after the pre-processing stage. If necessary, you can also run an Ant target before a specific pre-processing step — but this approach is not recommended.

[Version and support information](#) on page 301

You can use these extension points to define version and support information for a plug-in. Currently, DITA-OT does not do anything with this information, but it might do so in the future.

[General extension points](#) on page 296

These extension points enable you to extend DITA-OT. You can add Ant targets or imports; add a Java library to the classpath parameter; add a new transformation type; extend a catalog file; add new diagnostic messages, and more.

## Extension points in `org.dita.eclipsehelp`

Certain extension points are specific to the Eclipse Help transformation.

**dita.conductor.eclipse.toc.param**

Pass parameters to the XSLT step that generates the Eclipse Help table of contents (TOC).

**dita.map.eclipse.index.pre**

Runs an Ant target before the Eclipse index extraction process.

**dita.xsl.eclipse.plugin**

Overrides the default XSLT step that generates the `plugin.xml` file for Eclipse Help.

**dita.xsl.eclipse.toc**

Overrides the default XSLT step that generates the Eclipse Help table of contents (TOC).



## Extension points in `org.dita.html5`

In addition to the extension points provided by common processing and those shared by with other HTML-based transformations, the `org.dita.html5` plug-in provides extension points that are specific to the HTML5 transformation.

<b><code>dita.conductor.html5.param</code></b>	Pass parameters to the HTML5 transformation.
<b><code>dita.conductor.html5.toc.param</code></b>	Pass parameters to the XSLT step that generates the HTML5 table of contents (TOC).
<b><code>dita.xsl.html5</code></b>	Overrides the default HTML5 transformation. The referenced file is integrated directly into the XSLT step that generates HTML5.
<b><code>dita.xsl.html5.cover</code></b>	Overrides the default HTML5 cover page generation process.
<b><code>dita.xsl.html5.toc</code></b>	Overrides the default XSLT step that generates the HTML5 table of contents (TOC).

## Extension points in `org.dita.htmlhelp`

Certain extension points are specific to the HTML Help transformation.

<b><code>dita.xsl.htmlhelp.map2hhc</code></b>	Overrides the default XSLT step that generates the HTML Help contents ( <code>.hhc</code> ) file.
<b><code>dita.xsl.htmlhelp.map2hhp</code></b>	Overrides the default XSLT step that generates the HTML Help project ( <code>.hhp</code> ) file.

## Extension points in `org.dita.pdf2`

Certain extension points are specific to the PDF transformation (formerly known as “PDF2”).

<b><code>depend.org.dita.pdf2.format</code></b>	Formatting target
<b><code>depend.org.dita.pdf2.format.post</code></b>	Formatting post-target
<b><code>depend.org.dita.pdf2.format.pre</code></b>	Formatting pre-target
<b><code>depend.org.dita.pdf2.index</code></b>	Indexing target
<b><code>depend.org.dita.pdf2.init.pre</code></b>	Initialization pre-target
<b><code>dita.conductor.pdf2.formatter.check</code></b>	Formatter check
<b><code>dita.conductor.pdf2.param</code></b>	Pass parameters to the PDF transformation.
<b><code>dita.xsl.xslfo</code></b>	Overrides the default PDF transformation. The referenced XSL file is integrated directly into the XSLT step that generates the XSL-FO.
<b><code>dita.xsl.xslfo.i18n-postprocess</code></b>	PDF I18N postprocess import
<b><code>org.dita.pdf2.catalog.relative</code></b>	Adds the content of a catalog file to the main catalog file for the PDF plug-in.
<b><code>org.dita.pdf2.xsl.topicmerge</code></b>	PDF2 topic merge XSLT import

## Extension points in `org.dita.xhtml`

The `org.dita.xhtml` plug-in provides shared extension points that can be used to modify processing in HTML-based transformation types such as Eclipse help, HTML Help, and XHTML.

<b>dita.conductor.html.param</b>	Pass parameters to the HTML and HTML Help transformations.
<b>dita.conductor.xhtml.param</b>	Pass parameters to the XHTML and Eclipse Help transformations.
<b>dita.conductor.xhtml.toc.param</b>	Pass parameters to the XSLT step that generates the XHTML table of contents (TOC).
<b>dita.xsl.html.cover</b>	Overrides the default HTML cover page generation process.
<b>dita.xsl.htmltoc</b>	Overrides the default XSLT step that generates the HTML table of contents (TOC).
<b>dita.xsl.xhtml</b>	Overrides the default HTML or XHTML transformation, including HTML Help and Eclipse Help. The referenced file is integrated directly into the XSLT step that generates XHTML.

---

# Chapter 51

---

## License Information

---

DITA Open Toolkit is released under the Apache License, Version 2.0.

**Note:** For information on the terms and conditions for use, reproduction, and distribution of DITA Open Toolkit, refer to the [Apache License 2.0](#).

### Third-party software

---

DITA Open Toolkit uses third-party software components to provide certain features in the core toolkit, Java API, and bundled plug-ins.

#### DITA-OT 3.7

DITA-OT core processing uses the following third-party software:

Software	Version	License
Ant	1.10.12	<a href="#">Apache License 2.0</a>
Apache Commons Codec	1.10	<a href="#">Apache License 2.0</a>
Apache Commons IO	2.8.0	<a href="#">Apache License 2.0</a>
Guava	25.1-jre	<a href="#">Apache License 2.0</a>
ICU for Java (ICU4J)	70.1	<a href="#">ICU License</a>
Jackson data binding library	2.13.0	<a href="#">Apache License 2.0</a>
Logback Classic Module	1.2.8	<a href="#">Eclipse Public License 1.0</a> , <a href="#">GNU Lesser General Public License 2.1</a>
Saxon-HE	10.6	<a href="#">Mozilla Public License 1.0</a>
Simple Logging Facade for Java (SLF4J)	1.7.32	<a href="#">MIT License</a>
Xerces	2.12.2	<a href="#">Apache License 2.0</a>
XML APIs	1.4.01	<a href="#">Apache License 2.0</a> , <a href="#">W3C Document License</a>
XML Resolver	1.2	<a href="#">Apache License 2.0</a>

**Note:** The XML APIs library contains source code for SAX and DOM APIs, which each have their own licenses.

#### PDF plug-in

The `org.dita.pdf2` plug-in relies on additional third-party software to generate PDF output:

Software	Version	License
Apache Commons Logging	1.0.4	<a href="#">Apache License 2.0</a>
Apache XML Graphics	2.5	<a href="#">Apache License 2.0</a>
Batik	1.13	<a href="#">Apache License 2.0</a>
FOP	2.5	<a href="#">Apache License 2.0</a>

---

# Chapter

# 52

---

## Glossary

---

Certain terms have particular meaning in the context of the DITA Open Toolkit project.

### argument

---

Required parameter passed to the Ant process or `dita` command.

### DITA Open Toolkit

---

The open-source publishing engine for content authored in the Darwin Information Typing Architecture.

#### DITA-OT

**Note:** Treat as a proper noun; do not precede with *the* definite article.

#### DOST

**Note:** Deprecated acronym for “**DITA Open Source Toolkit**”. Use *DITA-OT* instead.

### extension point

---

Pre-defined interface that can be added to a plug-in to allow other plug-ins to extend or customize portions of its functionality. An extendable feature is defined by declaring an `<extension-point>` element in the `plugin.xml` file. Other plug-ins can then override the default behavior by defining custom code that runs when this extension point is called.

### option

---

Discretionary parameter passed to the Ant process or `dita` command.

### output format

---

Deliverable file or set of files containing all of the transformed content.

### parameter

---

Command-line argument or option passed to the Ant process or `dita` command.

## plug-in

---

Group of related files that change the default behavior of DITA-OT in some way.

## processor

---

Software that performs a series of operations to transform DITA content from one format to another.

## property

---

Ant-specific argument or option.

## template

---

Optional `<template>` elements can be added to `plugin.xml` files to define XML or XSL files that integrate DITA-OT extensions. Template files are often named with a `_template` suffix, and may be used to create custom extensions, group targets, and more. Anything contained in the plug-in's template files is integrated when the plug-in is installed.

## transformation type

---

Component of a plug-in that defines an output format.

### transtype

**Note:** Abbreviated form of *transformation type*. Use only to refer to the `transtype` parameter of the `dita` command, or to the `<transtype>` element in a `plugin.xml` file that defines the output format.

## variable

---

Language-specific piece of generated text, most often defined in the files in `org.dita.base\xsl\common`.

## XSL template

---

Set of rules in an XSL stylesheet that are applied to nodes that match specific XML structures.

---

# Appendix

## A

---

### DITA and DITA-OT resources

---

In addition to the DITA Open Toolkit documentation, there are other resources about DITA and DITA-OT that you might find helpful.

#### Web-based resources

---

There are many vital DITA resources online, including the DITA Users group and the DITA-OT project website at [dita-ot.org](http://dita-ot.org).

**DITA-OT project website: [dita-ot.org](http://dita-ot.org)**

The DITA-OT project website at [dita-ot.org](http://dita-ot.org) provides information about the latest toolkit releases, including download links, release notes, and documentation for recent DITA-OT versions.

**DITA Users group**

The original dita-users group was founded in 2004 as a Yahoo! Group and moved to Groups.io in November 2019. The mailing list addresses the needs of DITA users at all levels of experience, from beginners to experts, and serves as a vital resource for the DITA community.

**DITA-OT Users Google Group**

General interest DITA-OT product forum, for questions on any aspect of the toolkit—from installation and getting started to questions about specific overrides, plug-ins, and customizations.

**DITA-OT Slack workspace**

Forum for discussion related to DITA-OT development and design. Topics in this forum are more technical in nature, covering upcoming design or code changes. To request an invitation and join in the discussion, visit [slack.dita-ot.org](https://slack.dita-ot.org).

**Home page for the DITA Technical Committee**

The OASIS DITA Technical Committee develops the DITA standard.

**DITA-OT project archive**

The DITA-OT project archive at [dita-archive.xml.org](http://dita-archive.xml.org) provides news about earlier toolkit releases, and release notes for legacy versions.

#### Books

---

Several DITA-related publications include information on configuring and customizing DITA Open Toolkit with detailed examples on creating custom plug-ins for PDF output.

***DITA for Print: A DITA Open Toolkit Workbook (Second Edition, 2017)***

Authored by Leigh W. White, DITA Specialist at IXIASOFT, and published by XML Press, *DITA for Print* walks readers through developing a PDF customization from scratch.

Here is an excerpt from the back cover:

*DITA for Print* is for anyone who wants to learn how to create PDFs using the DITA Open Toolkit without learning everything there is to know about XSL-FO, XSLT, or XPath, or even about the DITA Open Toolkit itself. *DITA for Print* is written for non-programmers, by a non-programmer, and although it is written for people who have a good understanding of the DITA standard, you don't need a technical background to get custom PDFs up and running quickly.

This is an excellent, long-needed resource that was initially developed in 2013 for DITA-OT 1.8.

The second edition has been revised to cover DITA Open Toolkit Version 2, including customizing the DITA 1.3 troubleshooting topic type, localization strings, bookmarks, and the new back-cover functionality.

**Important:**

The first edition of *DITA for Print* recommended copying entire files from the PDF2 plug-in to your custom plug-in. The DITA-OT project — and the second edition of the book — do not recommend this practice.

Instead, you should copy only the specific attribute sets and templates that you want to override. Following this practice will more cleanly isolate your customizations from the DITA-OT code, which will make it easier for you to update your plug-ins to work with future versions of DITA-OT.

***DITA for Practitioners: Volume 1, Architecture and Technology (2012)***

Authored by Eliot Kimber and published by XML Press, this seminal resource contains a chapter dedicated to DITA Open Toolkit: “Running, Configuring, and Customizing the Open Toolkit”. In addition to a robust overview of DITA-OT customization and extension, the chapter contains a detailed example of customizing a PDF plug-in to specify 7" × 10" paper size and custom fonts for body text and headers.

The DITA-OT chapter in *DITA for Practitioners: Volume 1* was written for DITA-OT 1.5.4, which was the latest stable version at the time it was written.



---

# Appendix

# B

---

## DITA Open Toolkit 3.7 Release Notes

---

DITA Open Toolkit 3.7.3 is a maintenance release that fixes issues reported in DITA-OT 3.7, which includes stable IDs in re-used content, a common variable format for generated text strings, and an updated preview of features for the latest draft of the upcoming DITA 2.0 standard, such as the new “combine” chunk action, the `<titlealt>` element, and the alternative titles domain.

DITA-OT releases follow [semantic versioning](#) guidelines. Version numbers use the *major.minor.patch* syntax, where *major* versions may include incompatible API changes, *minor* versions add functionality in a backwards-compatible manner and *patch* versions are maintenance releases that include backwards-compatible bug fixes.

**Tip:** Download the `dita-ot-3.7.3.zip` package from the project website at [dita-ot.org/download](https://dita-ot.org/download).

## Requirements

---

DITA-OT is designed to run on Java version 8u101 or later and built and tested with the Open Java Development Kit (OpenJDK). Compatible Java distributions are available from multiple sources:

- You can download the Oracle JRE or JDK from [oracle.com/java](https://oracle.com/java) under commercial license.
- Eclipse Temurin is the free OpenJDK distribution available from [adoptium.net](https://adoptium.net).
- Free OpenJDK distributions are also provided by [Amazon Corretto](#), [Azul Zulu](#), and [Red Hat](#).

## DITA-OT 3.7.3

---

DITA Open Toolkit 3.7.3 is a maintenance release that includes the following bug fixes.

- In earlier versions, links to non-DITA resources were broken in branch filtering scenarios that used the `<dvrResourcePrefix>` or `<dvrResourceSuffix>` elements to adjust the names of filtered topic files. Processing has been corrected to only rename DITA resources, and preserve the original names of non-DITA resources like images or other assets. [#2704](#), [#3947](#)
- The image metadata processing failed to determine the height and width of images referenced via keyrefs. The `@format` attribute value is now set to `image` in the temporary `.job.xml` file, so the image dimensions can be read from the file metadata. [#3353](#), [#3963](#)
- In earlier versions, builds failed with a `NullPointerException` when projects contained references with absolute paths pointing outside the folder where the DITA map is located. A new guard has been added to handle these cases more gracefully. [#3366](#), [#3977](#)
- In DITA-OT 3.5.4 and later, builds failed with a `NullPointerException` when parsing specialized topics containing only table rows or cells. The table normalization filter has been updated to process these cases correctly. [#3597](#), [#3962](#)
- When passing DITA maps as `--resource` files with absolute paths on Windows, the temporary files folder path was added to the map path, resulting in invalid references. Processing has been updated to properly compute the file path for map resources with absolute paths. [#3724](#), [#3964](#)
- DITA-OT 3.6 always used the bundled open-source Saxon Home Edition (HE), even when a license for Saxon Professional Edition (PE) or Enterprise Edition (EE) was available in the DITA-OT classpath. The configuration has been updated to allow DITA-OT to use a licensed Saxon XSLT processor if present. [#3727](#), [#3949](#)

- Earlier versions generated incorrect links to nested topics when the parent topic contained a key reference and was re-used in different key scopes. Processing has been updated to preserve the fragment identifiers and ensure that links are generated correctly when topics are duplicated for each key scope. [#3867](#), [#3874](#), [#3945](#)
- On Windows, publishing speed was slower when running DITA-OT with recent Java versions, because the file canonicalization cache is no longer enabled by default in Java 12 and newer (see [JDK-8207005](#)). The Java commands in the `dita.bat` and `ant.bat` wrapper scripts have been updated to re-enable caching. [#3932](#), [#3933](#)
- On Windows, DITA-OT 3.6 failed to build output when input file paths contained non-ASCII characters. The encoding of the `.job.xml` file in the temporary directory has been explicitly set to UTF-8 to ensure that builds complete regardless of the operating system locale and input file path encoding. [#3934](#), [#3943](#)
- In earlier versions, builds failed with a `NullPointerException` when custom plug-ins referenced missing stylesheets. A new guard has been added to handle these cases more gracefully. [#3959](#), [#3960](#)
- When writing messages to the console in DITA-OT 3.6, `<xsl:message>` references to an XML element recursively printed its descendants. The logging code has been updated to properly serialize the nodes in XSL messages. [#3969](#), [#3978](#)
- The `DOTJ085E` error message has been aligned for consistency with other messages. [#3972](#)
- In DITA-OT 3.7, content references to topic elements were not resolved when publishing to HTML. Processing has been corrected to ensure that topic conrefs are handled correctly. [#3976](#), [#3979](#)
- In earlier versions, builds failed with a `NullPointerException` when processing maps that contained elements without `@class` attributes, such as inside `<foreign>` elements. Processing has been updated to handle these situations correctly. [#3980](#), [#3981](#)
- In earlier versions, builds would fail with XSLT errors when named templates returned an empty sequence. Processing has been relaxed to allow processing to continue under these circumstances. [#3991](#), [#3992](#)

For additional information on the issues resolved since the previous release, see the [3.7.3 milestone](#) and [changelog](#) on GitHub.

## DITA-OT 3.7.2 released May 17, 2022

---

DITA Open Toolkit 3.7.2 is a maintenance release that includes the following bug fixes.

- In version 3.7.1, processing failed when link targets contained unexpected syntax. The URL processing and validation filters in the Java code have been updated to support `mailto:` links and additional URI schemes. [#3730](#), [#3912](#)
- The DITA 1.3 grammar files have been updated to allow the `@outputclass` attribute on the `<change-historylist>` element. [#3905](#), [#3911](#)
- Processing will now report an error when a project file `param` is used to define a parameter that should be set with a dedicated key instead. [#3913](#), [#3915](#)
- When parallel processing was enabled with `parallel=true`, some files were occasionally skipped with “folder could not be created” errors when different processes tried to create the same directory. Processing has been updated to handle concurrent directory creation. If the directory already exists, processing will now continue without errors. [#3917](#), [#3925](#)
- The `jackson-databind` library has been updated to the latest patch version 2.13.2.2 to address a reported security vulnerability: [CVE-2020-36518](#). [#3923](#)

For additional information on the issues resolved since the previous release, see the [3.7.2 milestone](#) and [changelog](#) on GitHub.

## DITA-OT 3.7.1 released March 23, 2022

---

DITA Open Toolkit 3.7.1 is a maintenance release that includes the following bug fixes.

- In earlier versions, paths or filenames with typewriter apostrophes “’” or tilde “~” characters caused HTML builds to fail. Processing has been updated to ensure that these characters are handled correctly. [#2844](#), [#3880](#)

- On Windows, referencing images on another disk drive caused builds to fail. Resources with different drive letter paths are now handled correctly. [#3635](#), [#3885](#)
- As of version 3.6, XSL messages with serialized XML elements included only the text content. Processing has been revised to include the original XML element structure as in DITA-OT 3.5.4 and earlier releases. [#3662](#), [#3893](#)
- When publishing documents with nested topics or multiple glossary entries in the same file, generating @copy-to attributes with force-unique=true caused earlier versions of DITA-OT to create redundant copies of each file. The ForceUniqueFilter has been updated to properly handle references to separate topics within the same file. [#3750](#), [#3894](#)
- Earlier versions failed with errors when generating HTML5 output for chunked topics that include links between inner topics. Chunk processing has been updated to ensure that links between nested topics are generated correctly when the @chunk attribute is defined with to-content select-topic. [#3846](#), [#3881](#)
- The bundled Apache Xerces™ XML parser has been upgraded to version 2.12.2, which includes security updates to mitigate the vulnerability described in [CVE-2022-23437](#) when handling specially crafted XML document payloads. [#3857](#), [#3860](#)
- Strict processing mode has been updated to stop processing when images are missing. Earlier versions reported errors in this case, but allowed processing to continue. [#3858](#), [#3871](#)
- In earlier versions, the PDF2 dita.xsl.xslfo.il8n-postprocess extension point did not work, because the extension point and the XSLT templates were defined in the same place. The templates have been moved to a new file to ensure that templates in custom plug-ins take precedence when using the extension point. [#3861](#), [#3862](#)
- The DITA-OT 3.7 distribution package contained a spurious fop.jar file with an empty manifest in the root folder. The unnecessary Java archive has been removed. [#3864](#)
- In earlier versions, the branch filtering routine did not handle nested subtopics correctly. Processing has been corrected to properly re-write topic references with ditavalrefs and inner topics. [#3875](#), [#3887](#)
- Messages in build logs now contain location information when available. [#3877](#), [#3884](#)

The following error messages now include the name of the file where the issue was found:

- DOTJ041E
- DOTJ045I
- DOTJ046E
- DOTJ052E
- DOTJ060W
- DOTJ074W
- DOTJ077F
- DOTX008E
- DOTX065W
- The German and French translations for Caution, Notice, and Remember note labels have been updated to align with the signal words defined in ANSI Z535. [#3882](#), [#3883](#)
- When publishing to HTML, builds would fail when image paths contained a ? query component or # fragment identifier. Processing has been updated to handle these references correctly. [#3886](#), [#3892](#)
- The “Notice” strings added to PDF2 in DITA-OT 1.7.1 have been moved to the base plugin to ensure that all signal words for safety levels are defined in the same location. [#3888](#), [#3899](#)

For additional information on the issues resolved since the previous release, see the [3.7.1 milestone](#) and [changelog](#) on GitHub.

## DITA-OT 3.7 released January 17, 2022

---

DITA Open Toolkit Release 3.7 includes stable IDs in re-used content, a common variable format for generated text strings, and an updated preview of features for the latest draft of the upcoming DITA 2.0 standard, such as the new “combine” chunk action, the <titlealt> element, and the alternative titles domain.

## Common format for generated text

Prior to DITA-OT 3.7, there were two different XML structures for adding or modifying generated text (gentext). The base plug-in **org.dita.base** and any custom overrides defined via the `dita.strings.xml` extension point used a root element `<strings>`, with individual strings in `<str>` elements with `@name` attributes. This format was previously used for HTML, and all other output formats except PDF.

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <strings xml:lang="en-US">
3   <str name="String1">English generated text</str>
4 </strings>
```

**Figure 61: Base strings file structure prior to DITA-OT 3.7**

The PDF plug-in **org.dita.pdf2** used a root element `<vars>` with an XML namespace, and strings in `<variable>` elements with `@id` attributes.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <vars xmlns="http://www.idiominc.com/opentopic/vars">
3   <variable id="String1">English generated text</variable>
4 </vars>
```

**Figure 62: PDF2 strings file structure prior to DITA-OT 3.7**

Starting with DITA-OT 3.7, these structures have been deprecated and replaced with a new unified format. All files now use `<variables>` as the root element, with the `<variable>` elements previously used in PDF strings. The new format supports the XSL parameters used by the earlier PDF strings format to pass dynamic information such as chapter numbers or figure titles.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <variables>
3   <variable id="String1">English generated text</variable>
4 </variables>
```

**Figure 63: New common variable format as of DITA-OT 3.7**

The old formats are still supported, but plug-in developers should update any generated text files to reflect the new structure, as support for the old formats may be removed in a future release. [#3817](#)

## Updated DITA 2.0 preview

In addition to the [DITA 2.0 preview support](#) on page 282 provided in DITA-OT 3.5 and 3.6, this release adds support for the DITA 2.0 “combine” chunk action, and updated processing for the latest DRAFT versions of the DITA 2.0 DTD and RELAX NG grammar files from OASIS (as of January 2022). [#3674](#), [#3760](#), [#3809](#), [#3833](#), [#3847](#)

- The new “combine” chunk action can be used to merge content into new output documents.

When the `@chunk` attribute is set to `combine` on a map, branch, or map reference, all source DITA documents grouped by that reference will be combined into a single document in the output.

(Support for the DITA 2.0 “split” chunk action has not yet been implemented.)

**Note:** The new chunk action is only applied if the root map has a DITA 2.0 doctype, such as:

```
<!DOCTYPE map PUBLIC "-//OASIS//DTD DITA 2.0 Map//EN" "map.dtd">
```

If the root map uses an unversioned (or 1.x) doctype, DITA 1.3 processing will be applied, and 2.0 chunk actions will be ignored. With a 2.0 root map, any 1.3 chunk actions are ignored.

- The new `<keytext>` element can be used to define variable text referenced by `@keyref`. Although the DITA 2.0 grammar files in this release support the use of `<keytext>` in authored files, DITA-OT 3.7 does not yet have processing support for the element.

- The new alternative titles domain and `<titlealt>` element (separate from the `<titlealts>` element in DITA 1.3) may be used when you need to use an alternate title, such as for a navigation title, search title, link title, subtitle, or title hint.
- The new `@appid-role` attribute is available on `<resourceid>`. The default is `context-sensitive-help`.
- The `@keyref` attribute was added to all elements in the highlighting domain and the new emphasis domain.
- The `@href`, `@format`, and `@scope` attributes are now used consistently for linking elements.
- Several obsolete elements and attributes have been removed from DITA 2.0, including:
  - `<anchor>`
  - `<anchorref>`
  - `<data-about>`
  - `<hasInstance>`
  - `<hasKind>`
  - `<hasNarrower>`
  - `<hasPart>`
  - `<hasRelated>`
  - `<longquoteref>`
  - `<relatedSubjects>`
  - `<sectiondiv>`
  - `<subjectRel>`
  - `<subjectRelHeader>`
  - `<subjectRelTable>`
  - `<subjectRole>`
  - `@anchorref` from `<map>`
  - `@copy-to`
  - `@href`, `@format`, `@type`, `@scope`, `@reftitle` from `<lq>` (`@keyref` remains)
  - `@locktitle`
  - `@longdescref`
  - `@mapkeyref`
  - `@print`
  - `@query`
  - `@specentry` from `<stentry>`
  - `@spectitle`

DITA documents that reference the draft grammar files can be parsed, and where features overlap with DITA 1.3, those features will work as expected.

**Note:** Other new or revised features proposed for DITA 2.0 are not yet supported. Additional features will be implemented in future versions of DITA-OT as the specification evolves.

## Enhancements and changes

DITA Open Toolkit Release 3.7 includes the following enhancements and changes to existing features:

- The `Dockerfile` has been updated to better support the official [dita-ot-action](#) that was introduced in 3.6.1 to publish documentation via [GitHub Actions](#) whenever your source files are changed. The `Dockerfile` adds the `SHELL` command and installs the `locales` and `tzdata` packages as part of the base image, so custom actions can be simplified to a series of scripting hooks. [#3665](#)
- In earlier versions, IDs defined on elements in reusable components were not preserved when the parent element was included in other topics via content reference. In this case, element IDs were always randomized to prevent duplicate IDs, but this made it difficult to cross-reference reused content. The `conref` preprocessing module has been updated to retain the original IDs whenever possible, and only generate a randomized ID if the original would not be unique in the new context. This ensures that content references produce stable anchors in HTML and named destinations in PDF output. [#3736](#), [#3739](#)

- Additional support for Ant `<style>` was added to make custom `<pipeline>` [configurations](#) more consistent with XSLT tasks in Ant. A stylesheet can be passed as an Ant [resource](#), providing support for classpath-based plug-in resources. [#3780](#)
- The mappull processing step has changed how related links are generated with `args.rellinks`. Starting in 3.7, `noparent` will not generate any ancestor links and `nofamily` will not generate sibling, cousin, ancestor, or descendant links. Prior to 3.7, `args.rellinks=all` did not actually include all links. Now it will. As in previous versions, the default value for PDF output is `nofamily`, and other output formats include all link roles except ancestor links. [#3792](#), [#3850](#)
- Mapref processing was improved to remove any duplicate `@keyscope` values. Prior to 3.7 it was possible that `<mapref>` and `<map>` would contribute the same `@keyscope` value when the value was defined on both. [#3796](#)
- A `commonattributes` mode was added to the HTML5, PDF, and XHTML plug-ins to allow for easier extension. This is a backwards compatible change, however, existing plug-ins should be changed to use the new `commonattributes` mode. [#3806](#)

```
<xsl:template name="commonattributes">
  <!-- whole copy of commonattributes named template with customizations -->
  -->
</xsl:template>
```

**Figure 64: Named template prior to version 3.7**

```
<xsl:template match="@* | node()" mode="commonattributes">
  <xsl:param name="default-output-class" as="xs:string*" />
  <xsl:next-match>
    <xsl:with-param name="default-output-class" select="$default-output-class" />
  </xsl:next-match>
  <!-- customizations -->
</xsl:template>
```

**Figure 65: Template mode as of version 3.7**

- The `copy-to` preprocessing module has been updated to preserve fragment-only links. This ensures that any local anchors do not change when original topic resources are copied to new resources defined by the `@copy-to` attribute. [#3811](#), [#3832](#)
- HTML5
  - The order of elements in the `<head>` element of the HTML template files was changed to facilitate overrides. The common CSS stylesheets and any custom CSS files specified via `args.css` now come **after** the contents of the custom header file specified via `args.hdf`. This change better supports use cases in which the custom header file is used to insert references to external CSS stylesheets for frameworks like [Bootstrap](#). In previous versions of DITA-OT, framework styles took precedence over any equivalent rules in the user's custom stylesheet. This change allows rules in custom CSS files specified via `args.css` to override any of the framework styles as necessary. [#3770](#)
  - The legacy `gen-user` templates that were originally used to add content to the `<head>` element have been deprecated and will be removed in a future release. For each of these templates, parameter-based customizations are available that can be used to specify files that contain content that extends the default processing. [#3835](#), [#3849](#)
    - `gen-user-head` # use `args.hdf` instead
    - `gen-user-header` # use `args.hdr`
    - `gen-user-footer` # use `args.ftr`
    - `gen-user-scripts` # use `args.hdf`
    - `gen-user-styles` # use `args.css`
  - Support for the legacy media format Adobe Flash has been removed. All major browser vendors block Flash Player in recent versions, making it difficult to view Shockwave Flash content. [#3791](#)
  - The HTML5 stylesheets were updated to use XSL modes instead of named templates. [#3794](#)

This is a backwards compatible change, however, existing plug-ins should be changed to use modes instead of named templates for:

- `copyright`
- `gen-endnotes`
- `generateDefaultMeta`
- `generateCssLinks`
- `generateChapterTitle`
- `processHDF`
- `generateBreadcrumbs`
- `processHDR`
- `processFTR`
- `generateCharset`
- PDF
  - The new `@note__image` attribute set was added to combine attributes for images or icons for notes. [#3529](#) [#3660](#)
  - Japanese font mappings have been updated to ensure characters are rendered correctly. [#3768](#), [#3769](#)
    - The logical font Sans now prefers MS-Gothic, Hiragino Kaku Gothic Pro, HiraKakuProN-W3, or YuGothic over Arial Unicode MS.
    - For Serif text, MS-Mincho, Hiragino Mincho Pro, HiraMinProN-W3, or YuMincho are preferred to Arial Unicode MS.
    - For Monospaced text, MS-Gothic, Hiragino Kaku Gothic Pro, HiraKakuProN-W3, YuGothic, or Arial Unicode MS are used.
  - The source code for the renderer-specific PDF plug-ins for Antenna House Formatter (AXF) and RenderX XEP have been extracted to dedicated code repositories. The renderer-specific plug-ins are still distributed with DITA-OT. Only the source code location changed, allowing for easier maintenance. [#3807](#), [#3813](#)

This allows the plug-ins to be updated separately by commercial software vendors or open source contributors independent of the DITA-OT release cycle:

  - [org.dita.pdf2.axf](#)
  - [org.dita.pdf2.xep](#)
- Several bundled dependencies have been upgraded to new versions:
  - Ant 1.10.12 [#3821](#)
  - FOP 2.6 [#3774](#)
  - Gradle 7.2 [#3803](#)
  - ICU4J 70.1 [#3821](#)
  - Jackson 2.13.0 [#3821](#)
  - JUnit 4.13.2 [#3821](#)
  - Logback 1.2.8 [#3821](#), [#3837](#), [#3838](#)
  - RenderX XEP 3.6.3 [#3813](#)
  - Saxon 10.6 [#3485](#), [#3805](#),
  - SLF4J 1.7.32 [#3821](#)
  - Xerces 2.12.1 [#3821](#)
- Up until DITA-OT 2.4, the `log4j` logging library was bundled as a dependency of the Apache™ Formatting Objects Processor (FOP). DITA-OT 2.4 upgraded FOP to version 2.1, and removed the `log4j` library, but left the corresponding configuration files behind. The obsolete `log4j.properties` files have now been removed from the distribution package. [#3841](#)

## Bugs

DITA Open Toolkit Release 3.7 provides fixes for the following bugs:



- In PDF output generated with previous versions, “Warning” note labels used the same attribute set as “Danger” note labels. Processing has been corrected to apply the dedicated attribute set defined for warning note labels. Both attribute sets are empty by default, but this change makes it easier for custom plug-ins to define separate styling for danger and warning notes. [#3709](#)
- HTML5 output generated by earlier versions defined the character set twice in the <head> element, which certain HTML validation services reported as an error. The legacy <meta> element that specified the content type with an @http-equiv attribute has been removed in favor of the simpler version, which defines only the character set: <meta charset="UTF-8">. [#3715](#), [#3738](#)
- Key references were not properly expanded within content references when using key scopes. Processing has been updated to create unique topics for all resources, including resource-only topics. [#3733](#), [#3775](#)
- The command line interface now respects the convention to disable colored output when either the TERM=dumb or NO\_COLOR environment variables are set, or the --no-color option is passed to the dita command. [#3741](#)
- The German localization of the PDF *Preface* header strings included the page numbers twice, and the prodname parameter was missing. The default German strings have been aligned to include the product name and page numbers in the same pattern as other languages. [#3742](#)
- Column and row separators defined via the <tgroup> element were ignored. HTML processing has been corrected to ensure separators are applied as expected in HTML5 and XHTML table groups. [#3751](#), [#3752](#)
- The PDF2 internationalization configuration for the service mark character used an incorrect decimal code &#2120;, which corresponds to the U+0848 MANDAIC LETTER ATT character: #. The language files have been updated to use the correct hexadecimal code &#x2120; for the U+2120 SERVICE MARK character: #. [#3754](#)
- When plug-ins were installed on Windows systems, the integration process wrote Windows-style backslash “\” characters as path separators to the generated properties files, which caused errors if the same DITA-OT installation was used on other operating systems. All resources generated by the integrator now use UNIX-style slashes “/” as path separators, which work on Linux, macOS, and Windows. This ensures DITA-OT installations remain portable for use in continuous integration systems and other cross-platform publishing scenarios. [#3755](#), [#3759](#)
- Project files that included empty values in <param> elements failed with errors. Processing has been updated to allow processing to continue. [#3761](#), [#3824](#)
- In PDF output, figure descriptions were rendered before the image and title. Processing has been updated to correct the order of elements within figures. The image now appears first, followed by title and description. [#3765](#), [#3766](#)
- When processing simple tables such as parameter tables with no explicit header elements, earlier versions failed to assign IDs to generated elements. IDs are now generated correctly in these cases. [#3778](#)
- XHTML processing has been refined to correct the order of contents within <object> elements. Any <desc> or <longdesc> content is now generated after any <param> element to ensure the resulting XHTML files pass EPUBCheck validation. [#3779](#)
- HTML output generated from SVG files that specified height or width values in centimeters or inches were not scaled properly. Length values are now converted to pixels to ensure images are scaled correctly. [#3785](#), [#3786](#)
- When publishing documents with peer map references, spurious errors were reported for missing files, link text, and navigation titles when the peer maps were not available at processing time. Processing has been updated to relax these requirements for peer maps, and allow processing to complete without errors. [#3790](#)
- Table of contents navigation in HTML5 output used a <nav> element with the ARIA @role attribute set to toc. Certain accessibility tools flagged this as an error. The invalid role has been replaced with the navigation landmark role. A new toc class allows custom CSS styles to target the ToC navigation. CSS rules that use the nav[role='toc'] selector can be simplified to nav.toc. [#3800](#), [#3801](#)
- A 17-year-old bug in the content reference implementation has been resolved. When the original conref code was updated to XSLT 2.0 years ago, the syntax was not adjusted to account for the differences between XSLT 1.0 and 2.0, which caused errors in the selection of the first topic in a document. [#3842](#)
- DITA 1.3 grammar files have been updated to include hotfixes from the latest OASIS errata branch, which resolve issues with the available attributes on <change-historylist> and <colspec> elements. [#3843](#)



## Contributors

DITA Open Toolkit Release 3.7 includes [code contributions](#) by the following people:

1. Jarno Elovirta
2. Roger Sheen
3. Radu Coravu
4. Eric Sirois
5. Robert D Anderson
6. Eliot Kimber
7. Chris Papademetrious
8. Julien Lacour
9. Toshihiko Makita
10. Dmitriy Krasilnikov
11. David Bertalan
12. Jake Bourne
13. Jason Fox
14. Joe D. Williams

For the complete list of changes since the previous release, see the [changelog](#) on GitHub.

## Documentation updates

The documentation for DITA Open Toolkit Release 3.7 provides corrections and improvements to existing topics, along with new information in the following topics:

- [Migrating to release 3.7](#) on page 193
- [DITA 2.0 preview support](#) on page 282
- [Customizing generated text](#) on page 187
- [Installing DITA-OT via Homebrew](#) on page 19

For additional information on documentation issues resolved in DITA Open Toolkit Release 3.7, see the [3.7 milestone](#) in the documentation repository.

DITA Open Toolkit Release 3.7 includes [documentation contributions](#) by the following people:

1. Roger Sheen
2. Jarno Elovirta
3. Lief Erickson
4. Jason Fox
5. Nicolas Delobel
6. Stefan Eike

For the complete list of documentation changes since the previous release, see the [changelog](#).



# Index

## Special Characters

- debug [85](#)
- filter [85](#)
- force [85](#)
- format [83](#)
- help [84](#)
- input [83](#)
- install, *See* install subcommand
- logfile [85](#)
- output [85](#)
- parameter [85](#)
- plugins, *See* plugins subcommand
- propertyfile [85](#)
- temp [85](#)
- transtypes, *See* transtypes subcommand
- uninstall, *See* uninstall subcommand
- verbose [85](#)
- version, *See* version subcommand
- d [85](#)
- D [85](#)
- f [83](#)
- h [84](#)
- i [83](#)
- l [85](#)
- o [85](#)
- t [85](#)
- v [85](#)
- .hhc [73](#), [277](#)
- .hhk [73](#), [277](#)
- .hhp [73](#), [277](#)
- .properties file [26](#), [117](#)

## A

- <abbreviated-form> [281](#)
- <abstract> [206](#)
- Amazon Corretto [11](#), [13](#), [313](#)
- Ant [165](#), [263](#), [307](#)
  - args.debug [227](#)
  - build script [46](#), [89](#)
  - configuring [105](#)
  - dita command, benefits of [27](#)
  - <dita-cmd> [27](#)
  - <ditafileset> [149](#)
  - <exec> [27](#)
  - extending [265](#)
  - <jar> [165](#), [166](#), [167](#)
  - logging [225](#)
  - overview [45](#)
  - parameters [89](#)
  - <pipeline> [148](#), [165](#)
  - precedence [105](#)
  - preprocessing [154](#)
  - properties [89](#), [105](#)
  - publishing with [45](#), [46](#)
  - script [89](#)
  - <style> [148](#)

- targets [153](#)
  - <xsl:import> [149](#)
  - <xsl:include> [149](#)
  - <xslt> [148](#), [165](#)
  - See also* Saxon
- ANT\_OPTS [257](#)
- ant.import [153](#), [291](#), [302](#)
- Antenna House
  - change bars [123](#)
  - DITA XML mention domain [288](#)
  - local.properties [105](#)
  - plug-in [208](#)
  - plugin generator [183](#)
  - topic.fo [277](#)
  - transform.fo2pdf [277](#)
  - XSL-FO processor [13](#)
- Apache Commons Codec [307](#)
- Apache Commons IO [307](#)
- Apache Commons Logging [308](#)
- Apache FOP [308](#)
  - change bars [123](#), [196](#)
  - I18N [95](#), [107](#)
  - log files [225](#)
  - pdf.formatter [96](#)
  - plug-in [208](#)
  - plugin generator [183](#)
  - topic.fo [277](#)
  - transform.fo2pdf [277](#)
  - XSL-FO processor [13](#)
- Apache licence [307](#)
- Apache XML Graphics [308](#)
- API [49](#)
- Arabic [185](#)
- architecture [263](#), [263](#)
- args.artlbl [94](#), [96](#), [99](#)
- args.bookmap-order [94](#)
- args.bookmark.style [94](#)
- args.chapter.layout [94](#)
- args.copycss [96](#), [99](#)
- args.css [96](#), [99](#)
- args.csspath [96](#), [99](#)
- args.cssroot [96](#), [100](#)
- args.debug [89](#), [227](#)
- args.dita.locale [97](#), [100](#)
- args.draft [89](#)
- args.eclipse.provider [97](#), [102](#)
- args.eclipse.symbolic.name [97](#), [103](#)
- args.eclipse.version [97](#), [103](#)
- args.eclipsehelp.country [97](#), [103](#)
- args.eclipsehelp.jar.name [97](#), [103](#)
- args.eclipsehelp.language [97](#), [103](#)
- args.figurelink.style [89](#)
- args.filter [89](#)
- args.fo.userconfig [94](#)
- args.ftr [97](#), [100](#)
- args.gen.default.meta [97](#), [100](#)
- args.gen.task.lbl [90](#)
- args.grammar.cache [90](#)

- args.hdf 97, 100
- args.hdr 97, 100
- args.hide.parent.link 97, 100
- args.html5.classattr 100
- args.html5.contenttarget 101
- args.html5.toc 101
- args.html5.toc.class 101
- args.html5.toc.xsl 101
- args.htmlhelp.includefile 98, 102
- args.indexshow 98, 101
- args.input 90
- args.input.dir 24, 27, 86, 90
- args.outext 98, 101
- args.output.base 90
- args.rellinks 90, 90, 107, 211
- args.resources 90
- args.tablelink.style 91
- args.xhtml.classattr 98
- args.xhtml.contenttarget 98, 101
- args.xhtml.toc 98, 102
- args.xhtml.toc.class 98, 102
- args.xhtml.toc.xsl 98, 102
- args.xsl 98, 101
- args.xsl.pdf 94
- arguments 83
  - See also* dita command
- artlbl, *See* args.artlbl
- @as 210
- @audience 288
- authoring formats 51
  - DITA 263, 281
  - Lightweight DITA 57
  - Markdown 55
- axf.cmd 94
- axf.opt 95

## B

- Batik 308
- @behavior 162
- Belarusian 185
- bi-directional languages 185
- <bookmap> 208
- Bootstrap 201
- Bosnian 185
- branch filters 270, 281, 288
- branch-filter 270
- build\_html5-webfont.xml 171
- build.xml 45
- Bulgarian 185

## C

- canditopics.list 268
- @cascade 106, 281
- cascading style sheet, *See* CSS
- Catalan 185
- catalog 162
  - adding languages 180
  - catalog.xml 179, 180
  - example 181
  - extending 164

- grammar file resolution 281
- import precedence 106
- index configuration 179
- location 201
- referencing 151
- xml.catalog.files 202
- xml.catalog.path 202
- @changebar 123
- <char.set> 179
- character set 286
- Chinese 167, 185, 206
- CHM, *See* HTML Help
- <choicetable> 206
- @chunk 271
  - error recovery 284
  - HTML-based processing 276
  - root-chunk-override 93
  - supported methods 271, 284
- <cite> 209
- classpath
  - configuration-jar 202
  - dita command 27, 49
  - Java 49, 159
  - logging 226
- clean-map 276
- clean.temp 91
- cli.color 106
- <codeblock> 202, 271, 286
- <coderef> 271, 285, 286
- @collection-type 272
- @color 123
- command line 106
  - checking DITA-OT version 15
  - debugging 227
  - help 255
  - increase Java memory 257
  - local.properties file 105
  - properties 105
  - RELAX NG parsing 202
  - See also* dita command
- CommonMark 55, 59
- configuration properties
  - cli.color 106
  - default.cascade 106
  - default.coderef-charset 106
  - org.dita.pdf2.i18n.enabled 106
  - plugin.ignores 106
  - plugin.order 106
  - plugindir 106
  - registry 106
  - temp-file-name-scheme 106
- @conref 268, 270, 271
  - resolving 266, 270
  - support 281
- conref.list 268
- conrefpush 270
- conreftargets.list 268
- conserve-memory 91
- converting lightweight formats to DITA 55, 57, 77
- copy-files 276
- @copy-to 270, 270, 285
- copytosource.list 268

Croatian [185](#)  
 CSS  
   .properties file [117](#)  
   adding custom [111](#), [112](#), [113](#)  
   bi-directional languages [185](#)  
   copy to specific location [96](#), [100](#), [115](#)  
   Eclipse Help [71](#)  
   gen-style [214](#)  
   HTML [169](#)  
   HTML Help [73](#)  
   HTML transforms [169](#), [276](#)  
   HTML5 [69](#), [113](#), [151](#), [201](#), [276](#)  
   @outputclass [272](#)  
   right-to-left languages [185](#)  
   web fonts [171](#)  
   XHTML [79](#)  
 custom.css [171](#)  
 custom.xep.config [95](#)  
 Customization directory [121](#), [178](#), [210](#), [278](#)  
 customization.dir [95](#)  
 Czech [185](#)

## D

Danish [185](#)  
 debug-filter [269](#)  
 debugging [225](#)  
   args.debug [227](#)  
   attributes [285](#)  
   debug-filter preprocess step [269](#)  
   dita command [85](#)  
   generate-debug-attributes [92](#), [253](#), [259](#)  
   logging [49](#)  
   xtrc [285](#)  
   xtrf [285](#)  
   *See also* logging  
 @default [46](#), [46](#)  
 default.cascade [106](#)  
 default.coderef.charset [106](#)  
 default.language [91](#)  
 deinstalling, *See* uninstalling  
 deliverables subcommand [84](#)  
 @deliveryTarget [281](#)  
 depend.org.dita.pdf2.format [293](#), [305](#)  
 depend.org.dita.pdf2.format.post [293](#), [305](#)  
 depend.org.dita.pdf2.format.pre [293](#), [305](#)  
 depend.org.dita.pdf2.index [294](#), [305](#)  
 depend.org.dita.pdf2.init.pre [294](#), [305](#)  
 depend.preprocess.chunk.pre [291](#), [302](#)  
 depend.preprocess.clean-temp.pre [291](#), [302](#)  
 depend.preprocess.coderef.pre [291](#), [302](#)  
 depend.preprocess.conref.pre [292](#), [302](#)  
 depend.preprocess.conrefpush.pre [292](#), [302](#)  
 depend.preprocess.copy-files.pre [292](#), [302](#)  
 depend.preprocess.copy-flag.pre [292](#), [302](#)  
 depend.preprocess.copy-html.pre [292](#), [302](#)  
 depend.preprocess.copy-image.pre [292](#), [302](#)  
 depend.preprocess.copy-subsubsidiary.pre [292](#), [302](#)  
 depend.preprocess.debug-filter.pre [292](#), [302](#)  
 depend.preprocess.gen-list.pre [293](#), [302](#)  
 depend.preprocess.keyref.pre [294](#), [302](#)  
 depend.preprocess.maplink.pre [294](#), [302](#)

depend.preprocess.mappull.pre [294](#), [303](#)  
 depend.preprocess.mapref.pre [295](#), [303](#)  
 depend.preprocess.move-meta-entries.pre [295](#), [303](#)  
 depend.preprocess.post [295](#), [303](#)  
 depend.preprocess.pre [295](#), [303](#)  
 depend.preprocess.topicpull.pre [295](#), [303](#)  
 deprecated features  
   .notetitle classes [205](#), [208](#)  
   "bkinfo" demo plug-in [217](#)  
   args.fo.include.rellinks [211](#)  
   args.message.file [211](#)  
   args.odt.img.embed [209](#)  
   args.odt.include.rellinks [211](#)  
   artwork-preprocessor.xsl [211](#)  
   coderef target [206](#)  
   common-processing-phrase-within-link  
   template [209](#)  
   configuration-jar Ant target [202](#)  
   conref-check target [206](#)  
   conreffile [206](#)  
   copy-subsubsidiary target [209](#)  
   copy-subsubsidiary-check target [209](#)  
   Customization folder [121](#)  
   demo folder [217](#)  
   depend.preprocess.copy-subsubsidiary.pre extension points [209](#)  
   disableRelatedLinks [211](#)  
   displaytext [209](#)  
   dita.conductor.target [296](#)  
   dita.empty [211](#)  
   dita.extname [212](#)  
   dita.input [212](#)  
   dita.input.dirname [212](#)  
   dita.out.map.htmlhelp.\* targets [209](#)  
   dita.out.map.javaahelp.\* targets [209](#)  
   dita.out.map.xhtml.toc target [209](#)  
   dita.resource.dir [211](#)  
   dita.script.dir [211](#)  
   dita.specialization.catalog [164](#), [296](#)  
   DITaval templates [214](#)  
   dost.class.path [202](#)  
   dost.class.path property [159](#), [202](#)  
   help build target [209](#)  
   html.file [268](#)  
   html.list [209](#)  
   htmlfile [209](#), [268](#)  
   image.file [268](#)  
   image.list [209](#)  
   imagefile [209](#), [268](#)  
   ImgUtils [211](#)  
   InputMapDir [208](#)  
   insertVariable.old [211](#)  
   JavaHelp plug-in [203](#)  
   keydefs variable [209](#)  
   KEYREF-FILE [209](#)  
   keys [209](#)  
   layout-masters.xml [217](#)  
   Legacy PDF [211](#)  
   mode="elementname-fmt" [214](#)  
   ODT templates, list of [217](#)  
   otdita2fo\_frontend.xsl [211](#)  
   page-margin-left [212](#), [219](#)  
   page-margin-right [212](#), [219](#)

- parameters
  - args.debug 89
  - dita.input.valfile 91
- PDF localization variables 206
- PDF, insertVariable template 209
- PDF2 templates, list of 217
- plugin.xml, templates key 201
- print\_transtypes 219
- pull-in-title template 209
- target 209
- tm-area named template 206, 206
- TocJS plug-in 200
- topic pull templates, list of 217
- user.input.dir 208
- user.input.file 208
- workdir processing instruction 217, 217
- XHTML templates, list of 217
- XHTML, flagging-related templates 212
- xml.catalog.files property 202
- XSLT mode, layout-masters-processing 211
- XSLT mode, toc-prefix-text 211
- XSLT mode, toc-topic-text 211
- <desc> 272
- @dir 185, 185
- DITA
  - normalized 77
  - specializations 59, 125, 137, 145, 164, 265, 272, 281
- DITA 1.0 264, 281
- DITA 1.1 278, 281
- DITA 1.2 264, 281
- DITA 1.3
  - @cascade 106
  - effect on preprocessing 264
  - Lightweight DITA 57
  - specification support 281
  - SVG domain 202
  - XML mention domain 288
- dita command
  - .properties file 24, 26, 27, 86, 117
  - args.input.dir 24, 27, 86
  - arguments list 83
  - classpath 49
  - colored console output 106
  - debugging 227
  - help 255
  - Homebrew 19
  - installing 11
  - logging 225
  - migrating Ant scripts 27
  - normalized DITA 77
  - parameters 89
  - PATH environment variable 11
  - plug-in registry 131
  - plug-ins 127, 129, 210
  - project files 29
  - running from Docker images 37
  - running from GitHub CI/CD 41
  - using 17, 23
- DITA for Practitioners: Volume 1, Architecture and Technology 184, 312
- DITA for Print 184, 311
- DITA maps
  - dita command example 17, 26
  - input file 229
  - PDF file name 95
  - properties file 26
  - relative file locations 114
  - validate 264
- DITA specification 65
- DITA Technical Committee 311
- DITA Users group 311
- dita-cmd 27
- DITA-OT Slack workspace 311
- DITA-OT Users Google Group 311
- dita-ot.org 311
- <dita:extension> 143, 162, 162
- dita.basedir-resource-directory 293, 303
- dita.catalog.plugin-info 295, 303
- dita.conductor.eclipse.toc.param 292, 304
- dita.conductor.html.param 293, 306
- dita.conductor.html5.param 294, 305
- dita.conductor.html5.toc.param 294, 305
- dita.conductor.lib.import 294, 303
- dita.conductor.pdf2.formatter.check 293, 305
- dita.conductor.pdf2.param 295, 305
- dita.conductor.plugin 291, 303
- dita.conductor.target 291, 303
- dita.conductor.target.relative 291, 303
- dita.conductor.transtype.check 296, 303
- dita.conductor.xhtml.param 296, 306
- dita.conductor.xhtml.toc.param 293, 306
- dita.dir 91
- dita.html.extensions 293, 303
- dita.image.extensions 294, 303
- dita.input.valfile 91
- dita.list 268
- dita.map.eclipse 276
- dita.map.eclipse.index.pre 293, 304
- dita.map.htmlhelp 277
- dita.map.xhtml 276
- dita.parser 292, 303
- dita.preprocess.conref.param 292, 303
- dita.preprocess.debug-filter.param 292, 303
- dita.preprocess.map-reader.param 292, 303
- dita.preprocess.mappull.param 294, 303
- dita.preprocess.mapref.param 294, 303
- dita.preprocess.topic-reader.param 292, 303
- dita.preprocess.topicpull.param 295, 303
- dita.resource.extensions 295, 303
- dita.specialization.catalog 296, 303
- dita.specialization.catalog.relative 296, 304
- dita.temp.dir 91
- dita.transtype.print 295, 304
- dita.xml.properties 268
- dita.xsl.conref 291, 304
- dita.xsl.eclipse.plugin 293, 304
- dita.xsl.eclipse.toc 292, 304
- dita.xsl.html.cover 293, 306
- dita.xsl.html5 294, 305
- dita.xsl.html5.cover 294, 305
- dita.xsl.html5.toc 294, 305
- dita.xsl.htmlhelp.map2hhc 293, 305
- dita.xsl.htmlhelp.map2hhp 293, 305

- dita.xml.htmltoc [293](#), [306](#)
- dita.xml.maplink [294](#), [304](#)
- dita.xml.mappull [294](#), [304](#)
- dita.xml.mapref [294](#), [304](#)
- dita.xml.messages [292](#), [304](#)
- dita.xml.strings [293](#), [304](#)
- dita.xml.topicpull [295](#), [304](#)
- dita.xml.xhtml [293](#), [306](#)
- dita.xml.xslfo [295](#), [305](#)
- dita.xml.xslfo.i18n-postprocess [295](#), [305](#)
- dita2dita [77](#)
- dita2eclipsehelp [71](#)
- dita2html5 [69](#)
- dita2htmlhelp [73](#)
- dita2markdown [75](#)
- dita2pdf [67](#)
- dita2xhtml [79](#)
- <ditafilename> [149](#)
- DITAVAL [90](#), [90](#)
  - args.filter [90](#)
  - branch-filter preprocess step [270](#)
  - change bars [123](#)
  - copy-files preprocess step [276](#)
  - debug-filter preprocess step [269](#)
  - flag-module preprocess step [272](#)
  - HTML-based formats [276](#)
  - PDF [277](#)
  - profile preprocess step [271](#)
  - template changes in 1.7 [214](#)
  - See also* filters, profiling
- <ditaval-endprop> [272](#)
- <ditaval-prop> [272](#)
- <ditaval-startprop> [272](#)
- <ditavalref> [281](#)
- <div>
  - args.ftr [97](#), [100](#)
  - args.hdf [97](#), [100](#)
  - args.hdr [97](#), [100](#)
  - div.shortdesc [206](#)
  - HTML footer [97](#), [100](#), [113](#)
  - HTML <head> [97](#), [100](#)
  - HTML header [97](#), [100](#), [113](#)
  - support [281](#)
- DocBook [132](#), [205](#)
- Docker images [37](#), [38](#)
- DOST [309](#)
- DOTA001F [229](#)
- DOTA002F [229](#)
- DOTA003F [229](#)
- DOTA004F [230](#)
- DOTA006W [230](#)
- DOTA007E [230](#)
- DOTA008E [230](#)
- DOTA009E [230](#)
- DOTA011W [230](#)
- DOTA012W [230](#)
- DOTA013F [230](#)
- DOTA014W [230](#)
- DOTA066F [230](#)
- DOTA067W [231](#)
- DOTA068W [231](#)
- DOTA069F [231](#)
- DOTA069W [231](#)
- DOTJ005F [231](#)
- DOTJ007E [231](#)
- DOTJ007I [231](#)
- DOTJ007W [231](#)
- DOTJ009E [231](#)
- DOTJ012F [231](#)
- DOTJ013E [232](#)
- DOTJ014W [232](#)
- DOTJ018I [232](#)
- DOTJ020W [232](#)
- DOTJ021E [232](#)
- DOTJ021W [232](#)
- DOTJ022F [232](#)
- DOTJ023E [233](#)
- DOTJ025E [233](#)
- DOTJ026E [233](#)
- DOTJ028E [233](#)
- DOTJ029I [233](#)
- DOTJ030I [233](#)
- DOTJ031I [234](#)
- DOTJ033E [234](#)
- DOTJ034F [234](#)
- DOTJ035F [234](#)
- DOTJ036W [234](#)
- DOTJ037W [234](#)
- DOTJ038E [234](#)
- DOTJ039E [235](#)
- DOTJ040E [235](#)
- DOTJ041E [235](#)
- DOTJ042E [235](#)
- DOTJ043W [235](#)
- DOTJ044W [235](#)
- DOTJ045I [235](#)
- DOTJ046E [235](#)
- DOTJ047I [235](#)
- DOTJ048I [236](#)
- DOTJ049W [236](#)
- DOTJ050W [236](#)
- DOTJ051E [236](#)
- DOTJ052E [236](#), [286](#)
- DOTJ053W [236](#)
- DOTJ054E [236](#)
- DOTJ055E [237](#)
- DOTJ056E [237](#)
- DOTJ057E [237](#)
- DOTJ058E [237](#)
- DOTJ059E [237](#)
- DOTJ060W [237](#)
- DOTJ061E [237](#)
- DOTJ062E [237](#)
- DOTJ063E [237](#)
- DOTJ064W [237](#)
- DOTJ065I [237](#)
- DOTJ066E [237](#)
- DOTJ067E [237](#)
- DOTJ068E [237](#)
- DOTJ069E [238](#)
- DOTJ070I [238](#)
- DOTJ071E [238](#)
- DOTJ072E [238](#)
- DOTJ073E [238](#)

[DOTJ074W](#) 238  
[DOTJ075W](#) 238  
[DOTJ076W](#) 238  
[DOTJ077F](#) 238  
[DOTJ078F](#) 238  
[DOTJ079E](#) 239  
[DOTJ080W](#) 239  
[DOTJ081W](#) 239  
[DOTJ082E](#) 239  
[DOTJ083E](#) 239  
[DOTJ085E](#) 239  
[DOTX001W](#) 239  
[DOTX002W](#) 239  
[DOTX003I](#) 239  
[DOTX004I](#) 239  
[DOTX005E](#) 239  
[DOTX006E](#) 239  
[DOTX007I](#) 240  
[DOTX008E](#) 240  
[DOTX008W](#) 240  
[DOTX009W](#) 240  
[DOTX010E](#) 240  
[DOTX011W](#) 240  
[DOTX012W](#) 241  
[DOTX013E](#) 241  
[DOTX014E](#) 241  
[DOTX015E](#) 241  
[DOTX016W](#) 241  
[DOTX017E](#) 242  
[DOTX018I](#) 242  
[DOTX019W](#) 242  
[DOTX020E](#) 242  
[DOTX021E](#) 242  
[DOTX022W](#) 242  
[DOTX023W](#) 243  
[DOTX024E](#) 243  
[DOTX025E](#) 243  
[DOTX026W](#) 243  
[DOTX027W](#) 243  
[DOTX028E](#) 243  
[DOTX029I](#) 243  
[DOTX030W](#) 243  
[DOTX031E](#) 243  
[DOTX032E](#) 244  
[DOTX033E](#) 244  
[DOTX034E](#) 244  
[DOTX035E](#) 244  
[DOTX036E](#) 244  
[DOTX037W](#) 244  
[DOTX038I](#) 244  
[DOTX039W](#) 245  
[DOTX040I](#) 245  
[DOTX041W](#) 245  
[DOTX042I](#) 245  
[DOTX043I](#) 245  
[DOTX044E](#) 245  
[DOTX045W](#) 245  
[DOTX046W](#) 246  
[DOTX047W](#) 246  
[DOTX048I](#) 246  
[DOTX049I](#) 246  
[DOTX050W](#) 246

[DOTX052W](#) 246  
[DOTX053E](#) 246  
[DOTX054W](#) 246  
[DOTX055W](#) 247  
[DOTX056W](#) 247  
[DOTX057W](#) 247  
[DOTX058W](#) 247  
[DOTX060W](#) 247  
[DOTX061W](#) 247  
[DOTX062I](#) 248  
[DOTX063W](#) 248  
[DOTX064W](#) 248  
[DOTX065W](#) 248  
[DOTX066W](#) 248  
[DOTX067E](#) 248  
[DOTX068W](#) 248  
[DOTX069W](#) 249  
[DOTX070W](#) 249  
[DOTX071E](#) 249  
[DOTX071W](#) 249  
[DOTX072I](#) 249  
[DOTX073I](#) 249  
[DOTX074W](#) 249  
[DOTX075W](#) 249  
[DOTX076E](#) 249  
[DOTX077I](#) 249  
 draft  
     args.draft 89  
     <draft> 26  
     localizing generated text 187  
     PDF 89, 153  
 <dt> 209  
 DTD 145, 281, 281  
 Dublin Core metadata 196  
 <dummy> 157  
 Dutch 185

## E

Eclipse Content 205  
 Eclipse Help 71, 263, 276, 304, 305  
     *See also* transformations  
 Eliot Kimber 184, 312  
 encoding 285, 286  
 <endflag> 272  
 English 185, 185, 187, 206  
 entry file  
     broken links, reason for 114  
     HTML5 276  
     XHTML 276  
 environment variables 227  
 error messages 229  
 Estonian 185  
 <example> 204  
 extension points 291  
     ant.import 291, 302  
     common 302  
     creating 162  
     depend.org.dita.pdf2.format 293, 305  
     depend.org.dita.pdf2.format.post 293, 305  
     depend.org.dita.pdf2.format.pre 293, 305  
     depend.org.dita.pdf2.index 294, 305



- depend.org.dita.pdf2.init.pre 294, 305
- depend.preprocess.chunk.pre 291, 302
- depend.preprocess.clean-temp.pre 291, 302
- depend.preprocess.coderef.pre 291, 302
- depend.preprocess.conref.pre 292, 302
- depend.preprocess.conrefpush.pre 292, 302
- depend.preprocess.copy-files.pre 292, 302
- depend.preprocess.copy-flag.pre 292, 302
- depend.preprocess.copy-html.pre 292, 302
- depend.preprocess.copy-image.pre 292, 302
- depend.preprocess.copy-subsiary.pre 292, 302
- depend.preprocess.debug-filter.pre 292, 302
- depend.preprocess.gen-list.pre 293, 302
- depend.preprocess.keyref.pre 294, 302
- depend.preprocess.maplink.pre 294, 302
- depend.preprocess.mappull.pre 294, 303
- depend.preprocess.mapref.pre 295, 303
- depend.preprocess.move-meta-entries.pre 295, 303
- depend.preprocess.post 295, 303
- depend.preprocess.pre 295, 303
- depend.preprocess.topicpull.pre 295, 303
- dita.basedir-resource-directory 293, 303
- dita.catalog.plugin-info 295, 303
- dita.conductor.eclipse.toc.param 292, 304
- dita.conductor.html.param 293, 306
- dita.conductor.html5.param 294, 305
- dita.conductor.html5.toc.param 294, 305
- dita.conductor.lib.import 294, 303
- dita.conductor.pdf2.formatter.check 293, 305
- dita.conductor.pdf2.param 295, 305
- dita.conductor.plugin 291, 303
- dita.conductor.target 291, 303
- dita.conductor.target.relative 291, 303
- dita.conductor.transtype.check 296, 303
- dita.conductor.xhtml.param 296, 306
- dita.conductor.xhtml.toc.param 293, 306
- dita.html.extensions 293, 303
- dita.image.extensions 294, 303
- dita.map.eclipse.index.pre 293, 304
- dita.parser 292, 303
- dita.preprocess.conref.param 292, 303
- dita.preprocess.debug-filter.param 292, 303
- dita.preprocess.map-reader.param 292, 303
- dita.preprocess.mappull.param 294, 303
- dita.preprocess.mapref.param 294, 303
- dita.preprocess.topic-reader.param 292, 303
- dita.preprocess.topicpull.param 295, 303
- dita.resource.extensions 295, 303
- dita.specialization.catalog 296, 303
- dita.specialization.catalog.relative 296, 304
- dita.transtype.print 295, 304
- dita.xml.conref 291, 304
- dita.xml.eclipse.plugin 293, 304
- dita.xml.eclipse.toc 292, 304
- dita.xml.html.cover 293, 306
- dita.xml.html5 294, 305
- dita.xml.html5.cover 294, 305
- dita.xml.html5.toc 294, 305
- dita.xml.htmlhelp.map2hhc 293, 305
- dita.xml.htmlhelp.map2hhp 293, 305
- dita.xml.htmltoc 293, 306
- dita.xml.maplink 294, 304

- dita.xml.mappull 294, 304
- dita.xml.mapref 294, 304
- dita.xml.messages 292, 304
- dita.xml.strings 293, 304
- dita.xml.topicpull 295, 304
- dita.xml.xhtml 293, 306
- dita.xml.xmlfo 295, 305
- dita.xml.xmlfo.i18n-postprocess 295, 305
- Eclipse Help 305
- HTML 305
- HTML Help 305
- HTML5 305
- org.dita.eclipsehelp 304
- org.dita.html5 305
- org.dita.htmlhelp 305
- org.dita.pdf2 305
- org.dita.pdf2.catalog.relative 291, 305
- org.dita.pdf2.xml.topicmerge 295, 305
- overview 291
- package.support.email 295, 304
- package.support.name 295, 304
- package.version 295, 304
- plug-in 291
- XHTML 305
- XSLT 298
- See also* preprocessing
- <extension-point> 142

## F

- <feature> 142
- <fig> 270
- <figure> 181
- @file 142, 298
- files
  - build.xml 45
  - config/configuration.properties file 106
  - local.properties 105
  - plugin.properties 106
- filter-stage 91
- filters 270
  - dita command 83
  - duplicate conditions 284
  - map-first preprocessing 264
  - processing order 266
  - subject scheme 281
  - support 281
  - See also* branch filters, DITAAVAL
- Finnish 185, 219
- flag-module 272
- flagging 214, 272
- flagimage.list 268
- font-mappings.xml 178
- fonts
  - HTML 169, 171
  - PDF 95, 107, 178, 180
  - PDF plugin generator 183
- <footer> 113, 173
- FOP, *See* Apache FOP
- force-unique 91
- <foreign> 272
- @format 55, 57, 286

formats , *See* authoring formats, transformations

formatter [96](#), [105](#)

*See also* Antenna House, Apache FOP, RenderX

French [185](#)

<frontmatter> [208](#)

fullditamap.list [268](#)

fullditamapandtopic.list [268](#)

fullditatopic.list [268](#)

## G

Gaelic [187](#)

gen-list [268](#)

generate-debug-attributes [92](#)

generate.copy.outer [92](#), [114](#), [234](#), [234](#), [236](#)

generated text [185](#), [185](#), [187](#), [191](#)

generated text, adding new [189](#)

generated text, overriding [190](#)

<gentext> [187](#), [189](#), [190](#), [191](#)

German [185](#)

getVariable [187](#)

GitBook [75](#)

GitHub [131](#), [203](#), [205](#)

GitHub Actions [41](#)

GitHub-Flavored Markdown [75](#)

globalizing [185](#)

Google Group, *See* DITA-OT Users Google Group

grammar files [106](#), [281](#), [281](#)

*See also* DTD, schema

Greek [185](#)

Guava [307](#)

## H

HDITA, *See* Lightweight DITA

<head> [171](#), [173](#)

<header> [97](#), [100](#), [113](#)

Hebrew [185](#), [219](#)

Hindi [185](#)

@href [92](#), [209](#), [270](#), [285](#)

hrefditatopic.list [268](#)

hreftargets.list [268](#)

HTML [69](#), [79](#), [305](#)

build properties [117](#)

CHM [277](#)

common processing [276](#)

CSS [112](#), [169](#), [169](#)

custom plug-in [169](#), [169](#), [171](#)

customizing [109](#)

Eclipse Help [276](#)

files outside map directory [114](#)

fonts [169](#), [171](#)

HTML5 [276](#)

JavaScript [169](#)

markup, adding [169](#)

parameters [111](#)

PDF formatting differences [278](#)

various output types [276](#)

XHTML [276](#)

*See also* HTML5

HTML Help [73](#), [263](#), [277](#), [305](#), [305](#)

*See also* transformations

html.list [268](#)

HTML5 [69](#), [99](#)

args.rellinks [90](#), [107](#)

CSS [69](#), [112](#), [113](#), [151](#), [201](#), [276](#)

extension points [305](#)

footers [97](#), [100](#), [113](#)

headers [97](#), [100](#), [113](#)

JavaScript, adding [173](#)

nav-toc [101](#), [111](#), [276](#)

navigation, adding [111](#)

parameters [96](#)

preprocessing [263](#)

related links [90](#), [107](#)

*See also* transformations

html5.toc.generate [101](#)

Hungarian [185](#)

## I

I18N [180](#)

org.dita.pdf2.i18n.enabled [95](#), [107](#), [219](#)

PDF processing [206](#)

plug-in [165](#), [167](#), [178](#)

*See also* languages

Icelandic [185](#), [187](#)

ICU for Java (ICU4J) [307](#)

@id

args.eclipse.symbolic.name [103](#)

@conref resolution [270](#)

diagnostic messages [160](#)

plug-in [141](#), [162](#)

variables, overriding [180](#)

Idiom Technologies [278](#)

IETF BCP 47 [91](#)

@if [202](#)

@if:set [202](#)

image [233](#)

image map [245](#)

image.list [268](#)

images [149](#)

copying [276](#)

flagging [272](#)

Markdown [61](#)

scaling [285](#)

selecting [149](#)

*See also* copy-files

in-memory processing [196](#), [267](#)

index [114](#)

Eclipse Help [276](#)

entries in map file [271](#)

HTML Help [73](#)

indexing domain [278](#)

PDF [178](#), [179](#), [180](#), [277](#)

sorting [185](#), [185](#), [265](#)

*See also* entry file

index-attr.xml [180](#)

@index:lang [185](#), [185](#)

<index.group> [179](#)

<indexterm> [209](#)

Indonesian [185](#), [206](#), [219](#)

INDX001I [249](#)

INDX002E [249](#)

INDX003E [250](#)  
 <info> [278](#)  
 input formats, *See* authoring formats  
 install subcommand [84](#)  
 installing [83](#), [193](#)  
     check current version [15](#)  
     DITA-OT [11](#)  
     Homebrew [19](#)  
     prerequisites [13](#)  
 integrator [127](#)  
     *See also* plug-ins installing  
 integrator.xml [181](#)  
 internationalization, *See* I18N  
 ISO 639-1 [179](#), [180](#), [180](#)  
 Italian [185](#)

## J

Jackson data binding library [307](#)  
 Japanese [185](#)  
 Jarno Elovirta [183](#)  
 Java  
     Ant [45](#)  
     ANT\_OPTS [257](#)  
     API [49](#)  
     architecture [263](#)  
     chunk [271](#)  
     classes [85](#)  
     classpath [49](#), [159](#)  
     configuring [105](#)  
     conrefpush [270](#)  
     extending [265](#)  
     extension functions [166](#)  
     Java Development Kit (JDK) [11](#), [13](#)  
     Java Runtime Environment (JRE) [11](#), [13](#)  
     local.properties file [105](#)  
     logging [225](#), [253](#)  
     maplink [272](#)  
     memory [257](#)  
     move-meta-entries [271](#)  
     out of memory [103](#), [253](#)  
     plugin.properties [106](#)  
     precedence [105](#)  
     processing modules [265](#)  
     properties [105](#)  
     required version [259](#)  
     ServiceLoader [165](#)  
     temporary file names [106](#)  
     tools.jar [253](#)  
     UnsupportedClassVersionError [253](#)  
     versions [11](#), [13](#), [313](#)  
 JavaHelp [203](#), [203](#), [210](#)  
 JSON project files [33](#)  
 JVM [259](#)

## K

Kazakh [185](#), [219](#)  
 keydef [210](#)  
 keyref [270](#), [281](#), [281](#)  
 @keyscope [281](#)  
 <keyword> [209](#)

Korean [185](#), [206](#)

## L

language codes [185](#)  
 languages  
     adding support for [178](#), [180](#), [180](#), [187](#), [191](#)  
     auto-generated strings [278](#)  
     bi-directional [185](#)  
     default [91](#)  
     index sorting [185](#)  
     ISO 639-1 [179](#), [180](#), [180](#)  
     right-to-left [69](#), [79](#), [185](#), [204](#)  
     supported [185](#), [206](#), [219](#)  
     supported, list of [185](#)  
 Latvian [185](#)  
 legacypdf [278](#)  
 Leigh White [184](#), [311](#)  
 <li> [272](#)  
 license [307](#)  
 Lightweight DITA [51](#), [202](#), [202](#), [203](#)  
 line numbering [288](#)  
 <line-through> [281](#)  
 <line-through> styles [196](#)  
 <link> [46](#), [171](#), [272](#)  
 link processing [285](#)  
 link-crawl [92](#)  
 <linktext> [271](#), [272](#)  
 Linux  
     Ant [46](#)  
     colored console output [106](#)  
     delimiter [90](#)  
     dita command [17](#), [23](#)  
     DITA-OT version [15](#)  
     gradle [135](#)  
     help [255](#)  
     increase Java memory [257](#)  
     installing DITA-OT [11](#)  
     plug-in registry checksum [132](#)  
     rebuilding documentation [135](#)  
 Lithuanian [185](#)  
 local.properties file [105](#), [105](#)  
 locale [13](#), [179](#), [180](#), [265](#)  
     *See also* args.dita.locale, languages  
 localizing [185](#)  
 @locktitle [271](#)  
 Logback Classic Module [307](#)  
 logback.xml [226](#)  
 logging [225](#), [253](#)  
 LwDITA, *See* Lightweight DITA

## M

macOS [19](#)  
     Ant [46](#)  
     colored console output [106](#)  
     delimiter [90](#)  
     dita command [17](#), [23](#)  
     DITA-OT version [15](#)  
     gradle [135](#)  
     help [255](#)  
     increase Java memory [257](#)

- installing DITA-OT [11](#)
- plug-in registry checksum [132](#)
- rebuilding documentation [135](#)
- Malay [185](#), [219](#)
- <map> [269](#)
- map processing [285](#)
- maplink [272](#)
- mapref [269](#)
- maps, *See* DITA maps
- Markdown [55](#), [59](#), [75](#)
- Maven Central [49](#)
- maxJavaMemory [95](#)
- MDITA, *See* Lightweight DITA
- memory [92](#), [103](#), [253](#), [257](#), [272](#)
- metadata [143](#)
  - @cascade [106](#)
  - chunking, effect of [206](#)
  - Lightweight DITA [57](#), [64](#)
  - map [77](#)
  - Markdown [64](#)
  - moving [271](#)
  - plug-in [141](#), [162](#)
  - processing time, effect on [257](#)
  - specialization error [235](#)
  - topic [77](#)
- Microsoft HTML Help Workshop [73](#)
- migrating [193](#)
- Montenegrin [185](#)
- move-meta-entries [271](#)

## N

- @name [46](#)
- <nav> [69](#), [111](#)
- nav-toc [101](#), [111](#), [276](#)
- navtitle [242](#), [249](#)
- <nextCatalog> [201](#)
- Norwegian [185](#)
- <note> [179](#), [187](#), [266](#)

## O

- OASIS [164](#), [263](#), [311](#)
- <object> [281](#)
- <ol> [272](#)
- onlytopic.in.map [92](#)
- OpenDocument Text [205](#)
- OpenJDK [11](#), [13](#), [313](#)
- operating system, *See* Linux, macOS, Windows
- Oracle JDK [11](#), [13](#), [313](#)
- org.dita.base [302](#)
- org.dita.eclipsehelp [304](#)
- org.dita.html5 [171](#), [305](#)
- org.dita.htmlhelp [305](#)
- org.dita.index.skip [95](#)
- org.dita.pdf2 [278](#), [305](#)
- org.dita.pdf2.catalog.relative [291](#), [305](#)
- org.dita.pdf2.chunk.enabled [95](#)
- org.dita.pdf2.i18n.enabled [95](#), [106](#)
- org.dita.pdf2.xsl.topicmerge [295](#), [305](#)
- org.dita.xhtml [305](#)
- @orient [281](#), [288](#)

- OS X, *See* macOS
- outditafiles.list [268](#)
- outer.control [92](#)
- output formats [65](#)
- output.dir [92](#)
- @outputclass [202](#), [272](#), [272](#), [286](#)
- outputFile.base [95](#)
- <overline> [281](#)
- <overline> styles [196](#)

## P

- <p> [206](#), [272](#)
- package.support.email [295](#), [304](#)
- package.support.name [295](#), [304](#)
- package.version [295](#), [304](#)
- Pandoc [59](#), [64](#)
- parallel [92](#)
- parallel processing [196](#)
- <param> [144](#), [155](#), [157](#), [180](#), [202](#)
- parameters [89](#)
  - adding [157](#)
  - args.artlbl [94](#), [96](#), [99](#)
  - args.bookmap-order [94](#)
  - args.bookmark.style [94](#)
  - args.chapter.layout [94](#)
  - args.copycss [96](#), [99](#)
  - args.css [96](#), [99](#)
  - args.csspath [96](#), [99](#)
  - args.cssroot [96](#), [100](#)
  - args.debug [89](#)
  - args.dita.locale [97](#), [100](#)
  - args.draft [89](#), [89](#)
  - args.eclipse.provider [97](#), [102](#)
  - args.eclipse.symbolic.name [97](#), [103](#)
  - args.eclipse.version [97](#), [103](#)
  - args.eclipsehelp.country [97](#), [103](#)
  - args.eclipsehelp.jar.name [97](#), [103](#)
  - args.eclipsehelp.language [97](#), [103](#)
  - args.figurelink.style [89](#)
  - args.filter [89](#)
  - args.fo.userconfig [94](#)
  - args.ftr [97](#), [100](#)
  - args.gen.default.meta [97](#), [100](#)
  - args.gen.task.lbl [90](#)
  - args.grammar.cache [90](#)
  - args.hdf [97](#), [100](#)
  - args.hdr [97](#), [100](#)
  - args.hide.parent.link [97](#), [100](#)
  - args.html5.classattr [100](#)
  - args.html5.contenttarget [101](#)
  - args.html5.toc [101](#)
  - args.html5.toc.class [101](#)
  - args.html5.toc.xsl [101](#)
  - args.htmlhelp.includefile [98](#), [102](#)
  - args.indexshow [98](#), [101](#)
  - args.input [90](#)
  - args.input.dir [90](#)
  - args.outext [98](#), [101](#)
  - args.output.base [90](#)
  - args.rellinks [90](#)
  - args.resources [90](#)

- args.tablelink.style 91
- args.xhtml.classattr 98
- args.xhtml.contenttarget 98, 101
- args.xhtml.toc 98, 102
- args.xhtml.toc.class 98, 102
- args.xhtml.toc.xsl 98, 102
- args.xsl 98, 101
- args.xsl.pdf 94
- axf.cmd 94
- axf.opt 95
- clean.temp 91
- conserve-memory 91
- custom.xep.config 95
- customization.dir 95
- default.language 91
- dita.dir 91
- dita.input.valfile 91
- dita.temp.dir 91
- filter-stage 91
- force-unique 91
- generate-debug-attributes 92
- generate.copy.outer 92
- html5.toc.generate 101
- link-crawl 92
- maxJavaMemory 95
- nav-toc 101
- onlytopic.in.map 92
- org.dita.index.skip 95
- org.dita.pdf2.chunk.enabled 95
- org.dita.pdf2.i18n.enabled 95
- outer.control 92
- output.dir 92
- outputFile.base 95
- parallel 92
- pdf.formatter 95
- processing-mode 92
- publish.required.cleanup 96
- remove-broken-links 93
- result.rewrite-rule.class 93
- result.rewrite-rule.xsl 93
- root-chunk-override 93
- store-type 93
- transtype 93
- validate 93
- xep.dir 96
- <pathelement> 162
- PDF 67, 263
  - args.rellinks 90, 107, 211
  - change bars 123, 196
  - configuration properties 106
  - custom plug-in 177
  - customizing 119
  - customizing, best practices 121
  - draft 89
  - draft comments 153
  - fonts 178, 180
  - formatter 96, 105
  - HTML formatting differences 278
  - index 180
  - org.dita.pdf2 305
  - org.dita.pdf2.legacy 204
  - plug-in 131, 153, 178, 181
    - plug-in, history of 67, 278
    - plug-in, required software 307
    - plugin generator 183
    - preprocessing 277
    - related links 90, 107, 211
    - tables 180
    - See also* transformations
  - pdf.formatter 95
  - PDF2, *See* PDF plug-in, history of
  - PDFJ001E 250
  - PDFJ002E 250
  - PDFJ003I 250
  - PDFX001W 250
  - PDFX002W 250
  - PDFX003W 250
  - PDFX004F 250
  - PDFX005F 251
  - PDFX007W 251
  - PDFX008W 251
  - PDFX009E 251
  - PDFX011E 251
  - PDFX012E 251
  - PDFX013F 251
  - <ph> 209, 269
  - pipelines 263
    - Ant module 265
    - description of 263
    - HTML 276
    - Java module 265
    - map first 264
    - PDF 277
    - processing order 266
    - See also* preprocessing
- plug-ins 125, 137
  - Ant 153, 154
  - benefits 139
  - best practices 147
  - default, list of 65
  - dependencies 151
  - DITA specializations 145, 164
  - dita2dita 77
  - dita2eclipsehelp 71
  - dita2html5 69
  - dita2htmlhelp 73
  - dita2markdown 75
  - dita2pdf 67
  - dita2xhtml 79
  - DocBook 205
  - Eclipse Content 205
  - extension points 162, 302
  - HTML5 109
  - ideas for 153
  - identifiers 141
  - installing 127, 131
  - installing in Docker images 38
  - Java 159
  - JavaHelp 203
  - OpenDocument Text 205
  - order 151
  - parameters 157
  - plugin.xml 141, 145
  - prerequisites 151

- registry 131
- <require> 151
- RTF 205
- Saxon 165
- TocJS 200
- transformations 155
- troubleshooting 160
- uninstalling 129
- upgrading 148, 193, 203
- URL 131
- using file in another plug-in 151
- working with 125
- XSLT 157, 158
- <plugin> 141
- plugin.ignores 106
- plugin.order 106
- plugin.properties file 106
- plugin.xml 145, 171, 291
- plugindirs 106
- plugins subcommand 84
- Polish 185
- Portuguese 179, 185
- <preface> 208
- preprocessing 103, 153, 263
  - branch-filter 270
  - chunk 271
  - clean-map 276
  - conref 270
  - conrefpush 270
  - copy-files 276
  - copy-to 270
  - debug-filter 269
  - extension points (overview) 265
  - extension points, parameters 103, 300
  - extension points, Saxon 165
  - extension points, XSLT 298
  - flag-module 272
  - gen-list 268
  - keyref 270
  - map first 264
  - maplink 272
  - mapref 269
  - modules 268
  - move-meta-entries 271
  - profile 271
  - topic-fragment 271
  - topicpull 272
  - XSLT 103, 147, 151, 160, 162, 253
  - See also* Java
- <prereq> 98
- @print 271, 271
- processing 265, 266
- processing time 90, 259
- processing-mode 92
- @processing-role 281
- @product 266
- profile 271
- profiling 270, 271, 281, 288
  - See also* DITaval
- project files
  - JSON 33
  - using 29

- XML 31
- YAML 35
- project website, *See* dita-ot.org
- <prop> 272
- properties 105, 206
- <property> 153, 153, 227
- publish.required.cleanup 96

## R

- registry 106, 200, 202
- relationship tables
  - maplink preprocessing step 272
  - mapref preprocessing step 269
  - normalized DITA 77
  - PDF 46
- <reltable> 245
  - See also* relationship tables
- remove-broken-links 93
- removing, *See* uninstalling
- RenderX
  - change bars 123
  - local.properties 105
  - plug-in 208
  - plugin generator 183
  - topic.fo 277
  - transform.fo2pdf 277
  - XSL-FO processor 13
- <require> 143, 151, 169, 171, 173
- <required-cleanup> 26
- resourceonly.list 268
- result.rewrite-rule.class 93, 93, 165
- result.rewrite-rule.xsl 93, 93, 165
- @rev 272
- <revprop> 123, 272, 284
- rewriting file names 165
- RFC 5147 286
- @role 97, 97, 100, 100, 107, 113
- Romanian 185, 219
- root-chunk-override 93
- RTF 205
- Russian 185, 187, 219

## S

- Saxon 148, 165, 203, 271, 307
  - <service> 165, 166, 167
  - version 13
  - See also* Ant
- schema
  - DITA 1.2 281
  - DITA 1.3 281
  - RELAX NG 141, 150
- SCORM 281
- <section> 98, 270
- security 200, 202
- Serbian 185
- setting parameters with plug-ins 153
- <shortdesc> 271, 285
- Simple Logging Facade for Java 307
- <simpletable> 206
- Slack, *See* DITA-OT Slack workspace

Slovak [185](#)  
 Slovenian [185](#)  
 Spanish [185](#)  
 specializations, *See* DITA specializations  
 stack trace [227](#)  
 stage1.xml [277](#)  
 stage1a.xml [277](#)  
 stage2.fo [277](#)  
 stage3.fo [277](#)  
 <startflag> [272](#)  
 Store API [267](#)  
 store-type [93](#)  
 strings [185](#), [185](#), [185](#), [187](#), [187](#)  
 subjectscheme.list [268](#)  
 subtargets.list [268](#)  
 SVG [202](#)  
 Swedish [185](#), [219](#)

## T

table of contents  
   DOTX008W [240](#)  
   DOTX009W [240](#)  
   Eclipse Help [71](#), [239](#), [276](#)  
   HTML Help [73](#), [246](#)  
   HTML5 [69](#), [101](#), [111](#), [155](#)  
   Markdown [75](#)  
   nav-toc [101](#), [111](#)  
   navigation title [240](#)  
   no title [240](#)  
   PDF [208](#)  
   XHTML [79](#), [102](#)  
 tables  
   args.tablelink.style [91](#)  
   DITaval [269](#)  
   HTML5 [206](#)  
   indentation [204](#)  
   Markdown [63](#)  
   PDF [180](#), [200](#), [206](#)  
   tables.attr.xsl [180](#)  
 tables-attr.xsl [180](#)  
 targets  
   deprecated [202](#)  
   Eclipse Help [276](#)  
   HTML Help [277](#)  
   HTML5 [276](#)  
   PDF [277](#)  
   XHTML [276](#)  
 temp-file-name-scheme [106](#)  
 <template> [143](#), [162](#), [201](#)  
 temporary file names [106](#)  
 <term> [209](#)  
 terminal, *See* command line  
 Thai [185](#)  
 third-party software [307](#)  
 <titlealts> [89](#)  
 TLS [200](#), [202](#)  
 <toc> [208](#), [271](#)  
 TOC, *See* table of contents  
 TocJS [200](#)  
 tools.jar [253](#)  
 topic-fragment [271](#)

topic.fo [277](#), [277](#)  
 topicmerge, *See* org.dita.pdf2.xsl.topicmerge  
 topicpull [272](#)  
 <topicref> [57](#), [92](#), [271](#), [285](#)  
 transformations [65](#), [123](#)  
   creating [155](#)  
   Eclipse Help [71](#)  
   HTML [89](#), [109](#)  
   HTML Help [73](#)  
   HTML5 [69](#), [111](#), [112](#)  
   Markdown [75](#)  
   normalized DITA [77](#)  
   parameters [89](#)  
   PDF [67](#), [119](#), [177](#)  
   XHTML [79](#)  
 translating [185](#)  
 transtype [93](#)  
   custom [155](#)  
   list [23](#), [84](#), [93](#)  
   plugin.xml [144](#)  
 transtypes subcommand [84](#)  
 troubleshooting  
   plug-ins [160](#)  
 Turkish [185](#)  
 @type [160](#), [179](#), [271](#)

## U

Ukrainian [185](#)  
 <ul> [214](#)  
 uninstall subcommand [84](#)  
 uninstalling [83](#), [84](#), [129](#), [210](#)  
 @unless:set [202](#)  
 upgrading [148](#), [193](#), [203](#)  
   best practices [147](#)  
   default plug-ins [121](#)  
   PDF [121](#)  
   plug-ins [193](#)  
   *See also* installing, migrating  
 Urdu [185](#)  
 user.input.dir [268](#)  
 user.input.file [269](#)  
 user.input.file.listfile [269](#)  
 UTF [59](#)

## V

<val> [145](#), [284](#)  
 validate [93](#), [141](#), [150](#), [238](#), [264](#)  
 @value [142](#)  
 <variable> [180](#)  
 <vars> [187](#)  
 verbose logging [225](#)  
 version subcommand [84](#)  
 Vietnamese [185](#), [187](#)

## W

web fonts, *See* fonts  
 whitespace handling [287](#)  
 Windows [105](#)  
   Ant [46](#)

- colored console output [106](#)
- delimiter [90](#)
- dita command [17](#), [23](#)
- DITA-OT version [15](#)
- gradlew [135](#)
- help [255](#)
- increase Java memory [257](#)
- installing DITA-OT [11](#)
- plug-in registry checksum [132](#)
- rebuilding documentation [135](#)

## X

- XDITA, *See* Lightweight DITA
- XEP, *See* RenderX
- xep.dir [96](#)
- XEPJ001W [251](#)
- XEPJ002E [251](#)
- XEPJ003E [251](#)
- Xerces [307](#)
- XHTML [79](#), [158](#), [263](#), [305](#)
  - See also* transformations
- XML APIs [307](#)
- XML project files [31](#)
- XML Resolver [307](#)
- @xml:lang [91](#), [185](#), [187](#)
- <xmllatt> [281](#)
- <xmlcatalog> [151](#)
- <xmlelement> [281](#)
- <xref> [270](#), [270](#), [272](#), [298](#)
- XSL-FO processor, *See* Antenna House, Apache FOP, RenderX
- <xsl:import> [151](#), [162](#), [200](#)
- <xsl:include> [200](#)
- <xsl:param> [157](#)
- @xsl:sort [167](#)
- <xslt> [151](#)
- XSLT [89](#), [103](#), [151](#)
  - 1.0 [148](#), [203](#)
  - 2.0 [13](#), [148](#), [203](#), [210](#)
  - Ant [45](#), [202](#)
  - best practices [147](#)
  - conref step [270](#)
  - DITA-OT architecture [263](#)
  - errors [160](#), [253](#)
  - extension points [162](#), [298](#)
  - flag-module preprocess step [272](#)
  - Java [159](#)
  - maplink preprocessing step [272](#)
  - mapref preprocessing step [269](#)
  - move-meta-entries [271](#)
  - parameters [157](#), [300](#)
  - PDF [277](#)
  - preprocessing [158](#)
  - processing modules [265](#)
  - processor [13](#)
  - Saxon [165](#), [166](#)
  - stylesheet error [230](#)
  - topicpull [272](#)
  - URI resolver [167](#)
  - using another plug-in [151](#)
  - See also* extension points, plug-ins, preprocessing
- @xtrc [259](#), [269](#), [272](#), [285](#)

- @xtrf [259](#), [269](#), [272](#), [285](#)

## Y

- Yahoo! dita-users group, *See* DITA Users group
- YAML project files [35](#)