

# Session 2: Data Processing

R for Stata Users

---

Luiza Andrade, Rob Marty, Rony Rodriguez-Ramirez, Luis Eduardo San Martin, Leonardo Viotti  
The World Bank – DIME | [WB Github](#)

03 April 2021



# Table of contents

1. Introduction
2. Exploring your data
3. ID variables
4. Wrangling your data
5. Create variables
6. Appending and merging
7. Saving a dataframe
8. Factor variables
9. Reshaping

# Introduction

---

# Introduction

## Goals of this session

- To understand what RStudio projects are and how they can be used in your daily work.
- To organize data in a way that it will be easier to analyze it and communicate it.
- To get familiar with the packages bundled into the `tidyverse`.

## Things to keep in mind

- We'll take you through the same steps we've taken when we were preparing the datasets used in this course.
- In most cases, your datasets won't be `tidy`.

**Tidy data:** A dataset is said to be tidy if it satisfies the following conditions:

1. Every column is a variable.
2. Every row is an observation.
3. Every cell is a single value.

# Introduction

In this session, you'll be introduced to some basic concepts of data cleaning in R. We will cover:


1. RStudio projects;
2. Exploring a dataset;
3. Creating new variables;
4. Filtering and subsetting datasets;
5. Merging datasets;
6. Dealing with factor variables;
7. Saving data.

There are many other tasks that we usually perform as part of data cleaning that are beyond the scope of this session.



# Introduction: RStudio Projects

## What are RStudio projects?

- Projects should be reproducible, and if you happen to code in R, RStudio Projects will make your science reproducible and easier in the long-run.
- RStudio projects are simply working directories associated with a `.Rproj`.
  - If you open a `.Rproj` file, your working directory will be set automatically. Therefore, in this directory you should create folders containing your data, codes, notes, and other material.
- To create a RStudio project go to `File > New Project`, click on `New Repository`:

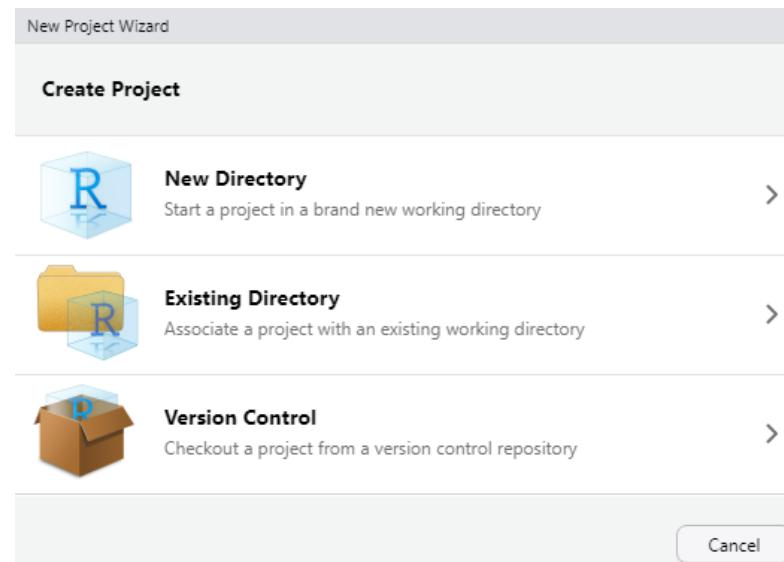

# Introduction: RStudio Projects

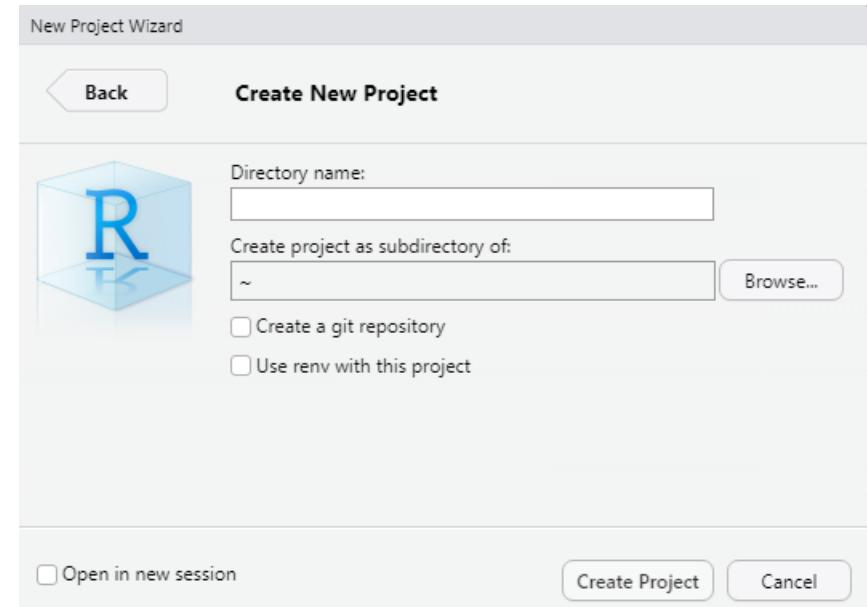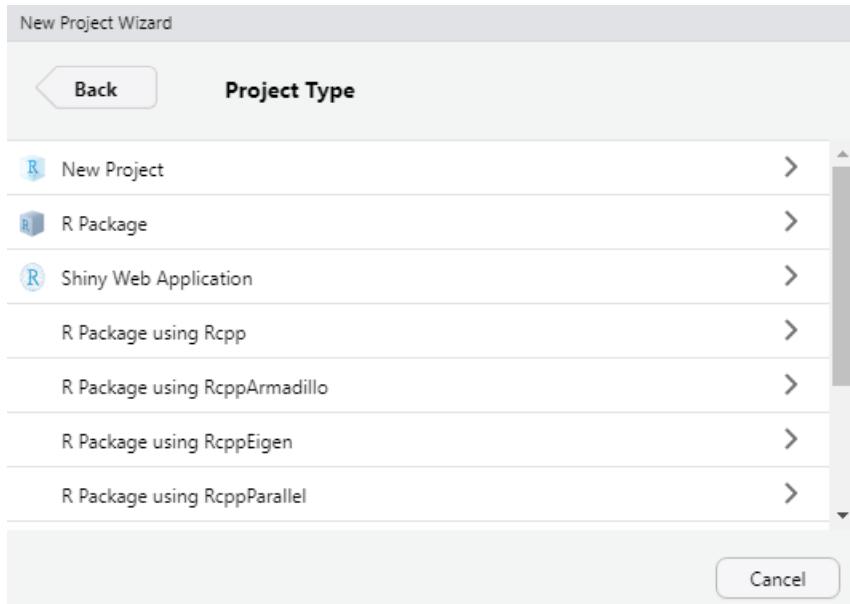

- Click on New Project
- Add a name to your project and directory, and click on create project.

# Introduction: RStudio Projects

RStudio projects give you a solid workflow:

- Uses relative paths.
- Keep data files there.
- You will have a history of the functions you have used.
- It could load the last state of your environment.


# Introduction: Packages

Another important aspect to consider is R packages. Consider the following:

R is a new phone



R packages are apps in your phone

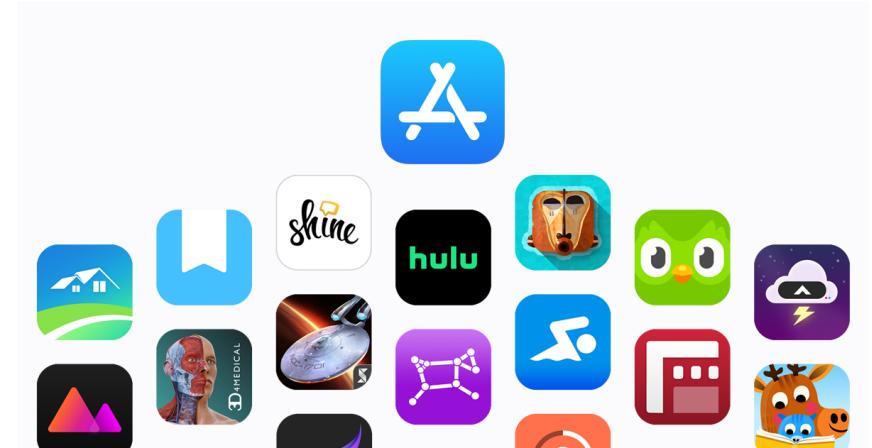

# Introduction: Packages

To install and load a package you can run the following command:

```
# To Install  
install.packages("tidyverse")  
  
# To load  
library(tidyverse)
```

# Introduction

Before we start, let's make sure we are all set:

1. Start a fresh RStudio session.
2. Open your RStudio project.
3. Load the tidyverse package.

## Notes for this session

- Most of our exercises for today focus on the tidyverse.
- The setup is a bit different than yesterday.
- Since we are "exploring" our data, we something don't need to assign everything to an object.

# Let's load the two other packages:

```
# If you haven't installed the packages uncomment the next line  
# install.package("here")  
# install.package("janitor")  
library(here)  
library(janitor)
```

```
##  
## Attaching package: 'janitor'  
  
## The following objects are masked from 'package:stats':  
##  
##     chisq.test, fisher.test
```

Remember that you should always load your packages before you start coding.

# File paths

The `here` package allows you to interact with your working directory. That's why it is important to set your RStudio project correctly.

The goal of this package is to:

- Easily reference your files in project-oriented workflows.



# Loading a dataset in R

Before we start wrangling our data, let's read our dataset. In R, we can use the `read.csv` function from Base R, or `read_csv` from the `readr` package if we want to load a CSV file. For this exercise, we are going to use the World Happiness Report (2015-2018)

## Exercise 1: Load Data. This is a recap from yesterday's session.

Use either of the functions mentioned above and load the three WHR datasets from the `DataWork/DataSets/Raw/Un WHR` folder. Use the following notation for each dataset: `whrYY`.

- Remember to use `here()` to simplify the folder path.

## How to do it?

```
whr15 <- read_csv(here("DataWork", "DataSets", "Raw", "Un WHR", "WHR2015.csv")) %>% clean_names()  
whr16 <- read_csv(here("DataWork", "DataSets", "Raw", "Un WHR", "WHR2016.csv")) %>% clean_names()  
whr17 <- read_csv(here("DataWork", "DataSets", "Raw", "Un WHR", "WHR2017.csv")) %>% clean_names()
```

Notice the `clean_names()` function and the `pipe (%>%)` operator. More on this in the next slide.

# The pipe %>% operator.

- "Piping" in R can be seen as "**chaining**." This means that we are invoking multiple method calls.
- Every time you have invoked a method (a function) this return an object that then is going to be used in the next pipe.

```
tony %>%  
  wake_up(time = "6:30") %>%  
  get_out_of_bed() %>%  
  do_exercise() %>%  
  shower() %>%  
  get_dressed() %>%  
  eat(meal = "breakfast", coffee = TRUE) %>%  
  brush_teeth() %>%  
  work(effort = "mininum")
```

```
work(  
  brush_teeth(  
    eat(  
      get_dressed(  
        shower(  
          do_exercise(  
            get_out_of_bed(  
              wake_up(me, time = "6:30")  
            ),  
          ),  
        ),  
      ),  
    ),  
  ),  
  meal = "breakfast", coffee = TRUE  
)  
, effort = "mininum"  
)
```

# The clean\_names() function

The `clean_names()` function helps us big time when our variables names are pretty bad. For example, if we have a variable that is called GDP\_per\_CApita\_2015, the `clean_names()` function will help us fix those messy names.

**Pro tip:** Use the `clean_names()` function in a pipe after you load a dataset as we did in the last slide.

If we wanto to rename our variable manually, we could use:

```
whr15 <- whr15 %>%
  rename(
    var_newname = var_oldname
  )
```

# Exploring your data

---

# Exploring a data set

Some useful functions from base R:

- `View()`: open the data set
- `class()`: reports object type or type of data stored.
- `dim()`: reports the size of each one of an object's dimension.
- `names()`: returns the variable names of a dataset.
- `str()`: general information on an R object.
- `summary()`: summary information about the variables in a data frame.
- `head()`: shows the first few observations in the dataset.
- `tail()`: shows the last few observations in the dataset.

Some other useful functions from the tidyverse:

- `glimpse()`: get a glimpse of your data

# Load and show a dataset

We can just show our dataset using the name of the object; in this case, `whr15`.

```
whr15
```

```
## # A tibble: 158 x 12
##   country region happiness_rank happiness_score standard_error economy_gdp_per~
##   <chr>    <chr>          <dbl>            <dbl>           <dbl>
## 1 Switze~ Weste~           1             7.59            0.0341         1.40
## 2 Iceland Weste~          2             7.56            0.0488         1.30
## 3 Denmark Weste~          3             7.53            0.0333         1.33
## 4 Norway  Weste~          4             7.52            0.0388         1.46
## 5 Canada   North~         5             7.43            0.0355         1.33
## 6 Finland Weste~          6             7.41            0.0314         1.29
## 7 Nether~ Weste~          7             7.38            0.0280         1.33
## 8 Sweden   Weste~          8             7.36            0.0316         1.33
## 9 New Ze~ Austr~          9             7.29            0.0337         1.25
## 10 Austra~ Austr~         10            7.28            0.0408        1.33
## # ... with 148 more rows, and 6 more variables: family <dbl>,
## #   health_life_expectancy <dbl>, freedom <dbl>,
## #   trust_government_corruption <dbl>, generosity <dbl>,
## #   dystopia_residual <dbl>
```

# Glimpse your data

Use `glimpse()` to get information about your variables (e.g., type, row, columns,)

```
whr15 %>%
  glimpse()
```

```
## Rows: 158
## Columns: 12
## $ country           <chr> "Switzerland", "Iceland", "Denmark", "Norw~
## $ region            <chr> "Western Europe", "Western Europe", "Weste~
## $ happiness_rank    <dbl> 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13,~
## $ happiness_score   <dbl> 7.587, 7.561, 7.527, 7.522, 7.427, 7.406, ~
## $ standard_error    <dbl> 0.03411, 0.04884, 0.03328, 0.03880, 0.0355~
## $ economy_gdp_per_capita <dbl> 1.39651, 1.30232, 1.32548, 1.45900, 1.3262~
## $ family             <dbl> 1.34951, 1.40223, 1.36058, 1.33095, 1.3226~
## $ health_life_expectancy <dbl> 0.94143, 0.94784, 0.87464, 0.88521, 0.9056~
## $ freedom             <dbl> 0.66557, 0.62877, 0.64938, 0.66973, 0.6329~
## $ trust_government_corruption <dbl> 0.41978, 0.14145, 0.48357, 0.36503, 0.3295~
## $ generosity          <dbl> 0.29678, 0.43630, 0.34139, 0.34699, 0.4581~
## $ dystopia_residual   <dbl> 2.51738, 2.70201, 2.49204, 2.46531, 2.4517~
```

# ID variables

---

# ID variables

Desired properties of an ID variable: uniquely and fully identifying.

- An ID variable cannot have duplicates
- An ID variable may never be missing
- The ID variable must be constant across a project
- The ID variable must be anonymous

# ID variables

Let's see first:

- **Dimensions of your data:**

```
dim(whi15)
```

```
## [1] 158 12
```

- **The number of distinct values of a particular variable:**

```
n_distinct(DATASET$variable, na.rm = TRUE)
```

The `$` sign is a subsetting operator. In R, we have three subsetting operators (`[[]`, `[`, and `$`). It is often used to access variables in a dataframe.

# Missing values in R

## Quick Note:

- Missings in R are treated differently than in Stata. They are represented by the NA symbol.
- Impossible values are represented by the symbol NaN which means 'not a number'.
- R uses the same symbol for character and numeric data.
- NA is not a string or a numeric value, but an indicator of missingness.
- NAs are contagious. This means that if you compare a number with NAs you will get NAs.
- Therefore, always remember the `na.rm = TRUE` argument if needed.

# ID variables

In the last example, we used `n_distinct`. This allows us to count the number of unique values of a variable length of a vector. We included `na.rm = TRUE`, so we don't count missing values.

## Exercise 2: Identify the ID.

Using the `n_distinct` function, can you tell if the following variables are IDs of the whr15 data set? Is any of these variables an ID variable?

1. Region
2. Country

## How to do it?

```
n_distinct(whr15$country, na.rm = TRUE)
```

```
## [1] 158
```

```
n_distinct(whr15$region, na.rm = TRUE)
```

```
## [1] 10
```

# ID variables

We can also test whether the number of rows is equal to the number of distinct values in a specific variable as follows:

```
nrow(whr15)
```

```
## [1] 158
```

We can use the two functions (`nrow` and `n_distinct`) together to test if their result is the same.

```
n_distinct(whr15$country, na.rm = TRUE) == nrow(whr15)
```

```
## [1] TRUE
```

```
n_distinct(whr16$country, na.rm = TRUE) == nrow(whr16)
```

```
## [1] TRUE
```

```
n_distinct(whr17$country, na.rm = TRUE) == nrow(whr17)
```

```
## [1] TRUE
```

# Wrangling your data

---

# dplyr::filter

- The `filter` function is used to subset rows in a dataset.
- For example, we can use to extract observations from Western European countries

```
whr15 %>%
  filter(region == "Western Europe")
```

```
## # A tibble: 21 x 12
##   country region happiness_rank happiness_score standard_error economy_gdp_per~
##   <chr>    <chr>          <dbl>            <dbl>        <dbl>           <dbl>
## 1 Switzer~ Weste~             1            7.59       0.0341        1.40
## 2 Iceland  Weste~             2            7.56       0.0488        1.30
## 3 Denmark  Weste~             3            7.53       0.0333        1.33
## 4 Norway   Weste~             4            7.52       0.0388        1.46
## 5 Finland  Weste~             6            7.41       0.0314        1.29
## 6 Netherl~ Weste~             7            7.38       0.0280        1.33
## 7 Sweden   Weste~             8            7.36       0.0316        1.33
## 8 Austria  Weste~            13            7.2        0.0375        1.34
## 9 Luxemb~ Weste~             17            6.95       0.0350        1.56
## 10 Ireland Weste~            18            6.94       0.0368        1.34
## # ... with 11 more rows, and 6 more variables: family <dbl>,
```

# dplyr::filter

## Exercise 3: Filter the dataset.

- Use `filter()` to extract only rows in one of these regions: (1) Eastern Asia and (2) North America.

The or operator (`|`) is one way to do it:

```
whr15 %>%
  filter(region == "Eastern Asia" | region == "North America")
```

A more elegant approach would be to use the `%in%` operator (equivalent to `inlist()` in Stata):

```
whr15 %>%
  filter(region %in% c("Eastern Asia", "North America"))
```

# dplyr::filter regular expressions

One advantage of the filter command is that you can also integrate regular expressions. Let's say that we want to subset all regions' divisions that have `America` in their names. We can use the following:

```
whr15 %>%
  filter(grepl("America", region)) %>%
  head(2)
```

```
## # A tibble: 2 x 12
##   country  region happiness_rank happiness_score standard_error economy_gdp_per~
##   <chr>     <chr>          <dbl>           <dbl>        <dbl>            <dbl>
## 1 Canada    North~         5             7.43       0.0355        1.33
## 2 Costa R~ Latin~        12            7.23       0.0445        0.956
## # ... with 6 more variables: family <dbl>, health_life_expectancy <dbl>,
## #   freedom <dbl>, trust_government_corruption <dbl>, generosity <dbl>,
## #   dystopia_residual <dbl>
```

Notice that I have used `head()` to show just the first 2 observations of the subset. If you want to save this subset you can assign it to an object. For example `whr15_east <- + the code above.`

# dplyr::filter missing cases

If case you want to remove (or identify) the missing cases for a specific variable, you can use `is.na()`.

- This function returns a value of true and false for each value in a data set.
- If the value is NA the `is.na()` function return the value of true, otherwise, return to a value of false.
- In this way, we can check NA values that can be used for other functions.
- We can also negate the function using `!is.na()` which indicates that we want to return those observations with no missings values in a specif variable.

The function syntax in a pipeline is as follows:

```
DATA %>%
  filter(
    is.na(VAR)
  )
```

What are we returning here?

The observations that have missing values for the variable VAR.

# dplyr::filter missing cases

Let's try filtering the whr15 data. Let's keep those observations that have information per region, i.e., no missing values.

```
whr15 %>%
  filter(!is.na(region)) %>%
  head(5)
```

```
## # A tibble: 5 x 12
##   country region happiness_rank happiness_score standard_error economy_gdp_per~
##   <chr>    <chr>          <dbl>            <dbl>           <dbl>
## 1 Switzer~ Wester~          1            7.59        0.0341        1.40
## 2 Iceland   Wester~          2            7.56        0.0488        1.30
## 3 Denmark   Wester~          3            7.53        0.0333        1.33
## 4 Norway    Wester~          4            7.52        0.0388        1.46
## 5 Canada    North~           5            7.43        0.0355        1.33
## # ... with 6 more variables: family <dbl>, health_life_expectancy <dbl>,
## #   freedom <dbl>, trust_government_corruption <dbl>, generosity <dbl>,
## #   dystopia_residual <dbl>
```

Notice that we are negating the function, i.e., `!is.na()`

In case we want to keep the observations that contains missing information we will only use `is.na()`.

# Creating new variables

---

# Creating new variables

In the tidyverse, we refer to creating variables as mutating

So, we use the `mutate()` function. Let's say we want to have interactions:

```
whr15 %>%
  mutate(
    hap_hle = happiness_score * health_life_expectancy,
  ) %>%
  select(country:happiness_score, health_life_expectancy, hap_hle) %>%
  head(5)
```

```
## # A tibble: 5 x 6
##   country     region   happiness_rank happiness_score health_life_expectancy  hap_hle
##   <chr>       <chr>        <dbl>            <dbl>                  <dbl>      <dbl>
## 1 Switzerland Western Europe         1            7.59                 0.941      7.14
## 2 Iceland      Western Europe         2            7.56                 0.948      7.17
## 3 Denmark      Western Europe         3            7.53                 0.875      6.58
## 4 Norway       Western Europe         4            7.52                 0.885      6.66
## 5 Canada       North America          5            7.43                 0.906      6.73
```

# Creating new variables: Dummy variables

```
whr15 %>%
  mutate(
    happiness_score_6 = (happiness_score > 6)
  )
```

What do you think is happening to this variable?

The variable we created contains either `TRUE` or `FALSE`.

If we want to have it as a numeric (1 or 0), we could include `as.numeric()`

```
whr15 %>%
  mutate(
    happiness_score_6 = as.numeric((happiness_score > 6))
  )
```

Finally, instead of using a random number such as 6, we can do the following:

```
whr15 %>%
  mutate(
    happiness_high_mean = as.numeric((happiness_score > mean(happiness_score)))
```

# Some notes: mutate() vs transmute()

`mutate()` vs `transmute()`

Similar in nature but:

1. `mutate()` returns original and new columns (variables).
2. `transmute()` returns only the new columns (variables).

# Creating variables by groups

Let's imagine now that we want to create a variable at the region level (recall `bys gen` in Stata). In R, we can use `group_by()` before we mutate. So for this example, we are going to pipe the following functions.

1. Group our data by the `region` variable.
2. Create a variable that would be the mean of `happiness_score` by each region.
3. Select the variables `country, region, happiness_score, mean_hap`.

```
whr15 %>%
  group_by(region) %>%
  mutate(
    mean_hap = mean(happiness_score)
  ) %>%
  select(country, region, happiness_score, mean_hap)
```

# Creating multiple variables at the same time

We can create multiple variables in an easy way. So, let's imagine that we want to estimate the mean value for the variables: happiness\_score, health\_life\_expectancy, and trust\_government\_corruption.

How we can do it?

- We can use the function `across()`. It behaves this way: `across(VARS that you want to transform, FUNCTION to execute)`.
- `across()` should be always use inside `summarise()` or `mutate()`.

---

Across      Output

---

```
vars <- c("happiness_score", "health_life_expectancy", "trust_government_corruption")  
  
wri15 %>%  
  group_by(region) %>%  
  summarise(  
    across(all_of(vars), mean)  
)
```

# Creating multiple variables at the same time

We can create multiple variables in an easy way. So, let's imagine that we want to estimate the mean value for the variables: happiness\_score, health\_life\_expectancy, and trust\_government\_corruption.

How we can do it?

- We can use the function `across()`. It behaves this way: `across(VARS that you want to transform, FUNCTION to execute)`.
- `across()` should be always use inside `summarise()` or `mutate()`.

Across      Output

```
## # A tibble: 3 x 4
##   region           happiness_score health_life_expectancy trust_government_corr
##   <chr>                 <dbl>              <dbl>                  <dbl>
## 1 Australia and New~    7.28               0.920                  0.393
## 2 Central and Easte~    5.33               0.719                  0.0867
## 3 Eastern Asia          5.63               0.877                  0.128
```

# Creating variables

Exercise 5: Create a variable called year that equals to the year of each dataframe .

- Use `mutate()`
- Remember to assign it to the same dataframe.

How to do it?

```
whr15 <- whr15 %>%
  mutate(
    year = 2015
)

whr16 <- whr16 %>%
  mutate(
    year = 2016
)

whr17 <- whr17 %>%
  mutate(
    year = 2017
)
```

# Appending and merging data sets

---

# Appending and merging data sets

Now that we can identify the observations, we can combine the data set. Here are two functions to append objects by row

```
rbind(df1, df2, df3)  
bind_rows(df1, df2, df3)
```

## Exercise 6: Append data sets.

- Use the function `bind_rows` to append the three WHR datasets:

## How to do it?

```
bind_rows(whr15, whr16, whr17)
```

## What problems do you think we can have with these approach?

- One of the problems with binding rows like this is that, sometimes, some columns are not compatible.

# Appending and merging data sets

Exercise 7: Fixing our variables and appending the dfs correctly.

Exercise 7a:

- Load the R data set `regions.RDS` from `DataWork/DataSets/Raw/Un WHR`

```
regions <- read_rds(here("DataWork", "DataSets", "Raw", "Un WHR", "regions.RDS"))
```

# Appending and merging data sets

We can use the `left_join()` function merge two dataframes. The function syntax is: `left_join(a_df, another_df, by = c("id_col1"))`.

A left join takes all the values from the first table, and looks for matches in the second table. If it finds a match, it adds the data from the second table; if not, it adds missing values. It is the equivalent of `merge, keep(master matched)` in Stata.

Exercise 7b:

- Now, we join the `regions` dataframe with the `whr17` dataframe.

```
whr17 <- whr17 %>%  
  left_join(regions, by = "country") %>%  
  select(country, region, everything())
```

**Notes:** Look at the `everything()` function. It takes all the variables from the dataframe and put them after country and region. In this way, `select` can be used to **order** columns!

# Appending and merging data sets

## Exercise 7c:

Check if there is any other country without region info:

- Only use pipes %>%
- And `filter()`
- Do not assign it to an object.

```
whr17 %>%
  filter(is.na(region))
```

```
## # A tibble: 2 x 14
##   country      region happiness_rank happiness_score whisker_high whisker_low
##   <chr>        <chr>          <dbl>            <dbl>         <dbl>        <dbl>
## 1 Taiwan Provinc~ <NA>             33            6.42         6.49        6.35
## 2 Hong Kong S.A.~ <NA>             71            5.47         5.55        5.39
## # ... with 8 more variables: economy_gdp_per_capita <dbl>, family <dbl>,
## #   health_life_expectancy <dbl>, freedom <dbl>, generosity <dbl>,
## #   trust_government_corruption <dbl>, dystopia_residual <dbl>, year <dbl>
```

# So we ended up with two countries with NAs

This is due to the name of the countries. The regions dataset doesn't have "Taiwan Province of China" nor "Hong Kong S.A.R., China" but "Taiwan" and "Hong Kong."

How do you think we should solve this?

- My approach would be to:
  1. fix the names of these countries in the whr17 dataset and;
  2. merge (left\_join) it with the regions dataset.

# Appending and merging data sets

Finally, let's keep those relevant variables first and bind those rows.

Exercise 8: Bind all rows and create a panel called: `whr_panel`.

- Use `rbind()`
- Select the variables: `country`, `region`, `year`, `happiness_rank`, `happiness_score`, `economy_gdp_per_capita`, `health_life_expectancy`, `freedom` for each df, i.e., `whr15`, `whr16`, `whr17`.

```
keepvars <- c("country", "region", "year", "happiness_rank",
             "happiness_score", "economy_gdp_per_capita",
             "health_life_expectancy", "freedom")

whr15 <- select(whr15, all_of(keepvars))
whr16 <- select(whr16, all_of(keepvars))
whr17 <- select(whr17, all_of(keepvars))

whr_panel <- rbind(whr15, whr16, whr17)    # or bind_rows
```

# Saving a dataset

---

# Saving a dataset

- The data set you have now is the same data set we've been using for earlier sessions, so we can save it now
- As mentioned before, R data sets are often save as csv.
- To save a dataset we can use the `write_csv` function from the tidyverse, or `write.csv` from base R.

The function takes the following structure:

```
write_csv(x, file, append = FALSE):
```

- `x`: the object (usually a data frame) you want to export to CSV
- `file`: the file path to where you want to save it, including the file name and the format (“.csv”)
- `append`: If FALSE, will create a new file. If TRUE, will append to an existing file.

# Saving a dataset

## Exercise 9: Save the dataset.

- Use `write_csv()`
- Use `here()`

```
# Save the whr data set

write_csv(whr_panel,
          here("DataWork", "DataSets", "Final", "whr_panel.csv"))
```

- The problem with CSVs is that they cannot differentiate between `strings` and `factors`
- They also don't save factor orders
- Data attributes (which are beyond the scope of this training, but also useful to document data sets) are also lost in csv data

# Saving a dataset

The R equivalent of a `.dta` file is a `.rds` file. It can be saved and loaded using the following commands:

- `write_rds(object, file = "")`: Writes a single R object to a file.
- `read_rds(file)`: Load a single R object from a file.

```
# Save the data set

write_rds(whr_panel, file = here("DataWork", "DataSets", "Final", "whr_panel.Rds"))
```

Thank you~~

# Appendix

---

# Other relevant functions: slice, subset, select

Arrange   Slice   Select   Combining functions

Arrange: allows you to order by a specific column.

```
whr15 %>%
  arrange(region, country) %>%
  head(5)
```

```
## # A tibble: 5 x 8
##   country    region      year happiness_rank happiness_score economy_gdp_per_c~
##   <chr>      <chr>     <dbl>        <dbl>            <dbl>            <dbl>
## 1 Australia  Australia  a~  2015          10       7.28           1.33
## 2 New Zeal~ Australia  a~  2015           9       7.29           1.25
## 3 Albania    Central and~ 2015          95       4.96           0.879
## 4 Armenia    Central and~ 2015         127       4.35           0.768
## 5 Azerbaij~ Central and~ 2015          80       5.21           1.02
## # ... with 2 more variables: health_life_expectancy <dbl>, freedom <dbl>
```

# Other relevant functions: slice, subset, select

Arrange   Slice   Select   Combining functions

**Slice**: allows you to select, remove, and duplicate rows.

```
happiness %>%  
  slice(1:5) # to select the first 5 rows
```

```
## # A tibble: 5 x 8  
##   country    region     year happiness_rank happiness_score economy_gdp_per_ca~  
##   <chr>      <chr>     <dbl>          <dbl>            <dbl>                <dbl>  
## 1 Switzerland Western Europe 2015             1              7.59               1.40  
## 2 Iceland     Western Europe 2015             2              7.56               1.30  
## 3 Denmark     Western Europe 2015             3              7.53               1.33  
## 4 Norway      Western Europe 2015             4              7.52               1.46  
## 5 Canada      North America 2015             5              7.43               1.33  
## # ... with 2 more variables: health_life_expectancy <dbl>, freedom <dbl>
```

You can also use `slice_head` and `slice_tail` to select the first or last rows respectively. Or `slice_sample` to randomly draw n rows.

# Other relevant functions: slice, subset, select

Arrange   Slice   **Select**   Combining functions

**Select**: allows you to select specific columns.

```
whr15 %>%
  select(region, country, happiness_rank)
```

```
## # A tibble: 158 x 3
##   region           country  happiness_rank
##   <chr>            <chr>          <dbl>
## 1 Western Europe  Switzerland      1
## 2 Western Europe  Iceland         2
## 3 Western Europe  Denmark        3
## 4 Western Europe  Norway         4
## 5 North America   Canada         5
## 6 Western Europe  Finland        6
## 7 Western Europe  Netherlands    7
## 8 Western Europe  Sweden         8
## 9 Australia and New Zealand New Zealand     9
## 10 Australia and New Zealand Australia     10
```

# Other relevant functions: slice, subset, select

Arrange   Slice   Select

Combining functions

Select: allows you to specific columns.

```
whr15 %>%
  arrange(region, country) %>%          # Arrange by region and country
  filter(!is.na(region)) %>%              # Filter those non-missing obs for region if any
  select(country, region, starts_with("happin")) %>% # Select country, year, and vars that stars with happen
  slice_head()                            # Get the first row
```

```
## # A tibble: 1 x 4
##   country    region      happiness_rank happiness_score
##   <chr>      <chr>          <dbl>            <dbl>
## 1 Australia Australia and New Zealand     10             7.28
```

# Using `ifelse` when creating a variable

We can also create a dummy variable with the `ifelse()` function. The way we use this function is as: `ifelse(test, yes, no)`. We can also use another function called `case_when()`.

```
whr15 %>%
  mutate(
    latin_america_car = ifelse(region == "Latin America and Caribbean", 1, 0)
  ) %>%
  arrange(-latin_america_car) %>%
  head(5)
```

```
## # A tibble: 5 x 9
##   country   region      year happiness_rank happiness_score economy_gdp_per_c~
##   <chr>     <chr>     <dbl>        <dbl>            <dbl>                <dbl>
## 1 Costa Rica Latin America 2015         12       7.23          0.956
## 2 Mexico    Latin America 2015         14       7.19          1.02 
## 3 Brazil    Latin America 2015         16       6.98          0.981
## 4 Venezuela Latin America 2015         23       6.81          1.04 
## 5 Panama    Latin America 2015         25       6.79          1.06 
## # ... with 3 more variables: health_life_expectancy <dbl>, freedom <dbl>,
## #   latin_america_car <dbl>
```

# Factor variables

---

# Factor variables

- When we imported this data set, we told R explicitly to not read strings as factor.
- We did that because we knew that we'd have to fix the country names.
- The region variable, however, should be a factor.

```
str(whi_panel$region)
```

```
##  chr [1:470] "Western Europe" "Western Europe" "Western Europe" ...
```

# Factor variables

To create a factor variable, we use the `factor()` function (or `as_factor()` from the `forcats` package).

- `factor(x, levels, labels)` : turns numeric or string vector `x` into a factor vector.
- `levels` : a vector containing the possible values of `x`.
- `labels` : a vector of strings containing the labels you want to apply to your factor variable
- `ordered` : logical flag to determine if the levels should be regarded as ordered (in the order given).

If your categorical variable does not need to be ordered, and your string variable already has the label you want, making the conversion is quite easy.

# Factor variables

## Exercise 10: Turn a string variable into a factor.

- Use the mutate function to create a variable called region\_cat containing a categorical version of the region variable.
- TIP: to do this, you only need the first argument of the factor function.

## How to do it?

```
whr_panel <- mutate(whr_panel, region_cat = factor(region))
```

And now we can check the class of our variable.

```
class(whr_panel$region_cat)  
  
## [1] "factor"
```

# Reshaping a dataset

---

# Reshaping a dataset

Finally, let's try to reshape our dataset using the tidyverse functions. No more `reshape` from Stata. We can use `pivot_wider` or `pivot_longer`. Let's assign our wide format panel to an object called `whr_panel_wide`.

---

Long to Wide

Wide to Long

---

```
whr_panel %>%
  select(country, region, year, happiness_score) %>%
  pivot_wider(
    names_from = year,
    values_from = happiness_score
  ) %>%
  head(5)
```

```
## # A tibble: 5 x 5
##   country     region `2015` `2016` `2017`
##   <chr>       <chr>   <dbl>   <dbl>   <dbl>
## 1 Switzerland Western Europe  7.59    7.51   7.49
## 2 Iceland      Western Europe  7.56    7.50   7.50
## 3 Denmark      Western Europe  7.53    7.53   7.52
## 4 Norway       Western Europe  7.52    7.50   7.54
```

# Reshaping a dataset

Finally, let's try to reshape our dataset using the tidyverse functions. No more `reshape` from Stata. We can use `pivot_wider` or `pivot_longer`. Let's assign our wide format panel to an object called `whr_panel_wide`.

Long to Wide      Wide to Long

```
whr_panel_wide %>%
  pivot_longer(
    cols = `2015`:`2017`,
    names_to = "year",
    values_to = "happiness_score"
  ) %>%
  head(5)
```

```
## # A tibble: 5 x 4
##   country     region     year  happiness_score
##   <chr>       <chr>      <chr>        <dbl>
## 1 Switzerland Western Europe 2015        7.59
## 2 Switzerland Western Europe 2016        7.51
## 3 Switzerland Western Europe 2017        7.49
## 4 Iceland      Western Europe 2015        7.56
```

Thank you~~