



# PreWork of Ed Wang

Entering something randomto see the data package of portswigger:

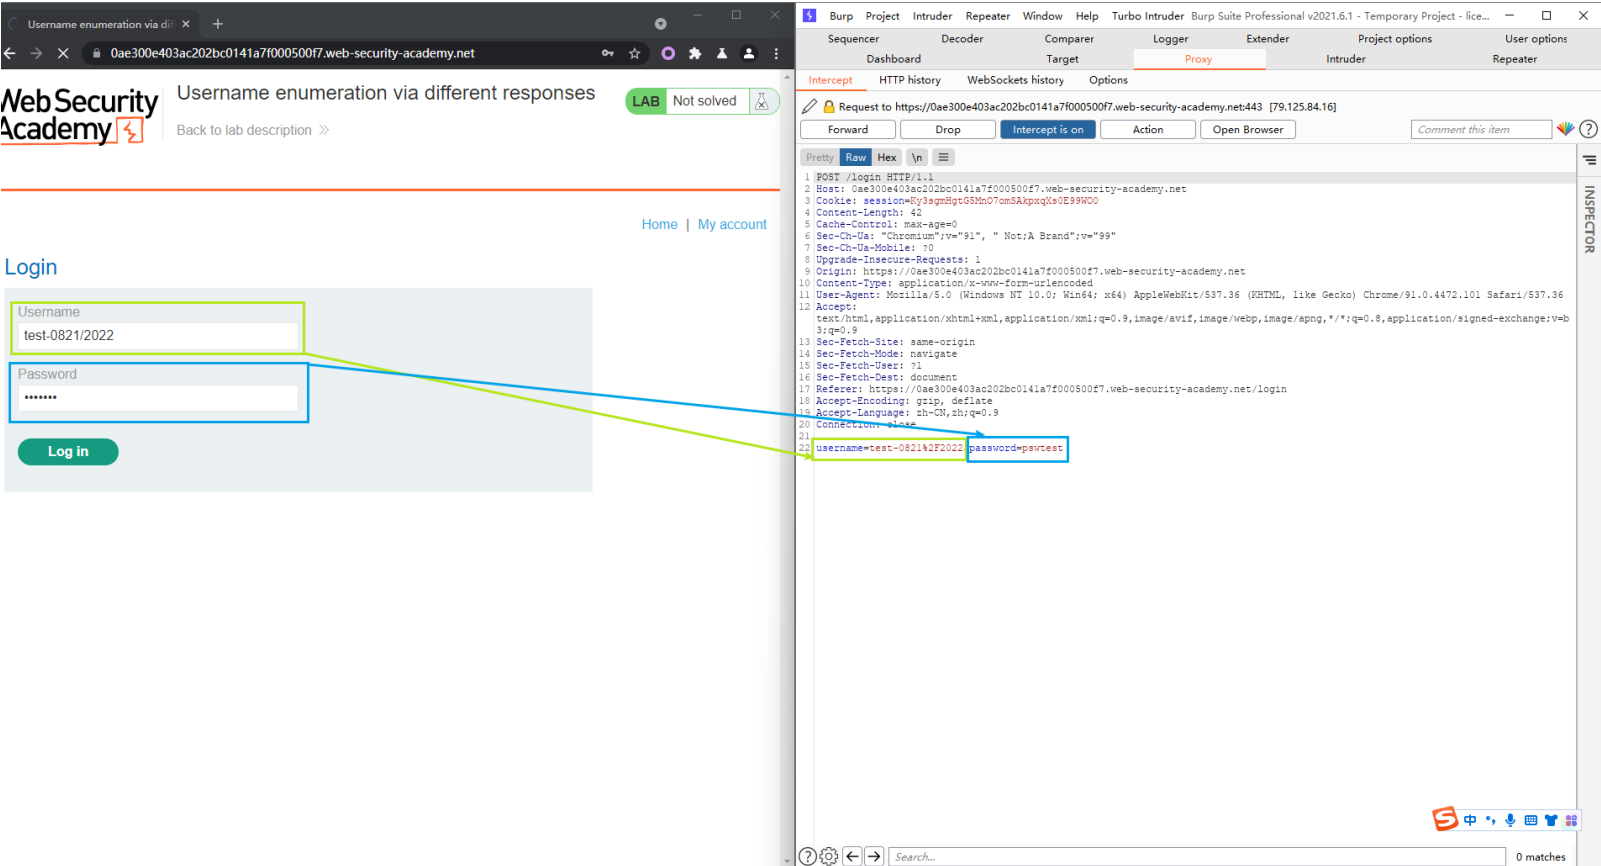

Send the sample to intruder, in order to find existing account, make certain configuration like below , using the user-name book we have [Here](#):

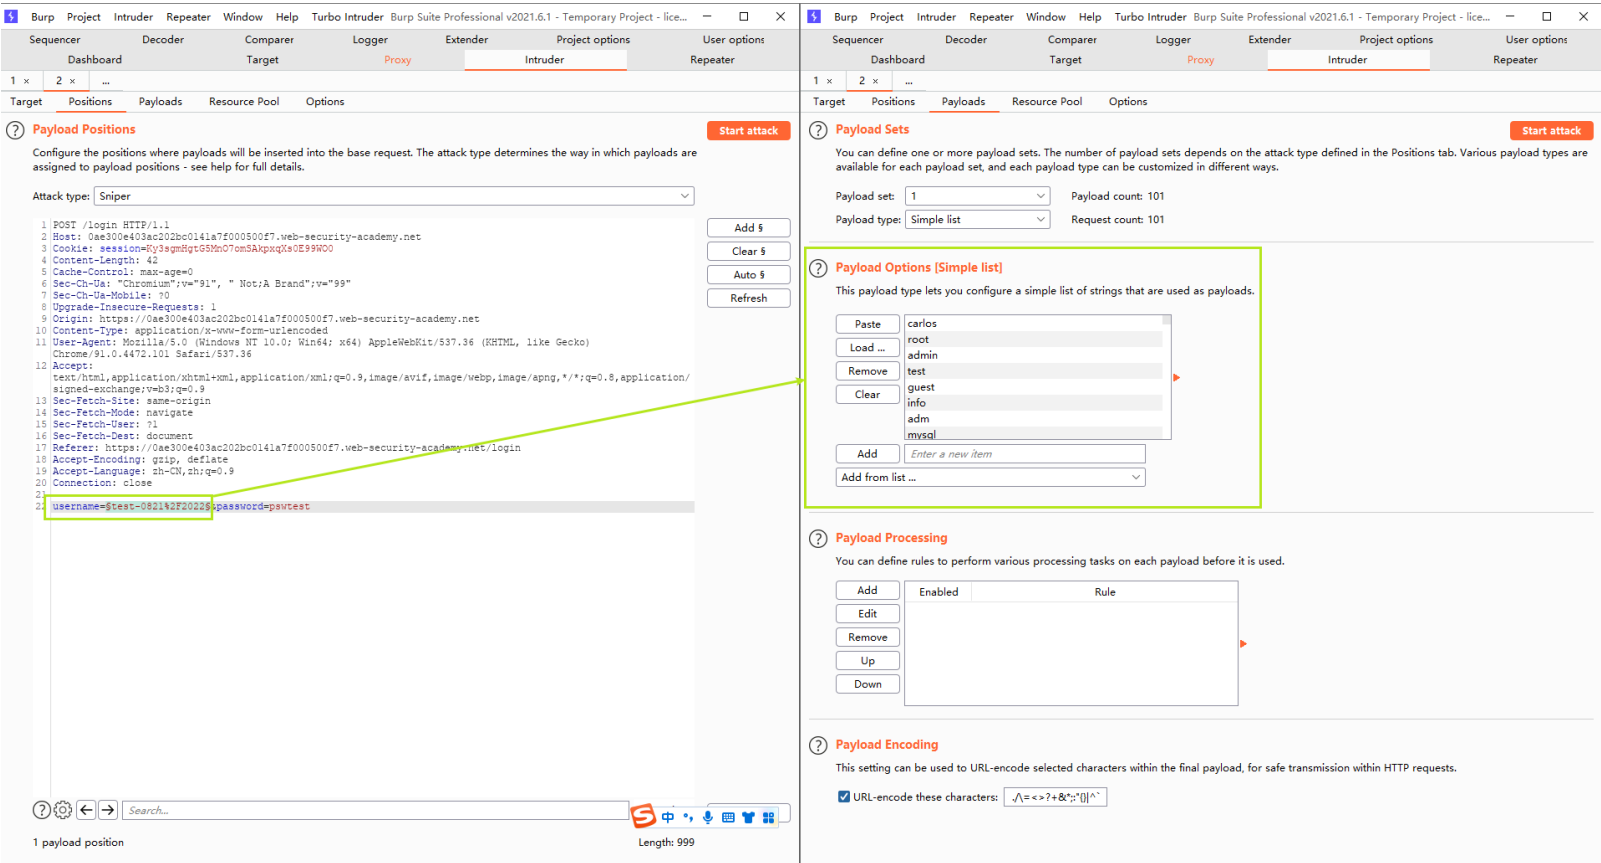

Sort the result by Length, we have a special one, below is the difference between them, so "activestat" it is.

Request	Payload	Status	Error	Timeout	Length	Comment
25	activestat	200			3198	
0		200			3196	
1	carlos	200			3196	
2	root	200			3196	
3	admin	200			3196	
4	test	200			3196	
5	guest	200			3196	
6	info	200			3196	
7	adm	200			3196	
8	mysql	200			3196	
9	user	200			3196	
10	administrator	200			3196	
11	oracle	200			3196	
12	ftp	200			3196	
13	pi	200			3196	
14	puppet	200			3196	

53

<p class=is-warning>  
Incorrect password  
</p>  
54

<form class=login-form method=POST action=/login>

53

<p class=is-warning>  
Invalid username  
</p>  
54

<form class=login-form method=POST action=/login>

Change the intruder payload a little bit like below, using the password book we have [Here](#):

[illegible]

Burp Project Intranet Repeater Window Help Turbo Intruder Burp Suite Professional v2021.6.1 - Temporary Project - lice... — □ ×

Sequencer	Decoder	Comparator	Logger	Extender	Project options	User options
Dashboards		Target	Proxy	Intruder	<u>Intruder</u>	Repeater

1 x 2 x ...

Target Positions Payloads Resource Pool Options

### ? Payload Sets

Start attack

You can define one or more payload sets. The number of payload sets depends on the attack type defined in the Positions tab. Various payload types are available for each payload set, and each payload type can be customized in different ways.

Payload set: 1      Payload count: 100  
 Payload type: Simple list      Request count: 100

---

### ? Payload Options [Simple list]

This payload type lets you configure a simple list of strings that are used as payloads.

Paste  
Load ...  
Remove  
Clear

123456  
password  
12345678  
qwerty  
123456789  
12345  
1234  
111111  
 Enter a new item  
Add from list ...

---

### ? Payload Processing

You can define rules to perform various processing tasks on each payload before it is used.

Add  
Edit  
Remove  
Up  
Down

Enabled Rule

---

### ? Payload Encoding

This setting can be used to URL-encode selected characters within the final payload, for safe transmission within HTTP requests.

☒ URL-encode these characters:

S 英 \*, ↓, ↻, 📄, 🗑️, 🔄

And we have starwars:

Attack
Save
Columns
4. Intruder attack of 0ae300e403ac202bc0141a7f000500f7.web-security-academy.net - Temporary attack - Not saved to project ...

Results
Target
Positions
Payloads
Resource Pool
Options

Filter: Showing all items

Request	Payload	Status	Error	Timeout	Length ^	Comment
55	starwars	302	<input type="checkbox"/>	<input type="checkbox"/>	170	
0		200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
1	123456	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
2	password	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
3	12345678	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
4	qwerty	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
5	123456789	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
6	12345	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
7	1234	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
8	111111	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
9	1234567	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
10	dragon	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	
11	123123	200	<input type="checkbox"/>	<input type="checkbox"/>	3198	

Request

Response

Pretty
Raw
Hex
Render
\n
≡

```

1 HTTP/1.1 302 Found
2 Location: /my-account
3 Set-Cookie: session=0700RaYhsa4CA0f0DVVWJeigh7x8XjKx; Secure; HttpOnly; SameSite=None
4 Connection: close
5 Content-Length: 0
6
7

```

?
⚙️
⬅️
➡️
Search...
0 matches

Finished

Great then.

Congratulations, you solved the lab! [Share your skills!](#) [Continue learning >>](#)

## My Account

Your username is: activestat

Your email is: [activestat@activestat.net](mailto:activestat@activestat.net)

Email

Update email

Burp Suite

Web vulnerability scanner

Burp Suite Editions

Release Notes

Vulnerabilities

Cross-site scripting (XSS)

SQL injection

Cross-site request forgery

XML external entity injection

Directory traversal

Server-side request forgery

Customers

Organizations

Testers

Developers

Company

About

PortSwigger News

Careers

Contact

Legal

Privacy Notice

Insights

Web Security Academy

Blog

Research

The Daily Swig

PortSwigger

Follow us

© 2022 PortSwigger Ltd.