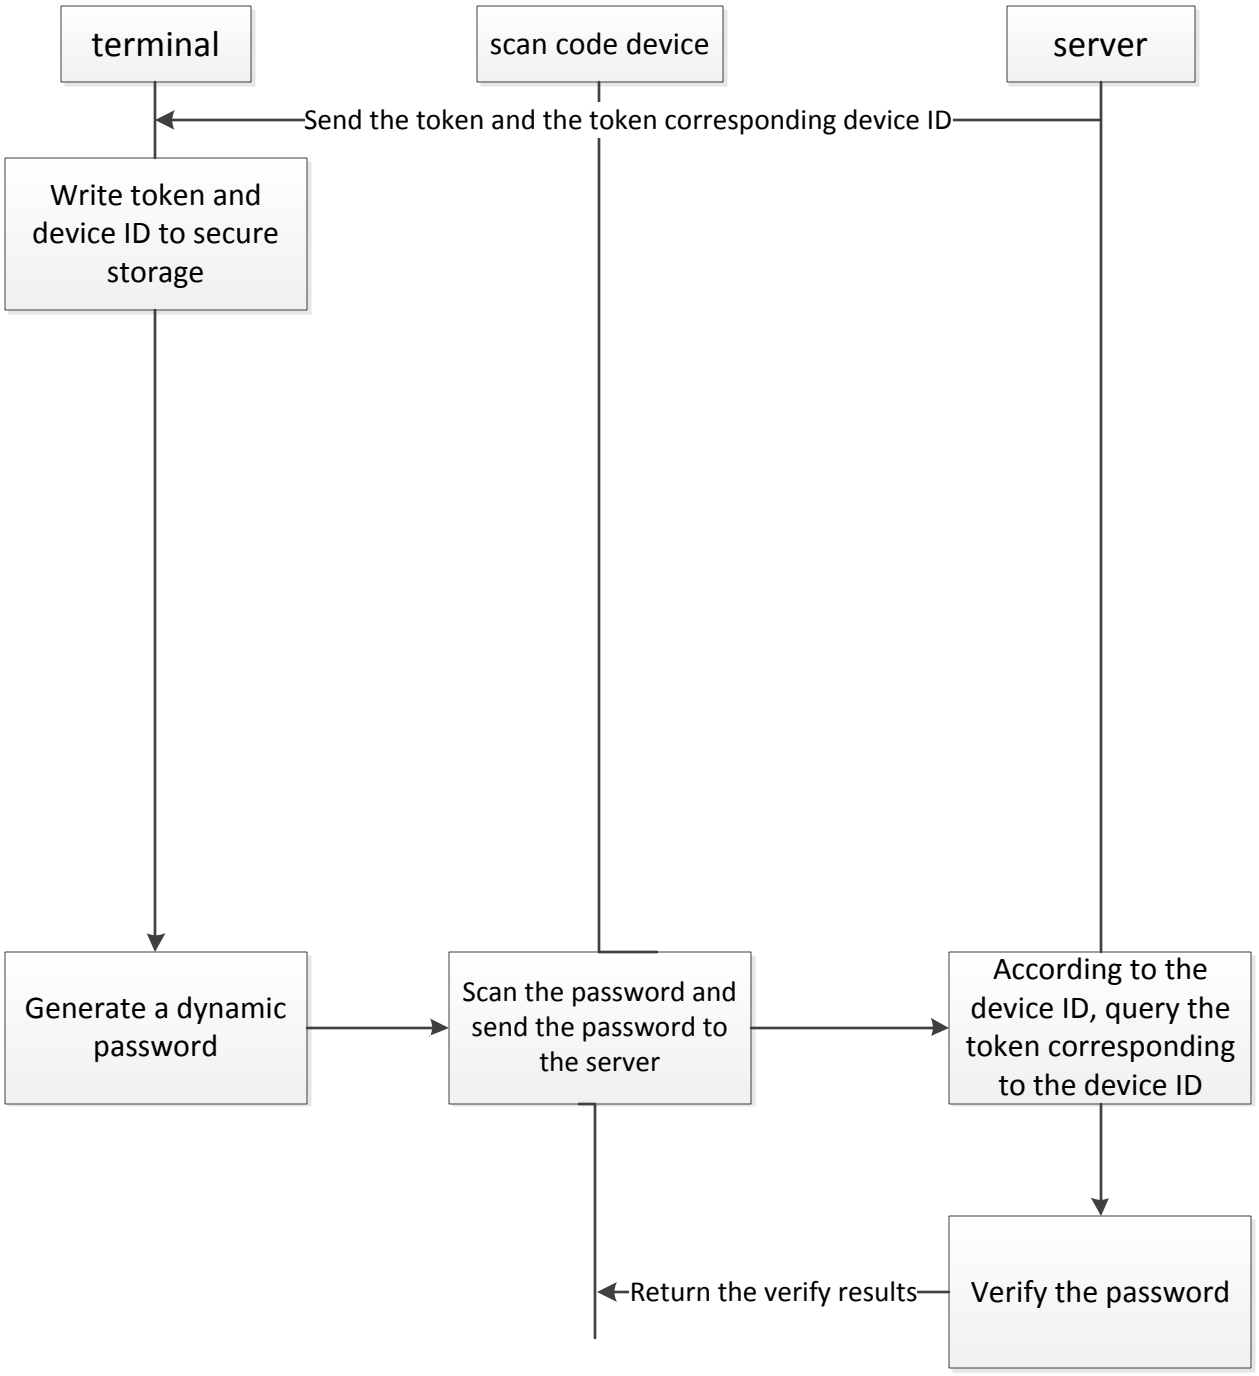
terminal
scan code device
server
Send the token and the token corresponding device ID
Write token and device ID to secure storage
Generate a dynamic password
Scan the password and send the password to the server
According to the device ID, query the token corresponding to the device ID
Verify the password
Return the verify results