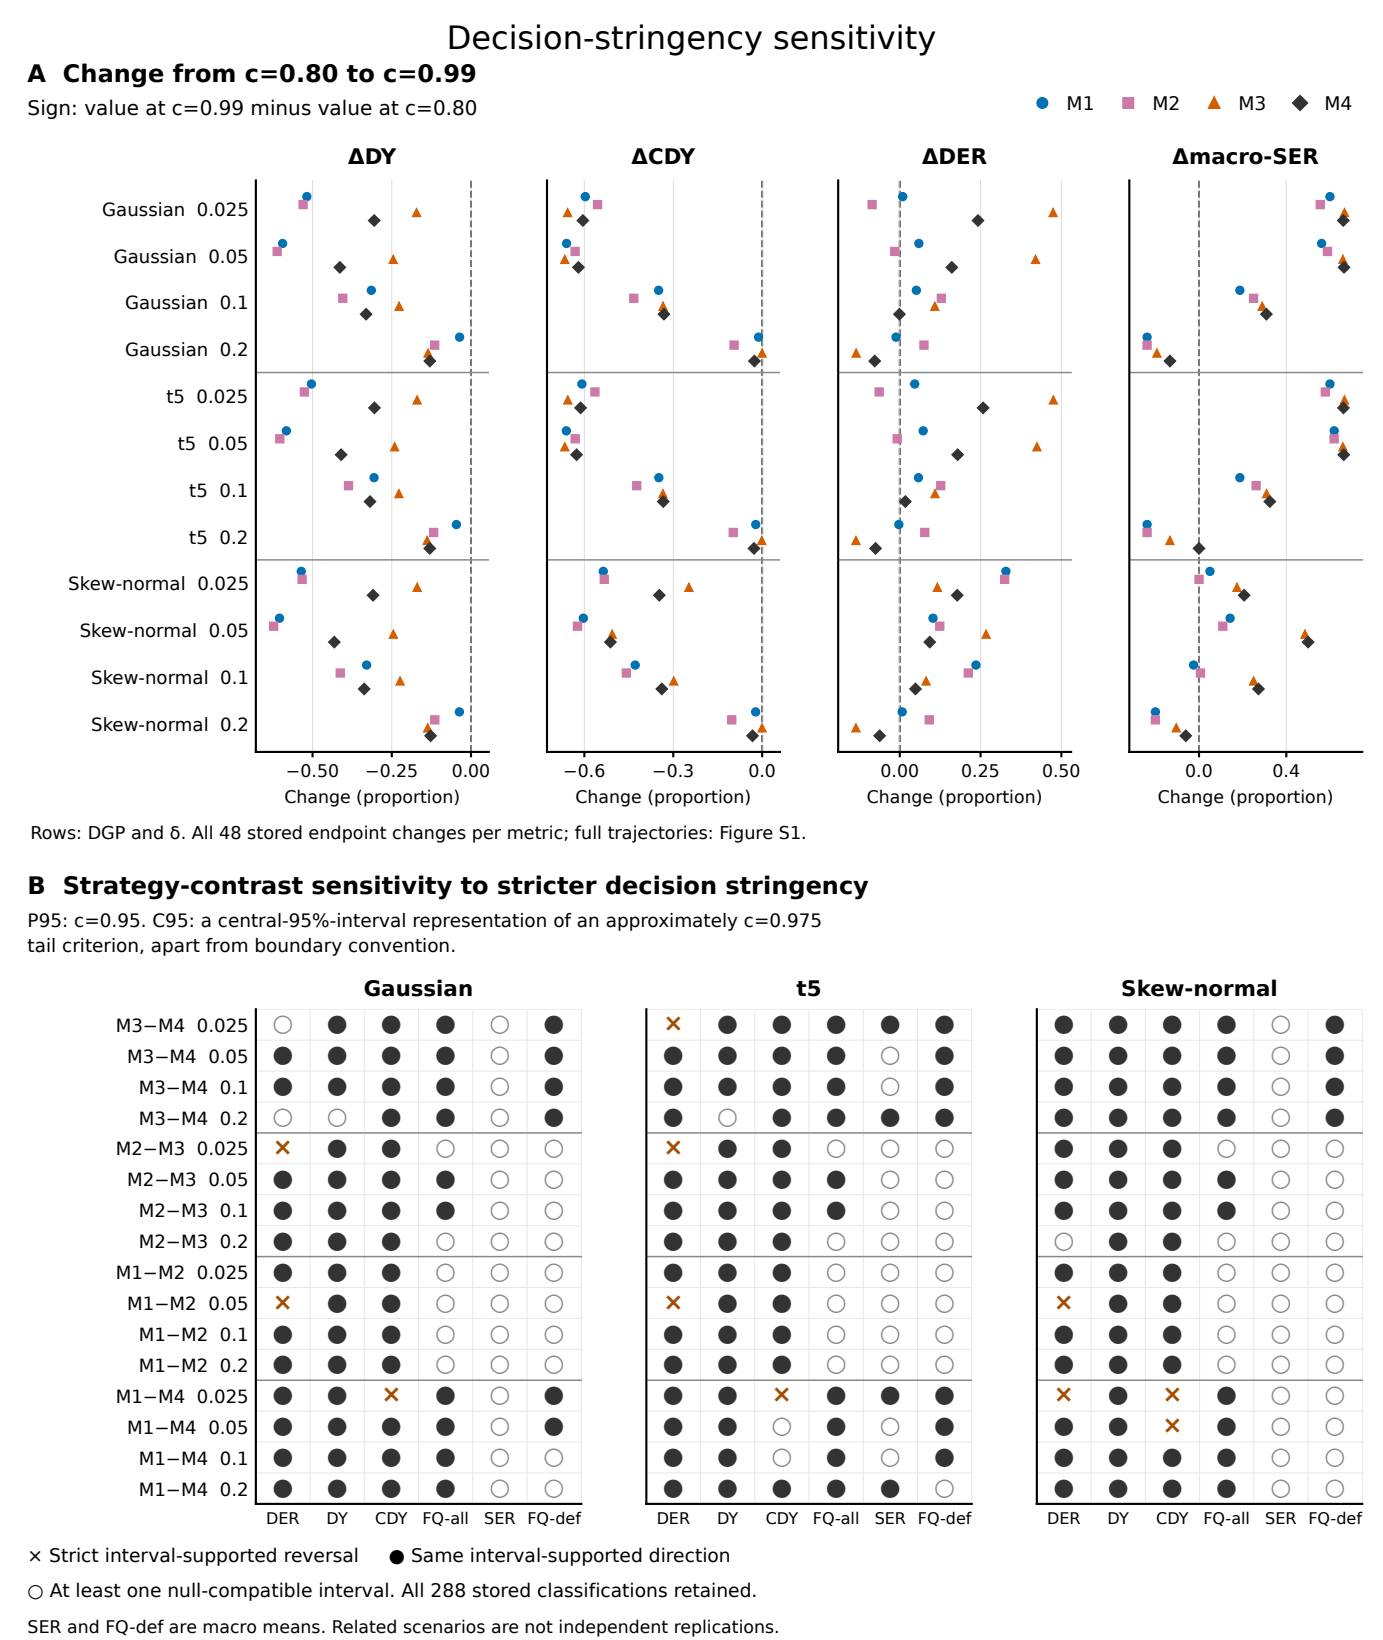
Decision-stringency sensitivity
A Change from c=0.80 to c=0.99
Sign: value at c=0.99 minus value at c=0.80
M1
M2
M3
M4
ΔDY
ΔCDY
ΔDER
Δmacro-SER
Gaussian 0.025
Gaussian 0.05
Gaussian 0.1
Gaussian 0.2
t5 0.025
t5 0.05
t5 0.1
t5 0.2
Skew-normal 0.025
Skew-normal 0.05
Skew-normal 0.1
Skew-normal 0.2
−0.50
−0.25
0.00
−0.6
−0.3
0.0
0.00
0.25
0.50
0.0
0.4
Change (proportion)
Rows: DGP and δ. All 48 stored endpoint changes per metric; full trajectories: Figure S1.
B Strategy-contrast sensitivity to stricter decision stringency
P95: c=0.95. C95: a central-95%-interval representation of an approximately c=0.975
tail criterion, apart from boundary convention.
Gaussian
t5
Skew-normal
M3−M4 0.025
M3−M4 0.05
M3−M4 0.1
M3−M4 0.2
M2−M3 0.025
M2−M3 0.05
M2−M3 0.1
M2−M3 0.2
M1−M2 0.025
M1−M2 0.05
M1−M2 0.1
M1−M2 0.2
M1−M4 0.025
M1−M4 0.05
M1−M4 0.1
M1−M4 0.2
DER
DY
CDY
FQ-all
SER
FQ-def
× Strict interval-supported reversal
● Same interval-supported direction
○ At least one null-compatible interval. All 288 stored classifications retained.
SER and FQ-def are macro means. Related scenarios are not independent replications.