(a) Semantic correspondence

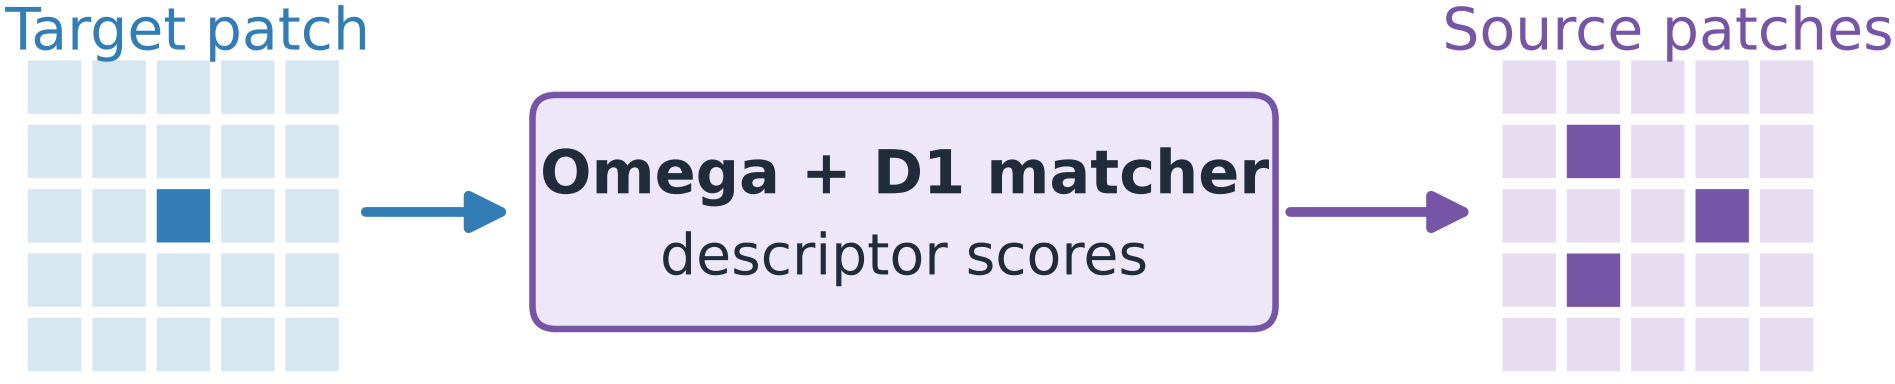

Top-K proposals

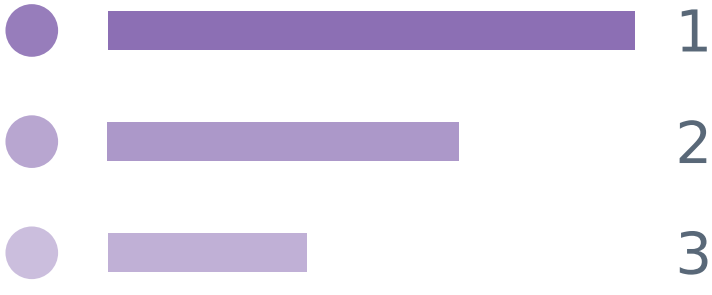

Members of one ray

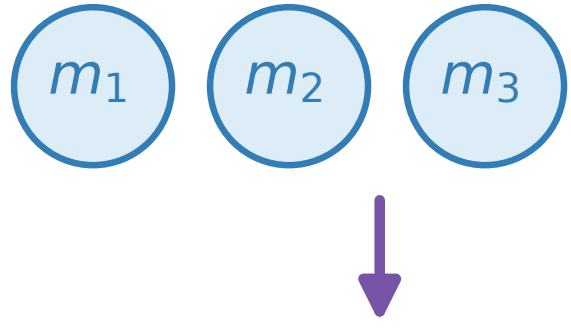

One distribution per source-camera ray

Member posteriors vote → retain Top-K

Absent / unsupported matches keep the native source path.