

# Kubernetes Native Developer

Architecture Workshop

Introduction to Quarkus

Use case description & Quarkus demo-app



[linkedin.com/company/red-hat](https://linkedin.com/company/red-hat)



[facebook.com/redhatinc](https://facebook.com/redhatinc)



[youtube.com/user/RedHatVideos](https://youtube.com/user/RedHatVideos)



[twitter.com/RedHat](https://twitter.com/RedHat)

# Self introduction

**Name:** Wanja Pernath

**Email:** wpernath@redhat.com

**Base:** Germany (very close to the Alps)

**Role:** EMEA Technical Partner Development Manager

- OpenShift and MW

**Experience:** Years of Consulting, Training, PreSales at  
Red Hat and before

**Twitter:** <https://twitter.com/wpernath>

**LinkedIn:** <https://www.linkedin.com/in/wanjapernath/>

**GitHub:** <https://github.com/wpernath>



# First book just published

## Getting GitOps

A technical blueprint for developing with Kubernetes and OpenShift based on a REST microservice example written with Quarkus

### Technologies discussed:


Quarkus, Helm Charts, Kustomize, Tekton Pipelines, Kubernetes Operators, OpenShift Templates, ArgoCD, CI/CD, GitOps....

### Download for free at:

<https://developers.redhat.com/e-books/getting-gitops-practical-platform-openshift-argo-cd-and-tekton>

### Interview with full GitOps Demo:

[https://www.youtube.com/watch?v=znMfVqAIRzY&ab\\_channel=OpenShift](https://www.youtube.com/watch?v=znMfVqAIRzY&ab_channel=OpenShift)

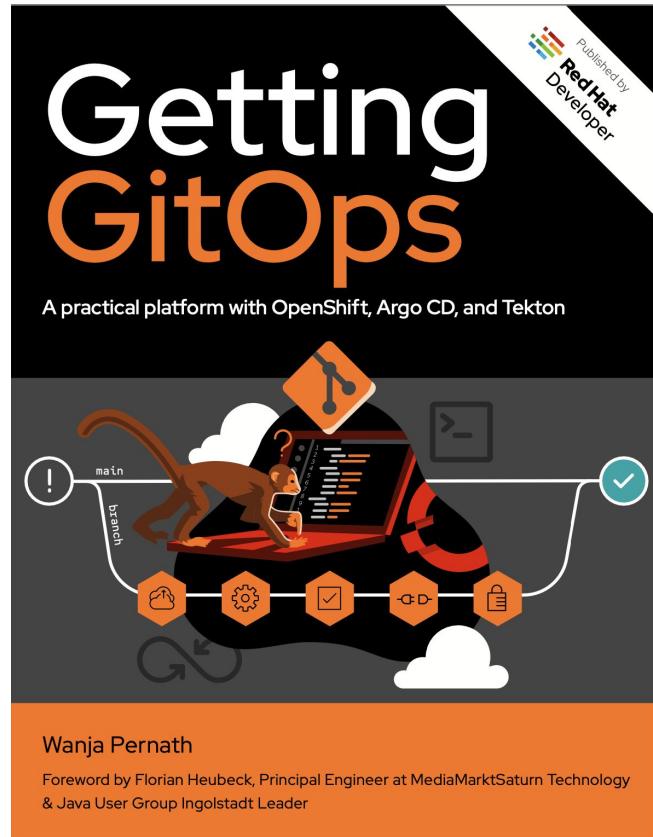

# Agenda

# Agenda

- What is this all about
- The Use Case
- Quarkus Business Value
- Quarkus Technical Value
- First steps with Quarkus

# What is this all about?

# Learning Goals

- Benefits of using Quarkus
- Concepts of Quarkus
- Basic understanding
- Making use of Quarkus Dev Services
- Understanding and using Quarkus to build a microservice
- Developing Quarkus Apps with OpenShift
  - Using Source to Image
  - Understanding Serverless (Knative)
  - Deployment of Quarkus apps on OpenShift
- Using and understanding of Kustomize and Helm Charts
- Use OpenShift Pipelines (Tekton Pipelines) to do CI/CD
- Use of ArgoCD and OpenShift GitOps

# The Use Case

**Source Code for this workshop:**

(Fork it, clone it, use it. It's open source!)

<https://github.com/wpernath/quarkus-grumpycat>

# The Use Case

- In order to understand Quarkus and how great it integrates into all the necessary technologies, let's write a game. Let's call it **Quarkus GrumpyCat**
- It's a multi player game for up to 4 concurrent players
- Goal is to be last dog standing



# The Use Case

The server is stateless  
and maintains the  
communication  
between the 4 players  
in a game



# The Use Case




# The Use Case

- The client is fully written in JavaScript with a simple game framework called MelonJS ([github.com/melonJS/melonJS](https://github.com/melonJS/melonJS))
- The client runs in any recent browser (Chrome, Safari, Firefox have been tested)
- The client communicates with the server via
  - REST API and
  - WebSocket
- But, this is a Quarkus workshop (or: a Kubernetes Native Workshop, so we try to ignore the client here, but trust me: Writing a JavaScript game is - pheww).


# Architecture of the Game

- The user talks via Browser to the cat-client.
- The client talks to the cat-server
- The server has integrations for the database to store state and high scores
- The server also talks to Kafka

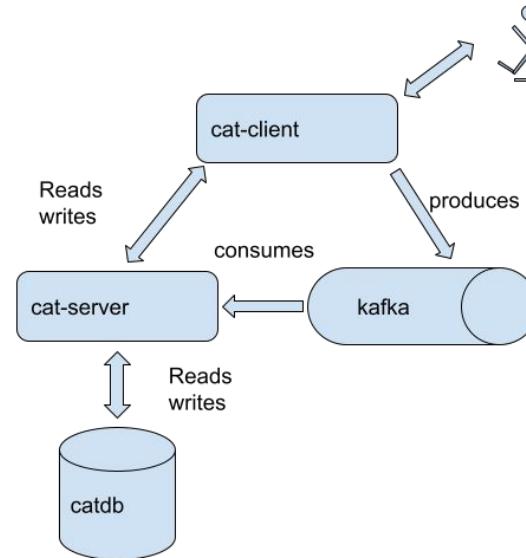


# Getting GitOps

- We use the GitOps paradigm for this project, so we will also implement Tekton Pipelines and will use ArgoCD on OpenShift to do CI/CD
- At the end of this workshop you're going to have a blueprint for your own projects.

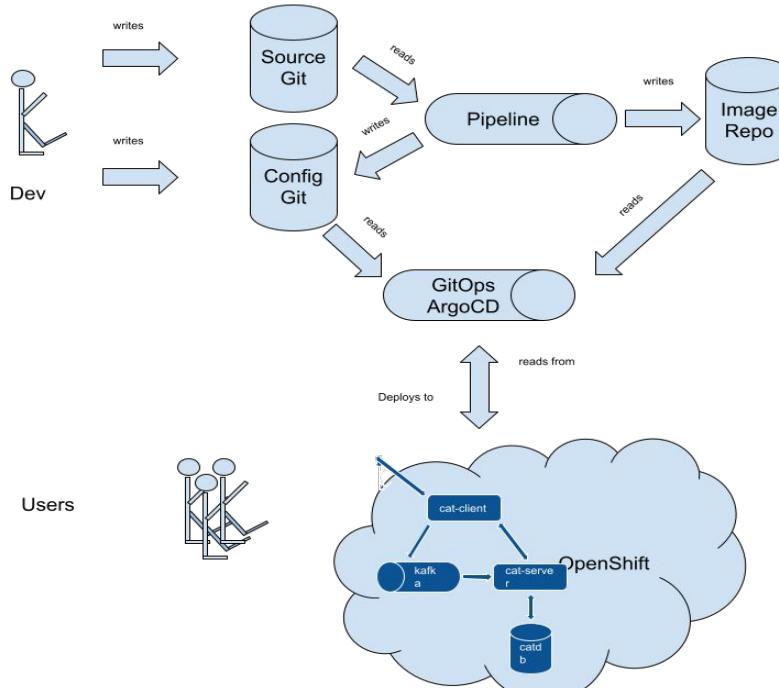

# Build, Deploy & Dev Workflow

# BUILD AND DEPLOY CONTAINER IMAGES

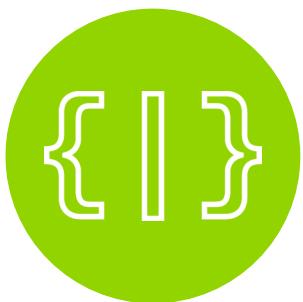

DEPLOY YOUR  
SOURCE CODE




DEPLOY YOUR  
APP BINARY




DEPLOY YOUR  
CONTAINER IMAGE


# DEPLOY SOURCE CODE WITH SOURCE-TO-IMAGE (S2I)

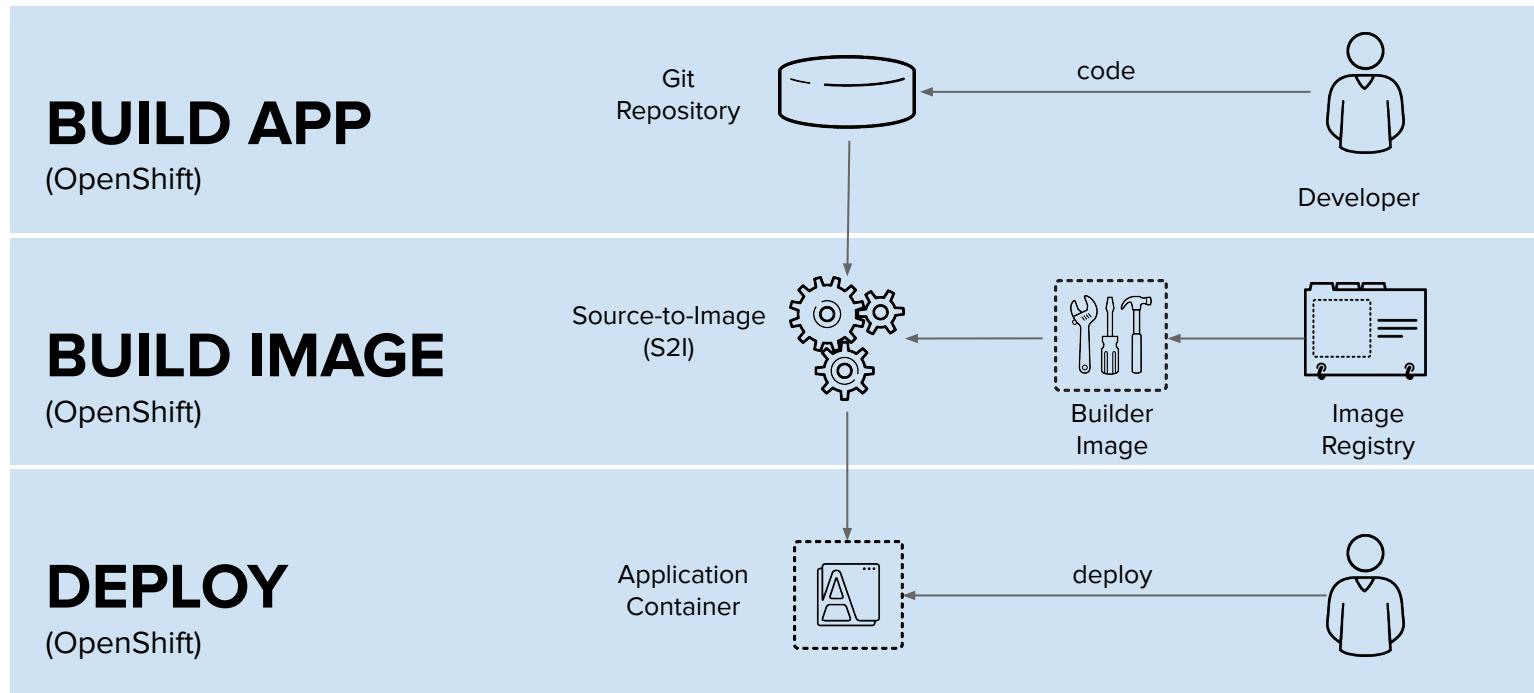

# DEPLOY APP BINARY WITH SOURCE-TO-IMAGE (S2I)

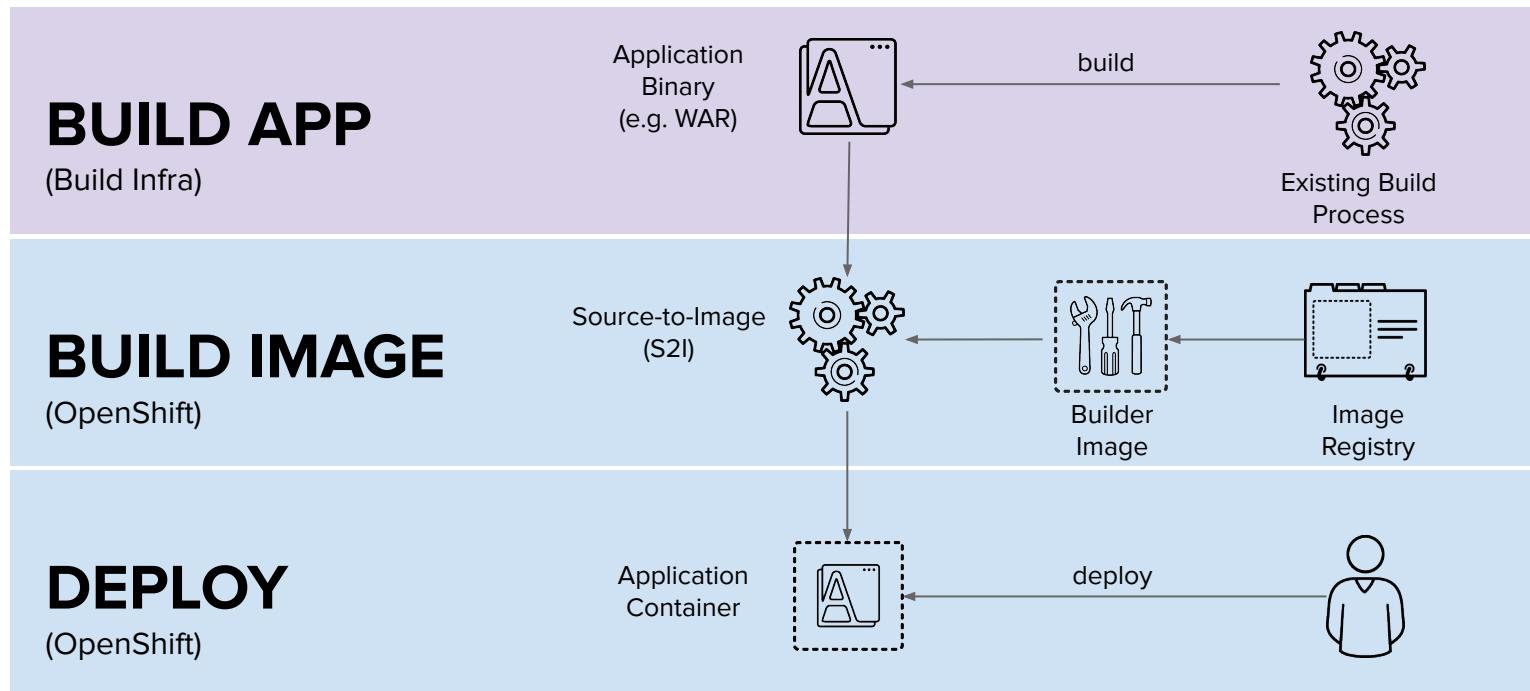


# DEPLOY DOCKER IMAGE

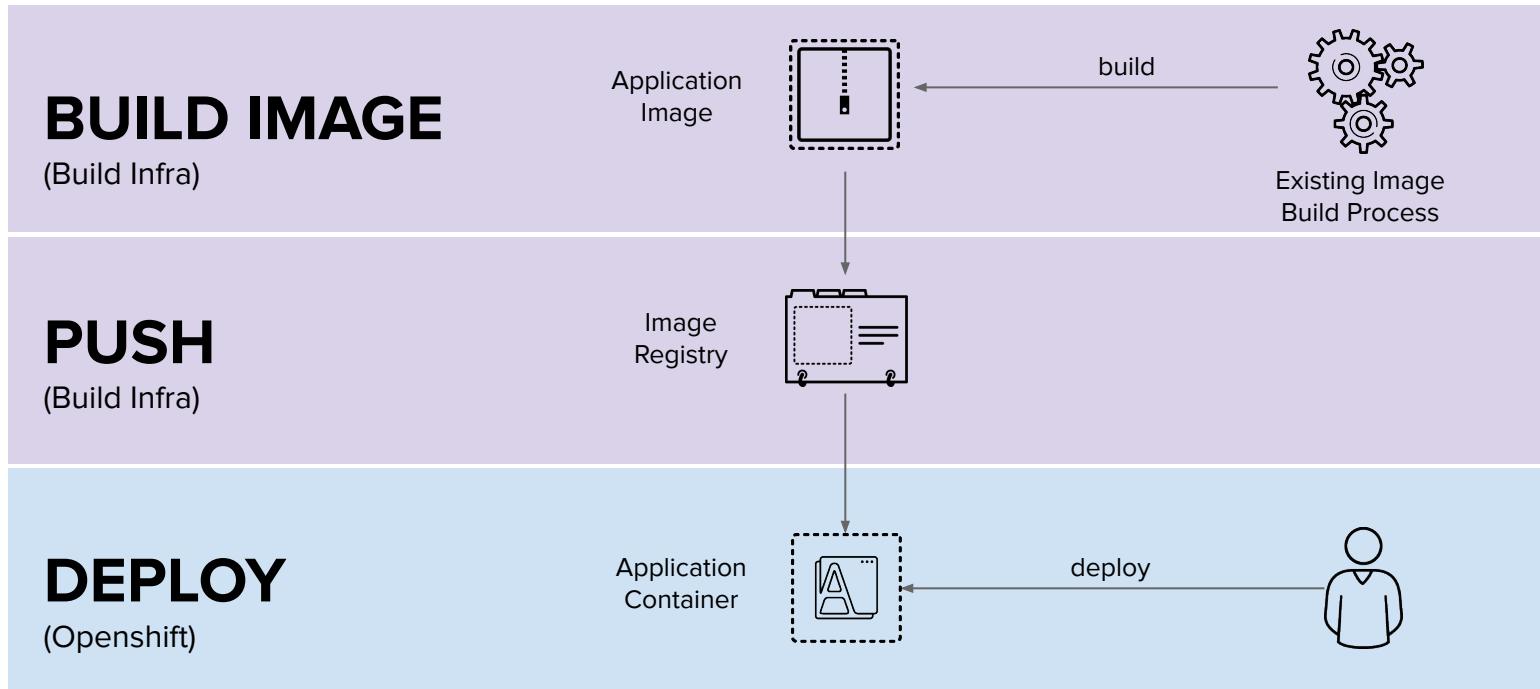


User/Tool Does      OpenShift Does

# DEVELOPER WORKFLOW

# LOCAL DEVELOPMENT WORKFLOW

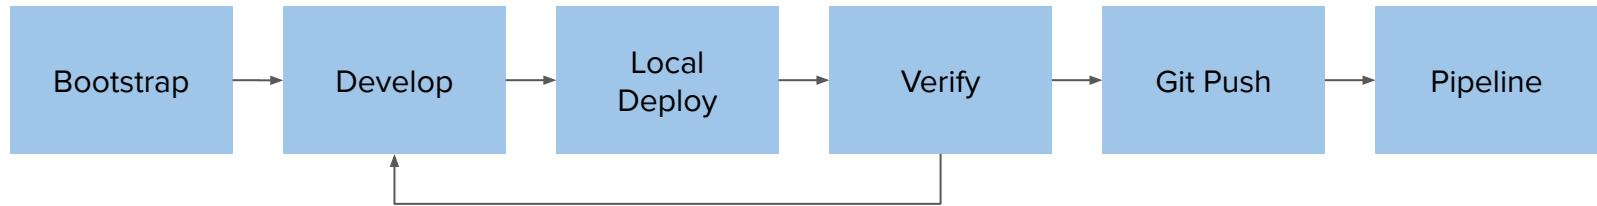


# LOCAL DEVELOPMENT WORKFLOW

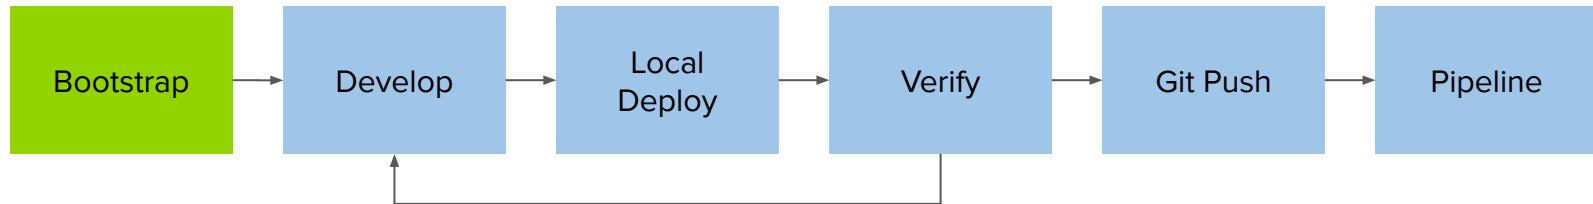

## BOOTSTRAP

- Pick your programming language and application runtime of choice
- Create the project skeleton from scratch or use a generator such as
  - Maven archetypes
  - Quickstarts and Templates
  - OpenShift Generator
  - Spring Initializr


# LOCAL DEVELOPMENT WORKFLOW

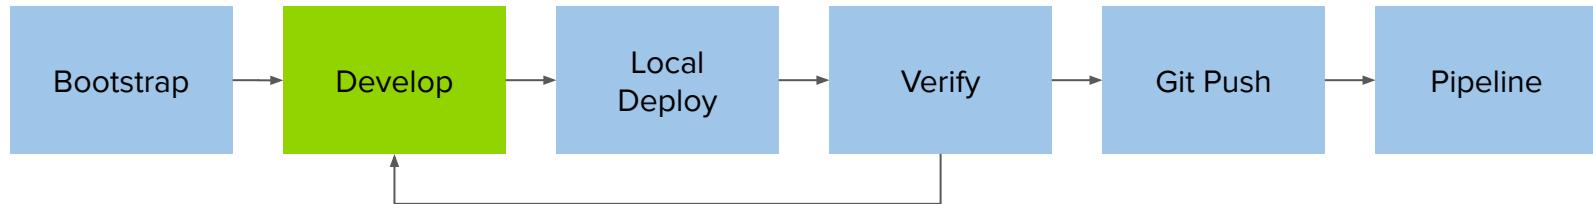

## DEVELOP

- Pick your framework of choice such as Java EE, Spring, Ruby on Rails, Django, Express, ...
- Develop your application code using your editor or IDE of choice
- Build and test your application code locally using your build tools
- Create or generate OpenShift templates or Kubernetes objects


# LOCAL DEVELOPMENT WORKFLOW

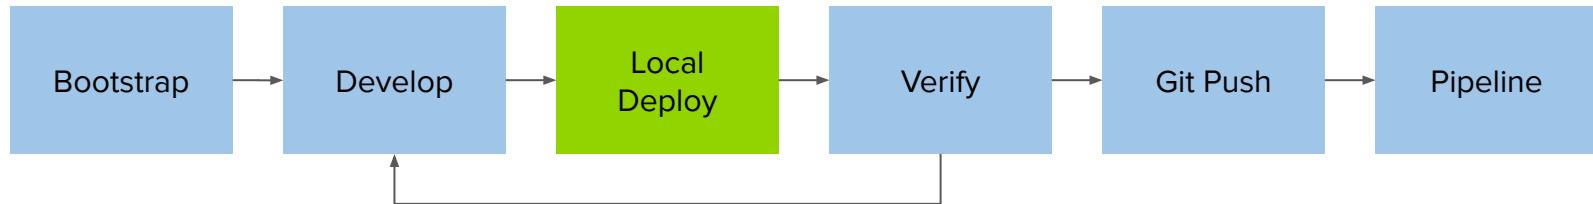

## LOCAL DEPLOY

- Deploy your code on a local OpenShift cluster
  - Red Hat Container Development Kit (CDK), minishift and oc cluster
- Red Hat CDK provides a standard RHEL-based development environment
- Use binary deploy, maven or CLI rsync to push code or app binary directly into containers


# LOCAL DEVELOPMENT WORKFLOW

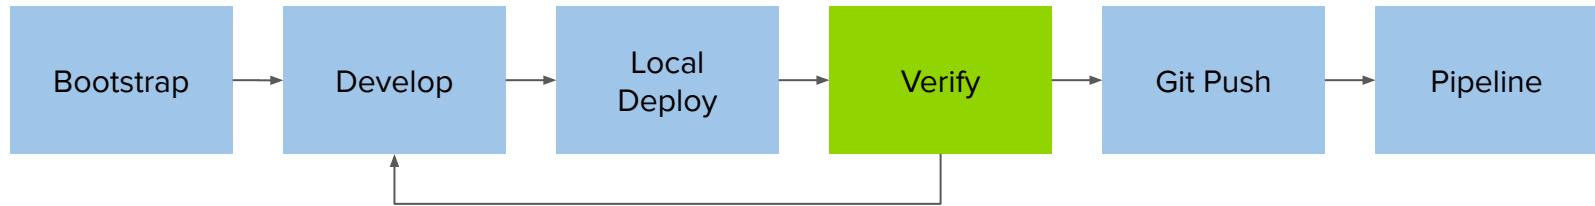

## VERIFY

- Verify your code is working as expected
- Run any type of tests that are required with or without other components (database, etc)
- Based on the test results, change code, deploy, verify and repeat


# LOCAL DEVELOPMENT WORKFLOW

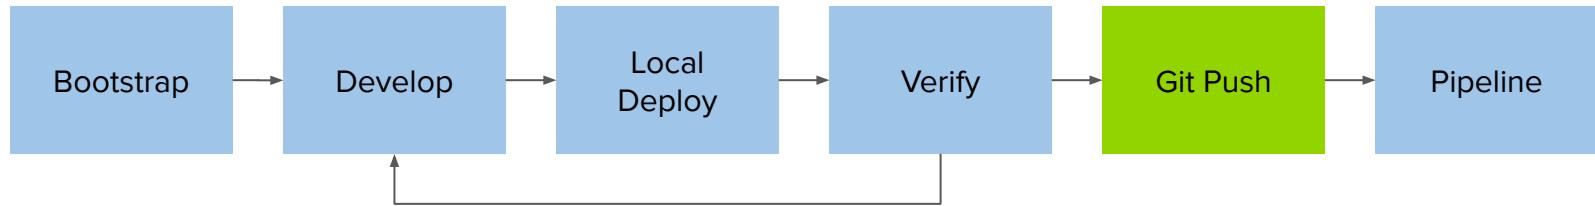

## GIT PUSH

- Push the code and configuration to the Git repository
- If using Fork & Pull Request workflow, create a Pull Request
- If using code review workflow, participate in code review discussions

# LOCAL DEVELOPMENT WORKFLOW

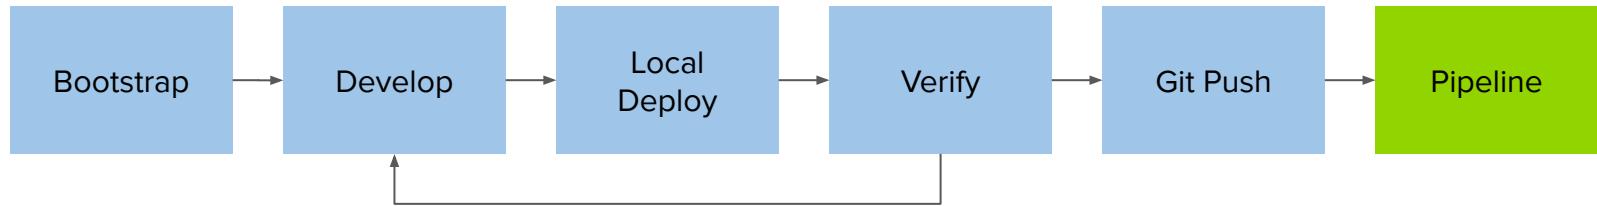

## PIPELINE

- Pushing code to the Git repository triggers one or multiple deployment pipelines
- Design your pipelines based on your development workflow e.g. test the pull request
- Failure in the pipeline? Go back to the code and start again

# Quarkus Business Value



# QUARKUS

---

Supersonic. Subatomic. Java.


# Quarkus - Kubernetes Native Java




Monolith




Cloud Native



Microservices

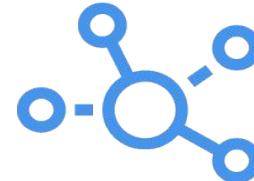

Serverless

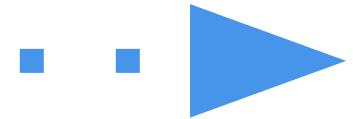

Event-Driven  
Architecture



**kubernetes**



**Istio**




**Knative**

# WHAT IS QUARKUS?

**QUARK**: elementary particle / **US**: hardest thing in computer science

# Quarkus Business Value

*"Supersonic, Subatomic Java"*



## Cost Savings

Cloud efficiency (low memory, fast startup, high density), serverless deployments



## Faster Time to Market

Developer productivity, extensions ecosystem, low learning curve, keep competitive edge



## Reliability

Trusted technology, active community, trusted sponsor, proven Java libraries and standards


# Why Quarkus?

*"Quarkus is a great fit if you are looking for..."*



## IMPROVED APP PERFORMANCE & COST

- Reduce memory consumption
- Increase startup speeds
- Reduce application size
- Looking for Spring or Java alternatives



## DIGITAL TRANSFORMATION

- Modernize or optimize existing applications
- Move to a cloud-native or microservices architecture
- Need lightweight connectivity between services
- Next generation business automation



## SERVERLESS

- Have seldom used but critical services
- Interested in serverless or FaaS (function as a service)

# Quarkus Technical Value

# *“Historical” Enterprise Java Stack*

Architecture: **Monoliths**



Deployment: **multi-app, appserver**

Dynamic Application Frameworks

App Lifecycle: **Months**

Application Server

Memory: **1GB+ RAM**

Java Virtual Machine (Hotspot)

Startup Time: **10s of sec**

Operating System + Hardware/VM

# ***“Modern” Enterprise Java Stack***


Architecture: **Microservices**

Deployment: **Single App**

App Lifecycle: **Days**


Memory: **100MBs+ RAM**

Startup Time: **Seconds**

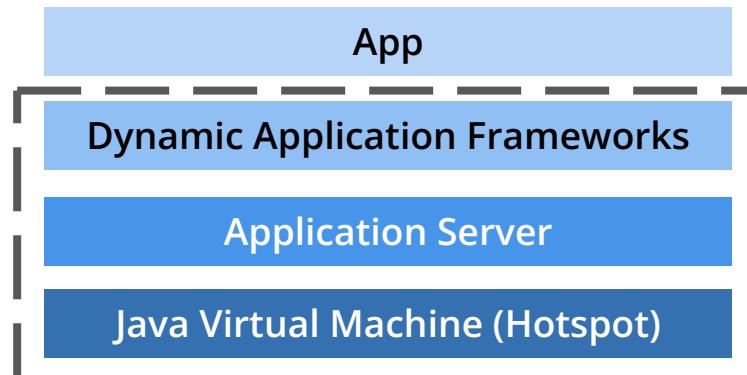

No  
Change

# Hidden Truth About Java + Containers

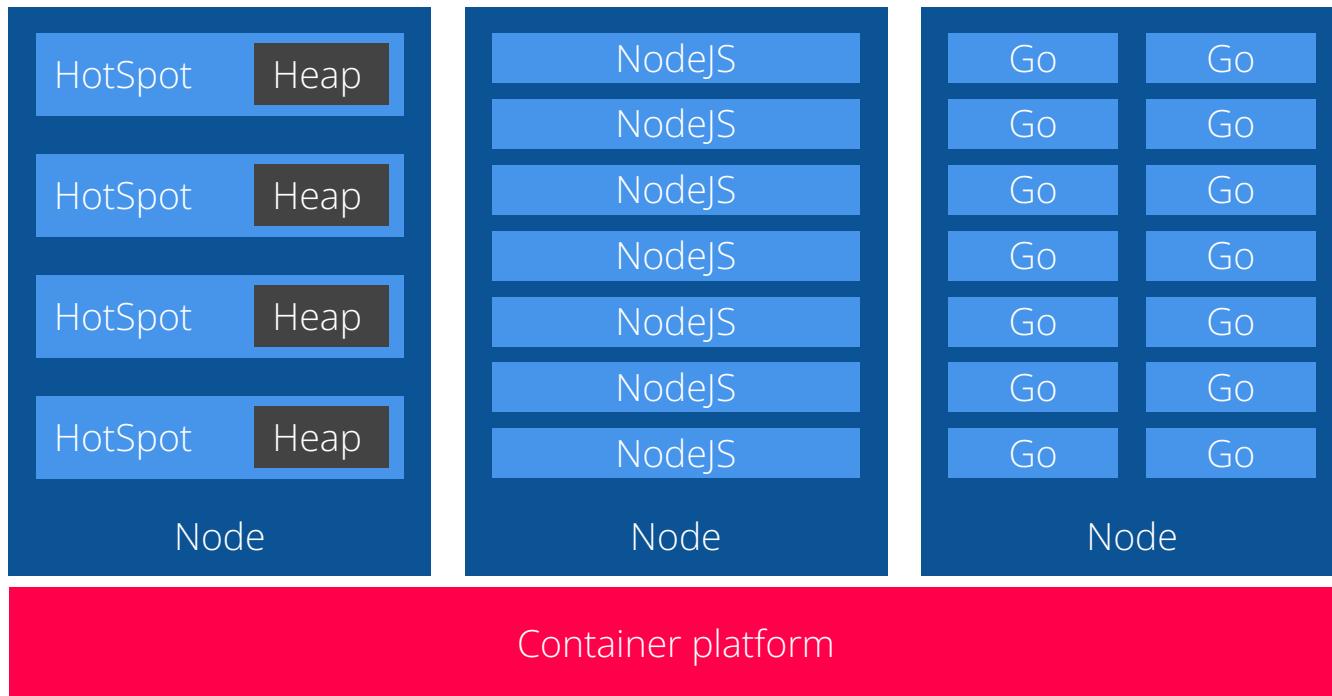

**THERE IS A NEED FOR A  
NEW JAVA STACK FOR  
CLOUD-NATIVE AND  
SERVERLESS**

# Experts from cloud-native Java OS projects

**VERT.X**



Eclipse Vert.x



Hibernate



RESTEasy



Eclipse MicroProfile



Undertow

**OpenJDK™**



## QUARKUS

# Differentiators



## Container First

- Tailors your app for HotSpot & GraalVM
- Fast boot time and low RSS memory
- Serverless fit



## Developer Joy

- Live coding
- Unified configuration



## Unifies Imperative & Reactive

- Combines blocking and non-blocking
- Built-in event bus




## Best of Breed Libraries & Standards

- 90+ extensions
- "Powered by Quarkus" applications


# Benefit No. 1: Container First

*"We went from 1-min startup times to 400 milliseconds"*


## Reduced Memory Footprint

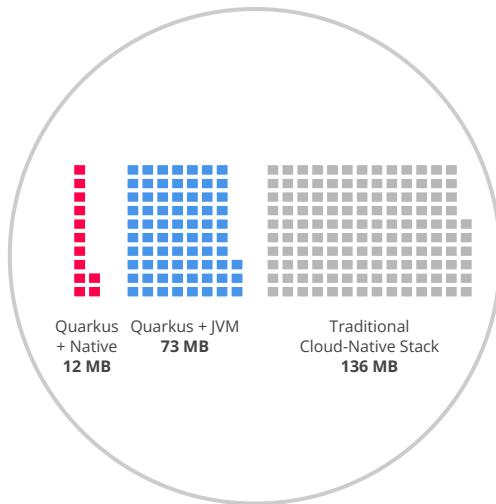

## Fast Startup Time

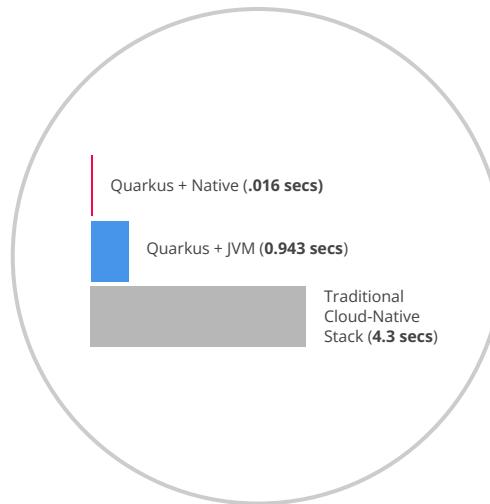

## Smaller Disk Footprint

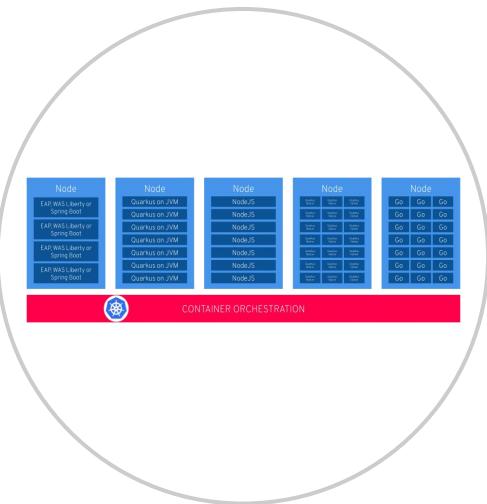


# Benefit No. 2: Developer Joy

*"Our developers used to wait **2 to 3 mins** to see their changes. **Live coding** does away with this."*

A cohesive platform for optimized developer joy:

- Based on standards and more
- Unified configuration
- Live coding
- Streamlined code for the 80% common usages, flexible for the 20%
- No hassle native executable generation

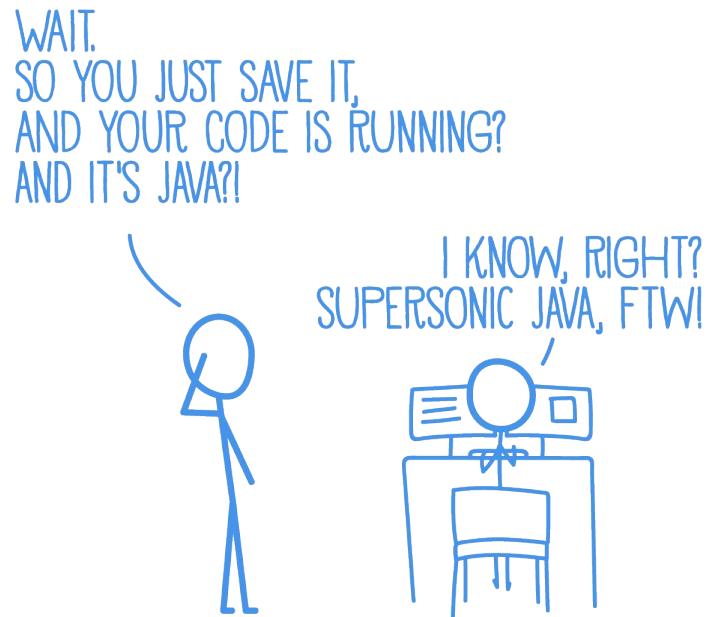

# Benefit No. 3: Unifies Imperative and Reactive

```
@Inject  
SayService say;  
  
@GET  
@Produces(MediaType.TEXT_PLAIN)  
public String hello() {  
    return say.hello();  
}
```

```
@Inject @Stream("kafka")  
Publisher<String> reactiveSay;  
  
@GET  
@Produces(MediaType.SERVER_SENT_EVENTS)  
public Publisher<String> stream() {  
    return reactiveSay;  
}
```

- Combine both Reactive and imperative development in the same application
- Inject the EventBus or the Vertx context
- Use the technology that fits your use-case
- Key for reactive systems based on event driven apps

# Benefit No. 4: Best of Breed Frameworks & Standards

*"When you adopt Quarkus, you will be productive from day one since you don't need to learn new technologies."*



Eclipse Vert.x



Hibernate



RESTEasy



Apache Camel



Eclipse MicroProfile



Netty



Kubernetes



OpenShift



Jaeger



Prometheus



Apache Kafka



Infinispan



Flyway



Neo4j



MongoDB





MQTT



Keycloak



Apache Tika

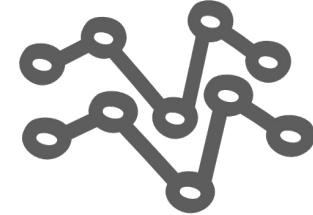

# Supersonic, Subatomic

Fast.

Blazing fast to start.

Millisecond fast!

# Supersonic, Subatomic Java

## REST

Quarkus + Native (via GraalVM) **0.016 Seconds**

Quarkus + JVM (via OpenJDK) **0.943 Seconds**

Traditional Cloud-Native Stack **4.3 Seconds**

## REST + CRUD

Quarkus + Native (via GraalVM) **0.042 Seconds**

Quarkus + JVM (via OpenJDK) **2.033 Seconds**

Traditional Cloud-Native Stack **9.5 Seconds**


Time to first response

# HOW DOES QUARKUS WORK?

# How Does a Framework Start?

Build Time


Runtime

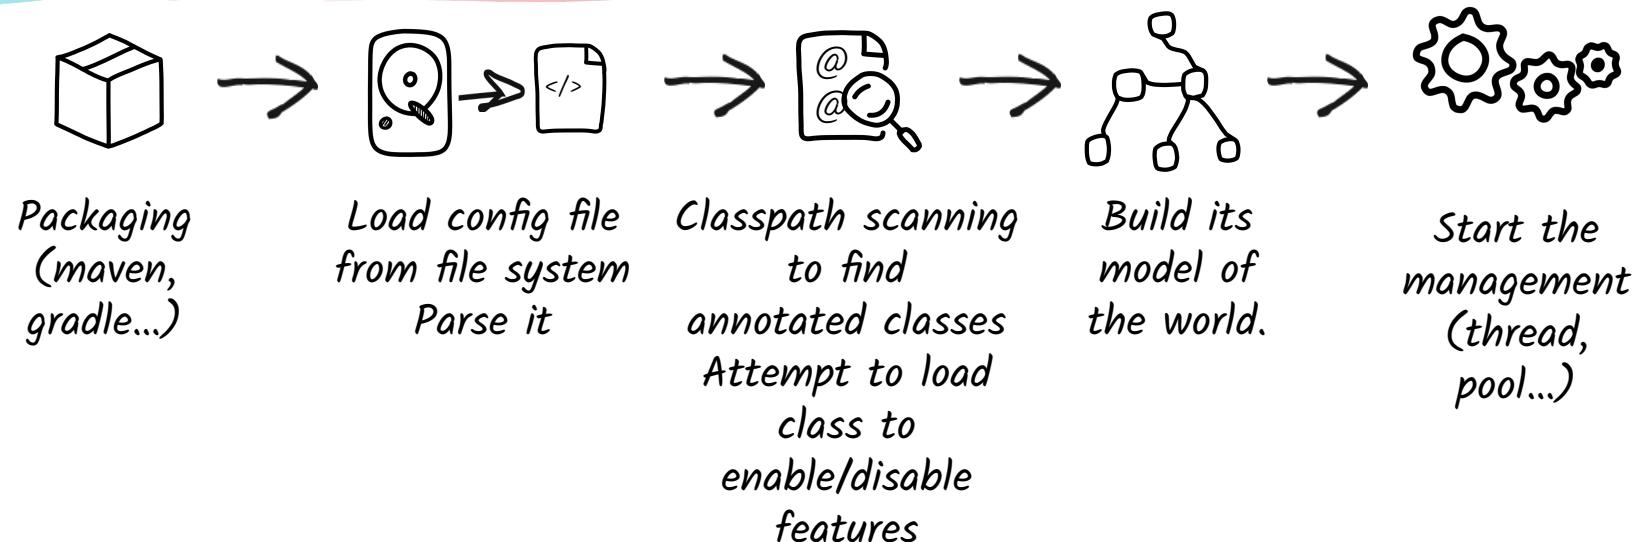

# The Quarkus Way

*Build Time*


*Runtime*

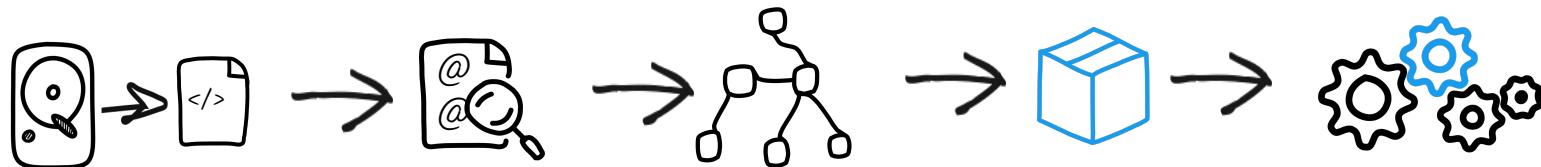


*Build Time*

*Runtime*


# An ahead-of-time, build-time, runtime




app.jar




frameworks



Runnable java app



native-app

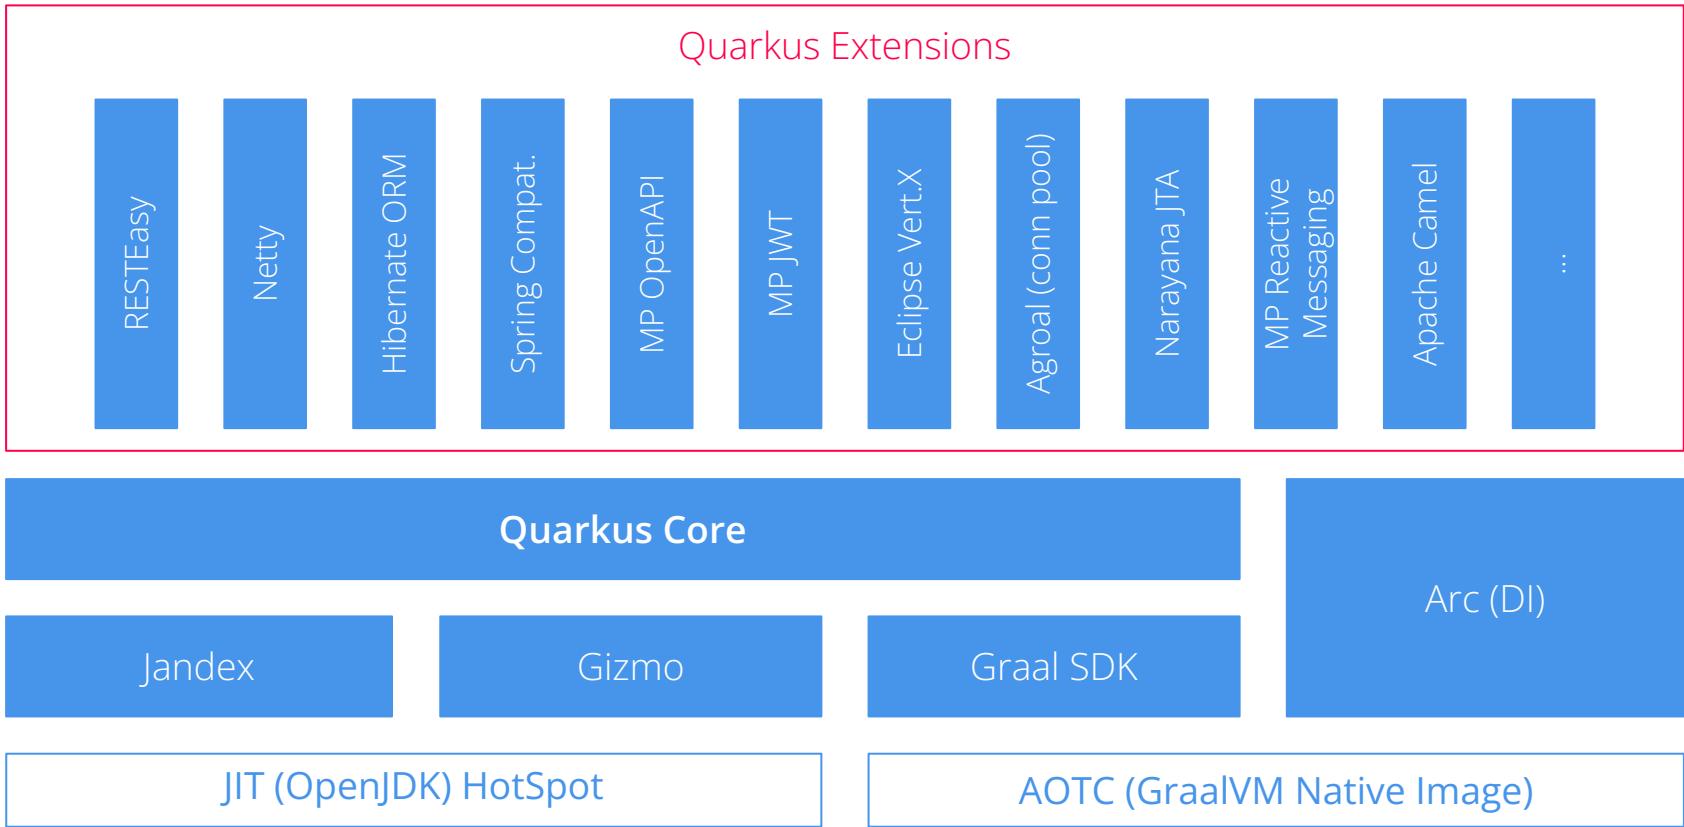

# The Right VM For the Right Deployment

## JIT (OpenJDK HotSpot)

- High memory density requirements
- High request/s/MB
- Fast startup time
- Best raw performance (CPU)
- Best garbage collectors
- Higher heap size usage
- Known monitoring tools
- Compile Once, Run anywhere
- Libraries that only work in standard JDK

## AOT (GraalVM native image)\*

- Highest memory density requirements
- Highest request/s/MB  
for low heap size usages
- Faster startup time  
10s of ms for Serverless

\*Currently in Tech Preview



# Quarkus Tools - Build

*maven*



Gradle\*

```
mvn io.quarkus:quarkus-maven-plugin:1.3.2.Final-redhat-00001:create \
-DprojectGroupId=org.acme \
-DprojectArtifactId=getting-started \
-DplatformGroupId=com.redhat.quarkus \
-DplatformVersion=1.3.2.Final-redhat-00001 \
-DclassName="org.acme.quickstart.GreetingResource" \
-Dpath="/hello"
cd getting-started
```

\*community supported




# Quarkus Tools - IDE



[VSCode](#)



[Eclipse](#)

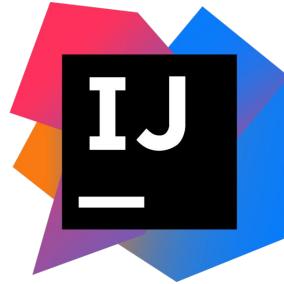

[IntelliJ](#)



[che.openshift.io](#)

# DEMO

# First steps

# First Steps

- You need to have Java 11 or Java 17 installed on your dev machine
- You need to have Maven or Gradle installed on your dev machine
- Then install quarkus CLI tool
  - <https://quarkus.io/guides/cli-tooling>
- If you want to use the Dev Services, install Docker Desktop or Podman Desktop
- Then you need to have a look at
  - <https://quarkus.io/guides/#getting-started>
- And then: HAVE FUN!

Optional section marker or title

58



# Thank you

 [linkedin.com/company/red-hat](https://www.linkedin.com/company/red-hat)

 [facebook.com/redhatinc](https://www.facebook.com/redhatinc)

 [youtube.com/user/RedHatVideos](https://www.youtube.com/user/RedHatVideos)

 [twitter.com/RedHat](https://twitter.com/RedHat)