

---

# An In-Silico Instrument for Pre-Validating Corpus-Bounded Instruction: Reference-Policy Transfer Measurement with Bidirectional Corpus-Gap and Leakage Diagnosis

---

Anonymous Author(s)

Affiliation

Address

email

## Abstract

1 Retrieval-augmented tutors are increasingly proposed for safety-critical, proce-  
2 dural domains, but validating that a tutor’s mechanism actually works—rather  
3 than merely sounding fluent—usually requires expensive human-subject studies.  
4 We present an *in-silico measurement instrument* that lets a designer falsify the  
5 mechanism of a corpus-bounded instructional method *before* spending human-  
6 subject effort. The instrument has two coupled parts. First (C2), we replace  
7 item-response correctness with an *objective continuous-control simulator whose*  
8 *reference solver yields regret-to-reference* as the transfer outcome, and we estab-  
9 lish a measurement-design property we call *knowledge-component* (KC)  $\rightarrow$  *single-*  
10 *metric identifiability*: each knowledge component governs exactly one metric, so  
11 ablating it degrades that metric and no other. Second (C1), we use that *same* in-  
12 strument *bidirectionally* over a governed external corpus—to *localize* which cor-  
13 pus rule is missing from measured task failures, and to *detect parametric leakage*  
14 by rule ablation, i.e. whether a model is answering from the corpus or from pre-  
15 trained priors. The method is *closed-model compatible* (it needs only API access),  
16 operates *per rule*, and reads both diagnoses off a single control-task metric. We  
17 exercise the instrument with controlled-competence proxy learners on maritime  
18 collision avoidance (COLREG) and a discrete procedural domain (roadside tire  
19 change), and report construct validity, estimator-recovery calibration, and a real-  
20 model discrimination result across six current LLMs. Read on the same regret  
21 instrument, the rule-ablation grades with binding fidelity under a strict prompt  
22 (falling monotonically with model capability) and collapses when the binding  
23 clause is removed, flipping *every* model to *leaking*; the lightest model fails to  
24 bind even when instructed to—a binding failure the instrument surfaces. All re-  
25 sults are **simulation-based mechanism evidence, not human-subject external**  
26 **validity**; we scope the contribution accordingly and pre-register the human study  
27 as future work.

**Plain-language summary.** An AI tutor that is supposed to answer only from an approved rulebook is easy to demo but hard to trust: you cannot easily tell whether it is really using the rulebook or just leaning on what the language model already learned, and you cannot tell whether the rulebook itself has holes. Normally you would find out by running an expensive study with real learners. We instead build a cheap “test bench” that answers both questions before involving any people. It drops the tutor into a realistic steering task—avoiding ship collisions—where a standard automatic solver gives a strong reference move, and scores the tutor by how far its decisions fall from that reference. Because we design each rule to control exactly one part of the score, we can remove a single rule and watch what breaks: if the score gets worse, the tutor genuinely relied on that rule; if nothing changes, the tutor was quietly using its own built-in knowledge—a “leak.” Run the other way, the same measurement pinpoints which rule is missing when the tutor fails. It works with ordinary commercial models over an API, needs no access to their internals, and we confirm it on a current model. Everything here is a controlled simulation that checks the machinery works—not yet a claim that learners learn more, which is the study we set up next.

## 1 Introduction

Generic retrieval-augmented (RAG) assistants optimize for semantic relevance: give a plausible answer to whatever is asked. That objective is wrong for training in safety-critical procedural domains, where a semantically accurate answer can still be instructionally wrong—delivered at the wrong complexity, skipping a prerequisite, or worse, confidently fabricated. A growing body of work therefore builds *corpus-bounded* tutors that abstain outside a curated corpus. But a designer who has built such a system faces a prior question: *does the mechanism work?* Does the tutor actually rely on its corpus, and does the corpus actually cover the domain? Answering this by human-subject study is slow and expensive, and a null result there conflates many causes.

We argue that the *mechanism* of a corpus-bounded method can be falsified cheaply and in silico, and we build the instrument to do it (Figure 1). Our contribution is a *methods/measurement* one, not a new tutor and not a new collision-avoidance technique. Concretely:

- **C2 — a reference-policy transfer instrument with KC→metric identifiability.** We measure a learner by its *regret against a reference-policy solver* on a continuous-control task, and design the instrument so that each knowledge component governs exactly one metric (Section 3).
- **C1 — bidirectional corpus diagnosis on one instrument.** The same metric both *localizes* a missing corpus rule and *detects parametric leakage* via rule ablation, per rule, using only API access (Section 4).
- **Application — controlled-competence proxy learners** exercise the instrument as a pre-human-trial screen, including an open-weight machine-unlearning arm (Sections 5–6).

Every *component* we build on is prior art; the *unified instrument* and the *reference-policy transfer metric* are the open ground (Section 2). We are explicit throughout that our evidence is simulation-based: it tests whether the machinery behaves as designed and whether the measurement can distinguish competence, not whether humans learn more.

## 2 Related work and positioning

We foreground the shoulders we stand on; reviewers reward honest reuse plus a sharp delta.

**Learner modeling and instructional theory.** Knowledge tracing [Corbett and Anderson, 1994], the Elo rating system for adaptive systems [Pelánek, 2016], the Knowledge-Learning-Instruction framework [Koedinger et al., 2012], open learner models [Bull and Kay, 2007], and the Zone of Proximal Development [Vygotsky, 1978] are all established. We reuse them as infrastructure, not as contributions.

**Corpus-bounded tutoring, leakage, and faithfulness.** RAG tutors that abstain outside a corpus are standard engineering. A separate line detects whether a model relies on provided context versus parametric memory: no-context filtering [Liu et al., 2026a], aggregate prior-dominance [Or, 2026],

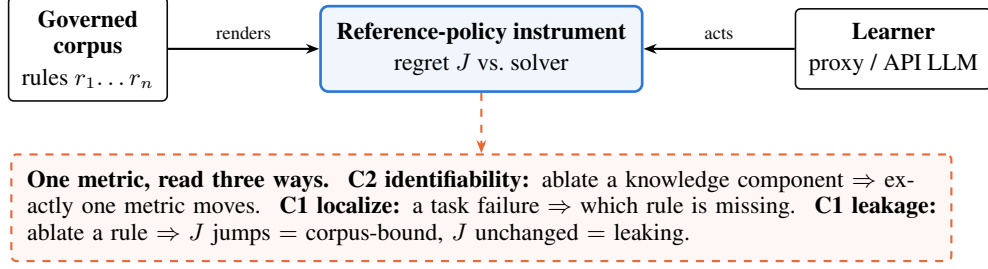


Figure 1: The instrument, used bidirectionally. A governed corpus and a learner both feed one reference-policy simulator that scores the learner’s *regret*  $J$  against an automatic solver. The same metric is then read three ways—to verify KC→single-metric identifiability (C2), to localize a missing rule from task failures (C1), and to detect parametric leakage by rule ablation (C1)—needing only API access to the learner.

65 counterfactual context [Zhang et al., 2025], and—closest to us—intervention-based evidence abla-  
 66 tion with a zero-retrieval control [Jain and Vedam, 2026]. These are per-answer or system-level and  
 67 judge *answer text*; none localizes *which specific corpus rule is missing* and detects leakage *on one*  
 68 *objective control-task metric*, per rule, bidirectionally. That join is our C1.

69 **Objective competency instruments.** Deviation-from-optimal scoring appears in flight [Zinn et al.,  
 70 2023] and construct-validity-by-novice/expert-separation in surgery [Van Dongen et al., 2007];  
 71 control-theoretic notation has been applied to knowledge dynamics [Anonymous, 2024b]; regret  
 72 is used in RL transfer [Tuynman and Ortner, 2022]; maritime training analytics regress simulator  
 73 measures onto instructor ratings [Lall and Liu, 2025]. None uses a *reference solver’s regret* as  
 74 the *learner* transfer outcome with KC→single-metric identifiability. That is our C2. We borrow  
 75 mature maritime-autonomy tooling—velocity obstacles [Fiorini and Shiller, 1998] and simulation-  
 76 based MPC [Johansen et al., 2016]—purely as reference solvers, never as a new collision-avoidance  
 77 method [Anonymous, 2024a, International Maritime Organization, 1972].

78 **Proxy learners.** Simulated students have long authored and evaluated tutors; LLM student agents  
 79 now pilot assessment items [Lu and Wang, 2024] and simulate learners for tutoring-system develop-  
 80 ment [Gao et al., 2025], and controlled variants suppress knowledge by prompting [Apartsin et al.,  
 81 2026], interpolate parametric competence [Liu et al., 2026b], or unlearn a model into a novice [Song  
 82 et al., 2026]. Pre-deployment simulated-learner screens have very recently appeared [Fan et al., 2026,  
 83 Lee et al., 2026]. We therefore *demote* the proxy-learner idea to an application: our narrow residual  
 84 claim is running *two complementary proxy classes* (parametric competence *and* unlearned LLM)  
 85 scored on the *same regret-to-reference instrument* the human trial would use—which none of these  
 86 do.

### 87 3 The transfer instrument (C2)

88 **Task and metric.** The worked domain is COLREG collision avoidance: a power-driven vessel  
 89 must choose course and speed to resolve an encounter. We implement a kinematic simulator with  
 90 an elliptical ship domain and a Collision Risk Index, and two reference solvers—velocity obstacles  
 91 [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]. For a learner policy  
 92  $\pi$  on scenario set  $S$  we define the transfer outcome as regret against a reference policy  $\pi^*$ ,

$$\mathcal{R}(\pi) = \frac{1}{|S|} \sum_{s \in S} [J(\pi, s) - J(\pi^*, s)], \quad (1)$$

93 where  $J$  is the per-encounter objective (a weighted sum of a safety-margin barrier, COLREG com-  
 94 pliance penalty, and route deviation; lower is better) and  $\pi^*$  is the reference maneuver. Unlike item  
 95 correctness,  $\mathcal{R}$  is continuous, objective, and instructor-free.

96 **On “reference,” not “optimal.”** We deliberately avoid claiming a global optimum. VO and SB-  
 97 MPC are strong, widely-used near-optimal solvers, but neither is proven globally optimal for the

| Policy              | mean $J$ | median  | min  | max     | cleared |
|---------------------|----------|---------|------|---------|---------|
| naive (hold course) | 1765.44  | 1988.08 | 1.08 | 1995.18 | 11%     |
| VO reference        | 0.70     | 0.58    | 0.33 | 1.27    | 100%    |
| SB-MPC reference    | 0.01     | 0.01    | 0.00 | 0.03    | 100%    |

Table 1: Construct validity and grading across nine varied encounters. The objective  $J$  separates the three competence levels cleanly and takes a continuous range of values (20 distinct across all cells,  $[0.00, 1995.18]$ )—it is a graded transfer metric, not a near-binary check. `npm run colreg:construct`.

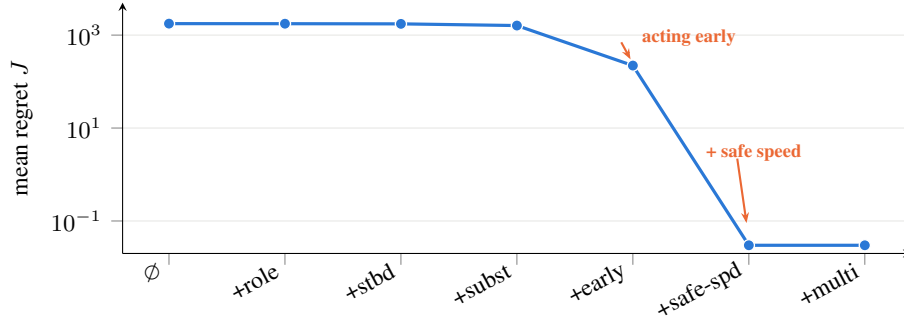


Figure 2: Competence→performance gradient on the nine-encounter instrument. Mean regret  $J$  (log scale) as the six knowledge components are acquired in curriculum order (left to right); each point is a competence stage, from the empty learner ( $\emptyset$ ) to full competence.  $J$  spans nearly five orders of magnitude and collapses as the two domain-clearing competencies—acting *early* and at a *safe speed*—come online, the graded behavior Table 1 reports numerically. `npm run colreg:construct`.

98 full nonconvex encounter; calling their output “optimal” would overclaim. The instrument does not  
99 need a true optimum—only a reference that construct validity shows separates naive from expert  
100 behavior (below). Regret is thus measured against a fixed, reproducible reference policy, and we  
101 report which solver is used.

102 **Construct validity and metric grading.** The instrument must separate good from bad policies  
103 before any learning claim, and—if it is to be a transfer measure rather than a pass/fail check—  
104 the metric must *grade*, not collapse to two values. Across a varied set of nine encounters (head-on,  
105 starboard/port crossing, overtaking, and restricted-visibility geometries), three policies of increasing  
106 competence separate cleanly and continuously on  $J$  (Table 1): a naive hold-course policy (mean  $J \approx$   
107 1765, clearing only 11% of domains), a velocity-obstacle reference ( $J \approx 0.70$ , all clear), and SB-  
108 MPC ( $J \approx 0.01$ ). The objective takes 20 distinct values in  $[0.00, 1995.18]$  over the policy×scenario  
109 cells—a graded metric, with the safe regime (VO/SB-MPC) itself spanning a continuous 0.00–1.27  
110 range. On the discrete procedural domain the same logic holds: an expert policy scores  $J = 0$   
111 against a reckless  $J = 200$  with the safety violation caught. This is the novice/expert-separation  
112 logic of Van Dongen et al. [2007], applied to a decision/control task rather than manual skill.

113 **KC→single-metric identifiability.** We design each knowledge component to govern exactly  
114 one metric, so ablating a KC degrades that metric and no other. On the procedural domain  
115 this is *exact*: each ablated competence degrades only its governed metric, and a monotone  
116 competence→performance gradient ( $J : 204 \rightarrow 0$ ) follows as competence is acquired in curricu-  
117 lum order; on the COLREG instrument the same gradient spans nearly five orders of magnitude  
118 (Figure 2). Because the property holds on both a continuous-control and a discrete-procedural in-  
119 strument, it is a general measurement-design property, not a COLREG artifact.

120 **Is identifiability tautological?** A fair objection is that the mapping is a design choice, so “ablate  
121 the KC, that metric moves” is true by construction. Two things make it a testable property rather than  
122 a tautology. First, the *cross-effect* claim can fail: designing the metrics is not enough to guarantee

| ablated KC ↓ / metric → | safety       | core         | order        | finish       |
|-------------------------|--------------|--------------|--------------|--------------|
| safety                  | <b>−1.00</b> | 0.00         | 0.00         | 0.00         |
| core steps              | 0.00         | <b>−1.00</b> | 0.00         | 0.00         |
| sequencing              | 0.00         | 0.00         | <b>−0.22</b> | 0.00         |
| finishing               | 0.00         | 0.00         | 0.00         | <b>−1.00</b> |

Table 2: KC→single-metric identifiability (procedural domain). Change in each metric after ablating each knowledge component. The diagonal (bold) is the intended governed metric; every off-diagonal cell is 0.00 (max  $|\Delta| = 0.0000$ )—ablation does not bleed across metrics. `npm run proc:identifiability`.

| Estimator | Recovery of known ground truth                              | Calibration (ECE) |
|-----------|-------------------------------------------------------------|-------------------|
| Elo       | static ability, mean abs. error 0.046                       | 0.023             |
| BKT       | latent state $P(\hat{L}) = 0.997$ (learned) vs. 0.175 (not) | 0.004             |

Table 3: Estimator-recovery and calibration on synthetic data with a known ground truth. The measurement, not just the metric, is validated.

that ablating one KC leaves the *others* unchanged—if the objective’s terms are entangled (e.g. a safety barrier that also moves the deviation term), ablation bleeds across metrics, and we measure and report that it does not. Identifiability is the empirically-checked *absence* of that bleed, not the presence of the intended effect. Second, the mapping is what makes the C1 diagnosis (Section 4) actionable: without it, a task failure cannot be attributed to a specific corpus rule. We therefore treat identifiability as a design *requirement to be verified per instrument*—a property an instrument can lack—and verifying it is part of building one, exactly as construct validity is. On the procedural domain the verification is clean (Table 2): ablating each knowledge component degrades only its governed metric, with maximum off-diagonal change 0.0000—no cross-bleed.

**Robustness to weighting choices.** The objective embeds weighting choices—the elliptical ship-domain radii and the margin/compliance/deviation weights—and a fair worry is that the competence ranking is an artifact of those choices. We falsify this with a sensitivity analysis (`npm run colreg:sensitivity`) that holds every policy’s *behavior* fixed and re-scores under 232 perturbations: a one-at-a-time  $\pm 25$ –50% sweep of each parameter plus 200 joint samples with every parameter independently scaled in  $[0.6, 1.4]$ . Across the whole ensemble, both orderings are preserved exactly—the naive policy stays worst and the six-component competence gradient stays monotone in  $J$  (Kendall  $\tau = 1.00$  on every perturbation, invariant rate 100%). The CRI parameters are excluded because CRI is a reported diagnostic, not a term in the scored objective, so the ranking is invariant to them by construction. The protocol’s conclusions are thus a property of the competence structure, not of the weight calibration.

**Estimator recovery and calibration.** Feeding the instrument’s outcomes into a generic learner-agent estimator, we recover known ground truth on synthetic data (Table 3). This turns “we have a metric” into “the measurement is valid.”

## 4 Bidirectional corpus diagnosis (C1)

The same instrument answers two opposite questions with one objective metric.

**(i) Corpus-gap localization.** When the corpus is missing or wrong on a rule, the learner’s failures on the governed metric have a signature that attributes the failure to a *specific* rule/node. We compute, per rule, an ablation-delta—the rise in the governed penalty when that rule is removed—and a localization that names the governed component. A large delta plus a matching localization means the learner *relied on* that corpus rule.

**(ii) Parametric leakage detection.** The mirror image: ablate a rule from the corpus; if the metric it governs does *not* degrade, the model is answering from pretrained priors, not the corpus. We combine the ablation-delta with a *counterfactual* test (replace “alter to starboard” with “alter to

port”; does the learner follow the altered rule?) and a *closed-book* contamination baseline (no corpus supplied). The verdict—CORPUS-BOUND, LEAKING, or INCONCLUSIVE—is read from the same metric, by a majority vote over the three signals so that a clear ablation-and-contamination pattern is not vetoed by a single dissenting sub-test.

#### 4.1 One instrument, not two

It is fair to ask whether C1 really uses the C2 *transfer* instrument or merely a convenient side-metric. The bounded compliance penalty we threshold in  $[0, 1]$  is deliberately near-binary (following a discrete steering rule is close to binary), which could look decoupled from the graded regret  $\mathcal{R}$  of Section 3. It is not: the compliance penalty is a *term inside* the objective  $J$ , so the same rule ablation can be read on the full regret instrument directly. It carries the signal even more strongly—a corpus-bound learner that loses the rule it relied on abstains, collides, and its  $J$  jumps by  $\sim 2000$ , whereas a leaking learner’s  $J$  is invariant to the corpus. On the two reference mocks, the regret-ablation is 1981 (corpus-bound) versus 0 (leaking). So localization and leakage are read off the very metric that measures transfer; the bounded compliance penalty is just a low-variance, thresholdable readout of it. This is what makes the “single instrument, used bidirectionally” claim literal rather than rhetorical, and it is visible per model in the  $\delta_{\mathcal{R}}$  column of Table 4.

**Offline recovery of known ground truth.** Against two reference mock learners whose truth is known, the instrument recovers it exactly: the corpus-bound mock yields ablation-delta 1.000 (regret-ablation 1981), follows the counterfactual, and abstains closed-book ( $\Rightarrow$  CORPUS-BOUND); the leaking mock yields ablation-delta 0.000 (regret-ablation 0), ignores the counterfactual, and answers closed-book from priors ( $\Rightarrow$  LEAKING).

**Real-model discrimination.** We run the instrument on six current production LLMs under both prompt conditions—bound (the strict corpus-binding positive control) and unconstrained (the binding clause removed, parametric fallback allowed)—and read the verdict off the same metric (Table 4). The verdict is a majority vote of three orthogonal signals: low ablation- $\delta$ , counterfactual ignored, and closed-book contaminated. Three findings stand out. (1) *The diagnosis rides the transfer instrument.* The  $\delta_{\mathcal{R}}$  column is the same ablation read on the full regret objective  $J$  of Section 3—not a separate metric—and it carries the signal loudly: a corpus-bound learner that loses the rule it relied on collides, so  $J$  jumps by  $\sim 2000$ . C1 and C2 are one instrument (Section 4.1). (2) *Binding fidelity is graded, and capability tracks it.* Under the strict prompt,  $\delta_{\mathcal{R}}$  falls monotonically with model capability—1981 for the three stronger flash models, 1318 and 658 for the lite models,  $\approx 0$  for the lightest, which fails to rely on the corpus even when told to (diagnosed INCONCLUSIVE: a binding *failure* the instrument surfaces). (3) *Removing the binding clause makes every model leak.* Under unconstrained,  $\delta_{\mathcal{R}}$  collapses to  $\approx 0$  and closed-book flips to contamination for all six, and the vote returns LEAKING across the board. Raw completions are well-formed JSON with coherent rationales (e.g. the lightest model’s closed-book reply is {abstained:true, "not covered by the provided rules"}), so the leakage is genuine prior-following, not a parse artifact. Mock learners (rows 1–2) bound the scale.

**Per-rule, not just per-corpus.** To show the diagnosis attributes reliance to a *specific* rule rather than to corpus presence in general, we add a second, independent rule—Rule 15 crossing give-way—exercised on its own crossing scenarios (a rule only moves the metric on scenarios that invoke it, so each probe carries a matched subset). Ablating each rule produces a large regret signal on its own encounters: on *gemini-flash-latest* under the bound prompt, ablating Rule 14 gives  $\delta_{\mathcal{R}}=1981$  (head-on) and ablating Rule 15 gives 1285 (crossing); on *gemini-flash-lite-latest*, 658 and 662 respectively. The two rules are localized on disjoint scenario subsets, so the instrument reads reliance per rule.

**What in the corpus changes the answer: presence vs. retrieval.** The leakage test asks a binary question—does the learner rely on the corpus at all. A deployed RAG tutor raises a finer one: of the value curation adds, how much comes from the fact being *present* in the corpus versus from the retriever actually *surfacing* it? We decompose this over two binary factors—in-corpus and retrieved—whose three reachable cells are three scorable conditions (Table 5): NONE (closed-book, priors only), RETRIEVED (the deployed dense retriever’s top- $k$ ), and ORACLE (the answer-bearing chunk, i.e. perfect retrieval). Reading accuracy across them attributes the gain:  $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$  is the

| Learner                  | Condition | $\delta$ (compl.) | $\delta_{\mathcal{R}}$ ( $J$ ) | counterfact. | closed-book | Verdict      |
|--------------------------|-----------|-------------------|--------------------------------|--------------|-------------|--------------|
| mock (corpus-bound)      | —         | 1.000             | 1981                           | follows      | abstains    | CORPUS-BOUND |
| mock (leaking)           | —         | 0.000             | 0                              | ignores      | answers     | LEAKING      |
| gemini-flash-latest      | bound     | 1.000             | 1981                           | follows      | abstains    | CORPUS-BOUND |
| gemini-flash-latest      | unconstr. | 0.000             | 0                              | follows      | answers     | LEAKING      |
| gemini-2.5-flash         | bound     | 1.000             | 1981                           | follows      | abstains    | CORPUS-BOUND |
| gemini-2.5-flash         | unconstr. | 0.000             | 0                              | follows      | answers     | LEAKING      |
| gemini-3.5-flash         | bound     | 1.000             | 1981                           | follows      | abstains    | CORPUS-BOUND |
| gemini-3.5-flash         | unconstr. | 0.000             | 0                              | follows      | answers     | LEAKING      |
| gemini-flash-lite-latest | bound     | 0.667             | 1318                           | follows      | abstains    | CORPUS-BOUND |
| gemini-flash-lite-latest | unconstr. | 0.000             | 0                              | ignores      | answers     | LEAKING      |
| gemini-3.5-flash-lite    | bound     | 0.333             | 658                            | follows      | abstains    | CORPUS-BOUND |
| gemini-3.5-flash-lite    | unconstr. | 0.000             | 0                              | ignores      | answers     | LEAKING      |
| gemini-3.1-flash-lite    | bound     | 0.000             | 0                              | follows      | abstains    | INCONCLUSIVE |
| gemini-3.1-flash-lite    | unconstr. | 0.000             | 0                              | ignores      | answers     | LEAKING      |

Table 4: C1 discrimination on six real LLMs (head-on instrument,  $\delta$  threshold 0.15; verdict = majority of three signals).  $\delta_{\mathcal{R}}$  is the *same* ablation read on the full regret instrument  $J$  (Section 3), not a separate metric. Under the strict prompt it grades with binding fidelity (1981  $\rightarrow$  658  $\rightarrow$  0); removing the binding clause collapses it to 0 and flips every model to LEAKING. The lightest model fails to bind even when told to (INCONCLUSIVE under bound). Mock learners (top) bound the scale.

|               | not retrieved                   | retrieved                                    |
|---------------|---------------------------------|----------------------------------------------|
| not in corpus | priors only (NONE)              | — (unreachable)                              |
| in corpus     | retriever misses ( <i>gap</i> ) | RAG success (RETRIEVED $\rightarrow$ ORACLE) |

Table 5: Decomposing a RAG answer’s outcome over in-corpus  $\times$  retrieved. The three reachable cells are the NONE/RETRIEVED/ORACLE conditions;  $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$  is the content ceiling,  $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$  what the pipeline delivers, their difference the retrieval gap. Har-ness: experiments/retrieval-decomp.

209 *content ceiling* (value if retrieval were perfect),  $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$  is what the deployed  
210 pipeline *delivers*, and their difference is the *retrieval gap*—value present in the corpus but never  
211 surfaced. Running the three conditions through a small local generator (Qwen2.5-1.5B) on seven  
212 equipment-SOP fact-recall queries makes the split concrete: closed-book accuracy is 0/7 (empty pri-  
213 ors), ORACLE is 7/7 (every fact is recoverable from its chunk), and the deployed MiniLM pipeline  
214 lands between at 3/7—so of a 100% content ceiling the pipeline *delivers* 43% and *forfeits* a 57% re-  
215 trieval gap; a generator-independent recall@5 of any answer-bearing chunk (4/7) localizes it. Here  
216 the binding constraint is retrieval, not corpus coverage or model capability, and a curation failure  
217 (fact absent), a retrieval failure (present but unranked), and a priors success are distinct outcomes  
218 the binary leakage verdict cannot separate. (Numbers illustrate the method—one small model, seven  
219 queries—not a benchmark.)

## 220 5 Proxy learners as a pre-trial screen (application)

221 We exercise the instrument with *two complementary* controlled-competence proxy classes: (a) a  
222 parametric competence-vector learner, and (b) a knowledge-suppressed / unlearned LLM learner.  
223 Because both are scored on the *same*  $\mathcal{R}$  instrument, a method that fails to move the instrument in the  
224 expected direction is a *no-go* before any human is recruited. This differs from prior proxy-learner  
225 work [Apartsin et al., 2026, Liu et al., 2026b, Song et al., 2026, Fan et al., 2026, Lee et al., 2026]  
226 in scoring on an objective control-task outcome rather than dialogue behavior, profile alignment, or  
227 LLM-judge helpfulness.

## 228 6 Weight-level cross-check via machine unlearning

229 A reviewer’s sharpest attack on C1 is that corpus *context* removal is not weight-level *unlearning*, so  
230 the “leakage” test is the no-context heuristic in disguise. We answer with an open-weight arm: re-  
231 move the alter-to-starboard knowledge from an open-weight model with a real unlearning method—

SimNPO [Fan et al., 2024] as primary (reference-free, length-normalized), with NPO [Zhang et al., 2024], RMU [Li et al., 2024], and gradient ascent [Jang et al., 2022] as baselines—and score the base vs. unlearned model on the reference-policy instrument. A removal audit [Lynch et al., 2024] reports whether the knowledge is *gone* vs. merely *suppressed*; for a stable novice that resists benign relearning we layer in a robust utility-preserving recipe [Singh et al., 2025]. The predicted  $2 \times 2$ : the base model scores low even without the corpus (it has the knowledge in weights); the unlearned model scores high without the corpus and recovers with it (weight-level corpus reliance). Nobody has scored an *unlearned* learner on a control-task regret metric; this gives C1 a weight-level leakage result beside the context-level one. The harness is built, and a first CPU result already delivers the audit-level half: with the primary method SimNPO on Qwen2.5-1.5B-Instruct—a model that knows the rule—unlearning drives the forget-target NLL from 4.6 to 92 and the held-out direction-cue rate (robust to the starboard→right synonym) from 5/6 to 0/6, while retain knowledge stays coherent; the NPO baseline produces the same qualitative collapse ( $4.6 \rightarrow 41$ ,  $5/6 \rightarrow 0/6$ ), so the suppression is method-agnostic. This establishes behavioral *suppression*, not yet verified semantic *removal*: the probe is lexical and the NLL teacher-forced. Scoring the base-vs.-unlearned model on the full regret instrument at 7–8B scale—the step that turns suppression into an instrument-level removal result and fills the corpus-recovery cell of the  $2 \times 2$ —remains GPU-gated.

## 7 Limitations and scope

**Mechanism, not external validity.** Every result here is simulation-based mechanism evidence. We make no learning-gains claim and pre-register the human cohort study as future work. **Proxy validity.** Simulated learners can be unfaithful—prompt-suppressed and unlearned models may be too capable, may learn unrealistically fast, and need not reproduce authentic human misconceptions; recent work cautions that student simulation is valid only under specific conditions [Yuan et al., 2026] and documents systematic fidelity gaps between LLM “students” and real learners [Wu et al., 2025, Srivatsa et al., 2025]. We therefore treat the two proxy classes as a mutual cross-check, not a substitute for human data—which is exactly why the human cohort study is a pre-registered requirement rather than an optional extension. **Instrument sensitivity.** The protocol embeds weighting choices (ship domain, objective); we show the ranking survives a  $\pm 40\%$  reweighting ( $\tau = 1.00, §3$ ), but robustness beyond that range, and to the elliptical-domain *form* itself, is untested. **Model and domain coverage.** The discrimination result (Table 4) covers six models within one provider family, and two rules (Rule 14 head-on, Rule 15 crossing) on their respective encounters; cross-provider models and further rules/encounters would tighten the claim. **Compute-gated:** the audit-level unlearning result is in hand (CPU), but the instrument-scoring step of the open-weight arm (Section 6)—which settles *removal*—still needs one GPU.

## 8 Conclusion

We have described an in-silico instrument that lets a designer falsify the mechanism of a corpus-bounded instructional method before human-subject effort: a reference-policy transfer metric with KC→single-metric identifiability (C2), used bidirectionally to localize corpus gaps and detect parametric leakage on one closed-model-compatible metric (C1), exercised by two complementary proxy-learner classes. The claim is testable and narrow; the domains are worked examples, and the measurement method is the point.

**Reproducibility.** The simulator, instrument, diagnosis harness, proxy learners, and the open-weight unlearning scaffold will be released, along with a deterministic no-key dry-run that recovers the mock ground truth and a one-tap GPU notebook for the unlearning arm. (Code is withheld here to preserve double-blind review.)

## References

- Anonymous. Quantitative COLREG compliance evaluation for autonomous ships. *Ocean Engineering*, 2024a.
- Anonymous. Control knowledge tracing: A control-theoretic view of knowledge dynamics. In *Conf. on AI in Education (CAEI)*, 2024b.

281 Alexander Apartsin, Omri Sason, and Yehudit Aperia. Toward a benchmark for controllable simulation of  
282 imperfect students with large language models, 2026.

283 Susan Bull and Judy Kay. Student models that invite the learner in: The SMILI open learner modelling frame-  
284 work. *International Journal of Artificial Intelligence in Education*, 17(2):89–120, 2007.

285 Albert T. Corbett and John R. Anderson. Knowledge tracing: Modeling the acquisition of procedural knowl-  
286 edge. *User Modeling and User-Adapted Interaction*, 4(4):253–278, 1994.

287 Chongyu Fan, Jiancheng Liu, Licong Lin, Jinghan Jia, Ruiqi Zhang, Song Mei, and Sijia Liu. Simplicity  
288 prevails: Rethinking negative preference optimization for llm unlearning, 2024.

289 Shuyi Fan, Boyuan Deng, Mengyu Xu, Jiale Liu, Hongyang Zhang, Qiaoxin Yang, and Chongyang Gao. Re-  
290 thinking llm-judged helpfulness as a pedagogy signal: A pre-registered audit across tutor models, 2026.

291 Paolo Fiorini and Zvi Shiller. Motion planning in dynamic environments using velocity obstacles. *International*  
292 *Journal of Robotics Research*, 17(7):760–772, 1998.

293 Weibo Gao, Qi Liu, Linan Yue, Fangzhou Yao, Rui Lv, Zheng Zhang, Hao Wang, and Zhenya Huang.  
294 Agent4edu: Generating learner response data by generative agents for intelligent education systems, 2025.

295 International Maritime Organization. Convention on the international regulations for preventing collisions at  
296 sea (COLREGs), 1972.

297 Siddharth Jain and Venkat Narayan Vedam. Cue-r: Beyond the final answer in retrieval-augmented generation,  
298 2026.

299 Joel Jang, Dongkeun Yoon, Sohee Yang, Sungmin Cha, Moontae Lee, Lajanugen Logeswaran, and Minjoon  
300 Seo. Knowledge unlearning for mitigating privacy risks in language models, 2022.

301 Tor A. Johansen, Tristan Perez, and Andrea Cristofaro. Ship collision avoidance and COLREGS compliance  
302 using simulation-based control behavior selection with predictive hazard assessment. *IEEE Transactions on*  
303 *Intelligent Transportation Systems*, 17(12):3407–3422, 2016.

304 Kenneth R. Koedinger, Albert T. Corbett, and Charles Perfetti. The Knowledge-Learning-Instruction frame-  
305 work: Bridging the science-practice chasm to enhance robust student learning. *Cognitive Science*, 36(5):  
306 757–798, 2012.

307 Vishakha Lall and Yisi Liu. Ai meets maritime training: Precision analytics for enhanced safety and perfor-  
308 mance, 2025.

309 Unggi Lee, Sookbun Lee, Yeil Jeong, Eunjo Lee, Minchul Shin, and Hoilym Kwon. Educlaw-bench: A  
310 long-horizon benchmark for pedagogical llm agents with simulated learners, 2026.

311 Nathaniel Li, Alexander Pan, Anjali Gopal, Summer Yue, Daniel Berrios, Alice Gatti, Justin D. Li, Ann-Kathrin  
312 Dombrowski, Shashwat Goel, Long Phan, Gabriel Mukobi, Nathan Helm-Burger, Rassin Lababidi, Lennart  
313 Justen, Andrew B. Liu, Michael Chen, Isabelle Barrass, Oliver Zhang, Xiaoyuan Zhu, Rishub Tamirisa,  
314 Bhruu Bharathi, Adam Khoja, Zhenqi Zhao, Ariel Herbert-Voss, Cort B. Breuer, Samuel Marks, Oam Patel,  
315 Andy Zou, Mantas Mazeika, Zifan Wang, Palash Oswal, Weiran Lin, Adam A. Hunt, Justin Tienken-Harder,  
316 Kevin Y. Shih, Kemper Talley, John Guan, Russell Kaplan, Ian Steneker, David Campbell, Brad Jokubaitis,  
317 Alex Levinson, Jean Wang, William Qian, Kallol Krishna Karmakar, Steven Basart, Stephen Fitz, Mindy  
318 Levine, Ponnurangam Kumaraguru, Uday Tupakula, Vijay Varadharajan, Ruoyu Wang, Yan Shoshitaishvili,  
319 Jimmy Ba, Kevin M. Esvelt, Alexandr Wang, and Dan Hendrycks. The wmdp benchmark: Measuring and  
320 reducing malicious use with unlearning, 2024.

321 Jiayi Liu, Jiaxing Zhang, Bowen Jin, and Jennifer Neville. Generating leakage-free benchmarks for robust rag  
322 evaluation, 2026a.

323 Ruochen Liu, Zhiyuan Wen, Hao Yan, Jun Yin, Senzhang Wang, and Jiannong Cao. Ps<sup>2</sup>: Parameterized control  
324 for fine-grained student proficiency simulation, 2026b.

325 Xinyi Lu and Xu Wang. Generative students: Using llm-simulated student profiles to support question item  
326 evaluation, 2024.

327 Aengus Lynch, Phillip Guo, Aidan Ewart, Stephen Casper, and Dylan Hadfield-Menell. Eight methods to  
328 evaluate robust unlearning in llms, 2024.

329 Barak Or. Quantifying prior dominance in rag systems, 2026.

330 Radek Pelánek. Applications of the Elo rating system in adaptive educational systems. *Computers & Education*,  
331 98:169–179, 2016.

332 Naman Deep Singh, Maximilian Müller, Francesco Croce, and Matthias Hein. Unlearning that lasts: Utility-  
333 preserving, robust, and almost irreversible forgetting in llms, 2025.

334 Jiajia Song, Zhihan Guo, and Jionghao Lin. Simulating novice students using machine unlearning and relearn-  
335 ing in large language models, 2026.

336 KV Aditya Srivatsa, Kaushal Kumar Maurya, and Ekaterina Kochmar. Can llms reliably simulate real students’  
337 abilities in mathematics and reading comprehension?, 2025.

338 Adrienne Tuynman and Ronald Ortner. Transfer in reinforcement learning via regret bounds for learning agents,  
339 2022.

340 K. W. Van Dongen et al. Construct validity of the LapSim: Can the LapSim virtual reality simulator distinguish  
341 between novices and experts? *Surgical Endoscopy*, 21(8):1413–1417, 2007.

342 Lev S. Vygotsky. *Mind in Society: The Development of Higher Psychological Processes*. Harvard University  
343 Press, 1978.

344 Tao Wu, Jingyuan Chen, Wang Lin, Mengze Li, Yumeng Zhu, Ang Li, Kun Kuang, and Fei Wu. Embracing  
345 imperfection: Simulating students with diverse cognitive levels using llm-based agents, 2025.

346 Zhihao Yuan, Yunze Xiao, Ming Li, Weihao Xuan, Richard Tong, Mona Diab, and Tom Mitchell. Towards  
347 valid student simulation with large language models, 2026.

348 Qinggang Zhang, Zhishang Xiang, Yilin Xiao, Le Wang, Junhui Li, Xinrun Wang, and Jinsong Su. Faithfulrag:  
349 Fact-level conflict modeling for context-faithful retrieval-augmented generation, 2025.

350 Ruiqi Zhang, Licong Lin, Yu Bai, and Song Mei. Negative preference optimization: From catastrophic collapse  
351 to effective unlearning, 2024.

352 Zinn et al. Assessing flight competency from deviation to an optimal trajectory. *Cognition, Technology & Work*,  
353 2023.