
An In-Silico Instrument for Pre-Validating Corpus-Bounded Instruction: Reference-Policy Transfer Measurement with Bidirectional Corpus-Gap and Leakage Diagnosis

Anonymous Author(s)

Affiliation

Address

email

Abstract

1 When a model answers correctly with a corpus in context, did it *need* the corpus, or
2 did it already know the answer? We present an *in-silico measurement instrument*
3 that answers this—and the dual question of whether a corpus is *sufficient*—as a
4 behavioral task outcome, before any human-subject study. The central quantity is
5 *corpus necessity*: ablate a corpus item and measure the change in a task outcome
6 scored against a reference. Our headline contribution is that we make necessity
7 *non-confounded* by calibrating it against a *known parametric baseline*: we *con-*
8 *struct* the ground truth by teaching a fact into a model’s weights and showing
9 necessity falls as a *dose-response*. We demonstrate this in **two domains with in-**
10 **dependent objectives**, one of which uses *no simulator at all*: (i) a control-regret
11 simulator (maritime collision avoidance), where teaching a hidden charted haz-
12 ard into the weights collapses necessity from a full-barrier swing to ≈ 0 , with
13 the LoRA-scale and training-checkpoint gradients agreeing; and (ii) a simulator-
14 free *fictional-fact question answering* task scored by an answer checker, where
15 teaching invented facts into a 7B model drives necessity *smoothly and monoton-*
16 *ically from 1.00 to 0.03*. This calibrated necessity measure is the basis of two
17 products: a *corpus diagnosis* that ranks each item by necessity, localizes which
18 item is missing from task failures, and—crucially—splits an unrelieved-upon item
19 into *redundant* (the model already knows it) versus *unusable* (the model fails even
20 with it present); and a *corpus-sufficiency* verdict that surfaces *false sufficiency*—a
21 corpus that only appears sufficient because the model is coasting on priors and is
22 therefore fragile to distribution shift. Unlike faithfulness (RAGAS) and context-
23 attribution (ContextCite), which measure whether context *supported* or *influenced*
24 an output, we measure whether the model *needed* it, against a weight-level base-
25 line they lack. The method is *closed-model compatible* (API access only) and
26 operates *per item*. As breadth we report: cross-model discrimination across cur-
27 rent LLMs; a second control domain (roadside tire change); KC→single-metric
28 identifiability and estimator-recovery calibration; and a machine-unlearning arm
29 that yields a *says $\neq$ does* dissociation (gentle unlearning changes what a model
30 *says* but not what the instrument sees it *do*) as supporting weight-level evidence.
31 All results are **simulation-based mechanism evidence, not human-subject ex-**
32 **ternal validity**; we scope the contribution accordingly and pre-register the human
33 study as future work.

Plain-language summary. When an AI answers correctly with a rulebook in front of it, you cannot easily tell whether it *needed* the rulebook or already knew the answer—and you cannot tell whether the rulebook has holes. Normally you would find out with an expensive human study. We build a cheap “test bench” that answers both questions first. We remove a single item from the corpus and watch what breaks: if performance drops, the model genuinely relied on it; if nothing changes, it did not. To prove that “nothing changes” really means the knowledge was already in the model—and not some prompt artifact—we *construct* the answer: we teach a fact into the model’s weights and show reliance falls step by step (a “dose-response”). We do this in two settings, one of which uses no simulator at all: a ship-steering task, and a set of *made-up facts* about fictional places no model could know—taught into a real model, reliance on the corpus drops smoothly from 100% to near zero. The payoff is a corpus audit: which items are truly needed, which are *redundant* (already known—delete them), which are *unusable* (present but the model can’t act on them), and whether the corpus only *looks* sufficient because the model is coasting on what it already knew. Everything here is controlled simulation that checks the machinery—not yet a claim that human learners learn more, which is the study we set up next.

1 Introduction

Generic retrieval-augmented (RAG) assistants optimize for semantic relevance: give a plausible answer to whatever is asked. That objective is wrong for training in safety-critical procedural domains, where a semantically accurate answer can still be instructionally wrong—delivered at the wrong complexity, skipping a prerequisite, or worse, confidently fabricated. A growing body of work therefore builds *corpus-bounded* tutors that abstain outside a curated corpus. But a designer who has built such a system faces a prior question: *does the mechanism work?* Does the tutor actually rely on its corpus, and does the corpus actually cover the domain? Answering this by human-subject study is slow and expensive, and a null result there conflates many causes.

We argue that the *mechanism* of a corpus-bounded method can be falsified cheaply and in silico, and we build the instrument to do it (Figure 1). Our contribution is a *methods/measurement* one, not a new tutor and not a new collision-avoidance technique. Concretely:

The central storyline (Sections 4–5):

- **Necessity, calibrated by construction.** We measure *corpus necessity*—the change in a task outcome when a corpus item is ablated—and make it non-confounded by *constructing* the parametric baseline: teach a fact into the weights and necessity falls as a *dose-response*. We show this in **two domains with independent objectives**, one *simulator-free*: a control-regret simulator (teaching a hidden hazard collapses necessity to ≈ 0 ; LoRA-scale and checkpoint gradients agree) and a simulator-free fictional-fact QA task scored by an answer checker (teaching invented facts drives necessity smoothly $1.00 \rightarrow 0.03$ on a 7B model). This is a known-groups validation of the measure.
- **The corpus diagnosis** ranks each item by necessity, localizes a missing item from task failures, and splits an unrelayed-upon item into *redundant* (already known) versus *unusable* (present but the model fails with it)—distinct fixes (prune vs. fix the model).
- **Corpus sufficiency**, the product face of the audit, surfaces *false sufficiency*: a corpus that only looks sufficient because the model coasts on priors (necessity ≈ 0 everywhere), a fragility ordinary RAG metrics report as all-green.

Additional breadth (supporting the above, not the headline): a *transfer instrument* that scores a learner by its *regret against a reference-policy solver* with KC→single-metric identifiability (Section 3); a second control domain and estimator-recovery calibration; cross-model discrimination on current LLMs (Section 4); and a machine-unlearning arm that yields a *says $\neq$ does* dissociation as secondary weight-level evidence (Section 5).

Our contribution is a *methods/measurement* one, not a new tutor. Every *component* we build on is prior art; the *calibrated necessity measure* and its *corpus-value/sufficiency audit* are the open ground (Section 2). We are explicit throughout that our evidence is simulation-based: it tests whether the machinery behaves as designed, not whether humans learn more.

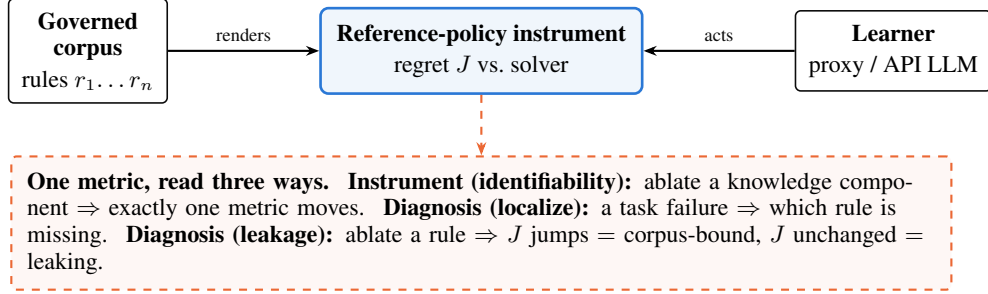


Figure 1: The instrument, used bidirectionally. A governed corpus and a learner both feed one reference-policy simulator that scores the learner’s *regret* J against an automatic solver. The same metric is then read three ways—to verify KC→single-metric identifiability (the *instrument*), to localize a missing rule from task failures, and to detect parametric leakage by rule ablation (the *diagnosis*)—needing only API access to the learner. The diagnosis is the instrument run backwards, not a separate tool.

72 2 Related work and positioning

73 Each strand below is established prior art; we reuse it as infrastructure and mark where our delta
74 departs from it.

75 **Learner modeling and instructional theory.** Knowledge tracing [Corbett and Anderson, 1994],
76 the Elo rating system for adaptive systems [Pelánek, 2016], the Knowledge-Learning-Instruction
77 framework [Koedinger et al., 2012], open learner models [Bull and Kay, 2007], and the Zone of
78 Proximal Development [Vygotsky, 1978] are all established. We reuse them as infrastructure, not
79 as contributions.

80 **Corpus-bounded tutoring, leakage, and faithfulness.** RAG tutors that abstain outside a corpus
81 are standard engineering. A large line asks whether a model uses provided context or parametric
82 memory: faithfulness metrics score whether an answer is grounded in context [Es et al., 2023];
83 context attribution ablates context sources and measures the change in output probability to attribute
84 a generation to them [Cohen-Wang et al., 2024, Or, 2026]; knowledge-conflict work studies which
85 side wins when context contradicts memory [Xu et al., 2024, Zhang et al., 2025]; leakage-free
86 benchmarking filters items answerable with no context [Liu et al., 2026a]; and intermediate-step
87 scoring looks beyond the final answer [Jain and Vedam, 2026]. All of these measure whether context
88 *influenced* the output, judged on *answer text*, per answer or system-wide. We differ on three axes:
89 (a) we score a *behavioral task outcome* against a reference-optimal policy, not answer text; (b) we
90 attribute *per corpus rule* and localize which rule is missing or wrong, not per token or system-wide;
91 and (c) we measure not merely *influence* but *necessity*—calibrated by manipulating the parametric
92 baseline directly (weight-level construction and unlearning, Section 5), so a fact the model already
93 knew is not mistaken for one it relied on. No context-attribution method has that weight-level ground
94 truth. The gap is structural, not incidental: a faithfulness or context-relevance score is a function of
95 the *(question, retrieved context, answer)* triple, which does not encode necessity. For a model that
96 already knows a fact and one that does not, *both* answering correctly *with* the corpus present, that
97 triple—and therefore the score—is identical, and reads *high* in both (the correct answer is entailed
98 by the context whether or not the model used it). Such a metric thus cannot separate a load-bearing
99 corpus from a redundant one, and reports the redundant case as sufficient—the false-sufficiency
100 failure our measure is built to catch (we confirm the invariance empirically in the released harness,
101 but it follows from the metric’s definition). **ContextCite** [Cohen-Wang et al., 2024] is the closest
102 relative: because it ablates context and measures the change in the response’s log-probability against
103 the model’s own baseline, it *partially* tracks necessity—but it requires open weights and per-token
104 log-probabilities (so it cannot run on the closed API models our necessity test does), attributes text-
105 influence rather than a task outcome, carries no weight-level known-groups calibration, and yields
106 no *redundant/unusable* split or sufficiency verdict. That join is the *Corpus Diagnosis*.

Objective competency instruments. Deviation-from-optimal scoring appears in flight [Zinn et al., 2023] and construct-validity-by-novice/expert-separation in surgery [Van Dongen et al., 2007]; control-theoretic notation has been applied to knowledge dynamics [Anonymous, 2024b]; regret is used in RL transfer [Tuynman and Ortner, 2022]; maritime training analytics regress simulator measures onto instructor ratings [Lall and Liu, 2025]. None uses a *reference solver’s regret* as the *learner* transfer outcome with KC→single-metric identifiability. That is the *Transfer Instrument*. We borrow mature maritime-autonomy tooling—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]—purely as reference solvers, never as a new collision-avoidance method [Anonymous, 2024a, International Maritime Organization, 1972].

Proxy learners. Simulated students have long authored and evaluated tutors; LLM student agents now pilot assessment items [Lu and Wang, 2024] and simulate learners for tutoring-system development [Gao et al., 2025], and controlled variants suppress knowledge by prompting [Apartsin et al., 2026], interpolate parametric competence [Liu et al., 2026b], or unlearn a model into a novice [Song et al., 2026]. Pre-deployment simulated-learner screens have very recently appeared [Fan et al., 2026, Lee et al., 2026]. We therefore *demote* the proxy-learner idea to an application: our narrow residual claim is running *two complementary proxy classes* (parametric competence *and* unlearned LLM) scored on the *same regret-to-reference instrument* the human trial would use—which none of these do.

3 The Transfer Instrument

This section defines and verifies the instrument’s *forward* use—measuring transfer and skill. The *backward* use that measures corpus necessity, the paper’s central contribution, follows in Section 4; the construct-validity, identifiability, and robustness checks below are the support that licenses it.

Task and metric. The worked domain is COLREG collision avoidance: a power-driven vessel must choose course and speed to resolve an encounter. We implement a kinematic simulator with an elliptical ship domain and a Collision Risk Index, and two reference solvers—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]. For a learner policy π on scenario set S we define the transfer outcome as regret against a reference policy π^* ,

$$\mathcal{R}(\pi) = \frac{1}{|S|} \sum_{s \in S} [J(\pi, s) - J(\pi^*, s)], \quad (1)$$

where J is the per-encounter objective (a weighted sum of a safety-margin barrier, COLREG compliance penalty, and route deviation; lower is better) and π^* is the reference maneuver. Unlike item correctness, $\mathcal{R}$ is continuous, objective, and instructor-free.

On “reference,” not “optimal.” We deliberately avoid claiming a global optimum. VO and SB-MPC are strong, widely-used near-optimal solvers, but neither is proven globally optimal for the full nonconvex encounter; calling their output “optimal” would overclaim. The instrument does not need a true optimum—only a reference that construct validity shows separates naive from expert behavior (below). Regret is thus measured against a fixed, reproducible reference policy, and we report which solver is used.

Construct validity and metric grading. The instrument must separate good from bad policies before any learning claim, and—if it is to be a transfer measure rather than a pass/fail check—the metric must *grade*, not collapse to two values. Across a varied set of nine encounters (head-on, starboard/port crossing, overtaking, and restricted-visibility geometries), three policies of increasing competence separate cleanly and continuously on J (Table 1): a naive hold-course policy (mean $J \approx 1765$, clearing only 11% of domains), a velocity-obstacle reference ($J \approx 0.70$, all clear), and SB-MPC ($J \approx 0.01$). The objective takes 20 distinct values in $[0.00, 1995.18]$ over the policy×scenario cells—a graded metric, with the safe regime (VO/SB-MPC) itself spanning a continuous 0.00–1.27 range. On the discrete procedural domain the same logic holds: an expert policy scores $J = 0$ against a reckless $J = 200$ with the safety violation caught. This is the novice/expert-separation logic of Van Dongen et al. [2007], applied to a decision/control task rather than manual skill.

Policy	mean J	median	min	max	cleared
naive (hold course)	1765.44	1988.08	1.08	1995.18	11%
VO reference	0.70	0.58	0.33	1.27	100%
SB-MPC reference	0.01	0.01	0.00	0.03	100%

Table 1: Construct validity and grading across nine varied encounters. The objective J separates the three competence levels cleanly and takes a continuous range of values (20 distinct across all cells, $[0.00, 1995.18]$)—it is a graded transfer metric, not a near-binary check. `npm run colreg:construct`.

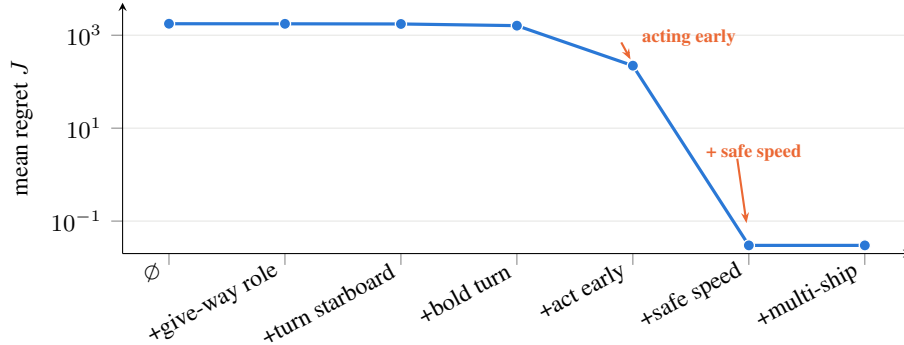


Figure 2: Competence→performance gradient on the nine-encounter instrument. Mean regret J (log scale) as the six knowledge components are acquired in curriculum order (left to right); each point is a competence stage, from the empty learner ($\emptyset$) to full competence. J spans nearly five orders of magnitude and collapses as the two domain-clearing competencies—acting *early* and at a *safe speed*—come online, the graded behavior Table 1 reports numerically. `npm run colreg:construct`.

154 **KC→single-metric identifiability.** We design each knowledge component to govern exactly
155 one metric, so ablating a KC degrades that metric and no other. On the procedural domain
156 this is *exact*: each ablated competence degrades only its governed metric, and a monotone
157 competence→performance gradient ($J : 204 \rightarrow 0$) follows as competence is acquired in curricu-
158 lum order; on the COLREG instrument the same gradient spans nearly five orders of magnitude
159 (Figure 2). Because the property holds on both a continuous-control and a discrete-procedural in-
160 strument, it is a general measurement-design property, not a COLREG artifact.

161 **Is identifiability tautological?** A fair objection is that the mapping is a design choice, so “ablate
162 the KC, that metric moves” is true by construction. Two things make it a testable property rather than
163 a tautology. First, the *cross-effect* claim can fail: designing the metrics is not enough to guarantee
164 that ablating one KC leaves the *others* unchanged—if the objective’s terms are entangled (e.g. a
165 safety barrier that also moves the deviation term), ablation bleeds across metrics, and we measure
166 and report that it does not. Identifiability is the empirically-checked *absence* of that bleed, not the
167 presence of the intended effect. Second, the mapping is what makes the Corpus Diagnosis (Section 4)
168 actionable: without it, a task failure cannot be attributed to a specific corpus rule. We therefore treat
169 identifiability as a design *requirement to be verified per instrument*—a property an instrument can
170 lack—and verifying it is part of building one, exactly as construct validity is. On the procedural
171 domain the verification is clean (Table 2): ablating each knowledge component degrades only its
172 governed metric, with maximum off-diagonal change 0.0000—no cross-bleed.

173 **Robustness to weighting choices.** The objective embeds weighting choices—the elliptical ship-
174 domain radii and the margin/compliance/deviation weights—and a fair worry is that the compe-
175 tence ranking is an artifact of those choices. We falsify this with a sensitivity analysis (`npm run`
176 `colreg:sensitivity`) that holds every policy’s *behavior* fixed and re-scores under 232 perturba-
177 tions: a one-at-a-time ± 25 –50% sweep of each parameter plus 200 joint samples with every param-
178 eter independently scaled in $[0.6, 1.4]$. Across the whole ensemble, both orderings are preserved
179 exactly—the naive policy stays worst and the six-component competence gradient stays monotone

ablated KC ↓ / metric →	safety	core	sequencing	finishing
safety	−1.00	0.00	0.00	0.00
core steps	0.00	−1.00	0.00	0.00
sequencing	0.00	0.00	−0.22	0.00
finishing	0.00	0.00	0.00	−1.00

Table 2: KC→single-metric identifiability (procedural domain). Change in each metric after ablating each knowledge component. The diagonal (bold) is the intended governed metric; every off-diagonal cell is 0.00 (max $|\Delta| = 0.0000$)—ablation does not bleed across metrics. `npm run proc:identifiability`.

Estimator	Recovery of known ground truth	Calibration (ECE)
Elo	static ability, mean abs. error 0.046	0.023
BKT	latent state $P(\hat{L}) = 0.997$ (learned) vs. 0.175 (not)	0.004

Table 3: Estimator-recovery and calibration on synthetic data with a known ground truth. The measurement, not just the metric, is validated.

180 in J (Kendall $\tau = 1.00$ on every perturbation, invariant rate 100%). The CRI parameters are ex-
181 cluded because CRI is a reported diagnostic, not a term in the scored objective, so the ranking is
182 invariant to them by construction. The protocol’s conclusions are thus a property of the competence
183 structure, not of the weight calibration.

184 **Estimator recovery and calibration.** Feeding the instrument’s outcomes into a generic learner-
185 agent estimator, we recover known ground truth on synthetic data (Table 3). This turns “we have a
186 metric” into “the measurement is valid.”

187 4 The Corpus Diagnosis: the same instrument, read backwards

188 The Corpus Diagnosis is not a second tool. It is the Transfer Instrument of Section 3 run in reverse:
189 the *same* objective metric answers two opposite questions. This backward reading—*does the learner*
190 *rely on a given corpus item?*—is the paper’s central contribution; the forward construct validity of
191 Section 3 is what licenses it.

192 **(i) Corpus-gap localization.** When the corpus is missing or wrong on a rule, the learner’s failures
193 on the governed metric have a signature that attributes the failure to a *specific* rule/node. We com-
194 pute, per rule, an ablation-delta—the rise in the governed penalty when that rule is removed—and a
195 localization that names the governed component. A large delta plus a matching localization means
196 the learner *relied on* that corpus rule.

197 **(ii) Parametric leakage detection (necessity).** The mirror image: ablate a rule from the corpus;
198 if the metric it governs does *not* degrade, the model is answering from pretrained priors, not the
199 corpus. We combine the ablation-delta with a *counterfactual* test (replace “alter to starboard” with
200 “alter to port”; does the learner follow the altered rule?) and a *closed-book* contamination baseline
201 (no corpus supplied). The verdict—CORPUS-BOUND, LEAKING, or INCONCLUSIVE—is read from
202 the same metric, by a majority vote over the three signals so that a clear ablation-and-contamination
203 pattern is not vetoed by a single dissenting sub-test. Section 5.1 calibrates this necessity against
204 a known parametric baseline by construction. Because the bounded compliance penalty is a *term*
205 *inside* the objective J , this necessity is read off the graded regret instrument itself—not a decoupled
206 side-metric—and is visible per model in the $\delta_{\mathcal{R}}$ column of Table 4.

207 **(iii) Why an item is not needed: *redundant* vs. *unusable*.** A small ablation-delta says the corpus
208 did not move behavior, but not *why*, and the two reasons demand opposite fixes. We split a LEAKING
209 item by its *with-corpus* performance: *redundant* (the learner is competent *with* the item present—it
210 already knows the rule, so the item is dead weight and should be pruned) versus *unusable* (the learner
211 fails the task *even with* the item present—the content has value but this model cannot act on it, so

the fix is the model/prompting/retrieval, not the corpus). The delta alone conflates these; the with-corpus outcome (regret in the control domain, accuracy in QA) separates them. On the real-model sweep this is not hypothetical: on the corpus-only hazard, Claude Opus reads CORPUS-BOUND while Llama-3.3-70B grounds regardless (with-corpus regret ≈ 457)—*unusable*, not redundant.

Corpus sufficiency, and false sufficiency. Rolling the per-item verdicts to the corpus level yields a sufficiency judgement for a query set: *contributing* (every item relied upon), *partial*, *unusable*, or—the diagnostic ordinary RAG metrics cannot produce—*false sufficiency*: task accuracy is high yet necessity is ≈ 0 everywhere, so the corpus is not carrying the load and success rides on priors, fragile to distribution shift. The claim is explicitly scoped to the probed query set (sufficiency is always “for these queries”); the false-sufficiency signal (necessity ≈ 0) is precisely the measurable warning that a bounded-query sufficiency claim will not survive a shift.

Offline recovery of known ground truth. Before the real-model sweep, we confirm the verdicts recover truth we control. Against two reference mock learners whose truth is known, the instrument recovers it exactly: the corpus-bound mock yields ablation-delta 1.000 (regret-ablation 1981), follows the counterfactual, and abstains closed-book ($\Rightarrow$ CORPUS-BOUND); the leaking mock yields ablation-delta 0.000 (regret-ablation 0), ignores the counterfactual, and answers closed-book from priors ($\Rightarrow$ LEAKING).

Real-model discrimination. We run the necessity test on eight production models over AWS Bedrock—Claude Haiku/Sonnet/Opus 4.5, Llama-3.1-8B / 3.3-70B, and Nova micro/lite/pro—contrasting a *standard-COLREG* corpus with the *corpus-only charted hazard* of Section 5.1 (Table 4, Figure 3). Three findings.

(1) *Standard rules are redundant for these frontier models.* Every model relies on little of the standard corpus (relied 0–1 of 4; it duplicates their parametric COLREG—*redundant*, an actionable “do not ship” verdict). We also ran two open reasoning models (OpenAI gpt-oss 20B/120B) that *appeared* to rely on the same corpus (relied 2–3/4), but we exclude them from Table 4: the single-shot instrument cannot score them reliably. Their harmony-format reasoning frequently failed to terminate within the decode budget (the 20B needed a 50k-token budget where every other model used $< 4k$), and with no repeat/variance control an unstable output yields ablation deltas indistinguishable from genuine reliance. Whether such models truly rely on standard COLREG—i.e. whether necessity is a property of the (corpus, learner) pair and not the corpus alone—is a real question, but confirming it needs a variance-controlled, parse-budget-matched rerun (future work).

(2) *Necessity has wide dynamic range on the hazard.* $\delta_{\mathcal{R}}$ spans 0 to ~ 2000 : Nova-micro ignores the corpus ($\delta_{\mathcal{R}}=0$) while Opus reads it and clears at the full barrier ($\delta_{\mathcal{R}}=1998$, $\mathcal{R}_{\text{with}}=0.2$)—the cleanest CORPUS-BOUND reader.

(3) *The redundant-vs-unusable split shows on real models* (Figure 3). With-corpus regret separates *usable* from *unusable*: all clear once given the rule ($\mathcal{R}_{\text{with}} \approx 0.2$) *except* Llama-3.3-70B (457) and Nova-micro (670), which ground *even with the rule present*—the content has value but the model cannot act on it (UNUSABLE; fix the model, not the corpus). This is genuine learner-dependence: the same corpus item is *usable* for one model and *unusable* for another. (A prompt-condition study on Gemini gives the binding-fidelity control: under a strict binding prompt necessity grades monotonically with capability; removing the clause flips every model to LEAKING.) The continuous $\delta_{\mathcal{R}}$ and $\mathcal{R}_{\text{with}}$ are more reliable than the categorical verdict, a noisier three-signal majority vote.

Per-rule, not just per-corpus. To show the diagnosis attributes reliance to a *specific* rule rather than to corpus presence in general, we add a second, independent rule—Rule 15 crossing give-way—exercised on its own crossing scenarios (a rule only moves the metric on scenarios that invoke it, so each probe carries a matched subset). Ablating each rule produces a large regret signal on its own encounters: on *gemini-flash-latest* under the bound prompt, ablating Rule 14 gives $\delta_{\mathcal{R}}=1981$ (head-on) and ablating Rule 15 gives 1285 (crossing); on *gemini-flash-lite-latest*, 658 and 662 respectively. The two rules are localized on disjoint scenario subsets, so the instrument reads reliance per rule.

External validity on real charted dangers. The corpus-bound reading is not an artifact of our synthetic hazard—it holds on *real*, publicly-documented dangers. We closed-book-screen four can-

Model	Standard relied/4	Charted hazard (corpus-only)		
		$\delta_{\mathcal{R}}$	$\mathcal{R}_{\text{with}}$	reads hazard as
<i>mock corpus-bound</i>	—	1981	0.2	CORPUS-BOUND
<i>mock leaking</i>	0	0	—	LEAKING
Claude Haiku 4.5	0	669	0.2	INCONCL.
Claude Sonnet 4.5	1	669	0.2	LEAKING
Claude Opus 4.5	1	1998	0.2	CORPUS-BOUND
Llama-3.1-8B	0	667	0.1	LEAKING
Llama-3.3-70B	0	213	457	UNUSABLE
Nova-micro	1	0	670	UNUSABLE
Nova-lite	0	145	0.2	INCONCL.
Nova-pro	1	669	0.2	INCONCL.

Table 4: Cross-model necessity on AWS Bedrock (eight models). **relied/4**: standard-COLREG rules the model relies on, of four (per-item audit); 0–1 reads *redundant*/false-sufficiency. **Hazard**: $\delta_{\mathcal{R}}$ is necessity (regret rise when the corpus-only rule is ablated); $\mathcal{R}_{\text{with}}$ is regret *with* the rule present (≈ 0.2 = clears, so *usable*; $\gg 0$ = grounds anyway = **UNUSABLE**). Standard COLREG is *redundant* across all eight (relied 0–1/4). On the hazard, $\delta_{\mathcal{R}}$ ranges from 0 (Nova-micro ignores it) to 1998 (Opus, full-barrier CORPUS-BOUND); this number is a coarse ordinal set by the fixed sim geometry (identical maneuvers therefore yield identical $\delta_{\mathcal{R}}$ —four models emit the same 30° avoidance and land at 669), not a fine-grained per-model scalar. $\mathcal{R}_{\text{with}}$ exposes two models that ground even with the rule (**UNUSABLE**). Mock learners bound the scale. (Two open gpt-oss reasoning models were excluded: their reasoning did not reliably terminate within the decode budget, so the single-shot instrument cannot score them without a variance control—see text.)

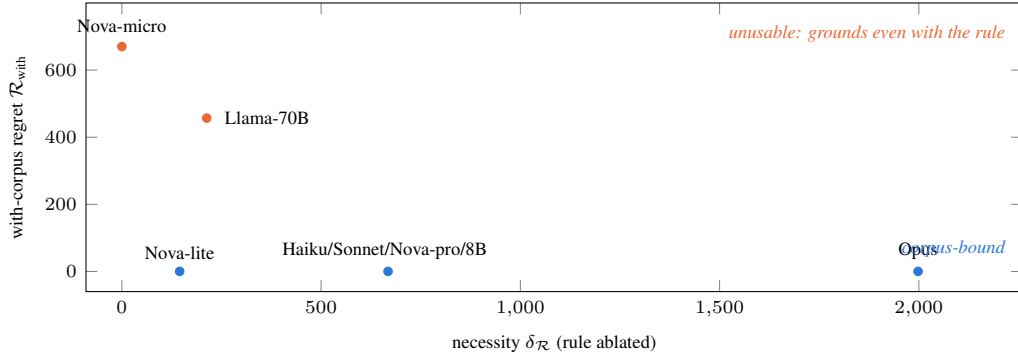


Figure 3: The necessity–usability plane for the eight models of Table 4 on the corpus-only hazard. *Horizontal*: necessity $\delta_{\mathcal{R}}$ (how much ablating the rule raises regret; a coarse ordinal set by the fixed geometry—the four blue points at $\delta_{\mathcal{R}} \approx 668$ are four models that emit the same avoidance angle). *Vertical*: with-corpus regret— ≈ 0 (blue, on the axis) means the model *clears* once given the rule (*usable*); a large value (orange) means it *grounds even with the rule present* (*unusable*). Reliance and usability are distinct axes: Claude Opus reads the corpus-only fact and clears, while Nova-micro and Llama-70B ground regardless.

264 didates on Claude Opus (dropping any it already names) and run the survivors through the same
265 hazard probe. Two obscure, official-gazetteer-verified rocks—Elwha Rock (Cayou Channel, Puget
266 Sound) and Fullastern Rock (Adelaide Island, Antarctica)—read CORPUS-BOUND at the full barrier
267 ($\delta_{\mathcal{R}} \approx 1998$, $\mathcal{R}_{\text{with}}=0.2$), exactly as the constructed hazard does. Whittle Rock (False Bay) was
268 *screened out*—Opus named it unprompted, so it is parametric, not corpus-only—which is the screen
269 working. (A famous control, the Seven Stones reef, was *not* named for its track—Opus recalled
270 adjacent dangers instead—so it did not screen out as expected; we report this rather than force it.)
271 The instrument thus reads corpus reliance on real charted facts, not only a hand-built one.

	not retrieved	retrieved
not in corpus	priors only (NONE)	— (unreachable)
in corpus	retriever misses (<i>gap</i>)	RAG success (RETRIEVED→ORACLE)

Table 5: Decomposing a RAG answer’s outcome over in-corporus $\times$ retrieved. The three reachable cells are the NONE/RETRIEVED/ORACLE conditions; $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$ is the content ceiling, $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$ what the pipeline delivers, their difference the retrieval gap. Har-ness: experiments/retrieval-decomp.

272 **What in the corpus changes the answer: presence vs. retrieval.** The leakage test asks a binary
273 question—does the learner rely on the corpus at all. A deployed RAG tutor raises a finer one: of the
274 value curation adds, how much comes from the fact being *present* in the corpus versus from the re-
275 triever actually *surfacing* it? We decompose this over two binary factors—in-corporus and retrieved—
276 whose three reachable cells are three scorable conditions (Table 5): NONE (closed-book, priors only),
277 RETRIEVED (the deployed dense retriever’s top- k), and ORACLE (the answer-bearing chunk, i.e. per-
278 fect retrieval). Reading accuracy across them attributes the gain: $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$ is the
279 *content ceiling* (value if retrieval were perfect), $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$ is what the deployed
280 pipeline *delivers*, and their difference is the *retrieval gap*—value present in the corpus but never
281 surfaced. Running the three conditions through a small local generator (Qwen2.5-1.5B) on seven
282 equipment-SOP fact-recall queries makes the split concrete: closed-book accuracy is 0/7 (empty pri-
283 ors), ORACLE is 7/7 (every fact is recoverable from its chunk), and the deployed MiniLM pipeline
284 lands between at 3/7—so of a 100% content ceiling the pipeline *delivers* 43% and *forfeits* a 57% re-
285 trieval gap; a generator-independent recall@5 of any answer-bearing chunk (4/7) localizes it. Here
286 the binding constraint is retrieval, not corpus coverage or model capability, and a curation failure
287 (fact absent), a retrieval failure (present but unranked), and a priors success are distinct outcomes
288 the binary leakage verdict cannot separate. (Numbers illustrate the method—one small model, seven
289 queries—not a benchmark.)

290 5 Validating necessity at the weight level

291 The necessity/leakage test infers a fact about a model’s *weights* from a change in the *prompt*: ablate
292 an item from the corpus, and if the governed outcome does not move, the model did not need it.
293 The sharpest objection is that corpus *context* removal is not weight-level *knowledge* change, so a
294 small necessity could be the no-context heuristic in disguise—or, conversely, a large necessity could
295 reflect a fact the model happens not to know for reasons we did not control. We close this two ways,
296 in increasing strength.

297 5.1 Validation by construction: the necessity dose-response

298 The holding this section establishes: *necessity is a non-confounded, calibrated measure*—teaching
299 a fact into the weights drives it down as a dose-response—so a near-zero reading is evidence the
300 model already knew the item, not a context-removal artifact. The decisive test is *known-groups*:
301 build models along a gradient from fact-naïve to fact-knowing *by construction*, and show necessity
302 falls monotonically. We teach a target fact into the weights (LoRA SFT) and sweep two indepen-
303 dent knowledge gradients—the LoRA scale α (one adapter, evaluated at $\alpha \in [0, 1]$) and training
304 checkpoints—so their agreement rules out a gradient-method artifact. We run this in two domains
305 with *independent objectives*, the second of which uses no simulator at all.

306 **Domain 1 — control-regret (a hidden hazard).** Standard COLREG rules have little dynamic
307 range for this test—every current frontier model already knows them (Section 4)—so we use a
308 *corpus-only charted hazard*: a danger scored by the objective barrier but not shown in the prompt,
309 knowable only from the corpus. Teaching it into a Qwen2.5-3B model collapses necessity from a
310 full-barrier swing ($\mathcal{R}$ -necessity ≈ 667 , naïve) to ≈ 0.2 (taught), and the α and checkpoint sweeps
311 *agree* on the transition. The curve is a *step*, not graded—the correct signature for a *single discrete*
312 *fact*, which is learned as a threshold (the model either lacks the fact and grounds, or has it and
313 clears)—so the hazard arm establishes the large-effect known-groups *endpoints*, and the graded
314 curve is Domain 2’s job.

Domain / objective	necessity across the knowledge gradient				
	naive	... step ...			taught
Hazard / $\mathcal{R}$ (Qwen-3B)	667				0.2
	$\alpha=0$	0.25	0.5	0.75	$\alpha=1$
Fictional-fact QA / accuracy (Qwen-7B)	1.00	0.93	0.29	0.03	0.03

Table 6: Necessity dose-response by construction. Teaching a fact into the weights drives the instrument’s necessity for that fact down. The hazard (control-regret objective) gives a large-effect *step*—the known-groups endpoints for one discrete fact, with α /checkpoint sweeps agreeing—while the simulator-free fictional-fact QA (answer-accuracy objective) gives the *graded* monotone curve over many independent facts. Two objectives, one measure. Harness: experiments/unlearning (dose_response.py), src/engine/factqa.

Domain 2 — simulator-free fictional-fact QA. We invent facts about fictional entities (research outposts and their attributes) that no model can have memorized, and score answers with a programmatic checker—*no simulator, no reference policy*. Because the facts are fictional, a competent model is necessarily corpus-bound at baseline, and because there are many *independent* facts, partial teaching learns a fraction of them, so the aggregate necessity is *graded*. Teaching the facts into a Qwen2.5-7B-Instruct model drives mean necessity smoothly and monotonically down the LoRA- α gradient: $1.00 \rightarrow 0.93 \rightarrow 0.29 \rightarrow 0.03$ (Table 6), with the verdict flipping CORPUS-BOUND $\rightarrow$ LEAKING as the facts are internalized. A training-checkpoint sweep reproduces the same curve ($1.00 \rightarrow 0.25 \rightarrow 0.03$)—the two gradients are built differently (scaling one converged adapter vs. genuine partial training), so their agreement rules out a gradient-method artifact. This is the clean dose-response, in a domain we did not build a simulator for—answering the objection that the measure is an artifact of one hand-built environment. (Necessity here is measured closed-book: the without-corpus condition permits parametric answering, so taught knowledge surfaces rather than being suppressed by a strict “answer only from the provided facts” instruction.)

5.2 Validation by unlearning: a *says* $\neq$ *does* dissociation (supporting)

The complementary direction removes a rule the model *does* know and asks whether necessity rises. This arm is secondary—it has dynamic range only on a rule with a real corpus-vs-prior gap, which the standard rules lack—but it yields an independently interesting result. We remove the alter-to-starboard knowledge from an open-weight model with a real unlearning method—SimNPO [Fan et al., 2024] as primary (reference-free, length-normalized), with NPO [Zhang et al., 2024], RMU [Li et al., 2024], and gradient ascent [Jang et al., 2022] as baselines—and score the base vs. unlearned model on the reference-policy instrument. A removal audit [Lynch et al., 2024] reports whether the knowledge is *gone* vs. merely *suppressed*; for a stable novice that resists benign re-learning we layer in a robust utility-preserving recipe [Singh et al., 2025]. A completed GPU run (gentle, guardrailed SimNPO on Qwen2.5-3B; config in Table 7) delivers not just the audit half but a first instrument-scoring result, whose lesson is sharper than the predicted 2×2 : **the standard free-text unlearning metrics overstate removal because they measure what the model *says*; the reference-policy instrument measures what the model *does*—its steering decision—and shows the decision is untouched.**

Primary result: a *says* $\neq$ *does* dissociation. Every metric that reads the model’s *words* registers forgetting: on the GPU run the forget-probe “starboard” rate falls $0.43 \rightarrow 0.27$, the forget-set NLL rises $7.4 \rightarrow 32.4$ (retain-set NLL, teacher-forced, even *improves* $4.3 \rightarrow 1.07$), and—most tellingly—the Rule-14 *citation* disappears, the model reattributing its maneuver to Rules 15/16/17. (A CPU run reproduces the likelihood collapse method-agnostically: forget NLL $4.6 \rightarrow 92$, direction-cue $5/6 \rightarrow 0/6$.) Yet scored on the head-on instrument (corpus present vs. ablated) the 2×2 does not move a cell: both base and unlearned read LEAKING, ablation-delta 0.000, and the unlearned completions *still turn +30° to starboard*—the steering *decision* is unchanged; only the citation and verbalization moved (model damage flat at 0.10, retain-coherence 0.91). A words-level metric reports a fact removed while the policy that governs behavior is entirely intact.

Metric	1.5B (CPU, SimNPO)		3B (GPU, gentle SimNPO)	
	base	unlearned	base	unlearned
Forget-target NLL ($\uparrow$)	4.6	92.0	7.4	32.4
Retain-set NLL, teacher-forced ($\downarrow$)	3.2	0.18	4.3	1.07
Forget-probe “starboard” rate ($\downarrow$)	5/6	0/6	0.43	0.27
Retain-coherence, free-gen ($\uparrow$)	—	—	1.00	0.91
Model damage (wrong+degen., $\downarrow$)	—	—	0.10	0.10
<i>Steering decision (instrument)</i>	—	—	<i>stbd</i>	<i>stbd</i>

Table 7: Gentle, guardrailed SimNPO unlearning of the alter-to-starboard rule, on a 1.5B model (CPU) and Qwen2.5-3B (GPU, bf16; 5×10^{-5} , retain_weight 3.0, Rule-14 kept in the retain set). Every *words-level* metric registers forgetting—the forget-target likelihood collapses (NLL $\uparrow$), the “starboard” probe rate drops, and the Rule-14 citation disappears (model cites 15/16/17)—while retain utility is preserved (retain NLL improves; free-generation coherence 0.91) and there is no inversion (model damage flat at 0.10). Yet the *decision* the reference-policy instrument scores is untouched: the unlearned model still turns $+30^\circ$ to starboard, and the 2×2 stays verdict LEAKING, ablation-delta 0.000—a *says* $\neq$ *does* dissociation. Benign relearning (20 steps) pulls forget NLL $32.4 \rightarrow 9.2$, confirming the fact was *suppressed*, not removed; the decision holds throughout. Har-ness: experiments/unlearning.

Suppressed, not removed (benign relearning). A gone-vs.-suppressed test [Hu et al., 2024, Deeb and Roger, 2024] confirms the reading from the other side. Twenty benign fine-tuning steps pull the forget-set NLL $32.4 \rightarrow 9.2$, back near its base value—the textbook *suppressed-not-removed* signature: the fact was never gone, only pushed down. Across the whole pipeline—base $\rightarrow$ unlearned $\rightarrow$ relearned—the one quantity that never moves is the decision the instrument measures: starboard, verdict LEAKING, at every stage. The likelihood rises and falls; the policy does not.

Contrast: aggressive unlearning *inverts* the rule. The gentleness is load-bearing. An earlier, aggressive recipe (1×10^{-4} , retain_weight 1.0, no guardrail) drove model damage $0.10 \rightarrow 0.33$ and turned the ship to *port*—the wrong way—on 6/8 prompts, moving the 2×2 to 6/8 port and verdict INCONCLUSIVE. Because the head-on turn is essentially binary, the default objective (push down “starboard”) simply relocated the mass onto “port,” *inverting* the safety rule rather than removing it—a caution that naive weight-level unlearning of a safety rule can yield *confident non-compliance*. The two recipes bracket the finding: gentle unlearning suppresses the *words* but not the *policy* (the instrument stays flat and so exposes the illusion), while aggressive unlearning moves the instrument—in the wrong direction. In both, the probe metrics track words and the instrument tracks the decision.

Why the 2×2 is flat. Rule 14 is already LEAKING at baseline—every model in Table 4 knows head-on $\rightarrow$ starboard (Section 4)—so ablating it changes nothing (ablation-delta 0), leaving no dynamic range for the corpus-bound cell to travel. The LEAKING verdicts are therefore *correct*; this is exactly why the primary weight-level validation is the construction dose-response (Section 5.1), where a corpus-only fact *does* have range, and not this arm. A broader suite of corpus-only probes across effect sizes (a medium-effect routing convention, a conflicting fact about another vessel’s intention) is future work (Section 7).

6 Proxy learners as a pre-trial screen (application)

With the measure validated, its intended use is a pre-trial screen. We exercise the instrument with *two complementary* controlled-competence proxy classes: (a) a parametric competence-vector learner, and (b) a knowledge-suppressed / unlearned LLM learner (the arm of Section 5.2). Because both are scored on the *same* $\mathcal{R}$ instrument, a method that fails to move the instrument in the expected direction is a *no-go* before any human is recruited—exactly what the *says* $\neq$ *does* dissociation flags for naive unlearning. This differs from prior proxy-learner work [Apartsin et al., 2026, Liu et al., 2026b, Song et al., 2026, Fan et al., 2026, Lee et al., 2026] in scoring on an objective control-task outcome rather than dialogue behavior, profile alignment, or LLM-judge helpfulness.

7 Limitations and scope

Mechanism, not external validity. Every result here is simulation-based mechanism evidence. We make no learning-gains claim and pre-register the human cohort study as future work. **Proxy validity.** Simulated learners can be unfaithful—prompt-suppressed and unlearned models may be too capable, may learn unrealistically fast, and need not reproduce authentic human misconceptions; recent work cautions that student simulation is valid only under specific conditions [Yuan et al., 2026] and documents systematic fidelity gaps between LLM “students” and real learners [Wu et al., 2025, Srivatsa et al., 2025]. We therefore treat the two proxy classes as a mutual cross-check, not a substitute for human data—which is exactly why the human cohort study is a pre-registered requirement rather than an optional extension. **Instrument sensitivity.** The protocol embeds weighting choices (ship domain, objective); we show the ranking survives a $\pm 40\%$ reweighting ($\tau = 1.00$, §3), but robustness beyond that range, and to the elliptical-domain *form* itself, is untested. **Small evidence base — illustrative, not a benchmark.** The numbers here demonstrate that the *method* behaves as designed; they are not a validity claim at scale. The discrimination result (Table 4) covers eight models across *three* provider families (Anthropic, Meta, Amazon)—two open reasoning models were run but excluded as unscorable by the single-shot instrument (§4)—and reports the head-on rule; the released harness now exercises *three* rules across *two* metric axes—turn direction (Rule 14 head-on, Rule 15 crossing) and, on a restricted-visibility subset, speed (Rule 6/19 safe speed, scored through the decision’s speed rather than its heading)—and the unlearning arm turns on a single rule and model family. A persuasive claim still needs more models per family and many more rules/encounters—which is why we release the harness (`experiment.sh`, and a Bedrock provider $\times$ size sweep) built to run exactly that, and report these as worked examples rather than a leaderboard. **Single-rule decomposability may not generalize.** KC $\rightarrow$ single-metric identifiability and clean per-rule ablation are properties we *design into* a governed corpus and *verify* per instrument (Table 2); they are not guaranteed for an arbitrary corpus, whose rules may be entangled, redundant, or jointly govern one outcome. Where a single rule cannot be cleanly isolated, the localization degrades to a coarser attribution and the leakage test to a group-level one; how far clean decomposition extends beyond corpora we constructed is open. **The unlearning arm is a single model at one scale.** The *says* $\neq$ *does* result (Section 5.2) is informative—a gentle recipe suppresses the *words* while the scored *decision* is untouched, an aggressive one *inverts* the rule—but it is one 3B model, and seed/method variance is outstanding. It is a *supporting* result: a clean necessity transition is structurally out of reach for any pretrained COLREG rule (all leak), which is exactly why the primary weight-level validation is the *construction* dose-response (Section 5.1), where we build the knowledge into the weights and observe necessity fall—already run in two domains, though on single models per domain; more seeds and sizes (and a 7B hazard replication in bfloat16, not 4-bit, since quantization noise would confound the effect) remain breadth. **Sufficiency is scoped to a query set.** Every sufficiency verdict is relative to the probed queries; we mitigate rather than escape this by always reporting the query count and by treating the false-sufficiency signal as the measurable warning of fragility to shift, but a corpus adequate for one query distribution may be insufficient for another.

Future work. The pre-registered human cohort study is the external-validity test this in-silico screen is built to de-risk. Method-side, we plan to scale the cross-model discrimination (more providers and rule sets; the harness already runs class $\times$ size sweeps) and to broaden the weight-level battery from one discrete hazard to a *suite* of corpus-only probes across effect sizes—a medium-effect routing convention and a conflicting fact about another vessel’s intention, building on the real charted-danger leg already shown (Section 4)—so necessity is validated as a distribution across probe kinds, not a single test.

8 Conclusion

We have described an in-silico instrument that measures whether a learner *needs* a corpus, and whether a corpus is *sufficient*, before human-subject effort. The central contribution is a *necessity* measure made non-confounded by *construction*: teaching a fact into a model’s weights drives the instrument’s necessity for that fact down as a dose-response, which we demonstrate in two domains with independent objectives—a control-regret simulator (large-effect known-groups endpoints) and a *simulator-free* fictional-fact QA task (the graded monotone curve, $1.00 \rightarrow 0.03$). On that cal-

440 ibrated measure we build a corpus-value audit—ranking items by necessity, localizing a missing
 441 item, and splitting the unrelayed-upon into *redundant* versus *unusable*—and a corpus-sufficiency ver-
 442 dict that surfaces *false sufficiency*. Distinct from faithfulness and context-attribution, we measure
 443 need against a weight-level baseline they lack. Supporting breadth—a reference-policy transfer
 444 instrument with KC→single-metric identifiability, cross-model discrimination, a second control do-
 445 main, and a *says* ≠ *does* unlearning dissociation—rounds out the picture. The claim is testable and
 446 narrow; the domains are worked examples, the evidence base is deliberately small, and the measure-
 447 ment method is the point.

448 **Reproducibility.** The simulator, the answer-checker QA domain, the diagnosis and sufficiency
 449 harness, the construction dose-response, and the open-weight unlearning scaffold will be released,
 450 along with a deterministic no-key dry-run that recovers the mock ground truth and one-tap GPU
 451 notebooks for the dose-response. (Code is withheld here to preserve double-blind review.)

452 References

- 453 Anonymous. Quantitative COLREG compliance evaluation for autonomous ships. *Ocean Engineering*, 2024a.
- 454 Anonymous. Control knowledge tracing: A control-theoretic view of knowledge dynamics. In *Conf. on AI in*
 455 *Education (CAEAI)*, 2024b.
- 456 Alexander Apartsin, Omri Sason, and Yehudit Aperia. Toward a benchmark for controllable simulation of
 457 imperfect students with large language models, 2026.
- 458 Susan Bull and Judy Kay. Student models that invite the learner in: The SMILI open learner modelling frame-
 459 work. *International Journal of Artificial Intelligence in Education*, 17(2):89–120, 2007.
- 460 Benjamin Cohen-Wang, Andrew Ilyas, Jonathan Wu, and Aleksander Madry. Contextcite: Attributing model
 461 generation to context. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- 462 Albert T. Corbett and John R. Anderson. Knowledge tracing: Modeling the acquisition of procedural knowl-
 463 edge. *User Modeling and User-Adapted Interaction*, 4(4):253–278, 1994.
- 464 Agnyad Deeb and Fabien Roger. Do unlearning methods remove information from language model weights?,
 465 2024.
- 466 Shahul Es, Jithin James, Luis Espinosa-Anke, and Steven Schockaert. RAGAS: Automated evaluation of
 467 retrieval augmented generation, 2023.
- 468 Chongyu Fan, Jiancheng Liu, Licong Lin, Jinghan Jia, Ruiqi Zhang, Song Mei, and Sijia Liu. Simplicity
 469 prevails: Rethinking negative preference optimization for llm unlearning, 2024.
- 470 Shuyi Fan, Boyuan Deng, Mengyu Xu, Jiale Liu, Hongyang Zhang, Qiaoxin Yang, and Chongyang Gao. Re-
 471 thinking llm-judged helpfulness as a pedagogy signal: A pre-registered audit across tutor models, 2026.
- 472 Paolo Fiorini and Zvi Shiller. Motion planning in dynamic environments using velocity obstacles. *International*
 473 *Journal of Robotics Research*, 17(7):760–772, 1998.
- 474 Weibo Gao, Qi Liu, Linan Yue, Fangzhou Yao, Rui Lv, Zheng Zhang, Hao Wang, and Zhenya Huang.
 475 Agent4edu: Generating learner response data by generative agents for intelligent education systems, 2025.
- 476 Shengyuan Hu, Yiwei Fu, Zhiwei Steven Wu, and Virginia Smith. Unlearning or obfuscating? jogging the
 477 memory of unlearned llms via benign relearning, 2024.
- 478 International Maritime Organization. Convention on the international regulations for preventing collisions at
 479 sea (COLREGs), 1972.
- 480 Siddharth Jain and Venkat Narayan Vedam. Cue-r: Beyond the final answer in retrieval-augmented generation,
 481 2026.
- 482 Joel Jang, Dongkeun Yoon, Sohee Yang, Sungmin Cha, Moontae Lee, Lajanugen Logeswaran, and Minjoon
 483 Seo. Knowledge unlearning for mitigating privacy risks in language models, 2022.
- 484 Tor A. Johansen, Tristan Perez, and Andrea Cristofaro. Ship collision avoidance and COLREGS compliance
 485 using simulation-based control behavior selection with predictive hazard assessment. *IEEE Transactions on*
 486 *Intelligent Transportation Systems*, 17(12):3407–3422, 2016.

487 Kenneth R. Koedinger, Albert T. Corbett, and Charles Perfetti. The Knowledge-Learning-Instruction frame-
488 work: Bridging the science-practice chasm to enhance robust student learning. *Cognitive Science*, 36(5):
489 757–798, 2012.

490 Vishakha Lall and Yisi Liu. Ai meets maritime training: Precision analytics for enhanced safety and perfor-
491 mance, 2025.

492 Unggi Lee, Sookbun Lee, Yeil Jeong, Eunjoo Lee, Minchul Shin, and Hoilym Kwon. Educlaw-bench: A
493 long-horizon benchmark for pedagogical llm agents with simulated learners, 2026.

494 Nathaniel Li, Alexander Pan, Anjali Gopal, Summer Yue, Daniel Berrios, Alice Gatti, Justin D. Li, Ann-Kathrin
495 Dombrowski, Shashwat Goel, Long Phan, Gabriel Mukobi, Nathan Helm-Burger, Rassin Lababidi, Lennart
496 Justen, Andrew B. Liu, Michael Chen, Isabelle Barrass, Oliver Zhang, Xiaoyuan Zhu, Rishub Tamirisa,
497 Bhruu Bharathi, Adam Khoja, Zhenqi Zhao, Ariel Herbert-Voss, Cort B. Breuer, Samuel Marks, Oam Patel,
498 Andy Zou, Mantas Mazeika, Zifan Wang, Palash Oswal, Weiran Lin, Adam A. Hunt, Justin Tienken-Harder,
499 Kevin Y. Shih, Kemper Talley, John Guan, Russell Kaplan, Ian Steneker, David Campbell, Brad Jokubaitis,
500 Alex Levinson, Jean Wang, William Qian, Kallol Krishna Karmakar, Steven Basart, Stephen Fitz, Mindy
501 Levine, Ponnurangam Kumaraguru, Uday Tupakula, Vijay Varadharajan, Ruoyu Wang, Yan Shoshitaishvili,
502 Jimmy Ba, Kevin M. Esvelt, Alexandr Wang, and Dan Hendrycks. The wmdp benchmark: Measuring and
503 reducing malicious use with unlearning, 2024.

504 Jiayi Liu, Jiaxing Zhang, Bowen Jin, and Jennifer Neville. Generating leakage-free benchmarks for robust rag
505 evaluation, 2026a.

506 Ruochen Liu, Zhiyuan Wen, Hao Yan, Jun Yin, Senzhang Wang, and Jiannong Cao. Ps²: Parameterized control
507 for fine-grained student proficiency simulation, 2026b.

508 Xinyi Lu and Xu Wang. Generative students: Using llm-simulated student profiles to support question item
509 evaluation, 2024.

510 Aengus Lynch, Phillip Guo, Aidan Ewart, Stephen Casper, and Dylan Hadfield-Menell. Eight methods to
511 evaluate robust unlearning in llms, 2024.

512 Barak Or. Quantifying prior dominance in rag systems, 2026.

513 Radek Pelánek. Applications of the Elo rating system in adaptive educational systems. *Computers & Education*,
514 98:169–179, 2016.

515 Naman Deep Singh, Maximilian Müller, Francesco Croce, and Matthias Hein. Unlearning that lasts: Utility-
516 preserving, robust, and almost irreversible forgetting in llms, 2025.

517 Jiajia Song, Zhihan Guo, and Jionghao Lin. Simulating novice students using machine unlearning and relearn-
518 ing in large language models, 2026.

519 KV Aditya Srivatsa, Kaushal Kumar Maurya, and Ekaterina Kochmar. Can llms reliably simulate real students’
520 abilities in mathematics and reading comprehension?, 2025.

521 Adrienne Tuynman and Ronald Ortner. Transfer in reinforcement learning via regret bounds for learning agents,
522 2022.

523 K. W. Van Dongen et al. Construct validity of the LapSim: Can the LapSim virtual reality simulator distinguish
524 between novices and experts? *Surgical Endoscopy*, 21(8):1413–1417, 2007.

525 Lev S. Vygotsky. *Mind in Society: The Development of Higher Psychological Processes*. Harvard University
526 Press, 1978.

527 Tao Wu, Jingyuan Chen, Wang Lin, Mengze Li, Yumeng Zhu, Ang Li, Kun Kuang, and Fei Wu. Embracing
528 imperfection: Simulating students with diverse cognitive levels using llm-based agents, 2025.

529 Rongwu Xu, Zehan Qi, Zhijiang Guo, Cunxiang Wang, Hongru Wang, Yue Zhang, and Wei Xu. Knowledge
530 conflicts for LLMs: A survey. In *Proceedings of EMNLP*, 2024.

531 Zhihao Yuan, Yunze Xiao, Ming Li, Weihao Xuan, Richard Tong, Mona Diab, and Tom Mitchell. Towards
532 valid student simulation with large language models, 2026.

533 Qinggang Zhang, Zhishang Xiang, Yilin Xiao, Le Wang, Junhui Li, Xinrun Wang, and Jinsong Su. Faithfulrag:
534 Fact-level conflict modeling for context-faithful retrieval-augmented generation, 2025.

535 Ruiqi Zhang, Licong Lin, Yu Bai, and Song Mei. Negative preference optimization: From catastrophic collapse
536 to effective unlearning, 2024.

537 Zinn et al. Assessing flight competency from deviation to an optimal trajectory. *Cognition, Technology & Work*,
538 2023.