
An In-Silico Instrument for Pre-Validating Corpus-Bounded Instruction: Reference-Policy Transfer Measurement with Bidirectional Corpus-Gap and Leakage Diagnosis

Anonymous Author(s)

Affiliation

Address

email

Abstract

1 When a model answers correctly with a corpus in context, did it *need* the corpus, or
2 did it already know the answer? We present an *in-silico measurement instrument*
3 that answers this—and the dual question of whether a corpus is *sufficient*—as a
4 behavioral task outcome, before any human-subject study. The central quantity is
5 *corpus necessity*: ablate a corpus item and measure the change in a task outcome
6 scored against a reference. Our headline contribution is that we make necessity
7 *non-confounded* by calibrating it against a *known parametric baseline*: we *con-*
8 *struct* the ground truth by teaching a fact into a model’s weights and showing
9 necessity falls as a *dose-response*. We demonstrate this in **two domains with in-**
10 **dependent objectives**, one of which uses *no simulator at all*: (i) a control-regret
11 simulator (maritime collision avoidance), where teaching a hidden charted haz-
12 ard into the weights collapses necessity from a full-barrier swing to ≈ 0 , with
13 the LoRA-scale and training-checkpoint gradients agreeing; and (ii) a simulator-
14 free *fictional-fact question answering* task scored by an answer checker, where
15 teaching invented facts into a 7B model drives necessity *smoothly and monoton-*
16 *ically from 1.00 to 0.03*. This calibrated necessity measure is the basis of two
17 products: a *corpus diagnosis* that ranks each item by necessity, localizes which
18 item is missing from task failures, and—crucially—splits an unrelieved-upon item
19 into *redundant* (the model already knows it) versus *unusable* (the model fails even
20 with it present); and a *corpus-sufficiency* verdict that surfaces *false sufficiency*—a
21 corpus that only appears sufficient because the model is coasting on priors and is
22 therefore fragile to distribution shift. Unlike faithfulness (RAGAS) and context-
23 attribution (ContextCite), which measure whether context *supported* or *influenced*
24 an output, we measure whether the model *needed* it, against a weight-level base-
25 line they lack. The method is *closed-model compatible* (API access only) and
26 operates *per item*. As breadth we report: cross-model discrimination across cur-
27 rent LLMs; a second control domain (roadside tire change); KC→single-metric
28 identifiability and estimator-recovery calibration; and a machine-unlearning arm
29 that yields a *says $\neq$ does* dissociation (gentle unlearning changes what a model
30 *says* but not what the instrument sees it *do*) as supporting weight-level evidence.
31 All results are **simulation-based mechanism evidence, not human-subject ex-**
32 **ternal validity**; we scope the contribution accordingly and pre-register the human
33 study as future work.

Plain-language summary. When an AI answers correctly with a rulebook in front of it, you cannot easily tell whether it *needed* the rulebook or already knew the answer—and you cannot tell whether the rulebook has holes. Normally you would find out with an expensive human study. We build a cheap “test bench” that answers both questions first. We remove a single item from the corpus and watch what breaks: if performance drops, the model genuinely relied on it; if nothing changes, it did not. To prove that “nothing changes” really means the knowledge was already in the model—and not some prompt artifact—we *construct* the answer: we teach a fact into the model’s weights and show reliance falls step by step (a “dose-response”). We do this in two settings, one of which uses no simulator at all: a ship-steering task, and a set of *made-up facts* about fictional places no model could know—taught into a real model, reliance on the corpus drops smoothly from 100% to near zero. The payoff is a corpus audit: which items are truly needed, which are *redundant* (already known—delete them), which are *unusable* (present but the model can’t act on them), and whether the corpus only *looks* sufficient because the model is coasting on what it already knew. Everything here is controlled simulation that checks the machinery—not yet a claim that human learners learn more, which is the study we set up next.

1 Introduction

Generic retrieval-augmented (RAG) assistants optimize for semantic relevance: give a plausible answer to whatever is asked. That objective is wrong for training in safety-critical procedural domains, where a semantically accurate answer can still be instructionally wrong—delivered at the wrong complexity, skipping a prerequisite, or worse, confidently fabricated. A growing body of work therefore builds *corpus-bounded* tutors that abstain outside a curated corpus. But a designer who has built such a system faces a prior question: *does the mechanism work?* Does the tutor actually rely on its corpus, and does the corpus actually cover the domain? Answering this by human-subject study is slow and expensive, and a null result there conflates many causes.

We argue that the *mechanism* of a corpus-bounded method can be falsified cheaply and in silico, and we build the instrument to do it (Figure 1). Our contribution is a *methods/measurement* one, not a new tutor and not a new collision-avoidance technique. Concretely:

The central storyline (Sections 4–6):

- **Necessity, calibrated by construction.** We measure *corpus necessity*—the change in a task outcome when a corpus item is ablated—and make it non-confounded by *constructing* the parametric baseline: teach a fact into the weights and necessity falls as a *dose-response*. We show this in **two domains with independent objectives**, one *simulator-free*: a control-regret simulator (teaching a hidden hazard collapses necessity to ≈ 0 ; LoRA-scale and checkpoint gradients agree) and a simulator-free fictional-fact QA task scored by an answer checker (teaching invented facts drives necessity smoothly $1.00 \rightarrow 0.03$ on a 7B model). This is a known-groups validation of the measure.
- **The corpus diagnosis** ranks each item by necessity, localizes a missing item from task failures, and splits an unrelayed-upon item into *redundant* (already known) versus *unusable* (present but the model fails with it)—distinct fixes (prune vs. fix the model).
- **Corpus sufficiency**, the product face of the audit, surfaces *false sufficiency*: a corpus that only looks sufficient because the model coasts on priors (necessity ≈ 0 everywhere), a fragility ordinary RAG metrics report as all-green.

Additional breadth (supporting the above, not the headline): a *transfer instrument* that scores a learner by its *regret against a reference-policy solver* with KC $\rightarrow$ single-metric identifiability (Section 3); a second control domain and estimator-recovery calibration; cross-model discrimination on current LLMs (Section 4); and a machine-unlearning arm that yields a *says $\neq$ does* dissociation as secondary weight-level evidence (Section 6).

Our contribution is a *methods/measurement* one, not a new tutor. Every *component* we build on is prior art; the *calibrated necessity measure* and its *corpus-value/sufficiency audit* are the open ground (Section 2). We are explicit throughout that our evidence is simulation-based: it tests whether the machinery behaves as designed, not whether humans learn more.

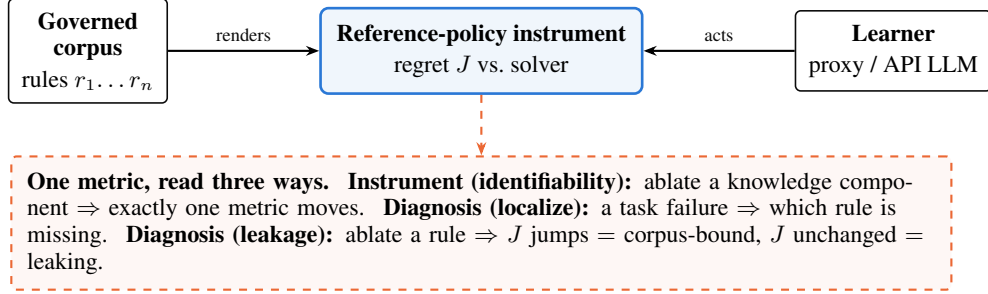


Figure 1: The instrument, used bidirectionally. A governed corpus and a learner both feed one reference-policy simulator that scores the learner’s *regret* J against an automatic solver. The same metric is then read three ways—to verify KC→single-metric identifiability (the *instrument*), to localize a missing rule from task failures, and to detect parametric leakage by rule ablation (the *diagnosis*)—needing only API access to the learner. The diagnosis is the instrument run backwards, not a separate tool.

2 Related work and positioning

Each strand below is established prior art; we reuse it as infrastructure and mark where our delta departs from it.

Learner modeling and instructional theory. Knowledge tracing [Corbett and Anderson, 1994], the Elo rating system for adaptive systems [Pelánek, 2016], the Knowledge-Learning-Instruction framework [Koedinger et al., 2012], open learner models [Bull and Kay, 2007], and the Zone of Proximal Development [Vygotsky, 1978] are all established. We reuse them as infrastructure, not as contributions.

Corpus-bounded tutoring, leakage, and faithfulness. RAG tutors that abstain outside a corpus are standard engineering. A large line asks whether a model uses provided context or parametric memory: faithfulness metrics score whether an answer is grounded in context [Es et al., 2023]; context attribution ablates context sources and measures the change in output probability to attribute a generation to them [Cohen-Wang et al., 2024, Or, 2026]; knowledge-conflict work studies which side wins when context contradicts memory [Xu et al., 2024, Zhang et al., 2025]; leakage-free benchmarking filters items answerable with no context [Liu et al., 2026a]; and intermediate-step scoring looks beyond the final answer [Jain and Vedam, 2026]. All of these measure whether context *influenced* the output, judged on *answer text*, per answer or system-wide. We differ on three axes: (a) we score a *behavioral task outcome* against a reference-optimal policy, not answer text; (b) we attribute *per corpus rule* and localize which rule is missing or wrong, not per token or system-wide; and (c) we measure not merely *influence* but *necessity*—calibrated by manipulating the parametric baseline directly (weight-level construction and unlearning, Section 6), so a fact the model already knew is not mistaken for one it relied on. No context-attribution method has that weight-level ground truth. That join is the *Corpus Diagnosis*.

Objective competency instruments. Deviation-from-optimal scoring appears in flight [Zinn et al., 2023] and construct-validity-by-novice/expert-separation in surgery [Van Dongen et al., 2007]; control-theoretic notation has been applied to knowledge dynamics [Anonymous, 2024b]; regret is used in RL transfer [Tuynman and Ortner, 2022]; maritime training analytics regress simulator measures onto instructor ratings [Lall and Liu, 2025]. None uses a *reference solver’s regret* as the *learner* transfer outcome with KC→single-metric identifiability. That is the *Transfer Instrument*. We borrow mature maritime-autonomy tooling—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]—purely as reference solvers, never as a new collision-avoidance method [Anonymous, 2024a, International Maritime Organization, 1972].

Proxy learners. Simulated students have long authored and evaluated tutors; LLM student agents now pilot assessment items [Lu and Wang, 2024] and simulate learners for tutoring-system development [Gao et al., 2025], and controlled variants suppress knowledge by prompting [Apartsin et al.,

Policy	mean J	median	min	max	cleared
naive (hold course)	1765.44	1988.08	1.08	1995.18	11%
VO reference	0.70	0.58	0.33	1.27	100%
SB-MPC reference	0.01	0.01	0.00	0.03	100%

Table 1: Construct validity and grading across nine varied encounters. The objective J separates the three competence levels cleanly and takes a continuous range of values (20 distinct across all cells, $[0.00, 1995.18]$)—it is a graded transfer metric, not a near-binary check. `npm run colreg:construct`.

2026], interpolate parametric competence [Liu et al., 2026b], or unlearn a model into a novice [Song et al., 2026]. Pre-deployment simulated-learner screens have very recently appeared [Fan et al., 2026, Lee et al., 2026]. We therefore *demote* the proxy-learner idea to an application: our narrow residual claim is running *two complementary proxy classes* (parametric competence *and* unlearned LLM) scored on the *same regret-to-reference instrument* the human trial would use—which none of these do.

3 The Transfer Instrument

Task and metric. The worked domain is COLREG collision avoidance: a power-driven vessel must choose course and speed to resolve an encounter. We implement a kinematic simulator with an elliptical ship domain and a Collision Risk Index, and two reference solvers—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]. For a learner policy π on scenario set S we define the transfer outcome as regret against a reference policy π^* ,

$$\mathcal{R}(\pi) = \frac{1}{|S|} \sum_{s \in S} [J(\pi, s) - J(\pi^*, s)], \quad (1)$$

where J is the per-encounter objective (a weighted sum of a safety-margin barrier, COLREG compliance penalty, and route deviation; lower is better) and π^* is the reference maneuver. Unlike item correctness, $\mathcal{R}$ is continuous, objective, and instructor-free.

On “reference,” not “optimal.” We deliberately avoid claiming a global optimum. VO and SB-MPC are strong, widely-used near-optimal solvers, but neither is proven globally optimal for the full nonconvex encounter; calling their output “optimal” would overclaim. The instrument does not need a true optimum—only a reference that construct validity shows separates naive from expert behavior (below). Regret is thus measured against a fixed, reproducible reference policy, and we report which solver is used.

Construct validity and metric grading. The instrument must separate good from bad policies before any learning claim, and—if it is to be a transfer measure rather than a pass/fail check—the metric must *grade*, not collapse to two values. Across a varied set of nine encounters (head-on, starboard/port crossing, overtaking, and restricted-visibility geometries), three policies of increasing competence separate cleanly and continuously on J (Table 1): a naive hold-course policy (mean $J \approx 1765$, clearing only 11% of domains), a velocity-obstacle reference ($J \approx 0.70$, all clear), and SB-MPC ($J \approx 0.01$). The objective takes 20 distinct values in $[0.00, 1995.18]$ over the policy $\times$ scenario cells—a graded metric, with the safe regime (VO/SB-MPC) itself spanning a continuous 0.00–1.27 range. On the discrete procedural domain the same logic holds: an expert policy scores $J = 0$ against a reckless $J = 200$ with the safety violation caught. This is the novice/expert-separation logic of Van Dongen et al. [2007], applied to a decision/control task rather than manual skill.

KC→single-metric identifiability. We design each knowledge component to govern exactly one metric, so ablating a KC degrades that metric and no other. On the procedural domain this is *exact*: each ablated competence degrades only its governed metric, and a monotone competence→performance gradient ($J : 204 \rightarrow 0$) follows as competence is acquired in curriculum order; on the COLREG instrument the same gradient spans nearly five orders of magnitude (Figure 2). Because the property holds on both a continuous-control and a discrete-procedural instrument, it is a general measurement-design property, not a COLREG artifact.

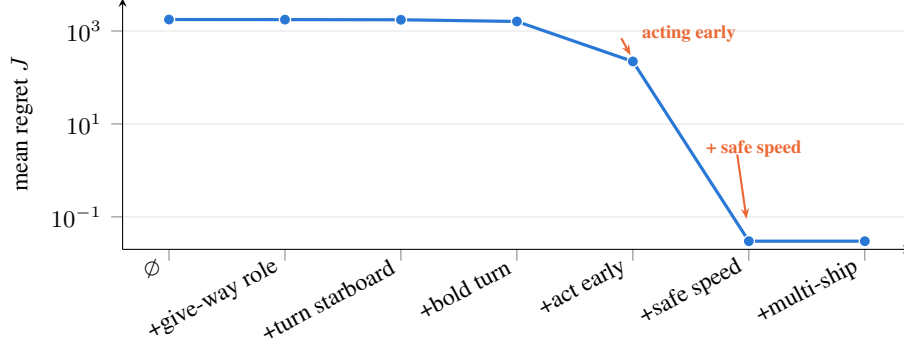


Figure 2: Competence→performance gradient on the nine-encounter instrument. Mean regret J (log scale) as the six knowledge components are acquired in curriculum order (left to right); each point is a competence stage, from the empty learner ($\emptyset$) to full competence. J spans nearly five orders of magnitude and collapses as the two domain-clearing competencies—acting *early* and at a *safe speed*—come online, the graded behavior Table 1 reports numerically. `npm run colreg:construct`.

ablated KC ↓ / metric →	safety	core	sequencing	finishing
safety	−1.00	0.00	0.00	0.00
core steps	0.00	−1.00	0.00	0.00
sequencing	0.00	0.00	−0.22	0.00
finishing	0.00	0.00	0.00	−1.00

Table 2: KC→single-metric identifiability (procedural domain). Change in each metric after ablating each knowledge component. The diagonal (bold) is the intended governed metric; every off-diagonal cell is 0.00 (max $|\Delta| = 0.0000$)—ablation does not bleed across metrics. `npm run proc:identifiability`.

146 **Is identifiability tautological?** A fair objection is that the mapping is a design choice, so “ablate
 147 the KC, that metric moves” is true by construction. Two things make it a testable property rather than
 148 a tautology. First, the *cross-effect* claim can fail: designing the metrics is not enough to guarantee
 149 that ablating one KC leaves the *others* unchanged—if the objective’s terms are entangled (e.g. a
 150 safety barrier that also moves the deviation term), ablation bleeds across metrics, and we measure
 151 and report that it does not. Identifiability is the empirically-checked *absence* of that bleed, not the
 152 presence of the intended effect. Second, the mapping is what makes the Corpus Diagnosis (Section 4)
 153 actionable: without it, a task failure cannot be attributed to a specific corpus rule. We therefore treat
 154 identifiability as a design *requirement to be verified per instrument*—a property an instrument can
 155 lack—and verifying it is part of building one, exactly as construct validity is. On the procedural
 156 domain the verification is clean (Table 2): ablating each knowledge component degrades only its
 157 governed metric, with maximum off-diagonal change 0.0000—no cross-bleed.

158 **Robustness to weighting choices.** The objective embeds weighting choices—the elliptical ship-
 159 domain radii and the margin/compliance/deviation weights—and a fair worry is that the compe-
 160 tence ranking is an artifact of those choices. We falsify this with a sensitivity analysis (`npm run`
 161 `colreg:sensitivity`) that holds every policy’s *behavior* fixed and re-scores under 232 perturba-
 162 tions: a one-at-a-time ± 25 –50% sweep of each parameter plus 200 joint samples with every param-
 163 eter independently scaled in $[0.6, 1.4]$. Across the whole ensemble, both orderings are preserved
 164 exactly—the naive policy stays worst and the six-component competence gradient stays monotone
 165 in J (Kendall $\tau = 1.00$ on every perturbation, invariant rate 100%). The CRI parameters are ex-
 166 cluded because CRI is a reported diagnostic, not a term in the scored objective, so the ranking is
 167 invariant to them by construction. The protocol’s conclusions are thus a property of the competence
 168 structure, not of the weight calibration.

Estimator	Recovery of known ground truth	Calibration (ECE)
Elo	static ability, mean abs. error 0.046	0.023
BKT	latent state $P(\hat{L}) = 0.997$ (learned) vs. 0.175 (not)	0.004

Table 3: Estimator-recovery and calibration on synthetic data with a known ground truth. The measurement, not just the metric, is validated.

Estimator recovery and calibration. Feeding the instrument’s outcomes into a generic learner-agent estimator, we recover known ground truth on synthetic data (Table 3). This turns “we have a metric” into “the measurement is valid.”

4 The Corpus Diagnosis: the same instrument, read backwards

The Corpus Diagnosis is not a second tool. It is the Transfer Instrument of Section 3 run in reverse: the *same* objective metric answers two opposite questions.

(i) Corpus-gap localization. When the corpus is missing or wrong on a rule, the learner’s failures on the governed metric have a signature that attributes the failure to a *specific* rule/node. We compute, per rule, an ablation-delta—the rise in the governed penalty when that rule is removed—and a localization that names the governed component. A large delta plus a matching localization means the learner *relied on* that corpus rule.

(ii) Parametric leakage detection (necessity). The mirror image: ablate a rule from the corpus; if the metric it governs does *not* degrade, the model is answering from pretrained priors, not the corpus. We combine the ablation-delta with a *counterfactual* test (replace “alter to starboard” with “alter to port”; does the learner follow the altered rule?) and a *closed-book* contamination baseline (no corpus supplied). The verdict—CORPUS-BOUND, LEAKING, or INCONCLUSIVE—is read from the same metric, by a majority vote over the three signals so that a clear ablation-and-contamination pattern is not vetoed by a single dissenting sub-test. Section 6.1 calibrates this necessity against a known parametric baseline by construction.

(iii) Why an item is not needed: *redundant* vs. *unusable*. A small ablation-delta says the corpus did not move behavior, but not *why*, and the two reasons demand opposite fixes. We split a LEAKING item by its *with-corpus* performance: *redundant* (the learner is competent *with* the item present—it already knows the rule, so the item is dead weight and should be pruned) versus *unusable* (the learner fails the task *even with* the item present—the content has value but this model cannot act on it, so the fix is the model/prompting/retrieval, not the corpus). The delta alone conflates these; the with-corpus outcome (regret in the control domain, accuracy in QA) separates them. On the real-model sweep this is not hypothetical: on the corpus-only hazard, Claude Haiku and Sonnet read CORPUS-BOUND while Llama-3.3-70B grounds regardless (with-corpus regret $\approx 1207 \approx$ full barrier)—*unusable*, not redundant.

Corpus sufficiency, and *false sufficiency*. Rolling the per-item verdicts to the corpus level yields a sufficiency judgement for a query set: *contributing* (every item relied upon), *partial*, *unusable*, or—the diagnostic ordinary RAG metrics cannot produce—*false sufficiency*: task accuracy is high yet necessity is ≈ 0 everywhere, so the corpus is not carrying the load and success rides on priors, fragile to distribution shift. The claim is explicitly scoped to the probed query set (sufficiency is always “for these queries”); the false-sufficiency signal (necessity ≈ 0) is precisely the measurable warning that a bounded-query sufficiency claim will not survive a shift.

4.1 One instrument, not two

It is fair to ask whether the Diagnosis really uses the *transfer* instrument or merely a convenient side-metric. The bounded compliance penalty we threshold in $[0, 1]$ is deliberately near-binary (following a discrete steering rule is close to binary), which could look decoupled from the graded regret $\mathcal{R}$ of Section 3. It is not: the compliance penalty is a *term inside* the objective J , so the same rule ablation

Learner	Condition	δ (compl.)	$\delta_{\mathcal{R}}$ (J)	counterfact.	closed-book	Verdict
mock (corpus-bound)	—	1.000	1981	follows	abstains	CORPUS-BOUND
mock (leaking)	—	0.000	0	ignores	answers	LEAKING
gemini-flash-latest	bound	1.000	1981	follows	abstains	CORPUS-BOUND
gemini-flash-latest	unconstr.	0.000	0	follows	answers	LEAKING
gemini-2.5-flash	bound	1.000	1981	follows	abstains	CORPUS-BOUND
gemini-2.5-flash	unconstr.	0.000	0	follows	answers	LEAKING
gemini-3.5-flash	bound	1.000	1981	follows	abstains	CORPUS-BOUND
gemini-3.5-flash	unconstr.	0.000	0	follows	answers	LEAKING
gemini-flash-lite-latest	bound	0.667	1318	follows	abstains	CORPUS-BOUND
gemini-flash-lite-latest	unconstr.	0.000	0	ignores	answers	LEAKING
gemini-3.5-flash-lite	bound	0.333	658	follows	abstains	CORPUS-BOUND
gemini-3.5-flash-lite	unconstr.	0.000	0	ignores	answers	LEAKING
gemini-3.1-flash-lite	bound	0.000	0	follows	abstains	INCONCLUSIVE
gemini-3.1-flash-lite	unconstr.	0.000	0	ignores	answers	LEAKING

Table 4: Corpus-Diagnosis discrimination on six real LLMs (head-on instrument, δ threshold 0.15; verdict = majority of three signals). $\delta_{\mathcal{R}}$ is the *same* ablation read on the full regret instrument J (Section 3), not a separate metric. Under the strict prompt it grades with binding fidelity (1981 $\rightarrow$ 658 $\rightarrow$ 0); removing the binding clause collapses it to 0 and flips every model to LEAKING. The lightest model fails to bind even when told to (INCONCLUSIVE under bound). Mock learners (top) bound the scale.

can be read on the full regret instrument directly. It carries the signal even more strongly—a corpus-bound learner that loses the rule it relied on abstains, collides, and its J jumps by ~ 2000 , whereas a leaking learner’s J is invariant to the corpus. On the two reference mocks, the regret-ablation is 1981 (corpus-bound) versus 0 (leaking). So localization and leakage are read off the very metric that measures transfer; the bounded compliance penalty is just a low-variance, thresholdable readout of it. This is what makes the “single instrument, used bidirectionally” claim literal rather than rhetorical, and it is visible per model in the $\delta_{\mathcal{R}}$ column of Table 4.

Offline recovery of known ground truth. Against two reference mock learners whose truth is known, the instrument recovers it exactly: the corpus-bound mock yields ablation-delta 1.000 (regret-ablation 1981), follows the counterfactual, and abstains closed-book ($\Rightarrow$ CORPUS-BOUND); the leaking mock yields ablation-delta 0.000 (regret-ablation 0), ignores the counterfactual, and answers closed-book from priors ($\Rightarrow$ LEAKING).

Real-model discrimination. We run the instrument on six current production LLMs under both prompt conditions—bound (the strict corpus-binding positive control) and unconstrained (the binding clause removed, parametric fallback allowed)—and read the verdict off the same metric (Table 4). The verdict is a majority vote of three orthogonal signals: low ablation- δ , counterfactual ignored, and closed-book contaminated. Three findings stand out. (1) *The diagnosis rides the transfer instrument.* The $\delta_{\mathcal{R}}$ column is the same ablation read on the full regret objective J of Section 3—not a separate metric—and it carries the signal loudly: a corpus-bound learner that loses the rule it relied on collides, so J jumps by ~ 2000 . The Diagnosis and the Instrument are one tool (Section 4.1). (2) *Binding fidelity is graded, and capability tracks it.* Under the strict prompt, $\delta_{\mathcal{R}}$ falls monotonically with model capability—1981 for the three stronger flash models, 1318 and 658 for the lite models, ≈ 0 for the lightest, which fails to rely on the corpus even when told to (diagnosed INCONCLUSIVE: a binding *failure* the instrument surfaces). (3) *Removing the binding clause makes every model leak.* Under unconstrained, $\delta_{\mathcal{R}}$ collapses to ≈ 0 and closed-book flips to contamination for all six, and the vote returns LEAKING across the board. Raw completions are well-formed JSON with coherent rationales (e.g. the lightest model’s closed-book reply is {abstained:true, "not covered by the provided rules"}), so the leakage is genuine prior-following, not a parse artifact. Mock learners (rows 1–2) bound the scale.

Per-rule, not just per-corpus. To show the diagnosis attributes reliance to a *specific* rule rather than to corpus presence in general, we add a second, independent rule—Rule 15 crossing give-way—exercised on its own crossing scenarios (a rule only moves the metric on scenarios that invoke it, so each probe carries a matched subset). Ablating each rule produces a large regret signal on its own

	not retrieved	retrieved
not in corpus	priors only (NONE)	— (unreachable)
in corpus	retriever misses (<i>gap</i>)	RAG success (RETRIEVED→ORACLE)

Table 5: Decomposing a RAG answer’s outcome over in-corpus $\times$ retrieved. The three reachable cells are the NONE/RETRIEVED/ORACLE conditions; $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$ is the content ceiling, $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$ what the pipeline delivers, their difference the retrieval gap. Har-ness: experiments/retrieval-decomp.

encounters: on `gemini-flash-latest` under the bound prompt, ablating Rule 14 gives $\delta_{\mathcal{R}}=1981$ (head-on) and ablating Rule 15 gives 1285 (crossing); on `gemini-flash-lite-latest`, 658 and 662 respectively. The two rules are localized on disjoint scenario subsets, so the instrument reads reliance per rule.

What in the corpus changes the answer: presence vs. retrieval. The leakage test asks a binary question—does the learner rely on the corpus at all. A deployed RAG tutor raises a finer one: of the value curation adds, how much comes from the fact being *present* in the corpus versus from the retriever actually *surfacing* it? We decompose this over two binary factors—in-corpus and retrieved—whose three reachable cells are three scorable conditions (Table 5): NONE (closed-book, priors only), RETRIEVED (the deployed dense retriever’s top- k), and ORACLE (the answer-bearing chunk, i.e. perfect retrieval). Reading accuracy across them attributes the gain: $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$ is the *content ceiling* (value if retrieval were perfect), $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$ is what the deployed pipeline *delivers*, and their difference is the *retrieval gap*—value present in the corpus but never surfaced. Running the three conditions through a small local generator (Qwen2.5-1.5B) on seven equipment-SOP fact-recall queries makes the split concrete: closed-book accuracy is 0/7 (empty priors), ORACLE is 7/7 (every fact is recoverable from its chunk), and the deployed MiniLM pipeline lands between at 3/7—so of a 100% content ceiling the pipeline *delivers* 43% and *forfeits* a 57% retrieval gap; a generator-independent recall@5 of any answer-bearing chunk (4/7) localizes it. Here the binding constraint is retrieval, not corpus coverage or model capability, and a curation failure (fact absent), a retrieval failure (present but unranked), and a priors success are distinct outcomes the binary leakage verdict cannot separate. (Numbers illustrate the method—one small model, seven queries—not a benchmark.)

5 Proxy learners as a pre-trial screen (application)

We exercise the instrument with *two complementary* controlled-competence proxy classes: (a) a parametric competence-vector learner, and (b) a knowledge-suppressed / unlearned LLM learner. Because both are scored on the *same* $\mathcal{R}$ instrument, a method that fails to move the instrument in the expected direction is a *no-go* before any human is recruited. This differs from prior proxy-learner work [Apartsin et al., 2026, Liu et al., 2026b, Song et al., 2026, Fan et al., 2026, Lee et al., 2026] in scoring on an objective control-task outcome rather than dialogue behavior, profile alignment, or LLM-judge helpfulness.

6 Validating necessity at the weight level

The necessity/leakage test infers a fact about a model’s *weights* from a change in the *prompt*: ablate an item from the corpus, and if the governed outcome does not move, the model did not need it. The sharpest objection is that corpus *context* removal is not weight-level *knowledge* change, so a small necessity could be the no-context heuristic in disguise—or, conversely, a large necessity could reflect a fact the model happens not to know for reasons we did not control. We close this two ways, in increasing strength.

6.1 Validation by construction: the necessity dose-response

The decisive test is *known-groups*: build models along a gradient from fact-naïve to fact-knowing *by construction*, and show necessity falls monotonically. We teach a target fact into the weights (LoRA

Domain / objective	necessity across the knowledge gradient				
	naive	... step ...			taught
Hazard / $\mathcal{R}$ (Qwen-3B)	667				0.2
Fictional-fact QA / accuracy (Qwen-7B)	$\alpha=0$	0.25	0.5	0.75	$\alpha=1$
	1.00	0.93	0.29	0.03	0.03

Table 6: Necessity dose-response by construction. Teaching a fact into the weights drives the instrument’s necessity for that fact down. The hazard (control-regret objective) gives a large-effect *step*—the known-groups endpoints for one discrete fact, with α /checkpoint sweeps agreeing—while the simulator-free fictional-fact QA (answer-accuracy objective) gives the *graded* monotone curve over many independent facts. Two objectives, one measure. Harness: experiments/unlearning (dose_response.py), src/engine/factqa.

283 SFT) and sweep two independent knowledge gradients—the LoRA scale α (one adapter, evaluated
284 at $\alpha \in [0, 1]$) and training checkpoints—so their agreement rules out a gradient-method artifact. We
285 run this in two domains with *independent objectives*, the second of which uses no simulator at all.

286 **Domain 1 — control-regret (a hidden hazard).** Standard COLREG rules have no dynamic range
287 for this test—every current model already knows them (Section 4)—so we use a *corpus-only charted*
288 *hazard*: a danger scored by the objective barrier but not shown in the prompt, knowable only from
289 the corpus. Teaching it into a Qwen2.5-3B model collapses necessity from a full-barrier swing ($\mathcal{R}$ -
290 necessity ≈ 667 , naive) to ≈ 0.2 (taught), and the α and checkpoint sweeps *agree* on the transition.
291 The curve is a *step*, not *graded*—the correct signature for a *single discrete fact*, which is learned as
292 a threshold (the model either lacks the fact and grounds, or has it and clears)—so the hazard arm
293 establishes the large-effect known-groups *endpoints*, and the graded curve is Domain 2’s job.

294 **Domain 2 — simulator-free fictional-fact QA.** We invent facts about fictional entities (research
295 outposts and their attributes) that no model can have memorized, and score answers with a pro-
296 grammatic checker—*no simulator, no reference policy*. Because the facts are fictional, a competent
297 model is necessarily corpus-bound at baseline, and because there are many *independent* facts, par-
298 tial teaching learns a fraction of them, so the aggregate necessity is *graded*. Teaching the facts
299 into a Qwen2.5-7B-Instruct model drives mean necessity smoothly and monotonically down the
300 LoRA- α gradient: $1.00 \rightarrow 0.93 \rightarrow 0.29 \rightarrow 0.03$ (Table 6), with the verdict flipping CORPUS-
301 BOUND $\rightarrow$ LEAKING as the facts are internalized. A training-checkpoint sweep reproduces the same
302 curve ($1.00 \rightarrow 0.25 \rightarrow 0.03$)—the two gradients are built differently (scaling one converged adapter
303 vs. genuine partial training), so their agreement rules out a gradient-method artifact. This is the
304 clean dose-response, in a domain we did not build a simulator for—answering the objection that the
305 measure is an artifact of one hand-built environment. (Necessity here is measured closed-book: the
306 without-corpus condition permits parametric answering, so taught knowledge surfaces rather than
307 being suppressed by a strict “answer only from the provided facts” instruction.)

308 6.2 Validation by unlearning: a *says* $\neq$ *does* dissociation (supporting)

309 The complementary direction removes a rule the model *does* know and asks whether necessity rises.
310 This arm is secondary—it has dynamic range only on a rule with a real corpus-vs-prior gap, which
311 the standard rules lack—but it yields an independently interesting result. We remove the alter-to-
312 starboard knowledge from an open-weight model with a real unlearning method—SimNPO [Fan
313 et al., 2024] as primary (reference-free, length-normalized), with NPO [Zhang et al., 2024], RMU
314 [Li et al., 2024], and gradient ascent [Jang et al., 2022] as baselines—and score the base vs. un-
315 learned model on the reference-policy instrument. A removal audit [Lynch et al., 2024] reports
316 whether the knowledge is *gone* vs. merely *suppressed*; for a stable novice that resists benign relearn-
317 ing we layer in a robust utility-preserving recipe [Singh et al., 2025]. The harness is built, and a
318 completed GPU run (SimNPO on Qwen2.5-3B-Instruct, bf16, LoRA $r=8$, at a deliberately
319 gentle, guardrailed setting: $\text{lr } 5 \times 10^{-5}$, retain_weight 3.0, 3 epochs, with COLREG’s own Rule-14
320 head-on-port prohibition kept in the retain set as an anti-inversion guardrail) delivers not just the
321 audit half but a first instrument-scoring result (Table 7). Its lesson is sharper than the predicted
322 2×2 : **the standard free-text unlearning metrics overstate removal because they measure what**

323 **the model says; the reference-policy instrument measures what the model *does*—its steering**
324 **decision—and shows the decision is untouched.**

325 **Primary result: a *says* $\neq$ *does* dissociation.** On CPU the primary method reproduces the clas-
326 sic likelihood collapse (SimNPO on Qwen2.5-1.5B drives forget-target NLL $4.6 \rightarrow 92$ and the
327 direction-cue rate $5/6 \rightarrow 0/6$; the NPO baseline matches it, $4.6 \rightarrow 41$, $5/6 \rightarrow 0/6$), so the
328 audit-level suppression is method-agnostic. The GPU run tells the more interesting story. Every
329 metric that reads the model’s *words* registers forgetting: the forget-probe “starboard” rate falls
330 $0.43 \rightarrow 0.27$, and—most tellingly—the Rule-14 *citation* disappears, the model now attributing
331 its maneuver to Rules 15/16/17 instead of 14. The likelihood audit calls it a clean success (forget-set
332 NLL $7.4 \rightarrow 32.4$; retain-set NLL, teacher-forced, actually *improves* $4.3 \rightarrow 1.07$ as retain_weight= 3
333 intended). Yet when the same base and unlearned models are scored on the head-on instrument
334 (corpus present vs. ablated), the 2×2 does not move a cell: both read verdict LEAKING, ablation-
335 delta 0.000, counterfactual ignored, closed-book contaminated. The unlearned completions *still*
336 *turn +30° to starboard*—the steering *decision* is unchanged; only the citation and the verbalization
337 moved. Model damage stays flat (wrong+degenerate 0.10, unchanged) with no inversion, and retain-
338 coherence is nearly intact ($1.00 \rightarrow 0.91$: 3/32 free generations degenerate, one an off-language
339 Chinese “lookout” slip when the targeted English pathway frays). This is the thesis in one run: a
340 words-level metric can report a fact removed while the policy that governs behavior is entirely intact.

341 **Suppressed, not removed (benign relearning).** A gone-vs.-suppressed test [Hu et al., 2024,
342 Deeb and Roger, 2024] confirms the reading from the other side. Twenty benign fine-tuning
343 steps pull the forget-set NLL $32.4 \rightarrow 9.2$, back near its base value—the textbook *suppressed-*
344 *not-removed* signature: the fact was never gone, only pushed down. Across the whole pipeline—
345 base $\rightarrow$ unlearned $\rightarrow$ relearned—the one quantity that never moves is the decision the instrument
346 measures: starboard, verdict LEAKING, at every stage. The likelihood rises and falls; the policy
347 does not.

348 **Contrast: aggressive unlearning *inverts* the rule.** The gentleness is load-bearing. An earlier, ag-
349 gressive recipe ($\text{lr } 1 \times 10^{-4}$, retain_weight 1.0, no guardrail) drove model damage $0.10 \rightarrow 0.33$ and
350 turned the ship to *port*—the wrong way—on 6/8 prompts, moving the 2×2 to 6/8 port and verdict
351 INCONCLUSIVE. Because the head-on turn is essentially binary, the default objective (push down
352 “starboard”) simply relocated the mass onto “port,” *inverting* the safety rule rather than removing it—
353 a caution that naive weight-level unlearning of a safety rule can yield *confident non-compliance*. The
354 two recipes bracket the finding: gentle unlearning suppresses the *words* but not the *policy* (the instru-
355 ment stays flat and so exposes the illusion), while aggressive unlearning moves the instrument—in
356 the wrong direction. In both, the probe metrics track words and the instrument tracks the decision.

357 **Convergent evidence, and why the 2×2 is flat.** An API sweep across every enabled frontier
358 family—Anthropic Claude Haiku 4.5, Meta Llama 3.1/3.3/4 (8B–405B), and Amazon Nova (mi-
359 cro/lite/pro), read through Amazon Bedrock—returns verdict LEAKING on the standard COLREG
360 rules *universally*; only a constructed reference learner, trained on the corpus alone, reads CORPUS-
361 BOUND. The interpretation also explains the flat cell above: head-on $\rightarrow$ starboard is memorized by
362 every pretrained model, so ablating it from the corpus changes nothing (ablation-delta 0). The in-
363 strument’s LEAKING verdicts are therefore *correct*—and this is precisely why the 2×2 cannot move
364 under unlearning: Rule 14 is already leaking at baseline, leaving no dynamic range for the corpus-
365 bound cell to travel. Two would-be confounds do not bite here: the instrument scores a *task outcome*
366 (simulated-maneuver compliance), not a text probe, so it is not re-detecting the lexical suppression;
367 and it renders the full rule corpus, not a retrieved top- k , so a null in the corpus-present cell is not
368 a retrieval miss. The confound that does bite—a *damaged* model failing for the wrong reason—is
369 held off by the damage-aware audit (off-language / incoherent generations scored as damage, not
370 forgetting), which reads clean here (0.10, coherence 0.91).

371 **The honest limitation, and the experiment it motivates.** State it plainly: because Rule 14 is
372 already leaking at baseline—every pretrained model knows it—the 2×2 *cannot* exhibit a clean
373 CORPUS-BOUND $\rightarrow$ GONE transition under unlearning; both cells read LEAKING regardless of what
374 the weights do. To demonstrate the instrument detecting weight-level knowledge, the target rule
375 must be *corpus-bound at baseline* (high ablation-delta)—which no pretrained COLREG rule is. The
376 fix is a *corpus-only* fact with no pretraining support, scored at *full* effect by the objective barrier: a

Metric	1.5B (CPU, SimNPO)		3B (GPU, gentle SimNPO)	
	base	unlearned	base	unlearned
Forget-target NLL ($\uparrow$)	4.6	92.0	7.4	32.4
Retain-set NLL, teacher-forced ($\downarrow$)	3.2	0.18	4.3	1.07
Forget-probe “starboard” rate ($\downarrow$)	5/6	0/6	0.43	0.27
Retain-coherence, free-gen ($\uparrow$)	—	—	1.00	0.91
Model damage (wrong+degen., $\downarrow$)	—	—	0.10	0.10
<i>Steering decision (instrument)</i>	—	—	<i>stbd</i>	<i>stbd</i>

Table 7: Gentle, guardrailed SimNPO unlearning of the alter-to-starboard rule, on a 1.5B model (CPU) and Qwen2.5-3B (GPU, bf16; lr 5×10^{-5} , retain_weight 3.0, Rule-14 kept in the retain set). Every *words-level* metric registers forgetting—the forget-target likelihood collapses (NLL $\uparrow$), the “starboard” probe rate drops, and the Rule-14 citation disappears (model cites 15/16/17)—while retain utility is preserved (retain NLL improves; free-generation coherence 0.91) and there is no inversion (model damage flat at 0.10). Yet the *decision* the reference-policy instrument scores is untouched: the unlearned model still turns $+30^\circ$ to starboard, and the 2×2 stays verdict LEAKING, ablation-delta 0.000—a says $\neq$ does dissociation. Benign relearning (20 steps) pulls forget NLL $32.4 \rightarrow 9.2$, confirming the fact was *suppressed*, not removed; the decision holds throughout. Harness: experiments/unlearning.

377 **charted hazard** on the ownship’s track that is scored by the simulator but *not shown to the model*,
378 so it can be known only from the corpus. A model that reads the corpus alters to clear; one that
379 does not holds its track and grounds—a full-barrier swing (reference learners: corpus-reliance 0.93
380 / regret- $\delta \approx 2000$ when bound versus 0.00 when leaking), and no safety-refusal confound since
381 avoiding a charted danger is plainly sensible. We then *validate by construction*: teach the hazard
382 into the weights along a gradient (LoRA- α and training checkpoints) and show corpus-reliance falls
383 monotonically to 0 as the fact is memorized—the known-groups dose-response that a single cell can-
384 not provide (implementation in experiments/unlearning, PROBES=hazard). We present this as
385 the designed next experiment, not a completed result. The hidden hazard is the anchor of a *suite*
386 of corpus-only probes—an obscure *real* charted danger (external validity, via closed-book screen-
387 ing), a medium-effect routing convention, and a conflicting fact about another vessel’s intention—so
388 the eventual claim rests on corpus-reliance separating corpus-bound from leaking as a *distribution*
389 across probe kinds and effect sizes, not on any single test.

390 7 Limitations and scope

391 **Mechanism, not external validity.** Every result here is simulation-based mechanism evidence. We
392 make no learning-gains claim and pre-register the human cohort study as future work. **Proxy va-**
393 **lidity.** Simulated learners can be unfaithful—prompt-suppressed and unlearned models may be too
394 capable, may learn unrealistically fast, and need not reproduce authentic human misconceptions; re-
395 cent work cautions that student simulation is valid only under specific conditions [Yuan et al., 2026]
396 and documents systematic fidelity gaps between LLM “students” and real learners [Wu et al., 2025,
397 Srivatsa et al., 2025]. We therefore treat the two proxy classes as a mutual cross-check, not a substi-
398 tute for human data—which is exactly why the human cohort study is a pre-registered requirement
399 rather than an optional extension. **Instrument sensitivity.** The protocol embeds weighting choices
400 (ship domain, objective); we show the ranking survives a $\pm 40\%$ reweighting ($\tau = 1.00$, §3), but
401 robustness beyond that range, and to the elliptical-domain *form* itself, is untested. **Small evidence**
402 **base — illustrative, not a benchmark.** The numbers here demonstrate that the *method* behaves
403 as designed; they are not a validity claim at scale. The discrimination result (Table 4) covers six
404 models within *one* provider family, and reports the head-on rule; the released harness now exercises
405 *three* rules across *two* metric axes—turn direction (Rule 14 head-on, Rule 15 crossing) and, on a
406 restricted-visibility subset, speed (Rule 6/19 safe speed, scored through the decision’s speed rather
407 than its heading)—and the unlearning arm turns on a single rule and model family. A persuasive
408 claim still needs cross-provider models and many more rules/encounters—which is why we release
409 the harness (experiment.sh, and a Bedrock provider $\times$ size sweep) built to run exactly that, and
410 report these as worked examples rather than a leaderboard. **Single-rule decomposability may not**
411 **generalize.** KC $\rightarrow$ single-metric identifiability and clean per-rule ablation are properties we *design*

into a governed corpus and *verify* per instrument (Table 2); they are not guaranteed for an arbitrary corpus, whose rules may be entangled, redundant, or jointly govern one outcome. Where a single rule cannot be cleanly isolated, the localization degrades to a coarser attribution and the leakage test to a group-level one; how far clean decomposition extends beyond corpora we constructed is open. **The unlearning arm is a single model at one scale.** The *says* $\neq$ *does* result (Section 6.2) is informative—a gentle recipe suppresses the *words* while the scored *decision* is untouched, an aggressive one *inverts* the rule—but it is one 3B model, and seed/method variance is outstanding. It is a *supporting* result: a clean necessity transition is structurally out of reach for any pretrained COLREG rule (all leak), which is exactly why the primary weight-level validation is the *construction* dose-response (Section 6.1), where we build the knowledge into the weights and observe necessity fall—already run in two domains, though on single models per domain; more seeds and sizes (and a 7B hazard replication in bfloat16, not 4-bit, since quantization noise would confound the effect) remain breadth. **Sufficiency is scoped to a query set.** Every sufficiency verdict is relative to the probed queries; we mitigate rather than escape this by always reporting the query count and by treating the false-sufficiency signal as the measurable warning of fragility to shift, but a corpus adequate for one query distribution may be insufficient for another.

8 Conclusion

We have described an in-silico instrument that measures whether a learner *needs* a corpus, and whether a corpus is *sufficient*, before human-subject effort. The central contribution is a *necessity* measure made non-confounded by *construction*: teaching a fact into a model’s weights drives the instrument’s necessity for that fact down as a dose-response, which we demonstrate in two domains with independent objectives—a control-regret simulator (large-effect known-groups endpoints) and a *simulator-free* fictional-fact QA task (the graded monotone curve, $1.00 \rightarrow 0.03$). On that calibrated measure we build a corpus-value audit—ranking items by necessity, localizing a missing item, and splitting the unrelayed-upon into *redundant* versus *unusable*—and a corpus-sufficiency verdict that surfaces *false sufficiency*. Distinct from faithfulness and context-attribution, we measure need against a weight-level baseline they lack. Supporting breadth—a reference-policy transfer instrument with $KC \rightarrow$ single-metric identifiability, cross-model discrimination, a second control domain, and a *says* $\neq$ *does* unlearning dissociation—rounds out the picture. The claim is testable and narrow; the domains are worked examples, the evidence base is deliberately small, and the measurement method is the point.

Reproducibility. The simulator, the answer-checker QA domain, the diagnosis and sufficiency harness, the construction dose-response, and the open-weight unlearning scaffold will be released, along with a deterministic no-key dry-run that recovers the mock ground truth and one-tap GPU notebooks for the dose-response. (Code is withheld here to preserve double-blind review.)

References

- Anonymous. Quantitative COLREG compliance evaluation for autonomous ships. *Ocean Engineering*, 2024a.
- Anonymous. Control knowledge tracing: A control-theoretic view of knowledge dynamics. In *Conf. on AI in Education (CAEI)*, 2024b.
- Alexander Apartsin, Omri Sason, and Yehudit Aperia. Toward a benchmark for controllable simulation of imperfect students with large language models, 2026.
- Susan Bull and Judy Kay. Student models that invite the learner in: The SMILI open learner modelling framework. *International Journal of Artificial Intelligence in Education*, 17(2):89–120, 2007.
- Benjamin Cohen-Wang, Andrew Ilyas, Jonathan Wu, and Aleksander Madry. Contextcite: Attributing model generation to context. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- Albert T. Corbett and John R. Anderson. Knowledge tracing: Modeling the acquisition of procedural knowledge. *User Modeling and User-Adapted Interaction*, 4(4):253–278, 1994.
- Aghyad Deeb and Fabien Roger. Do unlearning methods remove information from language model weights?, 2024.

461 Shahul Es, Jithin James, Luis Espinosa-Anke, and Steven Schockaert. RAGAS: Automated evaluation of
462 retrieval augmented generation, 2023.

463 Chongyu Fan, Jiancheng Liu, Licong Lin, Jinghan Jia, Ruiqi Zhang, Song Mei, and Sijia Liu. Simplicity
464 prevails: Rethinking negative preference optimization for llm unlearning, 2024.

465 Shuyi Fan, Boyuan Deng, Mengyu Xu, Jiale Liu, Hongyang Zhang, Qiaoxin Yang, and Chongyang Gao. Re-
466 thinking llm-judged helpfulness as a pedagogy signal: A pre-registered audit across tutor models, 2026.

467 Paolo Fiorini and Zvi Shiller. Motion planning in dynamic environments using velocity obstacles. *International*
468 *Journal of Robotics Research*, 17(7):760–772, 1998.

469 Weibo Gao, Qi Liu, Linan Yue, Fangzhou Yao, Rui Lv, Zheng Zhang, Hao Wang, and Zhenya Huang.
470 Agent4edu: Generating learner response data by generative agents for intelligent education systems, 2025.

471 Shengyuan Hu, Yiwei Fu, Zhiwei Steven Wu, and Virginia Smith. Unlearning or obfuscating? joggling the
472 memory of unlearned llms via benign relearning, 2024.

473 International Maritime Organization. Convention on the international regulations for preventing collisions at
474 sea (COLREGs), 1972.

475 Siddharth Jain and Venkat Narayan Vedam. Cue-r: Beyond the final answer in retrieval-augmented generation,
476 2026.

477 Joel Jang, Dongkeun Yoon, Sohee Yang, Sungmin Cha, Moontae Lee, Lajanugen Logeswaran, and Minjoon
478 Seo. Knowledge unlearning for mitigating privacy risks in language models, 2022.

479 Tor A. Johansen, Tristan Perez, and Andrea Cristofaro. Ship collision avoidance and COLREGS compliance
480 using simulation-based control behavior selection with predictive hazard assessment. *IEEE Transactions on*
481 *Intelligent Transportation Systems*, 17(12):3407–3422, 2016.

482 Kenneth R. Koedinger, Albert T. Corbett, and Charles Perfetti. The Knowledge-Learning-Instruction frame-
483 work: Bridging the science-practice chasm to enhance robust student learning. *Cognitive Science*, 36(5):
484 757–798, 2012.

485 Vishakha Lall and Yisi Liu. Ai meets maritime training: Precision analytics for enhanced safety and perfor-
486 mance, 2025.

487 Unggi Lee, Sookbun Lee, Yeil Jeong, Eunjoo Lee, Minchul Shin, and Hoilym Kwon. Educlaw-bench: A
488 long-horizon benchmark for pedagogical llm agents with simulated learners, 2026.

489 Nathaniel Li, Alexander Pan, Anjali Gopal, Summer Yue, Daniel Berrios, Alice Gatti, Justin D. Li, Ann-Kathrin
490 Dombrowski, Shashwat Goel, Long Phan, Gabriel Mukobi, Nathan Helm-Burger, Rassin Lababidi, Lennart
491 Justen, Andrew B. Liu, Michael Chen, Isabelle Barrass, Oliver Zhang, Xiaoyuan Zhu, Rishub Tamirisa,
492 Bhruu Bharathi, Adam Khoja, Zhenqi Zhao, Ariel Herbert-Voss, Cort B. Breuer, Samuel Marks, Oam Patel,
493 Andy Zou, Mantas Mazeika, Zifan Wang, Palash Oswal, Weiran Lin, Adam A. Hunt, Justin Tienken-Harder,
494 Kevin Y. Shih, Kemper Talley, John Guan, Russell Kaplan, Ian Steneker, David Campbell, Brad Jokubaitis,
495 Alex Levinson, Jean Wang, William Qian, Kallol Krishna Karmakar, Steven Basart, Stephen Fitz, Mindy
496 Levine, Ponnurangam Kumaraguru, Uday Tupakula, Vijay Varadharajan, Ruoyu Wang, Yan Shoshitaishvili,
497 Jimmy Ba, Kevin M. Esvelt, Alexandr Wang, and Dan Hendrycks. The wmdp benchmark: Measuring and
498 reducing malicious use with unlearning, 2024.

499 Jiayi Liu, Jiaxing Zhang, Bowen Jin, and Jennifer Neville. Generating leakage-free benchmarks for robust rag
500 evaluation, 2026a.

501 Ruochen Liu, Zhiyuan Wen, Hao Yan, Jun Yin, Senzhang Wang, and Jiannong Cao. Ps²: Parameterized control
502 for fine-grained student proficiency simulation, 2026b.

503 Xinyi Lu and Xu Wang. Generative students: Using llm-simulated student profiles to support question item
504 evaluation, 2024.

505 Aengus Lynch, Phillip Guo, Aidan Ewart, Stephen Casper, and Dylan Hadfield-Menell. Eight methods to
506 evaluate robust unlearning in llms, 2024.

507 Barak Or. Quantifying prior dominance in rag systems, 2026.

508 Radek Pelánek. Applications of the Elo rating system in adaptive educational systems. *Computers & Education*,
509 98:169–179, 2016.

510 Naman Deep Singh, Maximilian Müller, Francesco Croce, and Matthias Hein. Unlearning that lasts: Utility-
511 preserving, robust, and almost irreversible forgetting in llms, 2025.

512 Jiajia Song, Zhihan Guo, and Jionghao Lin. Simulating novice students using machine unlearning and relearn-
513 ing in large language models, 2026.

514 KV Aditya Srivatsa, Kaushal Kumar Maurya, and Ekaterina Kochmar. Can llms reliably simulate real students’
515 abilities in mathematics and reading comprehension?, 2025.

516 Adrienne Tuynman and Ronald Ortner. Transfer in reinforcement learning via regret bounds for learning agents,
517 2022.

518 K. W. Van Dongen et al. Construct validity of the LapSim: Can the LapSim virtual reality simulator distinguish
519 between novices and experts? *Surgical Endoscopy*, 21(8):1413–1417, 2007.

520 Lev S. Vygotsky. *Mind in Society: The Development of Higher Psychological Processes*. Harvard University
521 Press, 1978.

522 Tao Wu, Jingyuan Chen, Wang Lin, Mengze Li, Yumeng Zhu, Ang Li, Kun Kuang, and Fei Wu. Embracing
523 imperfection: Simulating students with diverse cognitive levels using llm-based agents, 2025.

524 Rongwu Xu, Zehan Qi, Zhijiang Guo, Cunxiang Wang, Hongru Wang, Yue Zhang, and Wei Xu. Knowledge
525 conflicts for LLMs: A survey. In *Proceedings of EMNLP*, 2024.

526 Zhihao Yuan, Yunze Xiao, Ming Li, Weihao Xuan, Richard Tong, Mona Diab, and Tom Mitchell. Towards
527 valid student simulation with large language models, 2026.

528 Qinggang Zhang, Zhishang Xiang, Yilin Xiao, Le Wang, Junhui Li, Xinrun Wang, and Jinsong Su. Faithfulrag:
529 Fact-level conflict modeling for context-faithful retrieval-augmented generation, 2025.

530 Ruiqi Zhang, Licong Lin, Yu Bai, and Song Mei. Negative preference optimization: From catastrophic collapse
531 to effective unlearning, 2024.

532 Zinn et al. Assessing flight competency from deviation to an optimal trajectory. *Cognition, Technology & Work*,
533 2023.