

---

# An In-Silico Instrument for Pre-Validating Corpus-Bounded Instruction: Reference-Policy Transfer Measurement with Bidirectional Corpus-Gap and Leakage Diagnosis

---

Anonymous Author(s)

Affiliation

Address

email

## Abstract

1 Retrieval-augmented tutors are increasingly proposed for safety-critical, procedu-  
2 ral domains, but validating that a tutor’s mechanism actually works—rather than  
3 merely sounding fluent—usually requires expensive human-subject studies. We  
4 present an *in-silico measurement instrument* that lets a designer falsify the mecha-  
5 nism of a corpus-bounded instructional method *before* spending human-subject ef-  
6 fort. The instrument has two parts that are really one tool used two ways. The first  
7 is a *transfer instrument*: we replace item-response correctness with an *objective*  
8 *continuous-control simulator whose reference solver yields regret-to-reference* as  
9 the transfer outcome, and we establish a measurement-design property we call  
10 *knowledge-component (KC)  $\rightarrow$  single-metric identifiability*: each knowledge com-  
11 ponent governs exactly one metric, so ablating it degrades that metric and no other.  
12 The second is a *corpus diagnosis* that is simply the transfer instrument read *back-*  
13 *wards* over a governed external corpus—to *localize* which corpus rule is missing  
14 from measured task failures, and to *detect parametric leakage* by rule ablation  
15 (is a model answering from the corpus or from pretrained priors?). Because re-  
16 moving a rule from the *prompt* cannot by itself prove the knowledge lived in the  
17 *weights*, the leakage test is validated by a machine-unlearning arm that deletes  
18 a rule from an open model and checks that the instrument responds—so the un-  
19 learning arm is constitutive of the leakage claim, not a detachable add-on. The  
20 method is *closed-model compatible* (it needs only API access), operates *per rule*,  
21 and reads both diagnoses off a single control-task metric. We exercise the instru-  
22 ment with controlled-competence proxy learners on maritime collision avoidance  
23 (COLREG) and a discrete procedural domain (roadside tire change), and report  
24 construct validity, estimator-recovery calibration, and a real-model discrimination  
25 result across six current LLMs. Read on the same regret instrument, the rule-  
26 ablation grades with binding fidelity under a strict prompt (falling monotonically  
27 with model capability) and collapses when the binding clause is removed, flipping  
28 *every* model to *leaking*; the lightest model fails to bind even when instructed to—a  
29 binding failure the instrument surfaces. All results are **simulation-based mecha-**  
30 **nism evidence, not human-subject external validity**; we scope the contribution  
31 accordingly and pre-register the human study as future work.

**Plain-language summary.** An AI tutor that is supposed to answer only from an approved rulebook is easy to demo but hard to trust: you cannot easily tell whether it is really using the rulebook or just leaning on what the language model already learned, and you cannot tell whether the rulebook itself has holes. Normally you would find out by running an expensive study with real learners. We instead build a cheap “test bench” that answers both questions before involving any people. It drops the tutor into a realistic steering task—avoiding ship collisions—where a standard automatic solver gives a strong reference move, and scores the tutor by how far its decisions fall from that reference. Because we design each rule to control exactly one part of the score, we can remove a single rule and watch what breaks: if the score gets worse, the tutor genuinely relied on that rule; if nothing changes, the tutor was quietly using its own built-in knowledge—a “leak.” Run the other way, the same measurement pinpoints which rule is missing when the tutor fails. It works with ordinary commercial models over an API, needs no access to their internals, and we confirm it on a current model. Everything here is a controlled simulation that checks the machinery works—not yet a claim that learners learn more, which is the study we set up next.

## 1 Introduction

Generic retrieval-augmented (RAG) assistants optimize for semantic relevance: give a plausible answer to whatever is asked. That objective is wrong for training in safety-critical procedural domains, where a semantically accurate answer can still be instructionally wrong—delivered at the wrong complexity, skipping a prerequisite, or worse, confidently fabricated. A growing body of work therefore builds *corpus-bounded* tutors that abstain outside a curated corpus. But a designer who has built such a system faces a prior question: *does the mechanism work?* Does the tutor actually rely on its corpus, and does the corpus actually cover the domain? Answering this by human-subject study is slow and expensive, and a null result there conflates many causes.

We argue that the *mechanism* of a corpus-bounded method can be falsified cheaply and in silico, and we build the instrument to do it (Figure 1). Our contribution is a *methods/measurement* one, not a new tutor and not a new collision-avoidance technique. Concretely:

- **The Transfer Instrument.** We measure a learner by its *regret against a reference-policy solver* on a continuous-control task, and design the instrument so that each knowledge component governs exactly one metric (KC→single-metric identifiability; Section 3).
- **The Corpus Diagnosis — the same instrument, read backwards.** Not a second tool: running the *one* metric in reverse both *localizes* a missing corpus rule from task failures and *detects parametric leakage* by rule ablation, per rule, using only API access (Section 4). Its leakage half makes a claim about the model’s *weights*, so it is *validated at the weight level* by a machine-unlearning arm that actually deletes a rule and checks the instrument responds (Section 6)—that arm is part of this contribution, not an appendix to it.
- **A proxy-learner screen** exercises the instrument as a pre-human-trial go/no-go, using two complementary controlled-competence proxy classes—a parametric one and the unlearned open-weight one (Sections 5–6).

Every *component* we build on is prior art; the *unified instrument* and the *reference-policy transfer metric* are the open ground (Section 2). We are explicit throughout that our evidence is simulation-based: it tests whether the machinery behaves as designed and whether the measurement can distinguish competence, not whether humans learn more.

## 2 Related work and positioning

Each strand below is established prior art; we reuse it as infrastructure and mark where our delta departs from it.

**Learner modeling and instructional theory.** Knowledge tracing [Corbett and Anderson, 1994], the Elo rating system for adaptive systems [Pelánek, 2016], the Knowledge-Learning-Instruction framework [Koedinger et al., 2012], open learner models [Bull and Kay, 2007], and the Zone of Proximal Development [Vygotsky, 1978] are all established. We reuse them as infrastructure, not as contributions.

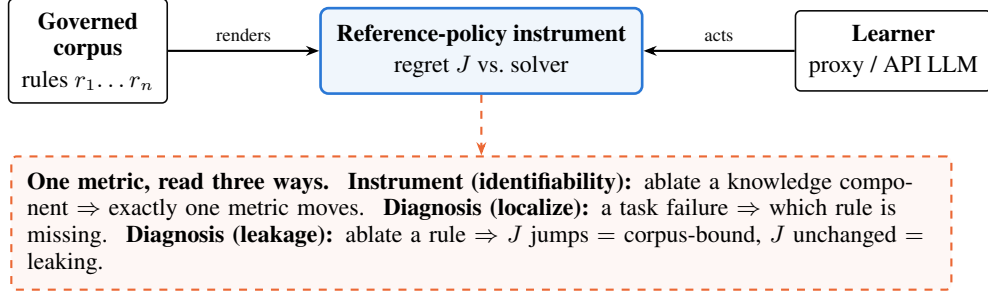


Figure 1: The instrument, used bidirectionally. A governed corpus and a learner both feed one reference-policy simulator that scores the learner’s *regret*  $J$  against an automatic solver. The same metric is then read three ways—to verify KC→single-metric identifiability (the *instrument*), to localize a missing rule from task failures, and to detect parametric leakage by rule ablation (the *diagnosis*)—needing only API access to the learner. The diagnosis is the instrument run backwards, not a separate tool.

**Corpus-bounded tutoring, leakage, and faithfulness.** RAG tutors that abstain outside a corpus are standard engineering. A large line asks whether a model uses provided context or parametric memory: faithfulness metrics score whether an answer is grounded in context [Es et al., 2023]; context attribution ablates context sources and measures the change in output probability to attribute a generation to them [Cohen-Wang et al., 2024, Or, 2026]; knowledge-conflict work studies which side wins when context contradicts memory [Xu et al., 2024, Zhang et al., 2025]; leakage-free benchmarking filters items answerable with no context [Liu et al., 2026a]; and intermediate-step scoring looks beyond the final answer [Jain and Vedam, 2026]. All of these measure whether context *influenced* the output, judged on *answer text*, per answer or system-wide. We differ on three axes: (a) we score a *behavioral task outcome* against a reference-optimal policy, not answer text; (b) we attribute *per corpus rule* and localize which rule is missing or wrong, not per token or system-wide; and (c) we measure not merely *influence* but *necessity*—calibrated by manipulating the parametric baseline directly (weight-level construction and unlearning, Section 6), so a fact the model already knew is not mistaken for one it relied on. No context-attribution method has that weight-level ground truth. That join is the *Corpus Diagnosis*.

**Objective competency instruments.** Deviation-from-optimal scoring appears in flight [Zinn et al., 2023] and construct-validity-by-novice/expert-separation in surgery [Van Dongen et al., 2007]; control-theoretic notation has been applied to knowledge dynamics [Anonymous, 2024b]; regret is used in RL transfer [Tuytman and Ortner, 2022]; maritime training analytics regress simulator measures onto instructor ratings [Lall and Liu, 2025]. None uses a *reference solver’s regret* as the *learner* transfer outcome with KC→single-metric identifiability. That is the *Transfer Instrument*. We borrow mature maritime-autonomy tooling—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]—purely as reference solvers, never as a new collision-avoidance method [Anonymous, 2024a, International Maritime Organization, 1972].

**Proxy learners.** Simulated students have long authored and evaluated tutors; LLM student agents now pilot assessment items [Lu and Wang, 2024] and simulate learners for tutoring-system development [Gao et al., 2025], and controlled variants suppress knowledge by prompting [Apartsin et al., 2026], interpolate parametric competence [Liu et al., 2026b], or unlearn a model into a novice [Song et al., 2026]. Pre-deployment simulated-learner screens have very recently appeared [Fan et al., 2026, Lee et al., 2026]. We therefore *demote* the proxy-learner idea to an application: our narrow residual claim is running *two complementary proxy classes* (parametric competence *and* unlearned LLM) scored on the *same regret-to-reference instrument* the human trial would use—which none of these do.

### 3 The Transfer Instrument

**Task and metric.** The worked domain is COLREG collision avoidance: a power-driven vessel must choose course and speed to resolve an encounter. We implement a kinematic simulator with

| Policy              | mean $J$ | median  | min  | max     | cleared |
|---------------------|----------|---------|------|---------|---------|
| naive (hold course) | 1765.44  | 1988.08 | 1.08 | 1995.18 | 11%     |
| VO reference        | 0.70     | 0.58    | 0.33 | 1.27    | 100%    |
| SB-MPC reference    | 0.01     | 0.01    | 0.00 | 0.03    | 100%    |

Table 1: Construct validity and grading across nine varied encounters. The objective  $J$  separates the three competence levels cleanly and takes a continuous range of values (20 distinct across all cells,  $[0.00, 1995.18]$ )—it is a graded transfer metric, not a near-binary check. `npm run colreg:construct`.

an elliptical ship domain and a Collision Risk Index, and two reference solvers—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]. For a learner policy  $\pi$  on scenario set  $S$  we define the transfer outcome as regret against a reference policy  $\pi^*$ ,

$$\mathcal{R}(\pi) = \frac{1}{|S|} \sum_{s \in S} [J(\pi, s) - J(\pi^*, s)], \quad (1)$$

where  $J$  is the per-encounter objective (a weighted sum of a safety-margin barrier, COLREG compliance penalty, and route deviation; lower is better) and  $\pi^*$  is the reference maneuver. Unlike item correctness,  $\mathcal{R}$  is continuous, objective, and instructor-free.

**On “reference,” not “optimal.”** We deliberately avoid claiming a global optimum. VO and SB-MPC are strong, widely-used near-optimal solvers, but neither is proven globally optimal for the full nonconvex encounter; calling their output “optimal” would overclaim. The instrument does not need a true optimum—only a reference that construct validity shows separates naive from expert behavior (below). Regret is thus measured against a fixed, reproducible reference policy, and we report which solver is used.

**Construct validity and metric grading.** The instrument must separate good from bad policies before any learning claim, and—if it is to be a transfer measure rather than a pass/fail check—the metric must *grade*, not collapse to two values. Across a varied set of nine encounters (head-on, starboard/port crossing, overtaking, and restricted-visibility geometries), three policies of increasing competence separate cleanly and continuously on  $J$  (Table 1): a naive hold-course policy (mean  $J \approx 1765$ , clearing only 11% of domains), a velocity-obstacle reference ( $J \approx 0.70$ , all clear), and SB-MPC ( $J \approx 0.01$ ). The objective takes 20 distinct values in  $[0.00, 1995.18]$  over the policy  $\times$  scenario cells—a graded metric, with the safe regime (VO/SB-MPC) itself spanning a continuous 0.00–1.27 range. On the discrete procedural domain the same logic holds: an expert policy scores  $J = 0$  against a reckless  $J = 200$  with the safety violation caught. This is the novice/expert-separation logic of Van Dongen et al. [2007], applied to a decision/control task rather than manual skill.

**KC  $\rightarrow$  single-metric identifiability.** We design each knowledge component to govern exactly one metric, so ablating a KC degrades that metric and no other. On the procedural domain this is *exact*: each ablated competence degrades only its governed metric, and a monotone competence  $\rightarrow$  performance gradient ( $J : 204 \rightarrow 0$ ) follows as competence is acquired in curriculum order; on the COLREG instrument the same gradient spans nearly five orders of magnitude (Figure 2). Because the property holds on both a continuous-control and a discrete-procedural instrument, it is a general measurement-design property, not a COLREG artifact.

**Is identifiability tautological?** A fair objection is that the mapping is a design choice, so “ablate the KC, that metric moves” is true by construction. Two things make it a testable property rather than a tautology. First, the *cross-effect* claim can fail: designing the metrics is not enough to guarantee that ablating one KC leaves the *others* unchanged—if the objective’s terms are entangled (e.g. a safety barrier that also moves the deviation term), ablation bleeds across metrics, and we measure and report that it does not. Identifiability is the empirically-checked *absence* of that bleed, not the presence of the intended effect. Second, the mapping is what makes the Corpus Diagnosis (Section 4) actionable: without it, a task failure cannot be attributed to a specific corpus rule. We therefore treat identifiability as a design *requirement to be verified per instrument*—a property an instrument can lack—and verifying it is part of building one, exactly as construct validity is. On the procedural

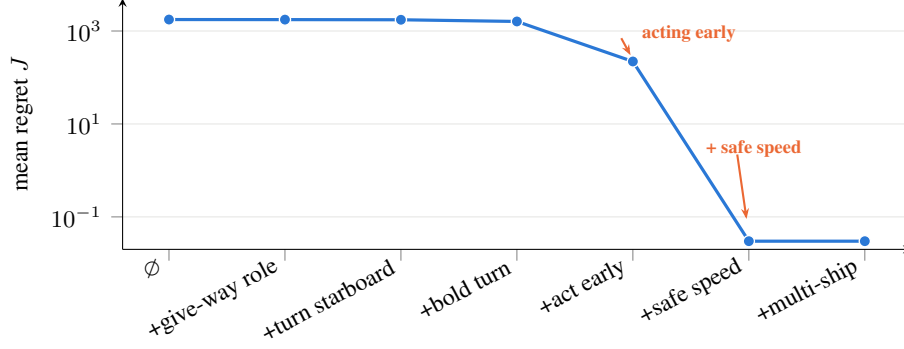


Figure 2: Competence→performance gradient on the nine-encounter instrument. Mean regret  $J$  (log scale) as the six knowledge components are acquired in curriculum order (left to right); each point is a competence stage, from the empty learner ( $\emptyset$ ) to full competence.  $J$  spans nearly five orders of magnitude and collapses as the two domain-clearing competencies—acting *early* and at a *safe speed*—come online, the graded behavior Table 1 reports numerically. `npm run colreg:construct`.

| ablated KC ↓ / metric → | safety       | core         | sequencing   | finishing    |
|-------------------------|--------------|--------------|--------------|--------------|
| safety                  | <b>−1.00</b> | 0.00         | 0.00         | 0.00         |
| core steps              | 0.00         | <b>−1.00</b> | 0.00         | 0.00         |
| sequencing              | 0.00         | 0.00         | <b>−0.22</b> | 0.00         |
| finishing               | 0.00         | 0.00         | 0.00         | <b>−1.00</b> |

Table 2: KC→single-metric identifiability (procedural domain). Change in each metric after ablating each knowledge component. The diagonal (bold) is the intended governed metric; every off-diagonal cell is 0.00 (max  $|\Delta| = 0.0000$ )—ablation does not bleed across metrics. `npm run proc:identifiability`.

146 domain the verification is clean (Table 2): ablating each knowledge component degrades only its  
 147 governed metric, with maximum off-diagonal change 0.0000—no cross-bleed.

148 **Robustness to weighting choices.** The objective embeds weighting choices—the elliptical ship-  
 149 domain radii and the margin/compliance/deviation weights—and a fair worry is that the compe-  
 150 tence ranking is an artifact of those choices. We falsify this with a sensitivity analysis (`npm run`  
 151 `colreg:sensitivity`) that holds every policy’s *behavior* fixed and re-scores under 232 perturba-  
 152 tions: a one-at-a-time  $\pm 25$ –50% sweep of each parameter plus 200 joint samples with every param-  
 153 eter independently scaled in  $[0.6, 1.4]$ . Across the whole ensemble, both orderings are preserved  
 154 exactly—the naive policy stays worst and the six-component competence gradient stays monotone  
 155 in  $J$  (Kendall  $\tau = 1.00$  on every perturbation, invariant rate 100%). The CRI parameters are ex-  
 156 cluded because CRI is a reported diagnostic, not a term in the scored objective, so the ranking is  
 157 invariant to them by construction. The protocol’s conclusions are thus a property of the competence  
 158 structure, not of the weight calibration.

159 **Estimator recovery and calibration.** Feeding the instrument’s outcomes into a generic learner-  
 160 agent estimator, we recover known ground truth on synthetic data (Table 3). This turns “we have a  
 161 metric” into “the measurement is valid.”

## 162 4 The Corpus Diagnosis: the same instrument, read backwards

163 The Corpus Diagnosis is not a second tool. It is the Transfer Instrument of Section 3 run in reverse:  
 164 the *same* objective metric answers two opposite questions.

165 **(i) Corpus-gap localization.** When the corpus is missing or wrong on a rule, the learner’s failures  
 166 on the governed metric have a signature that attributes the failure to a *specific* rule/node. We com-

| Estimator | Recovery of known ground truth                              | Calibration (ECE) |
|-----------|-------------------------------------------------------------|-------------------|
| Elo       | static ability, mean abs. error 0.046                       | 0.023             |
| BKT       | latent state $P(\hat{L}) = 0.997$ (learned) vs. 0.175 (not) | 0.004             |

Table 3: Estimator-recovery and calibration on synthetic data with a known ground truth. The measurement, not just the metric, is validated.

pute, per rule, an ablation-delta—the rise in the governed penalty when that rule is removed—and a localization that names the governed component. A large delta plus a matching localization means the learner *relied on* that corpus rule.

**(ii) Parametric leakage detection.** The mirror image: ablate a rule from the corpus; if the metric it governs does *not* degrade, the model is answering from pretrained priors, not the corpus. We combine the ablation-delta with a *counterfactual* test (replace “alter to starboard” with “alter to port”; does the learner follow the altered rule?) and a *closed-book* contamination baseline (no corpus supplied). The verdict—CORPUS-BOUND, LEAKING, or INCONCLUSIVE—is read from the same metric, by a majority vote over the three signals so that a clear ablation-and-contamination pattern is not vetoed by a single dissenting sub-test.

#### 4.1 One instrument, not two

It is fair to ask whether the Diagnosis really uses the *transfer* instrument or merely a convenient side-metric. The bounded compliance penalty we threshold in  $[0, 1]$  is deliberately near-binary (following a discrete steering rule is close to binary), which could look decoupled from the graded regret  $\mathcal{R}$  of Section 3. It is not: the compliance penalty is a *term inside* the objective  $J$ , so the same rule ablation can be read on the full regret instrument directly. It carries the signal even more strongly—a corpus-bound learner that loses the rule it relied on abstains, collides, and its  $J$  jumps by  $\sim 2000$ , whereas a leaking learner’s  $J$  is invariant to the corpus. On the two reference mocks, the regret-ablation is 1981 (corpus-bound) versus 0 (leaking). So localization and leakage are read off the very metric that measures transfer; the bounded compliance penalty is just a low-variance, thresholdable readout of it. This is what makes the “single instrument, used bidirectionally” claim literal rather than rhetorical, and it is visible per model in the  $\delta_{\mathcal{R}}$  column of Table 4.

**Offline recovery of known ground truth.** Against two reference mock learners whose truth is known, the instrument recovers it exactly: the corpus-bound mock yields ablation-delta 1.000 (regret-ablation 1981), follows the counterfactual, and abstains closed-book ( $\Rightarrow$  CORPUS-BOUND); the leaking mock yields ablation-delta 0.000 (regret-ablation 0), ignores the counterfactual, and answers closed-book from priors ( $\Rightarrow$  LEAKING).

**Real-model discrimination.** We run the instrument on six current production LLMs under both prompt conditions—bound (the strict corpus-binding positive control) and unconstrained (the binding clause removed, parametric fallback allowed)—and read the verdict off the same metric (Table 4). The verdict is a majority vote of three orthogonal signals: low ablation- $\delta$ , counterfactual ignored, and closed-book contaminated. Three findings stand out. (1) *The diagnosis rides the transfer instrument.* The  $\delta_{\mathcal{R}}$  column is the same ablation read on the full regret objective  $J$  of Section 3—not a separate metric—and it carries the signal loudly: a corpus-bound learner that loses the rule it relied on collides, so  $J$  jumps by  $\sim 2000$ . The Diagnosis and the Instrument are one tool (Section 4.1). (2) *Binding fidelity is graded, and capability tracks it.* Under the strict prompt,  $\delta_{\mathcal{R}}$  falls monotonically with model capability—1981 for the three stronger flash models, 1318 and 658 for the lite models,  $\approx 0$  for the lightest, which fails to rely on the corpus even when told to (diagnosed INCONCLUSIVE: a binding *failure* the instrument surfaces). (3) *Removing the binding clause makes every model leak.* Under unconstrained,  $\delta_{\mathcal{R}}$  collapses to  $\approx 0$  and closed-book flips to contamination for all six, and the vote returns LEAKING across the board. Raw completions are well-formed JSON with coherent rationales (e.g. the lightest model’s closed-book reply is {abstained:true, “not covered by the provided rules”}), so the leakage is genuine prior-following, not a parse artifact. Mock learners (rows 1–2) bound the scale.

| Learner                  | Condition | $\delta$ (compl.) | $\delta_R$ ( $J$ ) | counterfact. | closed-book | Verdict      |
|--------------------------|-----------|-------------------|--------------------|--------------|-------------|--------------|
| mock (corpus-bound)      | —         | 1.000             | 1981               | follows      | abstains    | CORPUS-BOUND |
| mock (leaking)           | —         | 0.000             | 0                  | ignores      | answers     | LEAKING      |
| gemini-flash-latest      | bound     | 1.000             | 1981               | follows      | abstains    | CORPUS-BOUND |
| gemini-flash-latest      | unconstr. | 0.000             | 0                  | follows      | answers     | LEAKING      |
| gemini-2.5-flash         | bound     | 1.000             | 1981               | follows      | abstains    | CORPUS-BOUND |
| gemini-2.5-flash         | unconstr. | 0.000             | 0                  | follows      | answers     | LEAKING      |
| gemini-3.5-flash         | bound     | 1.000             | 1981               | follows      | abstains    | CORPUS-BOUND |
| gemini-3.5-flash         | unconstr. | 0.000             | 0                  | follows      | answers     | LEAKING      |
| gemini-flash-lite-latest | bound     | 0.667             | 1318               | follows      | abstains    | CORPUS-BOUND |
| gemini-flash-lite-latest | unconstr. | 0.000             | 0                  | ignores      | answers     | LEAKING      |
| gemini-3.5-flash-lite    | bound     | 0.333             | 658                | follows      | abstains    | CORPUS-BOUND |
| gemini-3.5-flash-lite    | unconstr. | 0.000             | 0                  | ignores      | answers     | LEAKING      |
| gemini-3.1-flash-lite    | bound     | 0.000             | 0                  | follows      | abstains    | INCONCLUSIVE |
| gemini-3.1-flash-lite    | unconstr. | 0.000             | 0                  | ignores      | answers     | LEAKING      |

Table 4: Corpus-Diagnosis discrimination on six real LLMs (head-on instrument,  $\delta$  threshold 0.15; verdict = majority of three signals).  $\delta_R$  is the *same* ablation read on the full regret instrument  $J$  (Section 3), not a separate metric. Under the strict prompt it grades with binding fidelity (1981  $\rightarrow$  658  $\rightarrow$  0); removing the binding clause collapses it to 0 and flips every model to LEAKING. The lightest model fails to bind even when told to (INCONCLUSIVE under bound). Mock learners (top) bound the scale.

|               | not retrieved                   | retrieved                                    |
|---------------|---------------------------------|----------------------------------------------|
| not in corpus | priors only (NONE)              | — (unreachable)                              |
| in corpus     | retriever misses ( <i>gap</i> ) | RAG success (RETRIEVED $\rightarrow$ ORACLE) |

Table 5: Decomposing a RAG answer’s outcome over in-corpus  $\times$  retrieved. The three reachable cells are the NONE/RETRIEVED/ORACLE conditions;  $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$  is the content ceiling,  $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$  what the pipeline delivers, their difference the retrieval gap. Har-ness: experiments/retrieval-decomp.

211 **Per-rule, not just per-corpus.** To show the diagnosis attributes reliance to a *specific* rule rather  
212 than to corpus presence in general, we add a second, independent rule—Rule 15 crossing give-way—  
213 exercised on its own crossing scenarios (a rule only moves the metric on scenarios that invoke it, so  
214 each probe carries a matched subset). Ablating each rule produces a large regret signal on its own  
215 encounters: on `gemini-flash-latest` under the bound prompt, ablating Rule 14 gives  $\delta_R=1981$   
216 (head-on) and ablating Rule 15 gives 1285 (crossing); on `gemini-flash-lite-latest`, 658 and  
217 662 respectively. The two rules are localized on disjoint scenario subsets, so the instrument reads  
218 reliance per rule.

219 **What in the corpus changes the answer: presence vs. retrieval.** The leakage test asks a binary  
220 question—does the learner rely on the corpus at all. A deployed RAG tutor raises a finer one: of the  
221 value curation adds, how much comes from the fact being *present* in the corpus versus from the re-  
222 triever actually *surfacing* it? We decompose this over two binary factors—in-corpus and retrieved—  
223 whose three reachable cells are three scorable conditions (Table 5): NONE (closed-book, priors only),  
224 RETRIEVED (the deployed dense retriever’s top- $k$ ), and ORACLE (the answer-bearing chunk, i.e. per-  
225 fect retrieval). Reading accuracy across them attributes the gain:  $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$  is the  
226 *content ceiling* (value if retrieval were perfect),  $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$  is what the deployed  
227 pipeline *delivers*, and their difference is the *retrieval gap*—value present in the corpus but never  
228 surfaced. Running the three conditions through a small local generator (Qwen2.5-1.5B) on seven  
229 equipment-SOP fact-recall queries makes the split concrete: closed-book accuracy is 0/7 (empty pri-  
230 ors), ORACLE is 7/7 (every fact is recoverable from its chunk), and the deployed MiniLM pipeline  
231 lands between at 3/7—so of a 100% content ceiling the pipeline *delivers* 43% and *forfeits* a 57% re-  
232 trieval gap; a generator-independent recall@5 of any answer-bearing chunk (4/7) localizes it. Here  
233 the binding constraint is retrieval, not corpus coverage or model capability, and a curation failure  
234 (fact absent), a retrieval failure (present but unranked), and a priors success are distinct outcomes  
235 the binary leakage verdict cannot separate. (Numbers illustrate the method—one small model, seven  
236 queries—not a benchmark.)

## 5 Proxy learners as a pre-trial screen (application)

We exercise the instrument with *two complementary* controlled-competence proxy classes: (a) a parametric competence-vector learner, and (b) a knowledge-suppressed / unlearned LLM learner. Because both are scored on the *same*  $\mathcal{R}$  instrument, a method that fails to move the instrument in the expected direction is a *no-go* before any human is recruited. This differs from prior proxy-learner work [Apartsin et al., 2026, Liu et al., 2026b, Song et al., 2026, Fan et al., 2026, Lee et al., 2026] in scoring on an objective control-task outcome rather than dialogue behavior, profile alignment, or LLM-judge helpfulness.

## 6 Validating the leakage test at the weight level (machine unlearning)

This section is not an optional add-on; it is what earns the leakage half of the Corpus Diagnosis. That test infers a fact about a model’s *weights* from a change in the *prompt*: ablate a rule from the corpus, and if the governed metric does not move, we call the model a leaker. The sharpest objection is that corpus *context* removal is not weight-level *unlearning*, so “leakage” could be the no-context heuristic in disguise—a model might simply be answering a now-underspecified prompt. The only way to close that gap is to actually remove the knowledge from the weights and show the *same instrument* responds. So we build an open-weight arm: remove the alter-to-starboard knowledge from an open-weight model with a real unlearning method—SimNPO [Fan et al., 2024] as primary (reference-free, length-normalized), with NPO [Zhang et al., 2024], RMU [Li et al., 2024], and gradient ascent [Jang et al., 2022] as baselines—and score the base vs. unlearned model on the reference-policy instrument. A removal audit [Lynch et al., 2024] reports whether the knowledge is *gone* vs. merely *suppressed*; for a stable novice that resists benign relearning we layer in a robust utility-preserving recipe [Singh et al., 2025]. The harness is built, and a completed GPU run (SimNPO on Qwen2.5-3B-Instruct, bf16, LoRA  $r=8$ , at a deliberately gentle, guardrailed setting:  $\text{lr } 5 \times 10^{-5}$ , retain\_weight 3.0, 3 epochs, with COLREG’s own Rule-14 head-on-port prohibition kept in the retain set as an anti-inversion guardrail) delivers not just the audit half but a first instrument-scoring result (Table 6). Its lesson is sharper than the predicted  $2 \times 2$ : **the standard free-text unlearning metrics overstate removal because they measure what the model says; the reference-policy instrument measures what the model does—its steering decision—and shows the decision is untouched.**

**Primary result: a says  $\neq$  does dissociation.** On CPU the primary method reproduces the classic likelihood collapse (SimNPO on Qwen2.5-1.5B drives forget-target NLL  $4.6 \rightarrow 92$  and the direction-cue rate  $5/6 \rightarrow 0/6$ ; the NPO baseline matches it,  $4.6 \rightarrow 41$ ,  $5/6 \rightarrow 0/6$ ), so the audit-level suppression is method-agnostic. The GPU run tells the more interesting story. Every metric that reads the model’s *words* registers forgetting: the forget-probe “starboard” rate falls  $0.43 \rightarrow 0.27$ , and—most tellingly—the Rule-14 *citation* disappears, the model now attributing its maneuver to Rules 15/16/17 instead of 14. The likelihood audit calls it a clean success (forget-set NLL  $7.4 \rightarrow 32.4$ ; retain-set NLL, teacher-forced, actually *improves*  $4.3 \rightarrow 1.07$  as retain\_weight = 3 intended). Yet when the same base and unlearned models are scored on the head-on instrument (corpus present vs. ablated), the  $2 \times 2$  does not move a cell: both read verdict LEAKING, ablation-delta 0.000, counterfactual ignored, closed-book contaminated. The unlearned completions *still turn +30° to starboard*—the steering *decision* is unchanged; only the citation and the verbalization moved. Model damage stays flat (wrong+degenerate 0.10, unchanged) with no inversion, and retain-coherence is nearly intact ( $1.00 \rightarrow 0.91$ : 3/32 free generations degenerate, one an off-language Chinese “lookout” slip when the targeted English pathway frays). This is the thesis in one run: a words-level metric can report a fact removed while the policy that governs behavior is entirely intact.

**Suppressed, not removed (benign relearning).** A gone-vs.-suppressed test [Hu et al., 2024, Deeb and Roger, 2024] confirms the reading from the other side. Twenty benign fine-tuning steps pull the forget-set NLL  $32.4 \rightarrow 9.2$ , back near its base value—the textbook *suppressed-not-removed* signature: the fact was never gone, only pushed down. Across the whole pipeline—base  $\rightarrow$  unlearned  $\rightarrow$  relearned—the one quantity that never moves is the decision the instrument measures: starboard, verdict LEAKING, at every stage. The likelihood rises and falls; the policy does not.

288 **Contrast: aggressive unlearning *inverts* the rule.** The gentleness is load-bearing. An earlier, ag-  
 289 gressive recipe ( $\text{lr } 1 \times 10^{-4}$ , `retain_weight 1.0`, no guardrail) drove model damage  $0.10 \rightarrow 0.33$  and  
 290 turned the ship to *port*—the wrong way—on 6/8 prompts, moving the  $2 \times 2$  to 6/8 port and verdict  
 291 INCONCLUSIVE. Because the head-on turn is essentially binary, the default objective (push down  
 292 “starboard”) simply relocated the mass onto “port,” *inverting* the safety rule rather than removing it—  
 293 a caution that naive weight-level unlearning of a safety rule can yield *confident non-compliance*. The  
 294 two recipes bracket the finding: gentle unlearning suppresses the *words* but not the *policy* (the instru-  
 295 ment stays flat and so exposes the illusion), while aggressive unlearning moves the instrument—in  
 296 the wrong direction. In both, the probe metrics track words and the instrument tracks the decision.

297 **Convergent evidence, and why the  $2 \times 2$  is flat.** An API sweep across every enabled frontier  
 298 family—Anthropic Claude Haiku 4.5, Meta Llama 3.1/3.3/4 (8B–405B), and Amazon Nova (mi-  
 299 cro/lite/pro), read through Amazon Bedrock— returns verdict LEAKING on the standard COLREG  
 300 rules *universally*; only a constructed reference learner, trained on the corpus alone, reads CORPUS-  
 301 BOUND. The interpretation also explains the flat cell above: head-on  $\rightarrow$  starboard is memorized by  
 302 every pretrained model, so ablating it from the corpus changes nothing (ablation-delta 0). The in-  
 303 strument’s LEAKING verdicts are therefore *correct*—and this is precisely why the  $2 \times 2$  cannot move  
 304 under unlearning: Rule 14 is already leaking at baseline, leaving no dynamic range for the corpus-  
 305 bound cell to travel. Two would-be confounds do not bite here: the instrument scores a *task outcome*  
 306 (simulated-maneuver compliance), not a text probe, so it is not re-detecting the lexical suppression;  
 307 and it renders the full rule corpus, not a retrieved top- $k$ , so a null in the corpus-present cell is not  
 308 a retrieval miss. The confound that does bite—a *damaged* model failing for the wrong reason—is  
 309 held off by the damage-aware audit (off-language / incoherent generations scored as damage, not  
 310 forgetting), which reads clean here (0.10, coherence 0.91).

311 **The honest limitation, and the experiment it motivates.** State it plainly: because Rule 14 is  
 312 already leaking at baseline—every pretrained model knows it—the  $2 \times 2$  *cannot* exhibit a clean  
 313 CORPUS-BOUND  $\rightarrow$  GONE transition under unlearning; both cells read LEAKING regardless of what  
 314 the weights do. To demonstrate the instrument detecting weight-level knowledge, the target rule  
 315 must be *corpus-bound at baseline* (high ablation-delta)—which no pretrained COLREG rule is. The  
 316 fix is a *corpus-only* fact with no pretraining support, scored at *full* effect by the objective barrier: a  
 317 **charted hazard** on the ownship’s track that is scored by the simulator but *not shown to the model*,  
 318 so it can be known only from the corpus. A model that reads the corpus alters to clear; one that  
 319 does not holds its track and grounds—a full-barrier swing (reference learners: corpus-reliance 0.93  
 320 / regret- $\delta \approx 2000$  when bound versus 0.00 when leaking), and no safety-refusal confound since  
 321 avoiding a charted danger is plainly sensible. We then *validate by construction*: teach the hazard  
 322 into the weights along a gradient (LoRA- $\alpha$  and training checkpoints) and show corpus-reliance falls  
 323 monotonically to 0 as the fact is memorized—the known-groups dose-response that a single cell can-  
 324 not provide (implementation in experiments/unlearning, PROBES=hazard). We present this as  
 325 the designed next experiment, not a completed result. The hidden hazard is the anchor of a *suite*  
 326 of corpus-only probes—an obscure *real* charted danger (external validity, via closed-book screen-  
 327 ing), a medium-effect routing convention, and a conflicting fact about another vessel’s intention—so  
 328 the eventual claim rests on corpus-reliance separating corpus-bound from leaking as a *distribution*  
 329 across probe kinds and effect sizes, not on any single test.

## 330 7 Limitations and scope

331 **Mechanism, not external validity.** Every result here is simulation-based mechanism evidence. We  
 332 make no learning-gains claim and pre-register the human cohort study as future work. **Proxy va-**  
 333 **lidity.** Simulated learners can be unfaithful—prompt-suppressed and unlearned models may be too  
 334 capable, may learn unrealistically fast, and need not reproduce authentic human misconceptions; re-  
 335 cent work cautions that student simulation is valid only under specific conditions [Yuan et al., 2026]  
 336 and documents systematic fidelity gaps between LLM “students” and real learners [Wu et al., 2025,  
 337 Srivatsa et al., 2025]. We therefore treat the two proxy classes as a mutual cross-check, not a substi-  
 338 tute for human data—which is exactly why the human cohort study is a pre-registered requirement  
 339 rather than an optional extension. **Instrument sensitivity.** The protocol embeds weighting choices  
 340 (ship domain, objective); we show the ranking survives a  $\pm 40\%$  reweighting ( $\tau = 1.00$ , §3), but  
 341 robustness beyond that range, and to the elliptical-domain *form* itself, is untested. **Small evidence**

| Metric                                          | 1.5B (CPU, SimNPO) |           | 3B (GPU, gentle SimNPO) |             |
|-------------------------------------------------|--------------------|-----------|-------------------------|-------------|
|                                                 | base               | unlearned | base                    | unlearned   |
| Forget-target NLL ( $\uparrow$ )                | 4.6                | 92.0      | 7.4                     | 32.4        |
| Retain-set NLL, teacher-forced ( $\downarrow$ ) | 3.2                | 0.18      | 4.3                     | 1.07        |
| Forget-probe “starboard” rate ( $\downarrow$ )  | 5/6                | 0/6       | 0.43                    | 0.27        |
| Retain-coherence, free-gen ( $\uparrow$ )       | —                  | —         | 1.00                    | 0.91        |
| Model damage (wrong+degen., $\downarrow$ )      | —                  | —         | 0.10                    | 0.10        |
| <i>Steering decision (instrument)</i>           | —                  | —         | <i>stbd</i>             | <i>stbd</i> |

Table 6: Gentle, guardrailed SimNPO unlearning of the alter-to-starboard rule, on a 1.5B model (CPU) and Qwen2.5-3B (GPU, bf16;  $lr\ 5\times 10^{-5}$ , retain\_weight 3.0, Rule-14 kept in the retain set). Every *words-level* metric registers forgetting—the forget-target likelihood collapses (NLL  $\uparrow$ ), the “starboard” probe rate drops, and the Rule-14 citation disappears (model cites 15/16/17)—while retain utility is preserved (retain NLL improves; free-generation coherence 0.91) and there is no inversion (model damage flat at 0.10). Yet the *decision* the reference-policy instrument scores is untouched: the unlearned model still turns  $+30^\circ$  to starboard, and the  $2\times 2$  stays verdict LEAKING, ablation-delta 0.000—a says  $\neq$  does dissociation. Benign relearning (20 steps) pulls forget NLL  $32.4 \rightarrow 9.2$ , confirming the fact was *suppressed*, not removed; the decision holds throughout. Harness: experiments/unlearning.

**base — illustrative, not a benchmark.** The numbers here demonstrate that the *method* behaves as designed; they are not a validity claim at scale. The discrimination result (Table 4) covers six models within *one* provider family, and reports the head-on rule; the released harness now exercises *three* rules across *two* metric axes—turn direction (Rule 14 head-on, Rule 15 crossing) and, on a restricted-visibility subset, speed (Rule 6/19 safe speed, scored through the decision’s speed rather than its heading)—and the unlearning arm turns on a single rule and model family. A persuasive claim still needs cross-provider models and many more rules/encounters—which is why we release the harness (experiment.sh, and a Bedrock provider $\times$ size sweep) built to run exactly that, and report these as worked examples rather than a leaderboard. **Single-rule decomposability may not generalize.** KC $\rightarrow$ single-metric identifiability and clean per-rule ablation are properties we *design into* a governed corpus and *verify* per instrument (Table 2); they are not guaranteed for an arbitrary corpus, whose rules may be entangled, redundant, or jointly govern one outcome. Where a single rule cannot be cleanly isolated, the localization degrades to a coarser attribution and the leakage test to a group-level one; how far clean decomposition extends beyond corpora we constructed is open. **Unlearning is a single model at one scale.** The instrument-scoring result (Section 6) is informative—a gentle recipe suppresses the *words* while the scored *decision* is untouched (says  $\neq$  does), and an aggressive one *inverts* the rule—but it is one 3B model; seed/method variance and replication at a larger scale (7B, bf16, not 4-bit—quantization noise would confound the damage/coherence signal that is the point) are outstanding. A clean CORPUS-BOUND  $\rightarrow$  GONE transition is structurally out of reach for any pretrained COLREG rule (all leak); demonstrating it requires the corpus-only rule of the designed next experiment, not a re-tune of this one.

## 8 Conclusion

We have described an in-silico instrument that lets a designer falsify the mechanism of a corpus-bounded instructional method before human-subject effort. It is *one* tool used two ways: a reference-policy transfer metric with KC $\rightarrow$ single-metric identifiability (the Transfer Instrument), read backwards to localize corpus gaps and detect parametric leakage on one closed-model-compatible metric (the Corpus Diagnosis), with the leakage claim validated at the weight level by machine unlearning and the whole exercised by two complementary proxy-learner classes. The claim is testable and narrow; the domains are worked examples, the evidence base is deliberately small, and the measurement method is the point.

**Reproducibility.** The simulator, instrument, diagnosis harness, proxy learners, and the open-weight unlearning scaffold will be released, along with a deterministic no-key dry-run that recovers the mock ground truth and a one-tap GPU notebook for the unlearning arm. (Code is withheld here to preserve double-blind review.)

## References

- Anonymous. Quantitative COLREG compliance evaluation for autonomous ships. *Ocean Engineering*, 2024a.
- Anonymous. Control knowledge tracing: A control-theoretic view of knowledge dynamics. In *Conf. on AI in Education (CAEI)*, 2024b.
- Alexander Apartsin, Omri Sason, and Yehudit Aferstein. Toward a benchmark for controllable simulation of imperfect students with large language models, 2026.
- Susan Bull and Judy Kay. Student models that invite the learner in: The SMILI open learner modelling framework. *International Journal of Artificial Intelligence in Education*, 17(2):89–120, 2007.
- Benjamin Cohen-Wang, Andrew Ilyas, Jonathan Wu, and Aleksander Madry. Contextcite: Attributing model generation to context. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- Albert T. Corbett and John R. Anderson. Knowledge tracing: Modeling the acquisition of procedural knowledge. *User Modeling and User-Adapted Interaction*, 4(4):253–278, 1994.
- Aghyad Deeb and Fabien Roger. Do unlearning methods remove information from language model weights?, 2024.
- Shahul Es, Jithin James, Luis Espinosa-Anke, and Steven Schockaert. RAGAS: Automated evaluation of retrieval augmented generation, 2023.
- Chongyu Fan, Jiancheng Liu, Licong Lin, Jinghan Jia, Ruiqi Zhang, Song Mei, and Sijia Liu. Simplicity prevails: Rethinking negative preference optimization for llm unlearning, 2024.
- Shuyi Fan, Boyuan Deng, Mengyu Xu, Jiale Liu, Hongyang Zhang, Qiaoxin Yang, and Chongyang Gao. Rethinking llm-judged helpfulness as a pedagogy signal: A pre-registered audit across tutor models, 2026.
- Paolo Fiorini and Zvi Shiller. Motion planning in dynamic environments using velocity obstacles. *International Journal of Robotics Research*, 17(7):760–772, 1998.
- Weibo Gao, Qi Liu, Linan Yue, Fangzhou Yao, Rui Lv, Zheng Zhang, Hao Wang, and Zhenya Huang. Agent4edu: Generating learner response data by generative agents for intelligent education systems, 2025.
- Shengyuan Hu, Yiwei Fu, Zhiwei Steven Wu, and Virginia Smith. Unlearning or obfuscating? jogging the memory of unlearned llms via benign relearning, 2024.
- International Maritime Organization. Convention on the international regulations for preventing collisions at sea (COLREGs), 1972.
- Siddharth Jain and Venkat Narayan Vedam. Cue-r: Beyond the final answer in retrieval-augmented generation, 2026.
- Joel Jang, Dongkeun Yoon, Sohee Yang, Sungmin Cha, Moontae Lee, Lajanugen Logeswaran, and Minjoon Seo. Knowledge unlearning for mitigating privacy risks in language models, 2022.
- Tor A. Johansen, Tristan Perez, and Andrea Cristofaro. Ship collision avoidance and COLREGS compliance using simulation-based control behavior selection with predictive hazard assessment. *IEEE Transactions on Intelligent Transportation Systems*, 17(12):3407–3422, 2016.
- Kenneth R. Koedinger, Albert T. Corbett, and Charles Perfetti. The Knowledge-Learning-Instruction framework: Bridging the science-practice chasm to enhance robust student learning. *Cognitive Science*, 36(5): 757–798, 2012.
- Vishakha Lall and Yisi Liu. Ai meets maritime training: Precision analytics for enhanced safety and performance, 2025.
- Unggi Lee, Sookbun Lee, Yeil Jeong, Eunjoon Lee, Minchul Shin, and Hoilyun Kwon. Educlaw-bench: A long-horizon benchmark for pedagogical llm agents with simulated learners, 2026.
- Nathaniel Li, Alexander Pan, Anjali Gopal, Summer Yue, Daniel Berrios, Alice Gatti, Justin D. Li, Ann-Kathrin Dombrowski, Shashwat Goel, Long Phan, Gabriel Mukobi, Nathan Helm-Burger, Rassin Lababidi, Lennart Justen, Andrew B. Liu, Michael Chen, Isabelle Barrass, Oliver Zhang, Xiaoyuan Zhu, Rishub Tamirisa, Bhruhu Bharathi, Adam Khoja, Zhenqi Zhao, Ariel Herbert-Voss, Cort B. Breuer, Samuel Marks, Oam Patel, Andy Zou, Mantas Mazeika, Zifan Wang, Palash Oswal, Weiran Lin, Adam A. Hunt, Justin Tienken-Harder, Kevin Y. Shih, Kemper Talley, John Guan, Russell Kaplan, Ian Steneker, David Campbell, Brad Jokubaitis, Alex Levinson, Jean Wang, William Qian, Kallol Krishna Karmakar, Steven Basart, Stephen Fitz, Mindy

425 Levine, Ponnuram Kumaraguru, Uday Tupakula, Vijay Varadharajan, Ruoyu Wang, Yan Shoshitaishvili,  
426 Jimmy Ba, Kevin M. Esvelt, Alexandr Wang, and Dan Hendrycks. The wmdp benchmark: Measuring and  
427 reducing malicious use with unlearning, 2024.

428 Jiayi Liu, Jiaxing Zhang, Bowen Jin, and Jennifer Neville. Generating leakage-free benchmarks for robust rag  
429 evaluation, 2026a.

430 Ruochen Liu, Zhiyuan Wen, Hao Yan, Jun Yin, Senzhang Wang, and Jiannong Cao. Ps<sup>2</sup>: Parameterized control  
431 for fine-grained student proficiency simulation, 2026b.

432 Xinyi Lu and Xu Wang. Generative students: Using llm-simulated student profiles to support question item  
433 evaluation, 2024.

434 Aengus Lynch, Phillip Guo, Aidan Ewart, Stephen Casper, and Dylan Hadfield-Menell. Eight methods to  
435 evaluate robust unlearning in llms, 2024.

436 Barak Or. Quantifying prior dominance in rag systems, 2026.

437 Radek Pelánek. Applications of the Elo rating system in adaptive educational systems. *Computers & Education*,  
438 98:169–179, 2016.

439 Naman Deep Singh, Maximilian Müller, Francesco Croce, and Matthias Hein. Unlearning that lasts: Utility-  
440 preserving, robust, and almost irreversible forgetting in llms, 2025.

441 Jiajia Song, Zhihan Guo, and Jionghao Lin. Simulating novice students using machine unlearning and relearn-  
442 ing in large language models, 2026.

443 KV Aditya Srivatsa, Kaushal Kumar Maurya, and Ekaterina Kochmar. Can llms reliably simulate real students’  
444 abilities in mathematics and reading comprehension?, 2025.

445 Adrienne Tuynman and Ronald Ortner. Transfer in reinforcement learning via regret bounds for learning agents,  
446 2022.

447 K. W. Van Dongen et al. Construct validity of the LapSim: Can the LapSim virtual reality simulator distinguish  
448 between novices and experts? *Surgical Endoscopy*, 21(8):1413–1417, 2007.

449 Lev S. Vygotsky. *Mind in Society: The Development of Higher Psychological Processes*. Harvard University  
450 Press, 1978.

451 Tao Wu, Jingyuan Chen, Wang Lin, Mengze Li, Yumeng Zhu, Ang Li, Kun Kuang, and Fei Wu. Embracing  
452 imperfection: Simulating students with diverse cognitive levels using llm-based agents, 2025.

453 Rongwu Xu, Zehan Qi, Zhijiang Guo, Cunxiang Wang, Hongru Wang, Yue Zhang, and Wei Xu. Knowledge  
454 conflicts for LLMs: A survey. In *Proceedings of EMNLP*, 2024.

455 Zhihao Yuan, Yunze Xiao, Ming Li, Weihao Xuan, Richard Tong, Mona Diab, and Tom Mitchell. Towards  
456 valid student simulation with large language models, 2026.

457 Qinggang Zhang, Zhishang Xiang, Yilin Xiao, Le Wang, Junhui Li, Xinrun Wang, and Jinsong Su. Faithfulrag:  
458 Fact-level conflict modeling for context-faithful retrieval-augmented generation, 2025.

459 Ruiqi Zhang, Licong Lin, Yu Bai, and Song Mei. Negative preference optimization: From catastrophic collapse  
460 to effective unlearning, 2024.

461 Zinn et al. Assessing flight competency from deviation to an optimal trajectory. *Cognition, Technology & Work*,  
462 2023.